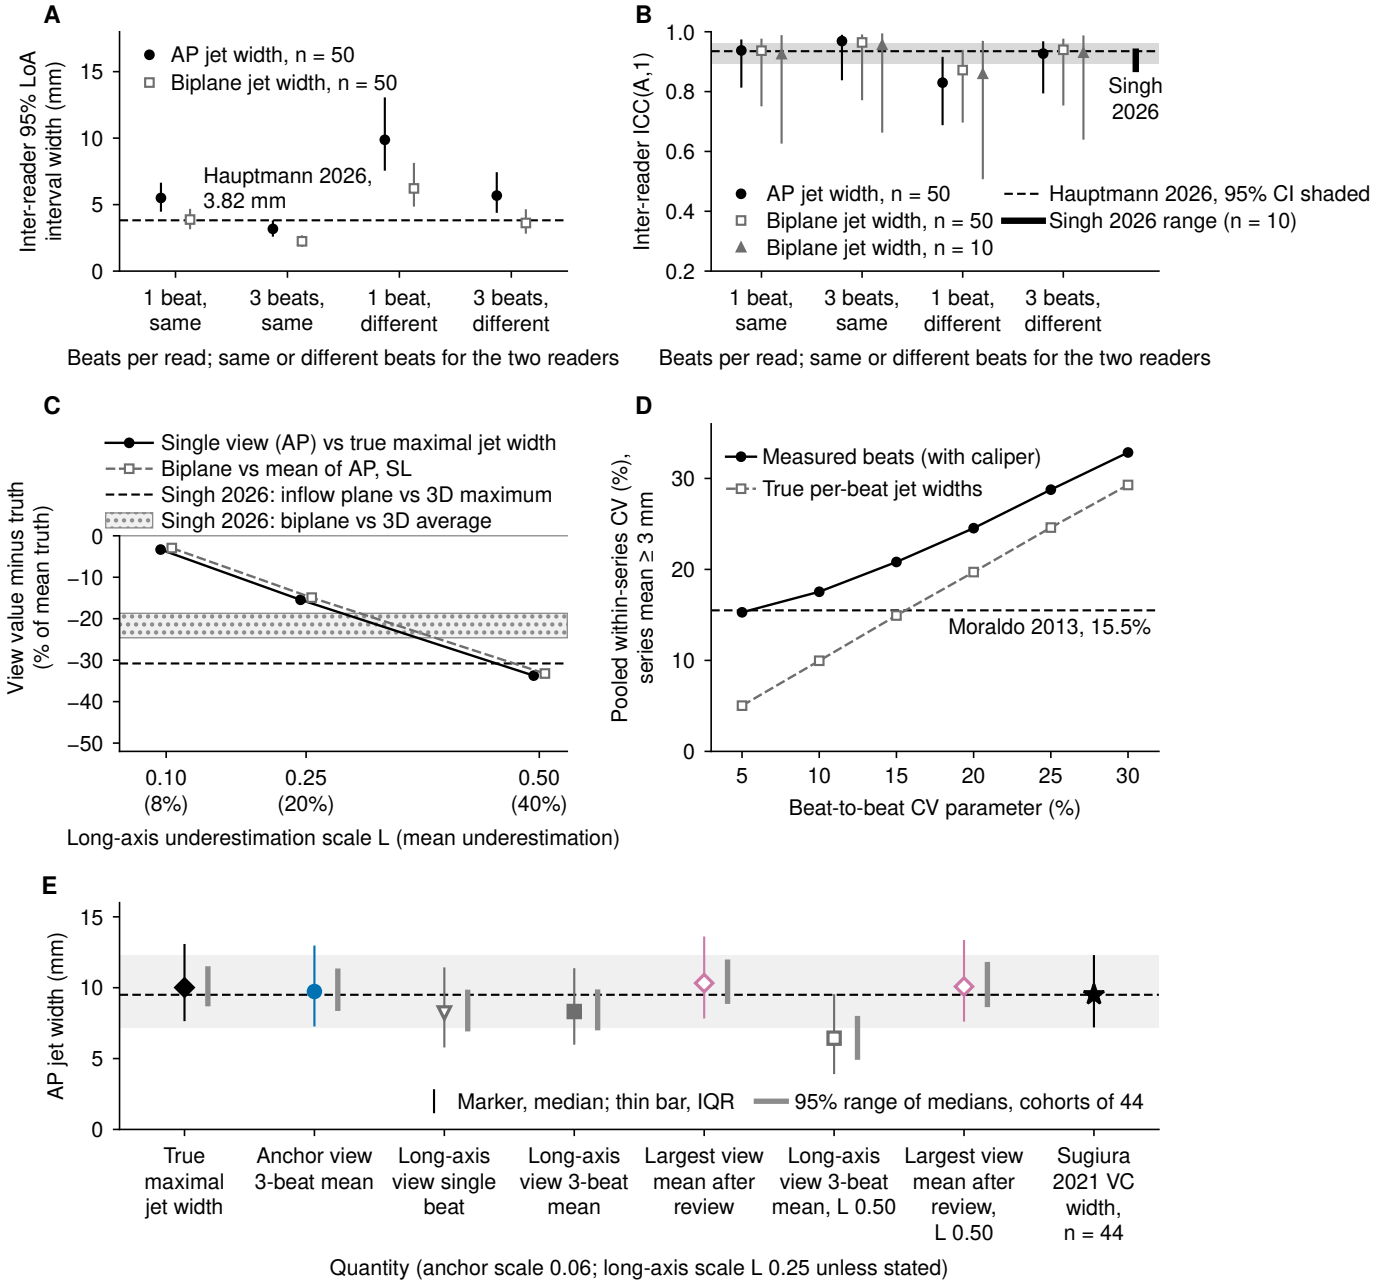

A
AP jet width, n = 50
Biplane jet width, n = 50
Hauptmann 2026, 3.82 mm
Inter-reader 95% LoA interval width (mm)
1 beat, same
3 beats, same
1 beat, different
3 beats, different
Beats per read; same or different beats for the two readers
B
Inter-reader ICC(A,1)
Singh 2026
AP jet width, n = 50
Biplane jet width, n = 50
Biplane jet width, n = 10
Hauptmann 2026, 95% CI shaded
Singh 2026 range (n = 10)
Beats per read; same or different beats for the two readers
C
Single view (AP) vs true maximal jet width
Biplane vs mean of AP, SL
Singh 2026: inflow plane vs 3D maximum
Singh 2026: biplane vs 3D average
View value minus truth (% of mean truth)
Long-axis underestimation scale L (mean underestimation)
D
Measured beats (with caliper)
True per-beat jet widths
Moraldo 2013, 15.5%
Pooled within-series CV (%), series mean ≥ 3 mm
Beat-to-beat CV parameter (%)
E
AP jet width (mm)
Marker, median; thin bar, IQR
95% range of medians, cohorts of 44
True maximal jet width
Anchor view 3-beat mean
Long-axis view single beat
Long-axis view 3-beat mean
Largest view mean after review
Long-axis view 3-beat mean, L 0.50
Largest view mean after review, L 0.50
Sugiura 2021 VC width, n = 44
Quantity (anchor scale 0.06; long-axis scale L 0.25 unless stated)