


Sample Config

For Stand Alone EAP

(AP MODE)

TP-LINK EAP PAGE

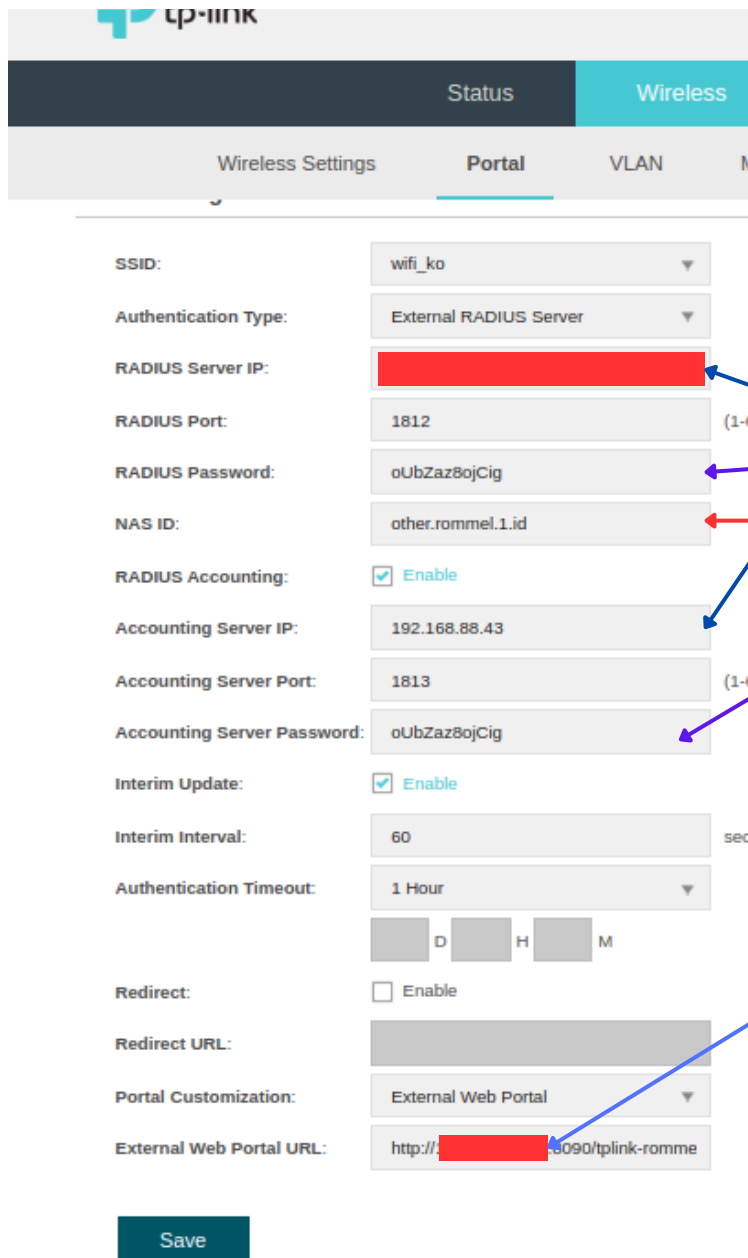


The TP-LINK EAP Configuration page is shown with the 'Wireless' tab selected. The 'Portal' sub-tab is active. The configuration fields are as follows:

Field	Value
SSID	wifi_ko
Authentication Type	External RADIUS Server
RADIUS Server IP	[Redacted]
RADIUS Port	1812
RADIUS Password	oUbZaz8ojCig
NAS ID	other.rommel.1.id
RADIUS Accounting	<input checked="" type="checkbox"/> Enable
Accounting Server IP	192.168.88.43
Accounting Server Port	1813
Accounting Server Password	oUbZaz8ojCig
Interim Update	<input checked="" type="checkbox"/> Enable
Interim Interval	60 sec
Authentication Timeout	1 Hour
Redirect	<input type="checkbox"/> Enable
Redirect URL	
Portal Customization	External Web Portal
External Web Portal URL	http://[Redacted]:8090/tplink-romme

Save

MENDYFI CONFIG PAGE

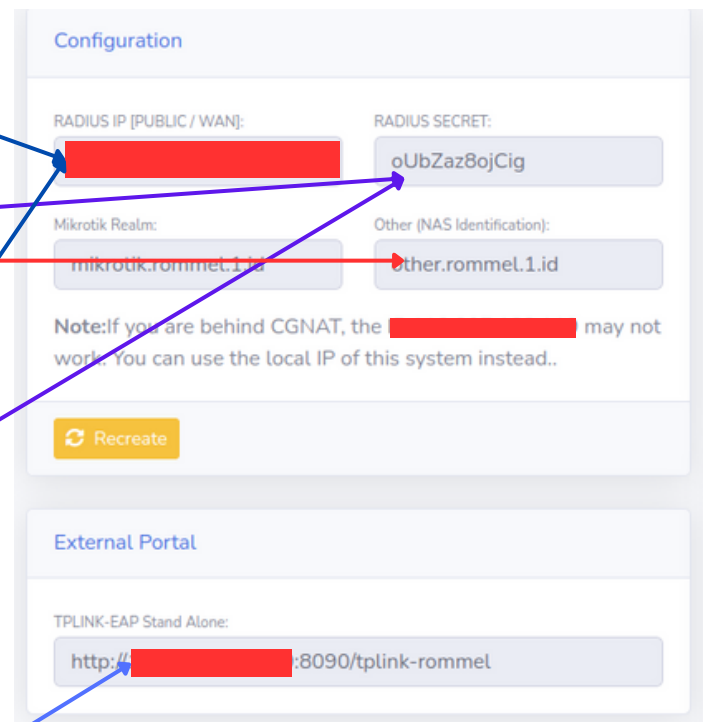

The MENDYFI Configuration page is shown with the 'Configuration' tab selected. The configuration fields are as follows:

Field	Value
RADIUS IP [PUBLIC / WAN]	[Redacted]
RADIUS SECRET	oUbZaz8ojCig
Mikrotik Realm	mikrotik.rommel.1.id
Other (NAS Identification)	other.rommel.1.id

Note: If you are behind CGNAT, the [Redacted] may not work. You can use the local IP of this system instead..

Recreate

External Portal

TPLINK-EAP Stand Alone:

http://[Redacted]:8090/tplink-romme