


StarTech.com Carte PCI Express avec 2 Ports Série RS232 et 1 Port Parallèle - UART 16550

Marque : StarTech.com

Code produit: PEX2S5531P

Nom du produit : Carte PCI Express avec 2 Ports Série RS232 et 1 Port Parallèle - UART 16550

StarTech.com Carte PCI Express avec 2 Ports Série RS232 et 1 Port Parallèle - UART 16550 (PEX2S5531P)
 StarTech.com Carte PCI Express avec 2 Ports Série RS232 et 1 Port Parallèle - UART 16550. Interface de l'hôte: PCIe, Interface de sortie: Série, Standard de carte d'extension: PCIe 1.0a. Couleur du produit: Vert, Acier inoxydable. Jeu de composants: ASIX - MCS9901CV-CC, Vitesse de transmission: 460,8 Kbit/s, FIFO (Premier entré, premier sorti): 128 o. Prise en charge du système d'exploitation Windows: Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64,..., Prise en charge du système d'exploitation Mac: Mac OS X 10.4 Tiger, Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS..., Prise en charge du système d'exploitation serveur: Windows Server 2003, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows.... Largeur: 120 mm, Profondeur: 105 mm, Hauteur: 20 mm



Connectivité		Configuration minimale du système	
Interface de l'hôte *	PCIe	Prise en charge du système d'exploitation Linux	✓
Interface de sortie *	Série		
Standard de carte d'extension	PCIe 1.0a		
Nombre de ports série	2	Prise en charge du système d'exploitation serveur	Windows Server 2003, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019
Type d'interface série	RS-232		
Nombre de ports parallèles	1		
Design		Prise en charge d'autres systèmes d'exploitation	Windows Embedded POSReady 2009, Windows Embedded Standard 2009
Interne *	✓		
Couleur du produit	Vert, Acier inoxydable		
Caractéristiques		Détails techniques	
Jeu de composants	ASIX - MCS9901CV-CC	Certificats de conformité	CE, RoHS
Vitesse de transmission	460,8 Kbit/s	Poids et dimensions	
FIFO (Premier entré, premier sorti)	128 o	Largeur	120 mm
Type de contrôle de flux	DTR/DSR, RTS/CTS, XON/XOFF	Profondeur	105 mm
Protocoles pris en charge	EPP, ECP, SPP, PS/2	Hauteur	20 mm
Conditions environnementales		Poids	112 g
Température d'opération	-10 - 80 °C	Informations sur l'emballage	
Température hors fonctionnement	-20 - 100 °C	Drivers inclus	✓
Humidité relative de fonctionnement (H-H)	5 - 85%	Manuel d'utilisation	✓
		Largeur du colis	145 mm
		Profondeur du colis	174 mm
		Hauteur du colis	31 mm
		Poids du paquet	208 g
		Données logistiques	
		Code du système harmonisé	84733020
		Produit par casier principal (externe)	75 pièce(s)


Configuration minimale du système		Données logistiques	
Prise en charge du système d'exploitation Windows	Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 Pro, Windows 10 Pro x64, Windows 2000, Windows 2000 Professional, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8.1, Windows 8.1 Enterprise, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64, Windows 95, Windows 98SE, Windows CE, Windows ME, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64	Largeur du casier principal (externe)	355 mm
		Longueur du casier principal (externe)	679 mm
		Hauteur du casier principal (externe)	320 mm
Prise en charge du système d'exploitation Mac	Mac OS X 10.4 Tiger, Mac OS X 10.5 Leopard, Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion, Mac OS X 10.9 Mavericks		



0065030841764



065030841764

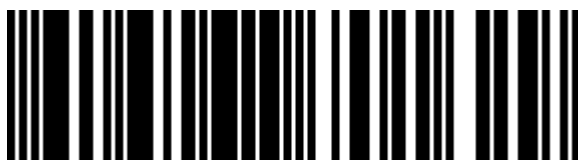

0616268701629



616268701629

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.