APC

APC Smart-UPS On-Line, 5kVA, Rackmount 3U, 230V, 6x C13+4x C19 IEC outlets, Network Card, Extended runtime, W/ rail kit, 6-year warranty

Brand : APC

Product code: SRT5KRMXLI-6W

Product name : Smart-UPS On-Line, 5kVA, Rackmount 3U, 230V, 6x C13+4x C19 IEC outlets, Network Card, Extended runtime, W/ rail kit, 6-year warranty

Smart-UPS On-Line, 5kVA, Rackmount 3U, 230V, 6x C13+4x C19 IEC outlets, Network Card, Extended runtime, W/ rail kit, 6-year warranty

APC Smart-UPS On-Line, 5kVA, Rackmount 3U, 230V, 6x C13+4x C19 IEC outlets, Network Card, Extended runtime, W/ rail kit, 6-year warranty:

This APC Smart-UPS is designed for IT professionals or network administrators to maintain business uptime and continuity. This 5kVA on-line 3U rackmount UPS provides pure sine wave power and extended runtime to support critical electronics during power disruptions. It comes with Hard Wire 3-wire (1P+N+E) input, 6x IEC 320 C13 and 4x IEC 320 C19 outlets, and 2x IEC jumper cables. The UPS has an embedded Network Management Card for UPS network-based monitoring and management. The UPS comes with PowerChute Network Shutdown that provides graceful shutdown of physical servers, virtual machines, and HCI clusters. It has an additional SmartSlot for optional accessory card such as Dry Contact I/O card. The UPS can connect to EcoStruxure IT or third-party centralized management platforms. The UPS has a 6-year warranty and comes with a built-in lead-acid battery.

Features

UPS topology *	Double-conversion (Online)
Output power capacity *	5 kVA
Output power *	4500 W
Waveform *	Sine
Input operation voltage (min) *	160 V
Input operation voltage (max) *	275 V
Input frequency *	40 - 70 Hz
Output operation voltage (min)	220 V
Output operation voltage (max)	240 V
Output frequency regulation	50/60 Hz
Surge energy rating	480 J
Efficiency	94.1%
Crest factor	3:1
Emergency Power Off (EPO)	✔
Output voltage Total Harmonic Distortion (THD)	3%
Noise level	55 dB
Surge protection	✔
Audible alarm(s)	✔
Auto-restart	✔

Ports & interfaces

AC outlet types	C13 coupler, C19 coupler
Power plug	Hardwire
AC outlets quantity	10 AC outlet(s)
Number of output IEC jumpers	2
USB port	✔
Serial interface	✔
Serial interface type	RJ-45
SmartSlot	✔

Battery

Battery technology	Sealed Lead Acid (VRLA)

Battery

Replacement battery cartridge	APCRBC140

Design

Form factor *	Rackmount
Rack capacity	3U
Product colour *	Black
Display type	LCD
International Protection (IP) code	IP20

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-15 - 45 °C
Operating relative humidity (H-H)	0 - 95%
Storage relative humidity (H-H)	0 - 95%
Operating altitude	0 - 3000 m
Non-operating altitude	0 - 15000 m

Certificates

Compliance certificates	RoHS
Certification	REACH, CE, CE Mark, EAC, EN/IEC 62040-1, EN/IEC 62040-2, IRAM, NOM, VDE

Packaging content

Rack mount kit	✔
Quick installation guide	✔

Sustainability

Sustainability certificates	ENERGY STAR

Weight & dimensions

Width	432 mm
Depth	719 mm
Height	130 mm
Weight	54.4 kg

Battery

Battery capacity	845 VAh
Typical backup time at full load	4 min
Typical backup time at half load	11.8 min
Battery life (max)	5 year(s)
Battery recharge time	1.5 h
Hot-swap battery	✔
Automatic battery test	✔
Cold start	✔

Packaging data

Bracket	✔
Temperature sensor	✔
Warranty card	✔
Package width	610 mm
Package depth	960 mm
Package height	330 mm
Package weight	66.9 kg

Logistics data

Products per pallet	6 pc(s)
Harmonized System (HS) code	85078000
Total carbon footprint (kg of CO2e)	8408.59

Other features

Packaging content	Web/SNMP Management Card
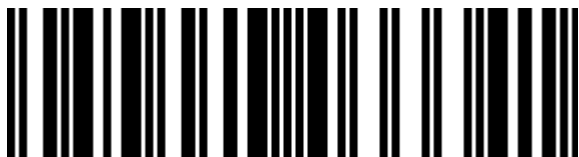
5054444033341

8592978040864

3606481338990
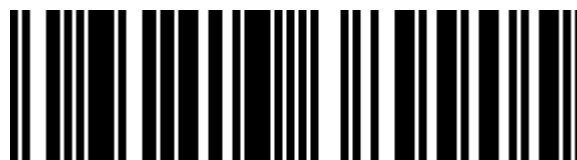
0064813389905

064813389905

Catalog Object Cloud