



## APC Smart-UPS, Line Interactive, 2200VA, Rackmount 2U, 230V, 8x IEC C13+2x IEC C19 outlets, Network Card, AVR, LCD



**Brand :** APC

**Product code:** SMT2200RMI2UNC

**Product name :** Smart-UPS, Line Interactive, 2200VA, Rackmount 2U, 230V, 8x IEC C13+2x IEC C19 outlets, Network Card, AVR, LCD


Smart-UPS, Line Interactive, 2200VA, Rackmount 2U, 230V, 8x IEC C13+2x IEC C19 outlets, Network Card, AVR, LCD

APC Smart-UPS, Line Interactive, 2200VA, Rackmount 2U, 230V, 8x IEC C13+2x IEC C19 outlets, Network Card, AVR, LCD. UPS topology: Line-Interactive, Output power capacity: 2.2 kVA, Output power: 1980 W. AC outlet types: C20 coupler, Power plug: C20 coupler, AC outlets quantity: 9 AC outlet(s). Battery technology: Sealed Lead Acid (VRLA), Battery capacity: 509 Ah, Battery recharge time: 5 h. Form factor: Rackmount, Product colour: Black, Rack capacity: 2U. Compliance certificates: RoHS, Certification: CE, EAC, EN/IEC 62040-1, EN/IEC 62040-2, GS Mark, IRAM, RCM, VDE, WEEE

Features		Design	
UPS topology *	Line-Interactive	Product colour *	Black
Output power capacity *	2.2 kVA	Display type	LCD
Output power *	1980 W	LED indicators	✓
Waveform *	Sine	<b>Operational conditions</b>	
Input operation voltage (min) *	151 V	Operating temperature (T-T)	0 - 40 °C
Input operation voltage (max) *	302 V	Storage temperature (T-T)	-15 - 45 °C
Input frequency *	50/60 Hz	Operating relative humidity (H-H)	0 - 95%
Output operation voltage (min)	220 V	Storage relative humidity (H-H)	0 - 95%
Output operation voltage (max)	240 V	Operating altitude	0 - 3000 m
Output frequency	50/60 Hz	Non-operating altitude	0 - 15000 m
Surge energy rating	375 J	<b>Certificates</b>	
Response time	4 ms	Compliance certificates	RoHS
Emergency Power Off (EPO)	0	Certification	CE, EAC, EN/IEC 62040-1, EN/IEC 62040-2, GS Mark, IRAM, RCM, VDE, WEEE
Noise level	55 dB	<b>Packaging content</b>	
Surge protection	✓	Rack mount kit	✓
Audible alarm(s)	✓	Cables included	Input power cable, USB cable
Web-based management	✓	Quick installation guide	✓
Audible alarm modes	Battery replacement	<b>Sustainability</b>	
Auto-restart	✓	Sustainability certificates	Green Premium
<b>Ports &amp; interfaces</b>		<b>Weight &amp; dimensions</b>	
AC outlet types	C20 coupler	Width	480 mm
Power plug	C20 coupler	Depth	683 mm
AC outlets quantity	9 AC outlet(s)	Height	86 mm
USB 2.0 ports quantity	1	Weight	42.2 kg
Ethernet LAN (RJ-45) ports	1	<b>Packaging data</b>	
<b>Battery</b>		Resource CD	✓
Battery technology	Sealed Lead Acid (VRLA)	Package width	600 mm
Battery capacity	509 Ah	Package depth	980 mm
Battery recharge time	5 h	Package height	254 mm
Hot-swap battery	✓	Package weight	49.6 kg
Automatic battery test	✓	<b>Logistics data</b>	
Cold start	✓	Products per pallet	8 pc(s)
<b>Design</b>		Harmonized System (HS) code	85078000
Form factor *	Rackmount	Total carbon footprint (kg of CO2e)	3327.3
Rack capacity	2U		

**Other features**

Output voltage	230 V
----------------	-------

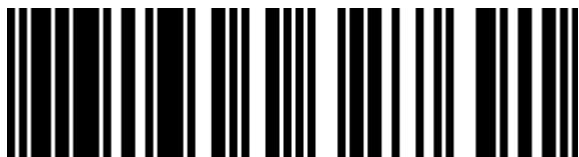

0731304327691



731304327691

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.