



APC Rack PDU 2G, Metered by Outlet with Switching, ZeroU, 32A, 230V, (21) C13 & (3) C19

Brand : APC


Product code: AP8653

Product name : Rack PDU 2G, Metered by Outlet with Switching, ZeroU, 32A, 230V, (21) C13 & (3) C19

Rack PDU 2G, Metered by Outlet with Switching, ZeroU, 32A, 230V, (21) C13 & (3) C19
APC Rack PDU 2G, Metered by Outlet with Switching, ZeroU, 32A, 230V, (21) C13 & (3) C19. PDU types: Metered, Metered-by-outlet, Switched, Rack capacity: 0U, Type: Single-phase. AC outlets quantity: 24 AC outlet(s), AC outlet types: C13 coupler, C19 coupler, Power plug: IEC309. Cable length: 3 m. Monitoring: Current, Power, Voltage, Outlet control: Lock-out, Recycle, Turn off, Turn on. Nominal input voltage: 230 V, Maximum current: 32 A, AC input frequency: 50 - 60 Hz



Design		Certificates	
PDU types *	Metered, Metered-by-outlet, Switched	Compliance certificates	RoHS
Type	Single-phase	Certification	EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3, VDE
Rack capacity *	0U	Operational conditions	
Mounting	Vertical	Operating temperature (T-T)	-5 - 45 °C
Product colour	Black	Storage temperature (T-T)	-25 - 65 °C
Ports & interfaces		Operating relative humidity (H-H)	5 - 95%
AC outlets quantity *	24 AC outlet(s)	Storage relative humidity (H-H)	5 - 95%
Power plug	IEC309	Operating altitude	0 - 3000 m
AC outlet types *	C13 coupler, C19 coupler	Non-operating altitude	0 - 15000 m
Features		Weight & dimensions	
Cable length	3 m	Width	56 mm
Management features		Depth	51 mm
Monitoring	Current, Power, Voltage	Height	1829 mm
Outlet control	Lock-out, Recycle, Turn off, Turn on	Weight	8.23 kg
Power		Packaging data	
Nominal input voltage *	230 V	Package weight	10.5 kg
AC input frequency	50 - 60 Hz	Package width	162 mm
Maximum current *	32 A	Package depth	118 mm
Nominal output voltage	230 V	Package height	2038 mm
Load capacity	7680 VA	Logistics data	
Maximum input current per phase	32 A	Total carbon footprint (kg of CO2e)	8595.81
Maximum total current draw per phase	32 A		
Power protection features	Overload		
Maximum power	7680 W		

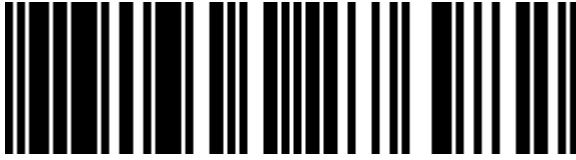

0731304276982



731304276982

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.