DELL

DELL UltraSharp 27 USB-C Hub Monitor - U2722DE

Brand : DELL   **Product family:** UltraSharp   **Product code:** DELL-U2722DE

Product name : Dell UltraSharp
27 USB-C Hub Monitor -
U2722DE

- 68.6cm (27") Quad HD 2560 x 1440 LED IPS
- 8ms, 16:9, 350cd/m², 1000:1
- USB, HDMI, DisplayPort
68.6cm (27") Quad HD 2560 x 1440 LED IPS, 16:9, 350cd/m², 1.07B, 8ms, 178°/178°, 1000:1

DELL UltraSharp 27 USB-C Hub Monitor - U2722DE:

Connected productivity. Vibrant color.
Take your work to new heights with this 27-inch QHD monitor featuring outstanding connectivity, brilliant color coverage including DCI-P3, ComfortView Plus—an always on built-in low blue light screen—and USB-C port with up to 90W power delivery and Ethernet connectivity.
DELL UltraSharp 27 USB-C Hub Monitor - U2722DE. Display diagonal: 68.6 cm (27"), Display resolution: 2560 x 1440 pixels, HD type: Quad HD, Display technology: LCD, Response time: 8 ms, Native aspect ratio: 16:9, Viewing angle, horizontal: 178°, Viewing angle, vertical: 178°. Built-in USB hub, USB hub version: 3.2 Gen 2 (3.1 Gen 2). VESA mounting, Height adjustment. Product colour: Silver

Display

Display diagonal *	68.6 cm (27")
Display resolution *	2560 x 1440 pixels
HD type *	Quad HD
Native aspect ratio *	16:9
Display technology *	LCD
Panel type *	IPS
Backlight type	LED
Touchscreen *	✗
Display brightness (typical)	350 cd/m²
Response time *	8 ms
Anti-glare screen	✔
Screen shape *	Flat
Supported graphics resolutions	2560 x 1440
Supported video modes	480i, 480p, 576p, 720p, 1080i, 1080p
Contrast ratio (typical) *	1000:1
Maximum refresh rate *	60 Hz
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours *	1.07 billion colours
Response time (fast)	5 ms
Pixel pitch	0.2331 x 0.2331 mm
Pixel density	108.78 ppi
Horizontal scan range	30 - 90 kHz
Vertical scan range	49 - 76 Hz
Viewable size, horizontal	59.7 cm
Viewable size, vertical	33.6 cm
Viewable size diagonal	68.5 cm

Ergonomics

Swivelling	✔
Swivel angle range	-45 - 45°
Tilt adjustment	✔
Tilt angle range	-5 - 21°
On Screen Display (OSD)	✔
Plug and Play	✔

Power

Energy efficiency class (SDR) *	E
Energy efficiency class (HDR) *	Not available
Energy consumption (SDR) per 1000 hours *	20 kWh
Power consumption (typical) *	20.4 W
Power consumption (standby) *	0.3 W
Power consumption (max)	197 W
Power consumption (average)	20.4 W
Power consumption (off)	0.3 W
Power consumption (PowerSave)	20.32 W
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Power supply type	Internal
Energy efficiency scale	A to G
European Product Registry for Energy Labelling (EPREL) code	414156

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-20 - 60 °C
Operating relative humidity (H-H)	10 - 80%
Storage relative humidity (H-H)	5 - 90%

Display

High Dynamic Range (HDR) supported	✗
Colour gamut standard	sRGB
Colour gamut	100%

Multimedia

Built-in speaker(s) *	✗
Built-in camera *	✗

Design

Market positioning *	Office
Product colour *	Silver
Front bezel colour	Black
Detachable stand	✔
Feet colour	Silver

Ports & interfaces

Built-in USB hub *	✔
USB hub version	3.2 Gen 2 (3.1 Gen 2)
USB upstream port type	USB Type-C
Number of upstream ports	2
Number of USB Type-C upstream ports quantity	2
USB Type-A downstream ports quantity	4
USB Type-C downstream ports quantity	1
USB Type-C DisplayPort Alternate Mode	✔
USB Power Delivery up to	90 W
DVI port	✗
HDMI *	✔
HDMI ports quantity	1
HDMI version	1.4
DisplayPorts quantity	2
DisplayPort version	1.4
Audio output	✔
Headphone connectivity	3.5 mm

Network

Wi-Fi	✗

Ergonomics

VESA mounting *	✔
Panel mounting interface	100 x 100 mm
Cable lock slot *	✔
Height adjustment *	✔
Adjustable height (max)	15 cm
Pivot	✔
Pivot angle	-90 - 90°

Operational conditions

Operating altitude	0 - 5000 m
Non-operating altitude	0 - 12192 m

Weight & dimensions

Width (with stand)	611.3 mm
Depth (with stand)	185 mm
Height (with stand)	535.1 mm
Weight (with stand)	6.59 kg
Width (without stand)	611.3 mm
Depth (without stand)	49.5 mm
Height (without stand)	352 mm
Weight (without stand)	4.78 kg
Bezel width (side)	7.3 mm
Bezel width (top)	7.3 mm
Bezel width (bottom)	9.05 mm

Packaging data

Package weight	10 kg

Packaging content

Cables included	AC, DisplayPort, HDMI, USB Type-C
DisplayPort cable length	1.8 m
HDMI cable length	1.8 m

Carbon footprint

Total carbon footprint (kg of CO2e)	643
Total carbon emissions, standard deviation (kg of CO2e)	107
Carbon emissions, manufacturing (kg of CO2e)	377.82
Carbon emissions, logistics (kg of CO2e)	50.8
Carbon emissions, energy usage (kg of CO2e)	210
Carbon emissions, end-of-life (kg of CO2e)	3.2
Total carbon emissions, w/o use phase (kg of CO2e)	433
PAIA version	1.2.13, 2021

Other features

Heavy metals free	Hg (mercury)
Ethernet LAN (RJ-45) ports	1

Logistics data

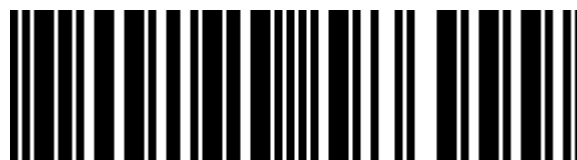|	
Harmonized System (HS) code	85285210

5397184505014

0884116390787

884116390787

5704174586999

5704174550600

Catalog Object Cloud