StarTech.com USB 3.0 Docking Station Dual Monitor with HDMI & 4K DisplayPort - USB 3.0 to 4x USB-A, Ethernet, HDMI and DP - USB Type A Universal Laptop Docking Station for Mac & Windows

Brand : StarTech.com

Product name : USB 3.0 Docking Station Dual Monitor with HDMI & 4K DisplayPort - USB 3.0 to 4x USB-A, Ethernet, HDMI and DP - USB Type A Universal Laptop Docking Station for Mac & Windows

Product code: USB3DOCKHDPC

StarTech.com USB 3.0 Docking Station Dual Monitor with HDMI & 4K DisplayPort - USB 3.0 to 4x USB-A, Ethernet, HDMI and DP - USB Type A Universal Laptop Docking Station for Mac & Windows (USB3DOCKHDPC)

Ports & interfaces

Connectivity technology *	Wired
Host interface *	USB 3.2 Gen 1 (3.1 Gen 1) Type-B
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity *	4
HDMI ports quantity *	1
DisplayPorts quantity	1
Headphone outputs *	1
Headphone connectivity	3.5 mm
USB connector type	USB Type-A

Network

Ethernet LAN *	✔
Ethernet LAN (RJ-45) ports	1
Ethernet LAN data rates	10,100,1000 Mbit/s
Wake-on-LAN ready	✔
Networking standards	IEEE 802.3, IEEE 802.3ab, IEEE 802.3u
Auto MDI/MDI-X	✔
Full duplex	✔

Performance

Card reader integrated *	✗
Data transfer rate	5 Gbit/s
Maximum digital resolution	3840 x 2160 pixels
Cable lock slot	✔
Product colour *	Black
LED indicators	Activity, Link
Charging function	✔
UASP support	✔

Software

Mac compatibility	✔
Mac operating systems supported	Mac OS X 10.11 El Capitan, Mac OS X 10.12 Sierra, Mac OS X 10.14 Mojave, Mac OS X 13.0 Ventura
Other operating systems supported	ChromeOS

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-10 - 80 °C
Operating relative humidity (H-H)	0 - 90%

Weight & dimensions

Width	76 mm
Depth	227 mm
Height	24 mm
Weight	277 g

Packaging data

Package width	251 mm
Package depth	198 mm
Package height	71 mm
Package weight	1.1 kg

Packaging content

Cables included	AC, USB
AC adapter included	✔
Manual	✔
Drivers included	✔

Technical details

Compliance certificates	RoHS

Performance

Housing material	Plastic, Steel
Brand compatibility	Any brand
Certification	CE, FCC, DisplayLink

Power

AC input voltage	100-240 V
Input current	1.5 A
Output voltage	5 V
Output current	6.5 A
Power consumption (typical)	32.5 W
Compatible power plug types	AU, EU, UK, US

Software

Windows operating systems supported	Windows 10, Windows 10 Education, Windows 10 Education x64, Windows 10 Enterprise, Windows 10 Enterprise x64, Windows 10 Home, Windows 10 Home x64, Windows 10 Pro, Windows 10 Pro x64, Windows 7, Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8 x64

Logistics data

Products per master (outer) case	10 pc(s)
Master (outer) case width	390 mm
Master (outer) case length	426 mm
Master (outer) case height	302 mm
Products per shipping (inner) case	150 pc(s)
Harmonized System (HS) code	84733020

Other features

Cable length	0.6 m
Chipset	DisplayLink - DL-5900, VLI - VL812
USB data transfer rates	5000 Mbit/s

0065030859233
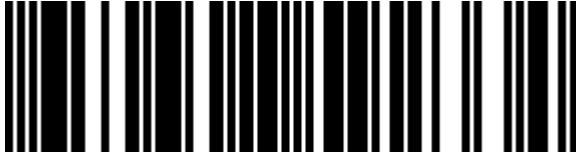
065030859233

0650308592334

650308592334

Catalog Object Cloud