![LG]

LG UH5F Digital signage flat panel 2.49 m (98") IPS Wi-Fi 500 cd/m² 4K Ultra HD Black 24/7

Brand : LG

Product name : UH5F

Product code: 98UH5F-H

- Crestron-certified compatibility with AV control system
- Vivid colour and wide viewing angle with IPS panel
- 83.8 mm slim design with 14.9 mm even bezel
- Interface : HDMI(3)/ DP/ DVI-D/ USB 2.0(2)/ RS232C/ RJ45/ Audio/ IR
- Built-in Content Management System and speaker
98" IPS, 3840 x 2160 (UHD), RS232C , RJ45, HDMI , DVI-D, Audio, USB, DisplayPort, 500cd/m²
LG UH5F. Product design: Digital signage flat panel. Display diagonal: 2.49 m (98"), Display technology: IPS, Display resolution: 3840 x 2160 pixels, Display brightness: 500 cd/m², HD type: 4K Ultra HD. Wi-Fi. Operating hours (hours/days): 24/7. Product colour: Black

Display

Display diagonal *	2.49 m (98")
Display technology *	IPS
Display resolution *	3840 x 2160 pixels
Display brightness *	500 cd/m²
HD type *	4K Ultra HD
Touchscreen *	✘
Native aspect ratio	16:9
Response time	8 ms
Contrast ratio (typical)	1200:1
Contrast ratio (dynamic)	1000000:1
Viewing angle, horizontal	178°
Viewing angle, vertical	178°
Display number of colours	1.06 billion colours

Ports & interfaces

HDMI ports quantity *	3
HDMI version	2.2/1.4
HDMI input ports quantity	3
DVI port *	✔
DVI-D ports quantity	1
DisplayPorts quantity *	2
DisplayPorts out	1
USB port *	✔
USB ports quantity	1
USB version	2.0
Ethernet LAN *	✔
Wi-Fi *	✔
RS-232C	✔
Remote (IR) input	1

Audio

Built-in speaker(s) *	✔

Design

Product design *	Digital signage flat panel
Placement supported *	Indoor
Orientation	Horizontal/Vertical
Product colour *	Black
VESA mounting *	✔
Panel mounting interface	800 x 400 mm
Bezel width (bottom)	1.49 cm
Bezel width (side)	1.49 cm
Bezel width (top)	1.49 cm

Performance

Operating hours (hours/days)	24/7

Power

Power consumption (typical) *	420 W
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz
Heat dissipation	1433.25 BTU/h

Weight & dimensions

Width	2191.8 mm
Depth	83.8 mm
Height	1246.8 mm
Weight	18.1 kg

Packaging content

Remote control included	✔

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	10 - 80%

Certificates

Certification	CB, NRTL, Yes, FCC Class "A" / CE / KC, ErP

Logistics data

Harmonized System (HS) code	85285210

0719192642683

719192642683
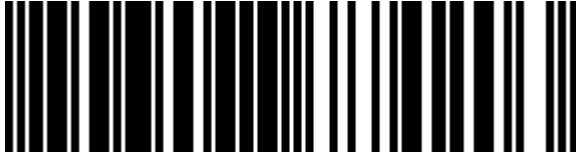
8806098774203
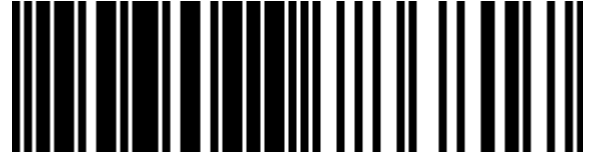
8806098786817

Catalog Object Cloud