

## ASUS TUF Gaming GT501 Midi Tower Black

**Brand :** ASUS

**Product code:** 90DC0012-B49000

**Product name :** TUF Gaming GT501

- Mid-Tower with support for EATX Motherboards featuring a metal chassis and panels with custom TUF Gaming spatter pattern and 4mm-thick smoked, tempered-glass full view side panel
  - Keep Your Cool with three 120mm Aura Sync RGB-illuminated fans, one 140mm rear PWM fan, and up to seven optional fan-mounting points
  - Custom Liquid Cooling Ready with support for top or front mounted 360mm radiators, rear mounted 140mm radiator, and pre-drilled water pump/reservoir mounting holes
  - Vertical GPU Expansion Slot plus 7 traditional expansion slots
  - Ergonomic, Woven-cotton Carry Handles enable easy and safe transport up to 65lbs
- ATX Mid Tower, ATX/micro ATX/Mini ITX/EATX, 4 x 2.5"/3.5", 3x 2.5", Front: 3x 120mm AURA RGB (1200RPM), Rear: 1x 140 PWM, 10.5 kg, Black




Design		Cooling	
Material	Plastic	Front fans installed	3x 120 mm
Form factor *	Midi Tower	Number of front fans supported (max)	3
Type *	PC	Front fans diameters supported	120 mm
Product colour *	Black	Rear fans installed	1x 140 mm
Supported motherboard form factors *	ATX, EATX, micro ATX, Mini-ITX	Number of rear fans supported (max)	1
Number of 3.5" bays *	4	Rear fans diameters supported	120,140 mm
Number of 2.5" bays	3	Top fans diameters supported	120,140 mm
Number of internal 3.5" bays	4	Front radiator sizes supported	120,140,240,280,360 mm
Number of expansion slots	9	Rear radiator sizes supported	120,140 mm
Side window	✓	Top radiator sizes supported	120,140,240,280,360 mm
Suitable for	Gaming	Storage	
Illumination	✓	Supported HDD sizes *	2.5,3.5"
Illumination colour	Multi	HDD/SSD combo cage	✓
Illumination location	Front	Packaging content	
Anti-dust filter	✓	Manual	✓
On/off button	✓	Weight & dimensions	
LED indicators	HDD, Power, Status	Width	215.4 mm
Maximum CPU cooler height	18 cm	Depth	533.4 mm
Maximum graphics card length	42 cm	Height	551.2 mm
Maximum PSU length	24 cm	Weight	10.5 kg
Power supply		Logistics data	
Power supply included *	✗	Harmonized System (HS) code	84733080
Power supply location	Bottom		
Ports & interfaces			
Audio input	✓		
Audio output	✓		


Ports & interfaces

USB 3.2 Gen 1 (3.1 Gen 1) Type-A  
ports quantity \*

2

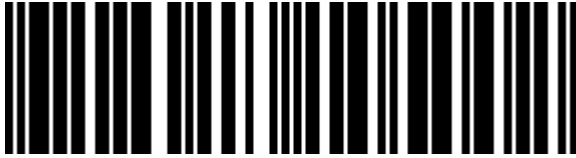

4718017105002

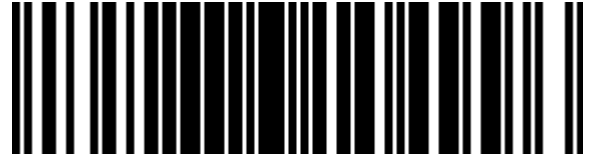

0192876104996



192876104996

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.