Viewsonic PA503X data projector Standard throw projector 3600 ANSI lumens DLP XGA (1024x768) Grey, White

Brand : Viewsonic

Product code: PA503X
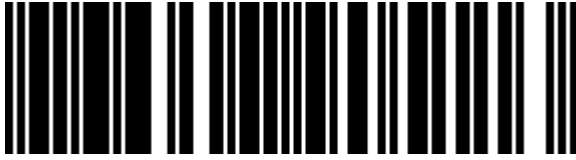
Product name : PA503X

1024 x 768, DLP, 3600 ANSI lum, 30-300", 190 W, 4:3, Mini USB B, RS-232, RCA, 3.5mm, HDMI 1.4, VGA, 2x RGB, 2 W RMS, 294x218x110 mm
Viewsonic PA503X. Projector brightness: 3600 ANSI lumens, Projection technology: DLP, Projector native resolution: XGA (1024x768). Light source type: Lamp, Service life of light source: 4500 h, Service life of light source (economic mode): 15000 h. Focus: Manual, Zoom type: Manual, Optical zoom: 1.1x. Analog signal format system: NTSC, PAL, PAL 60, SECAM, Supported graphics resolutions: 640 x 480 (VGA), 720 x 480, 720 x 576, 800 x 600 (SVGA), 1024 x 768 (XGA), 1280 x 1024 (SXGA),..., Supported video modes: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p. Serial interface type: RS-232, HDMI connector type: Full-size

Projector

Screen size compatibility *	762 - 7620 mm (30 - 300")
Projection distance	1.1 - 13 m
Contrast ratio (dynamic)	22000:1
Projector brightness *	3600 ANSI lumens
Projection technology *	DLP
Projector native resolution *	XGA (1024x768)
Native aspect ratio *	4:3
Number of colours	1.073 billion colours
Horizontal scan range	15 - 102 kHz
Vertical scan range	23 - 120 Hz
Keystone correction, vertical	-40 - 40°
Matrix size	1.4 cm (0.55")
Matrix type	DMD

Light source

Light source type *	Lamp
Service life of light source *	4500 h
Service life of light source (economic mode)	15000 h
Lamp power	190 W
Lamps quantity	1 lamp(s)

Lens system

Focus *	Manual
Zoom capability	✔
Zoom type	Manual
Optical zoom	1.1x
Throw ratio	1.96 - 2.15:1

Video

Analog signal format system *	NTSC, PAL, PAL 60, SECAM
3D Ready	✔
Supported graphics resolutions	640 x 480 (VGA), 720 x 480, 720 x 576, 800 x 600 (SVGA), 1024 x 768 (XGA), 1280 x 1024 (SXGA), 1280 x 720 (HD 720), 1280 x 800 (WXGA), 1360 x 768 (WXGA), 1366 x 768, 1400 x 1050 (SXGA+), 1440 x 900 (WXGA+), 1920 x 1200 (WUXGA)

Network

Ethernet LAN *	✖
Wi-Fi *	✖

Storage

Card reader integrated *	✖

Features

Certification	FCC (ICES-003), cTUVus

Multimedia

Built-in speaker(s) *	✔
RMS rated power	2 W
Number of built-in speakers	1

Design

Product type *	Standard throw projector
Product colour *	Grey, White
Placement	Desktop
Cable lock slot	✔
Cable lock slot type	Kensington

Display

Built-in display *	✖

Power

Power source *	AC
Power consumption (typical) *	260 W
Power consumption (standby) *	0.5 W
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Operating relative humidity (H-H)	10 - 90%
Operating altitude	0 - 1499 m

Weight & dimensions

Width	294 mm
Depth	218 mm
Height	110 mm

Video

Supported video modes	480i, 480p, 576i, 576p, 720p, 1080i, 1080p

Ports & interfaces

HDMI connector type	Full-size
HDMI version	1.4
Serial interface type *	RS-232
PC Audio in	✔
PC Audio out	✔
VGA (D-Sub) ports quantity *	3
HDMI ports quantity *	1
Composite video in *	1
DVI port *	✘
AC (power) in	✔

Weight & dimensions

Weight *	2.2 kg
Package width	365 mm
Package depth	188 mm
Package height	300 mm
Package weight	6.24 kg

Packaging content

Remote control included *	✔
Cables included	AC, VGA
Quick start guide	✔

Logistics data

Harmonized System (HS) code	85286200

Other features

RS-232 ports	1

0766907905113

766907905113

Catalog Object Cloud