



## APC Smart-UPS SMT2200IC - 8x C13, 1x C19, USB, SmartConnect, 2200VA

**Brand :** APC


**Product code:** SMT2200IC

**Product name :** APC Smart-UPS SMT2200IC - 8x C13, 1x C19, USB, SmartConnect, 2200VA

- 2200VA/1980W line interactive pure sine wave tower UPS
- Ideal for servers, storage, networking, business VoIP and desktops, retail POS
- Automatic Voltage Regulation helps correct utility voltage
- Cloud-based remote power monitoring via SmartConnect Ethernet Port
- Graceful shutdown using serial or USB cables via PowerChute Serial Shutdown

APC Smart-UPS SMT2200IC - 8x C13, 1x C19, USB, SmartConnect, 2200VA

APC Smart-UPS SMT2200IC - 8x C13, 1x C19, USB, SmartConnect, 2200VA. UPS topology: Line-Interactive, Output power capacity: 2.2 kVA, Output power: 1980 W. AC outlets quantity: 9 AC outlet(s), USB port type: USB Type-A. Battery technology: Sealed Lead Acid (VRLA), Typical backup time at full load: 8.7 min, Typical backup time at half load: 25 min. Product colour: Black, Display type: LCD. Compliance certificates: RoHS, Certification: CE, CSA, EAC, EN/IEC 62040-1, EN/IEC 62040-2, RCM, VDE

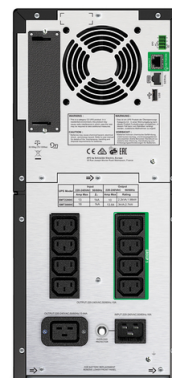

Features		Battery	
UPS topology *	Line-Interactive	Battery life (max)	5 year(s)
Output power capacity *	2.2 kVA	Battery recharge time	3 h
Output power *	1980 W	Design	
Waveform *	Sine	Product colour *	Black
Input operation voltage (min) *	151 V	Display type	LCD
Input operation voltage (max) *	302 V	LED indicators	✓
Input frequency *	50/60 Hz	Operational conditions	
Output operation voltage (min)	220 V	Operating temperature (T-T)	0 - 40 °C
Output operation voltage (max)	240 V	Storage temperature (T-T)	-15 - 45 °C
Surge energy rating	365 J	Operating relative humidity (H-H)	0 - 95%
Response time	6 ms	Storage relative humidity (H-H)	0 - 95%
Emergency Power Off (EPO)	✓	Operating altitude	0 - 3000 m
Output voltage Total Harmonic Distortion (THD)	5%	Non-operating altitude	0 - 15000 m
Noise level	45 dB	Certificates	
Power protection features	Over voltage, Overload	Compliance certificates	RoHS
Audible alarm(s)	✓	Certification	CE, CSA, EAC, EN/IEC 62040-1, EN/IEC 62040-2, RCM, VDE
Audible alarm modes	Alarm when on battery, Low battery alarm, Battery replacement	Packaging content	
Auto-restart	✓	Cables included	RS-232, USB cable
Ports & interfaces		Sustainability	
AC outlets quantity	9 AC outlet(s)	Sustainability certificates	Green Premium
USB port	✓	Weight & dimensions	
USB 2.0 ports quantity	1	Width	197 mm
USB port type	USB Type-A	Depth	544 mm
Serial interface	✓		

Ports & interfaces		Weight & dimensions	
Serial ports quantity	1	Height	435 mm
Ethernet LAN (RJ-45) ports	1	Weight	48.8 kg
SmartSlot	✓	Packaging data	
Battery		Software CD	✓
Battery technology	Sealed Lead Acid (VRLA)	Package width	381 mm
Typical backup time at full load	8.7 min	Package depth	762 mm
Typical backup time at half load	25 min	Package height	699 mm
		Package weight	61.9 kg
		Logistics data	
		Products per pallet	9 pc(s)
		Harmonized System (HS) code	85078000
		Total carbon footprint (kg of CO2e)	3715.93



0731304337317



731304337317

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.