



## Jabra Speak 750 MS Teams

**Brand :** Jabra

**Product code:** 7700-309

**Product name :** Jabra Speak 750 MS Teams

Jabra Speak 750 MS Teams

**Jabra Speak 750 MS Teams:**

Jabra Speak 750 is engineered to power your meetings with seamless, premium audio. With full duplex sound for more natural conversations, UC and Microsoft Teams certification & plug-and-play capability, you get maximum flexibility for your huddle room.

Jabra Speak 750 is engineered to power your meetings with seamless, premium audio. Full duplex sound for more natural conversations.

Jabra Speak 750 is engineered to power your meetings with seamless, premium audio. With full duplex sound for more natural conversations, UC and Microsoft Teams certification & plug-and-play capability, you get maximum flexibility for your huddle room.


Jabra Speak 750 is engineered to power your meetings with seamless, premium audio. With full duplex sound for more natural conversations, UC and Microsoft Teams certification & plug-and-play capability, you get maximum flexibility for your huddle room.



Features		Power	
Device type *	Universal	Battery recharge time	3 h
Auto *	✗	Operational conditions	
Product colour	Black, Silver	Storage temperature (T-T)	-40 - 65 °C
Portable	✓	Weight & dimensions	
Speakerphone	✓	Width	131 mm
Echo cancellation	✓	Height	38 mm
Maximum operating distance	30 m	Weight	301 g
Signal-to-Noise Ratio (SNR)	70 dB	Packaging data	
Cable length	0.9 m	Package width	154.5 mm
LED indicators	✓	Package depth	152 mm
On/off switch	✓	Package height	55 mm
Plug and Play	✓	Package weight	468.5 g
Control type	Touch	Packaging content	
Microphone		Quantity	1
Microphone mute	✓	Quick start guide	✓
Microphone direction type	Omnidirectional	Technical details	
Ports & interfaces		Accessories included	abra Link 370 Bluetooth Adapter, Soft Pouch
Interface	USB/Bluetooth	Logistics data	
Connectivity technology *	Wired & Wireless	Country of origin	China
Bluetooth	✓	Harmonized System (HS) code	85182900
Bluetooth profiles	HFP	Master (outer) case width	365 mm
Bluetooth version	4.2	Master (outer) case length	330 mm
Power		Master (outer) case height	188 mm
Power source type	Battery, USB	Master (outer) case gross weight	6.22 kg
Battery capacity	500 mAh	Products per master (outer) case	12 pc(s)
Input voltage	5 V		

**Power**

Talk time 11 h

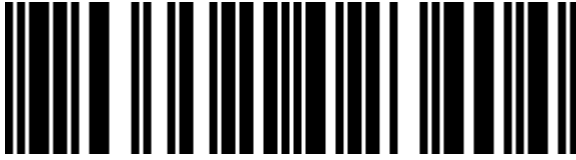

5706991023404



0706487020653



706487020653

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 26-JUL-2025. Prints or copies of Information are only valid on the printed Publication date