


Static TDI 2 + clock correction; ideal primary-noise cancellation

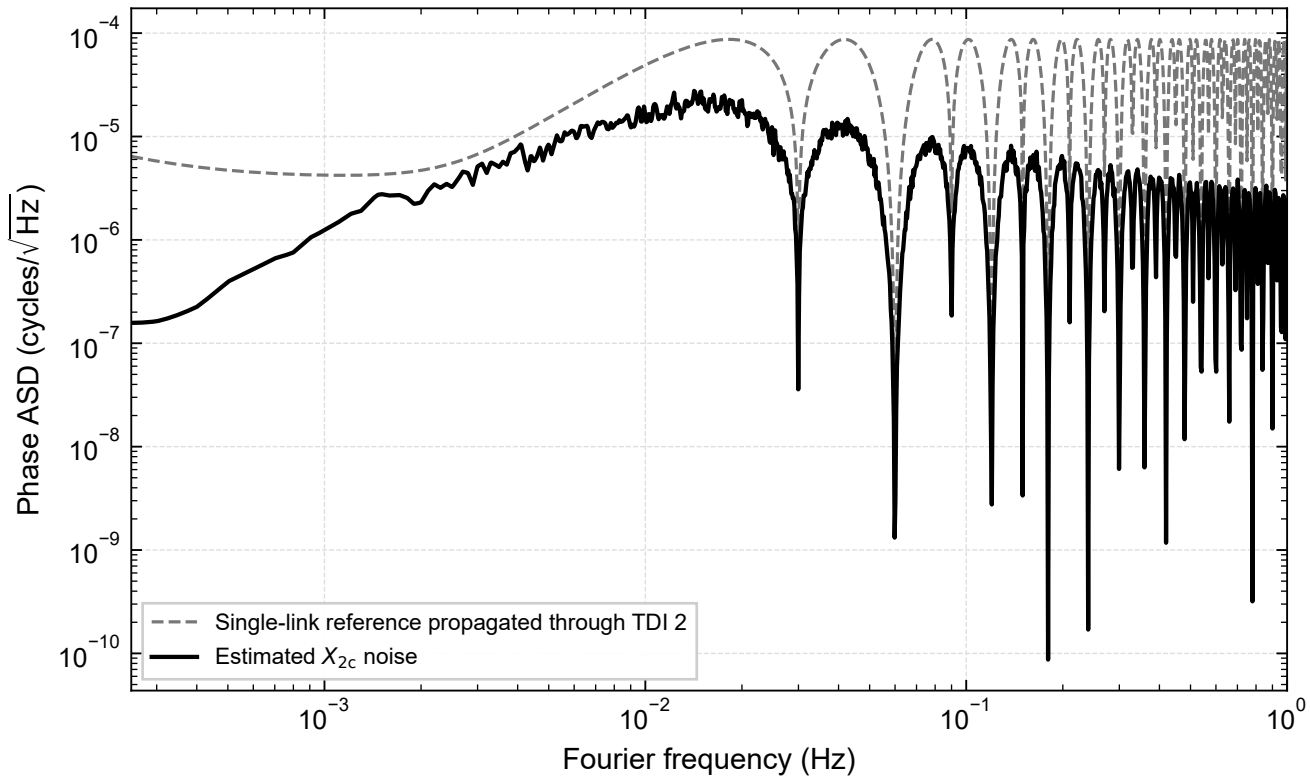

Modulation (SC1,2,3): 35, 36, 34 MHz; electrical carriers: 15, 10.9, 21.6 MHz
 Linear model: 4 mW/beam, $\mu_{\text{EOM}} = 0.53$; ADC covered by electronic baseline