

DIR-4


INDUSTRIAL ROBOT
ELECTRICAL CABINET



Three-phase three-wire power filter



Double switching power supply

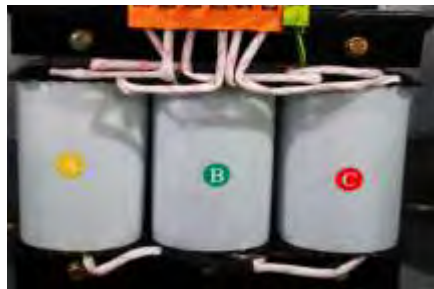

Three-phase dry-type servo isolation transformer



Built-in safety circuit

CABINET TECHNICAL INDEX

Teaching pendant	8-inch TFT-LCD, button + touch screen, mode selection switch, safety switch, emergency stop button
User memory	200M
Axis quantity that can be controlled	6ed+ 2 axes, 6 robot body axes + 2 external axes
Interface	Digital I/O interface, EtherCAT, 22 input / output(expandable COM)
	4-way 0~10V analog output, 12-bit accuracy(expandable COM)
	Two-way encoder signal interface(position tracking)
	Ethernet communication interface
Operation mode Moving function	Double USB interface
	Teaching, reproduction, remote
Command system	Point-to-point, straight line, circle
	Motion, logic, process, operation
Coordinate system	Joint coordinates, rectangular coordinates, user coordinates, tool coordinates, and base coordinates
Abnormal detection function	Abnormal stop, abnormal servo, abnormal user coordinates,abnormal tool coordinates, safety maintenance, abnormal arc,etc.
Robot safety	External emergency stop, anti-collision and safety bolt interface; MC safety circuit, servo soften, etc.
Reserved specific interface	arc welding interface, workstation interface
Software package	With options of welding, handling, palletizing, painting, andspraying applications
Others	Built-in PLC, regenerative braking, encoder interface (supporting synchronous belt), arc tracking and accessories (optional), vision software (optional), laser tracking software(optional), etc.
Connecting cable	3m
Power supply	Three phase 400V AC 50HZ
Dimension	550mm × 785mm × 410mm
Weight	90KG

CABINET DIMENSIONAL DRAWING

