

DIR-RH18-20

INDUSTRIAL ROBOT HANDLING APPLICATION




FUNCTIONAL FEATURES

- With compact design 20kg payload and about 1.8 meters arm span, it can be installed on the ground or upside down flexibly.
- With large working space and fast running speed, it is suitable for welding, spraying, loading and unloading, handling, sorting, assembling and other applications.
- The safety emergency stop board is independent of the controller, and the safety relay circuit is adopted to provide double circuit emergency stop to ensure the reliability of emergency stop.
- The robot body cables are made of special cables for highly flexible robots.
- Built-in three-phase transformer, 380V and 200V isolation, more stable power supply.
- Power supply requirements can be customized for different countries. Built-in three-phase filter can effectively improve the performance of EMC and EMI.
- The robot body is with dual-circuit gas pipe and meets welding and handling requirements.

ROBOT BODY TECHNICAL PARAMETERS

Model		DIR-RH18-20
Arm form		Vertical multiple joints
Degree of freedom		6 axis
Maximum payload		20KG
Repeated positioning accuracy		±0.08mm
Maximum reaching distance		1730mm
Robot body weight		285KG
Installation mode		Ground, upside down mounting, wall mounting
Maximum travel	axis 1	Ground/upside down mounting -167°~167°, wall mounting -30°~30°
	axis 2	-155°~105°
	axis 3	-170°~240°
	axis 4	-190°~190°
	axis 5	-90°~110°
	axis 6	-210°~210°
Maximum speed	axis 1	160°/S
	axis 2	160°/S
	axis 3	169°/S
	axis 4	301°/S
	axis 5	342°/S
	axis 6	520°/S
Allowable torque	axis 4	55N.m
	axis 5	55N.m
	axis 6	30N.m
Allowable moment of inertia	axis 4	2.2kg.m²
	axis 5	2.2kg.m²
	axis 6	1.2kg.m²
Installation environment	ambient temperature	0~45°C
	relative humidity	20~80% (No condensation)
	vibration	Under 0.5 G
	Others	Robot installation must be away from: Flammable or corrosive liquids or gases, electrical sources of interference
IP level		Body IP54 , wrist IP67
Advantage features		Compact structure, high speed, high precision, high expansibility and easy operation
Application		cutting, assembly, handling, marking, grinding

INSTALLATION INTERFACE DIAGRAM

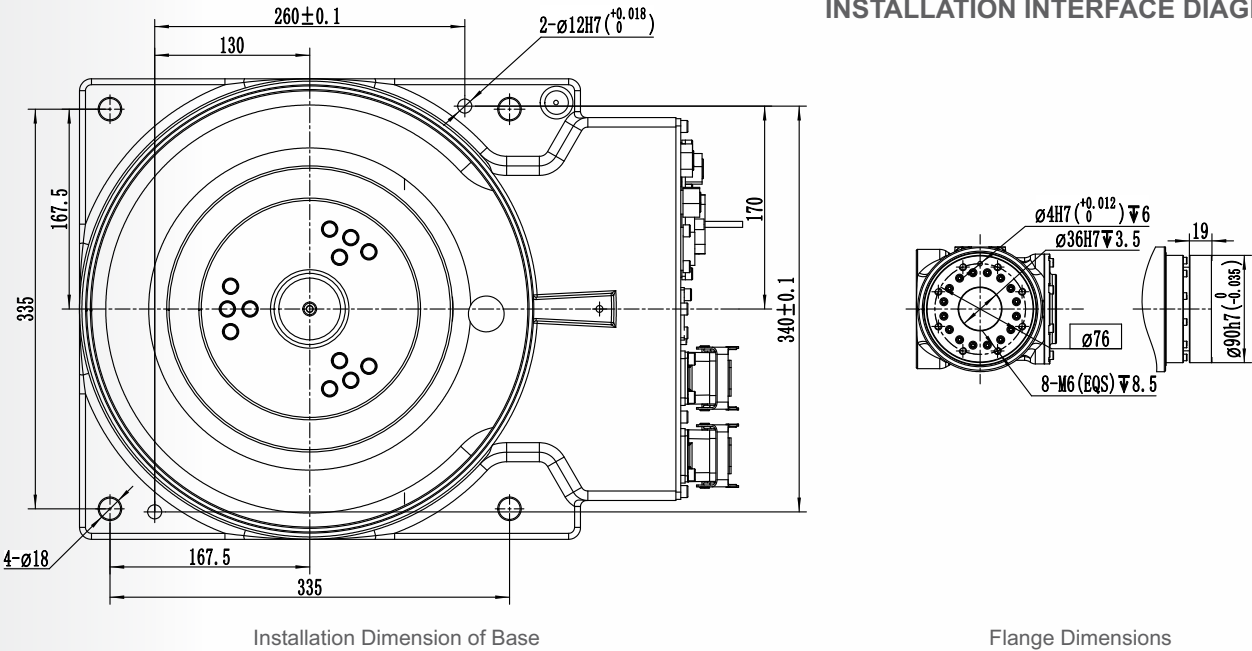

MOTION RANGE DIAGRAM

