


Phase 2a: decoder accuracy vs activation precision
 surface code d=5, p=0.010, r=3 -- 10M shots, fresh 200k tail

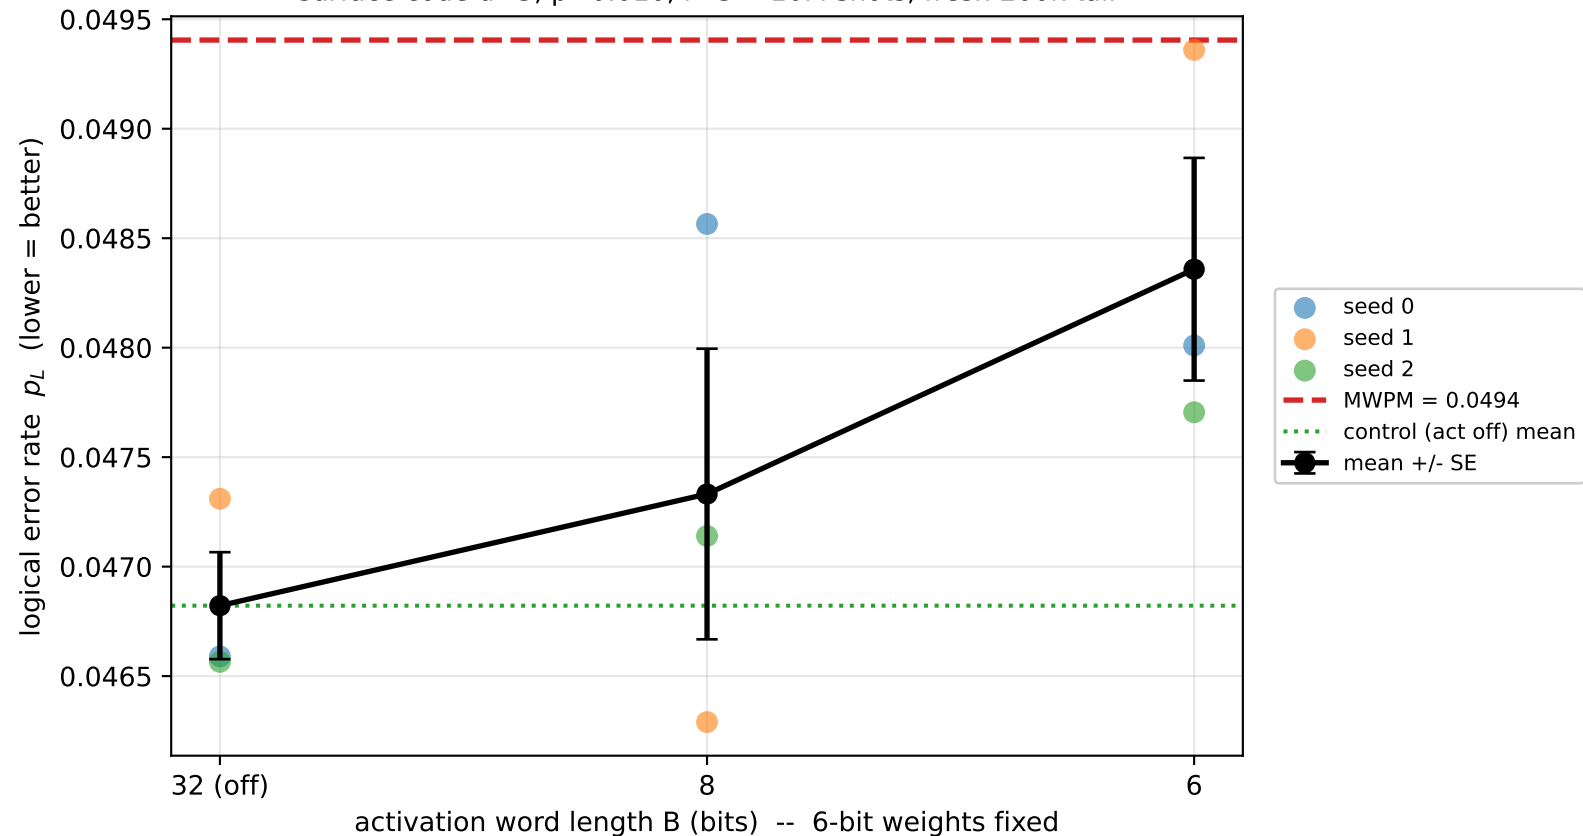

B=4 omitted: infeasible fixed-point format (negative fractional width), not a precision limit.
 Its run collapsed to the base rate 0.2826; the minimum viable B under the current integer widths is 6.