M T W T F S S
Page No.
Date
YOUVA

18.9.24

a) Exp: 11 Routing at Network Layer

Aim:

To simulate Static routing configuration using Cisco Packet tracer

Procedure:

(1) Open Cisco Packet tracer and Create topology → 3 routers, PC's, Switches and Server
(2) Identify the Networks
(3) Configure Static Routes
↳ Open each router →
↳ Enter Configuration Mode
↳ enable
↳ configure terminal
(4) Configure Main and backup Router.
↳ configure Primary route as Main
↳ route with higher AD as Backup
↳ If Main fails, backup is executed
(5) verify Static Routing
(6) Delete a Static Route if required
→ no ip route <destination - network> <subnet-mask> <next-hop>

eg

Route (config) Ip route < destination-network
< subnet mask < next hop-IP >

Command Prop / Router CI :

Router > enable

Router # Configure terminal


Router Config # ip route 192.168.20.0 255.255.255.0

Router (Config) # Head .

Router # Show ip route .

Output :

192.168.20.0/24 [110] via 10.0.0.2

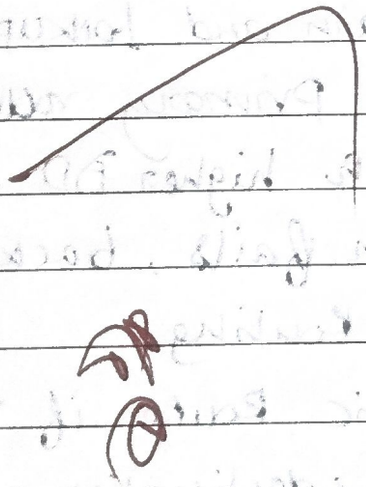

Result:

Thus, static routing with main and backup router was successfully configured using Cisco packet tracer. connectivity b/w different Network was verified using Ping