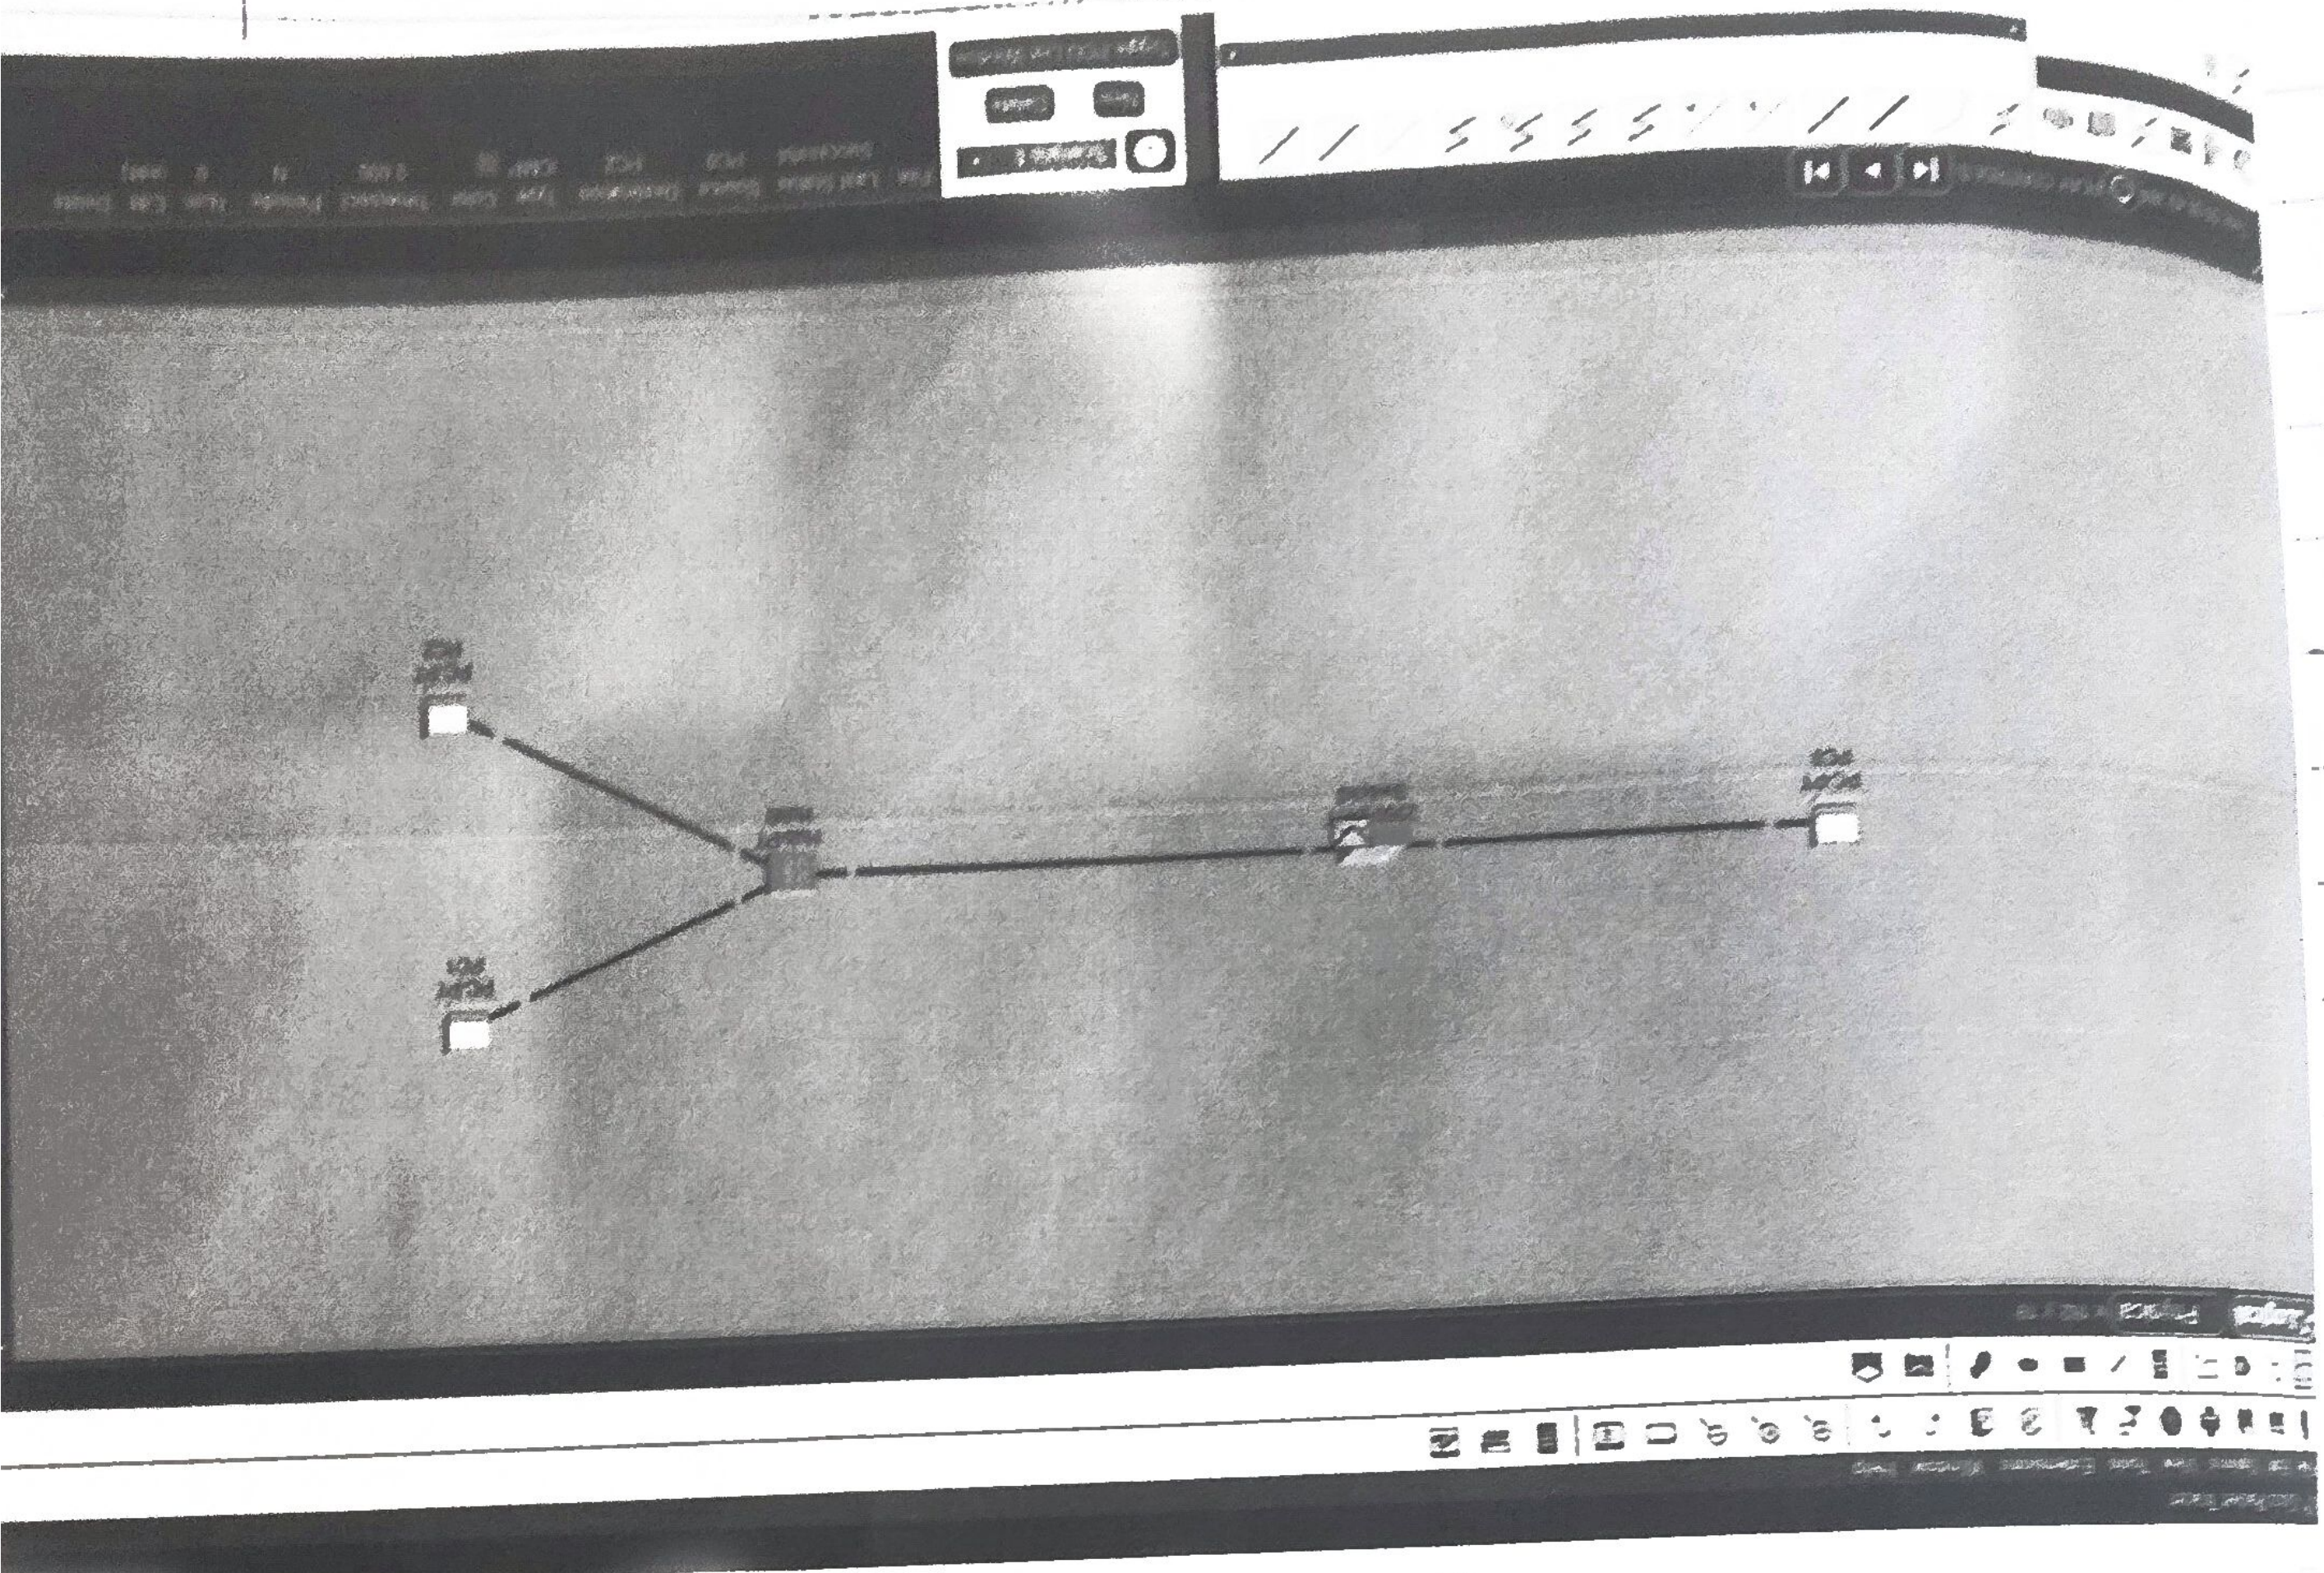

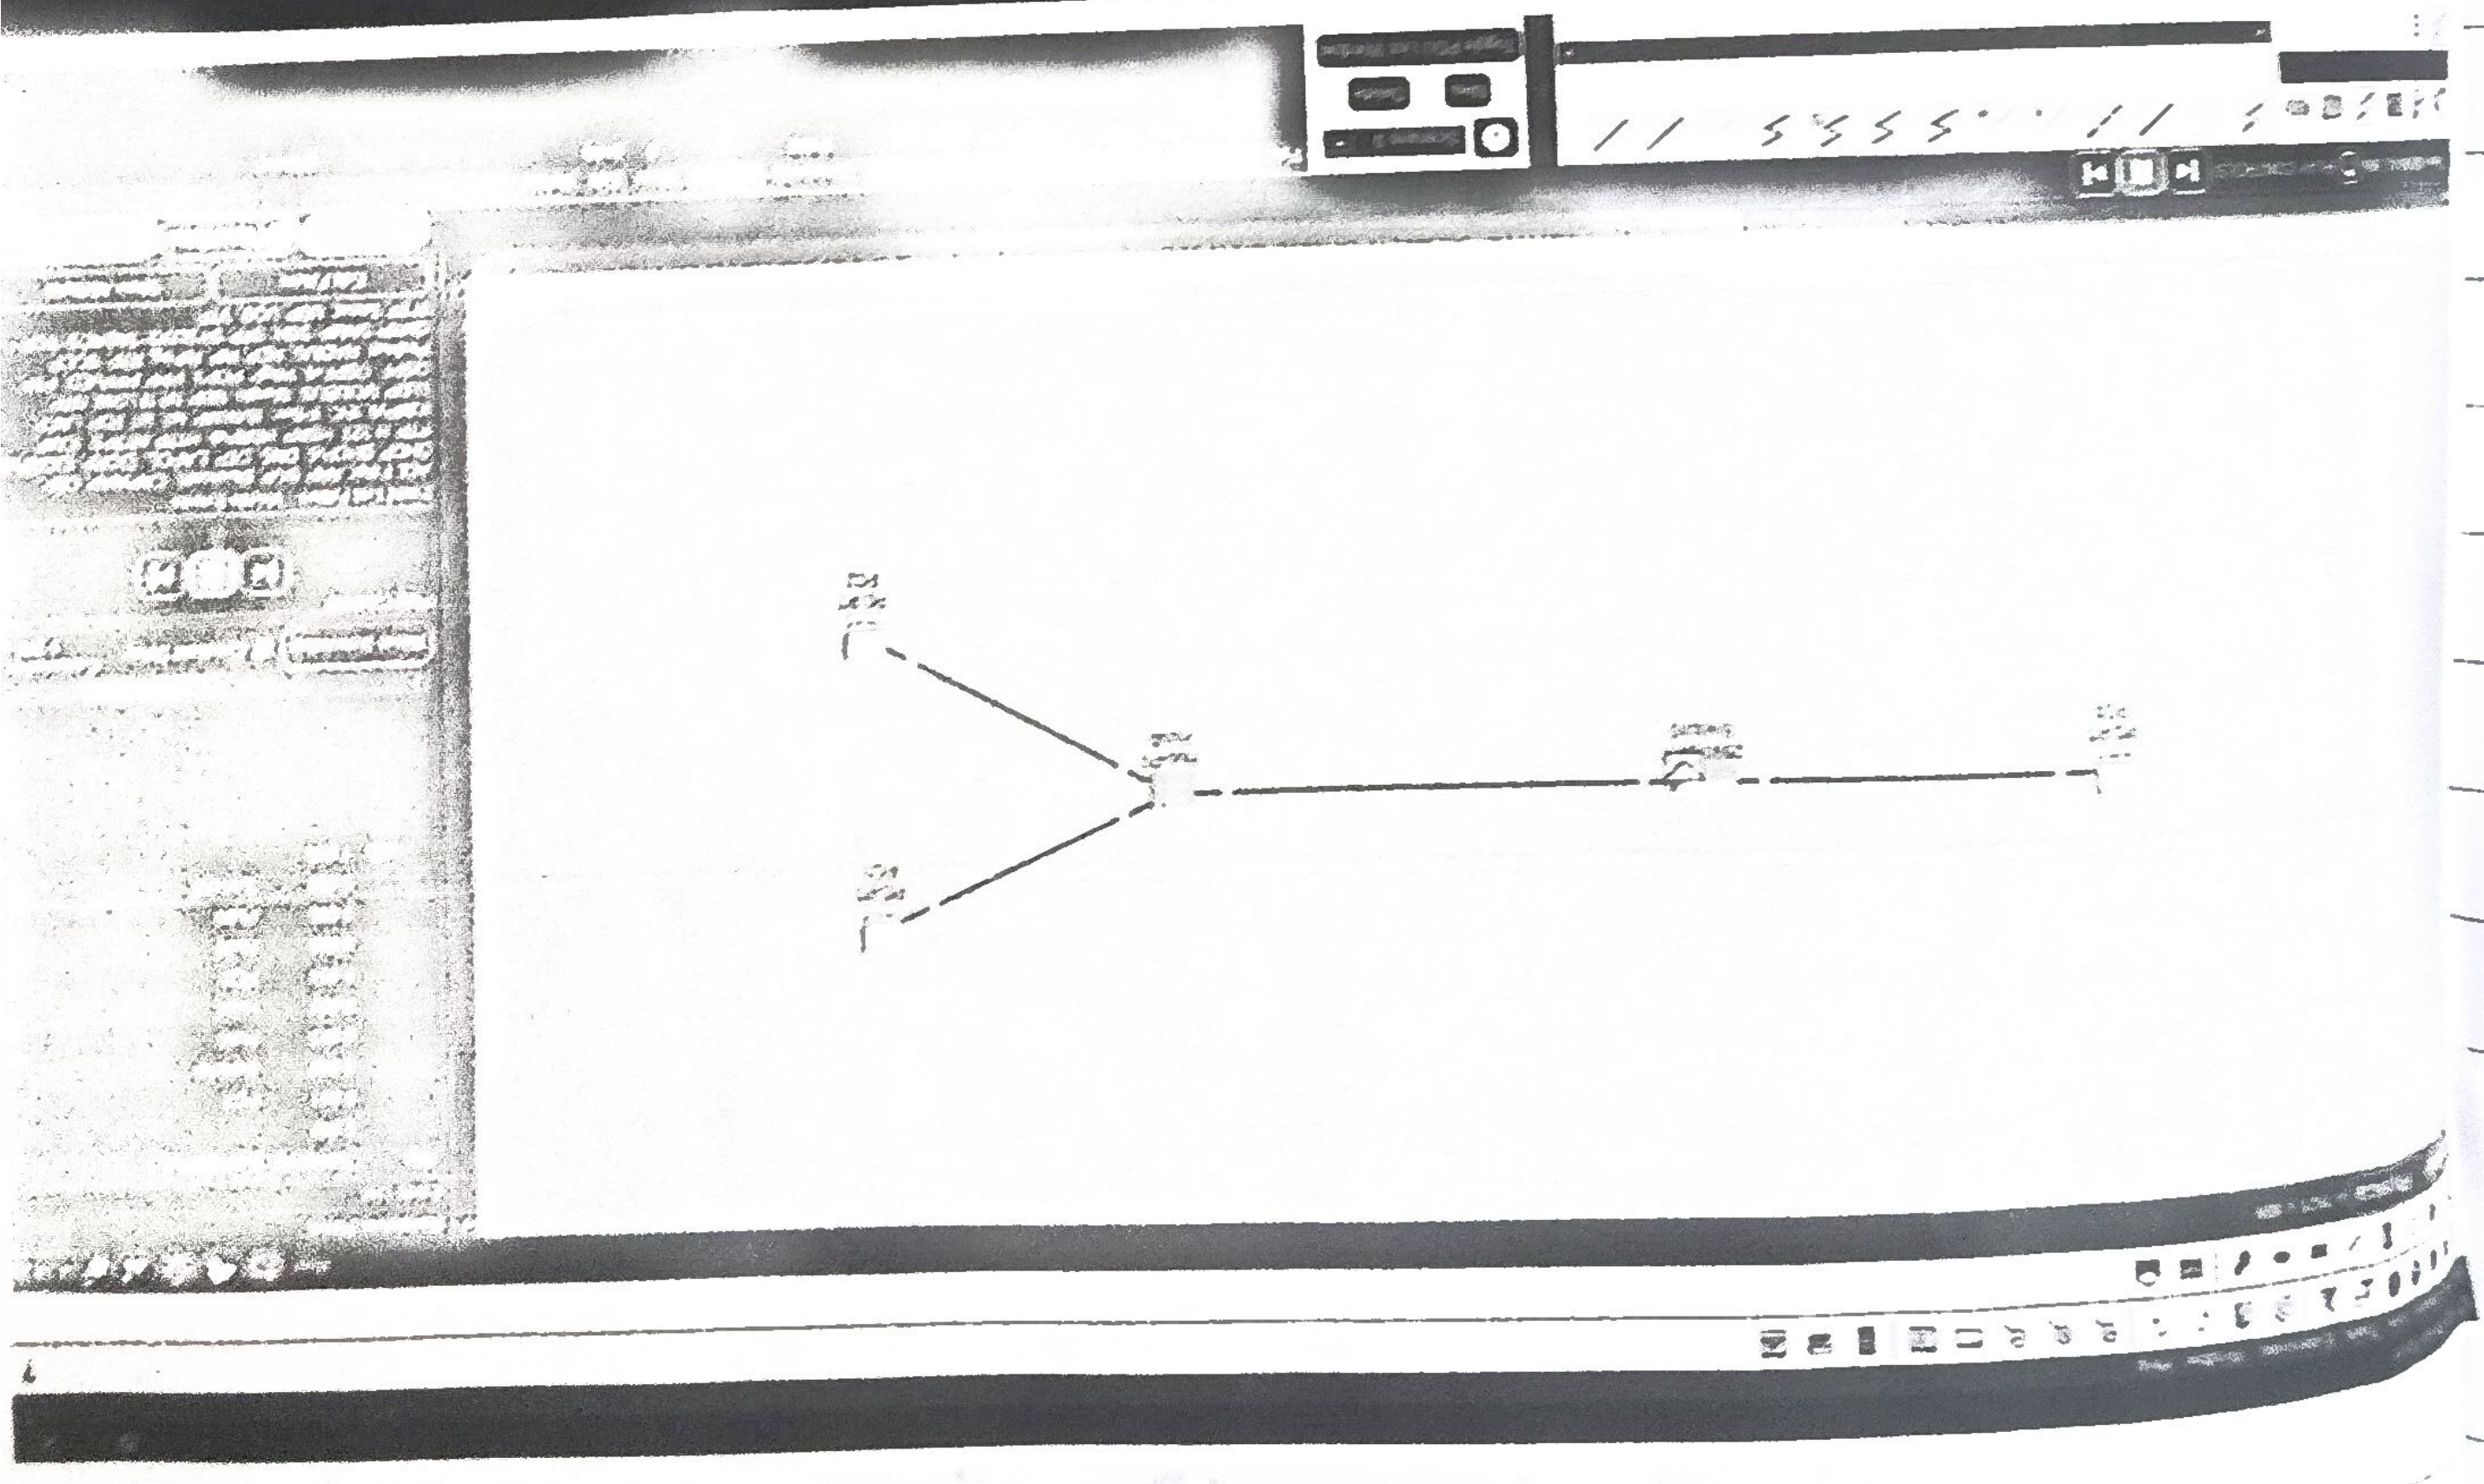

4) Workspace - This is the area where topologies are created and simulations are displayed.

5) Commons toolbar: used to control for manipulation topologies

6) Real-time / Simulation tabs - It is used to toggle between the real and simulation Modes.

7) Network component box - It contains all of the network and end devices available with Packet tracer.

8) user-created Packet box - users can create highly-customized Packets to test thier topology from this area.

Analyze the behaviour of network devices using CISCO packet tracker simulator

① From the network component box, Click and drag and drop the below components.

a) 4 genric PCs and one Hub

b) 4 genric PCs and one Switch.

② Click on connection.

a) click on copper straight-through cable

b) Select one of the PC and connect ~~the~~ it to HUB using the cable. the Link LED should glow in green.

c) Similarily connect 4 PCs to the switch using copper straight - through cable

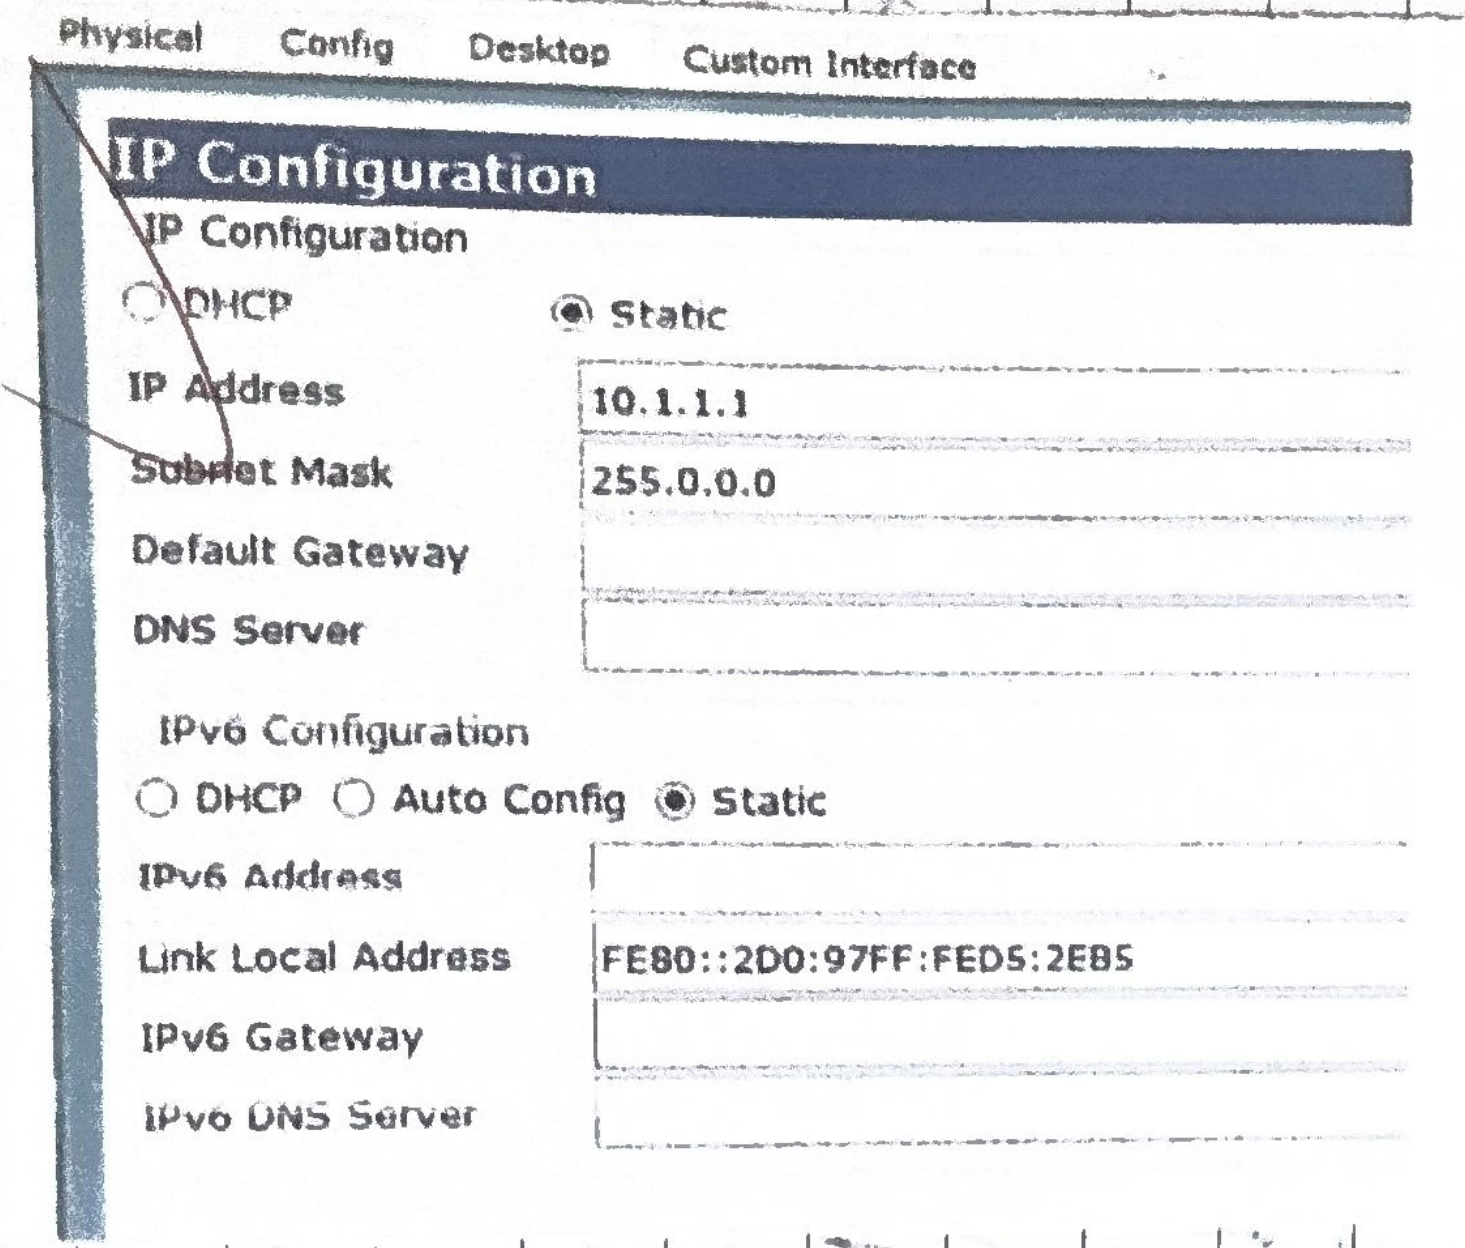
Physical
Config
Desktop
Custom Interface

IP Configuration

IP Configuration

○ DHCP ● Static

IP Address: 10.1.1.1

Subnet Mask: 255.0.0.0

Default Gateway:

DNS Server:

IPv6 Configuration

○ DHCP ○ Auto Config ● Static

IPv6 Address:

Link Local Address: FE80::2D0:97FF:FED5:2EB5

IPv6 Gateway:

IPv6 DNS Server:

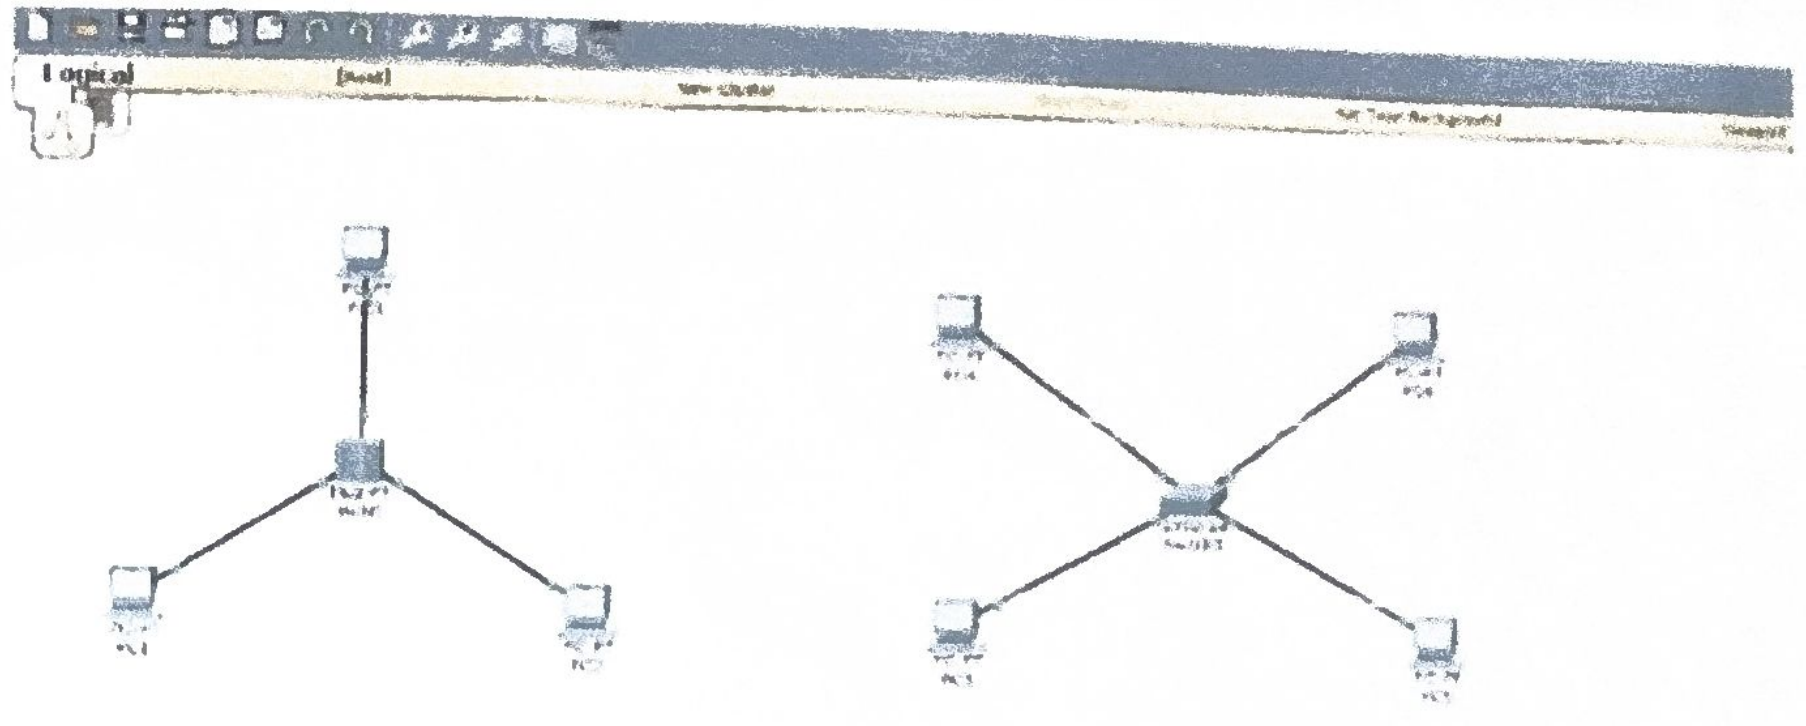

3) Click
tab,
IP a

4) Obser
to d
Mod

5) Rep
To

6) Obs
the
Con
H

3) Click on the PCS connected to hub, go to desktop tab, click on IP configuration and enter an IP address and Subnet Mask.

4) observe the flow of PDU from source PC to destination PC by selecting the Realtime Mode of Simulation.

5) Repeat Step#3 to step#5 for the PC's connected to switch.

6) Observe how HUB and switch are forwarding the PDU and write your observation and conclusion about the behaviours of switch and HUB.