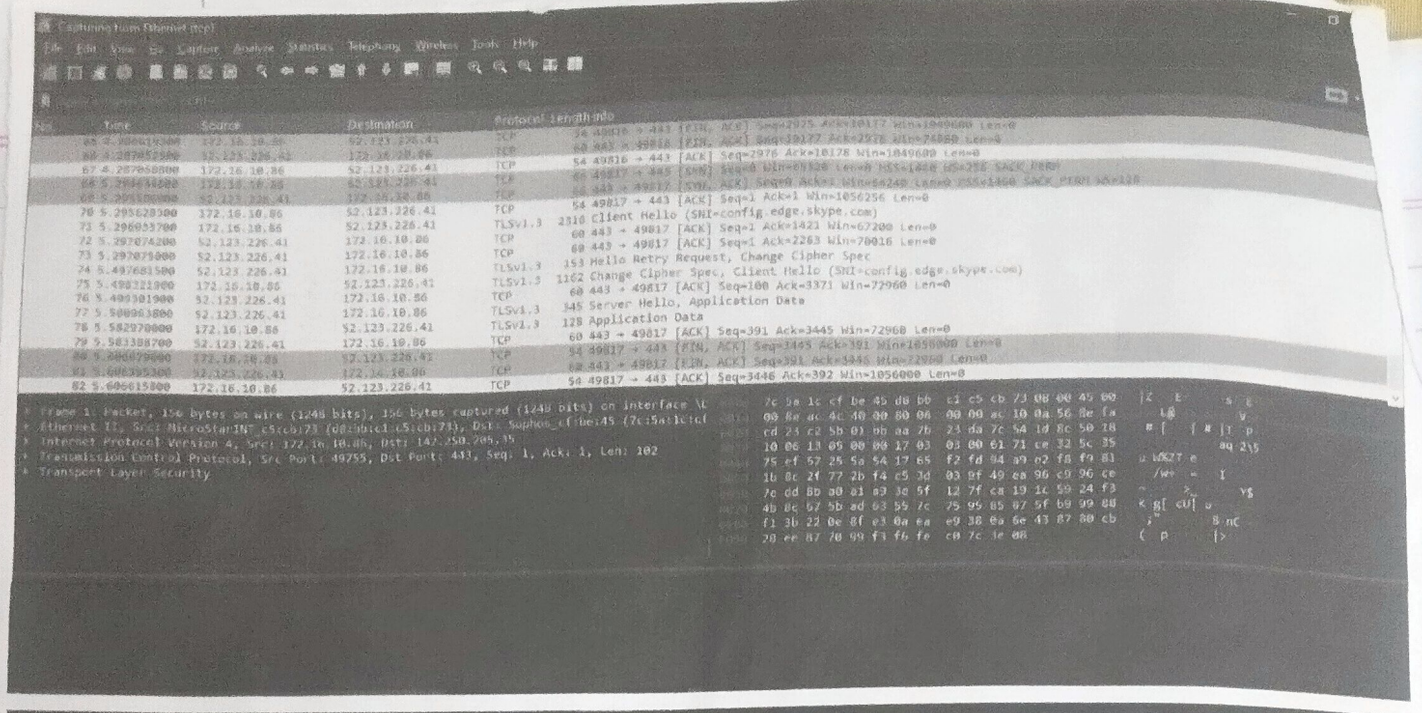
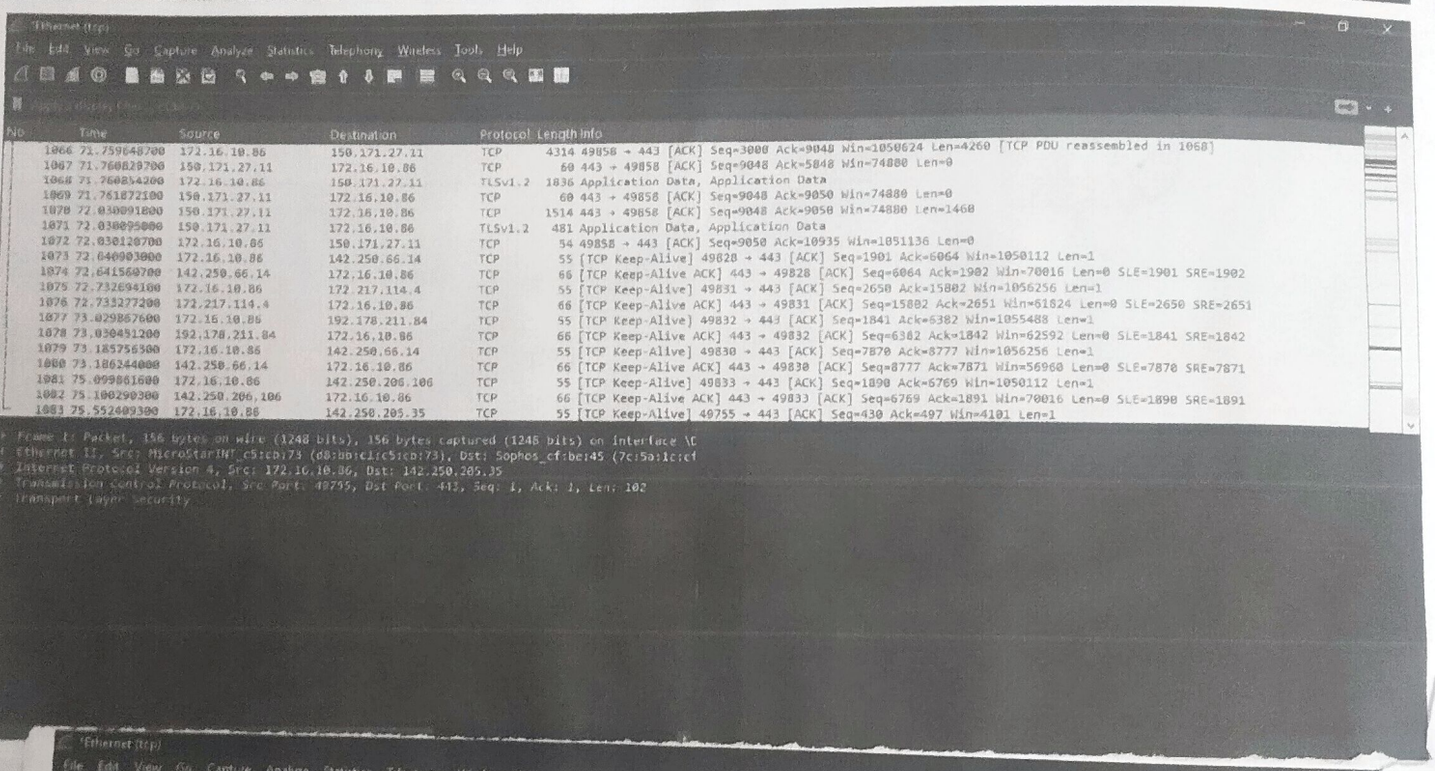
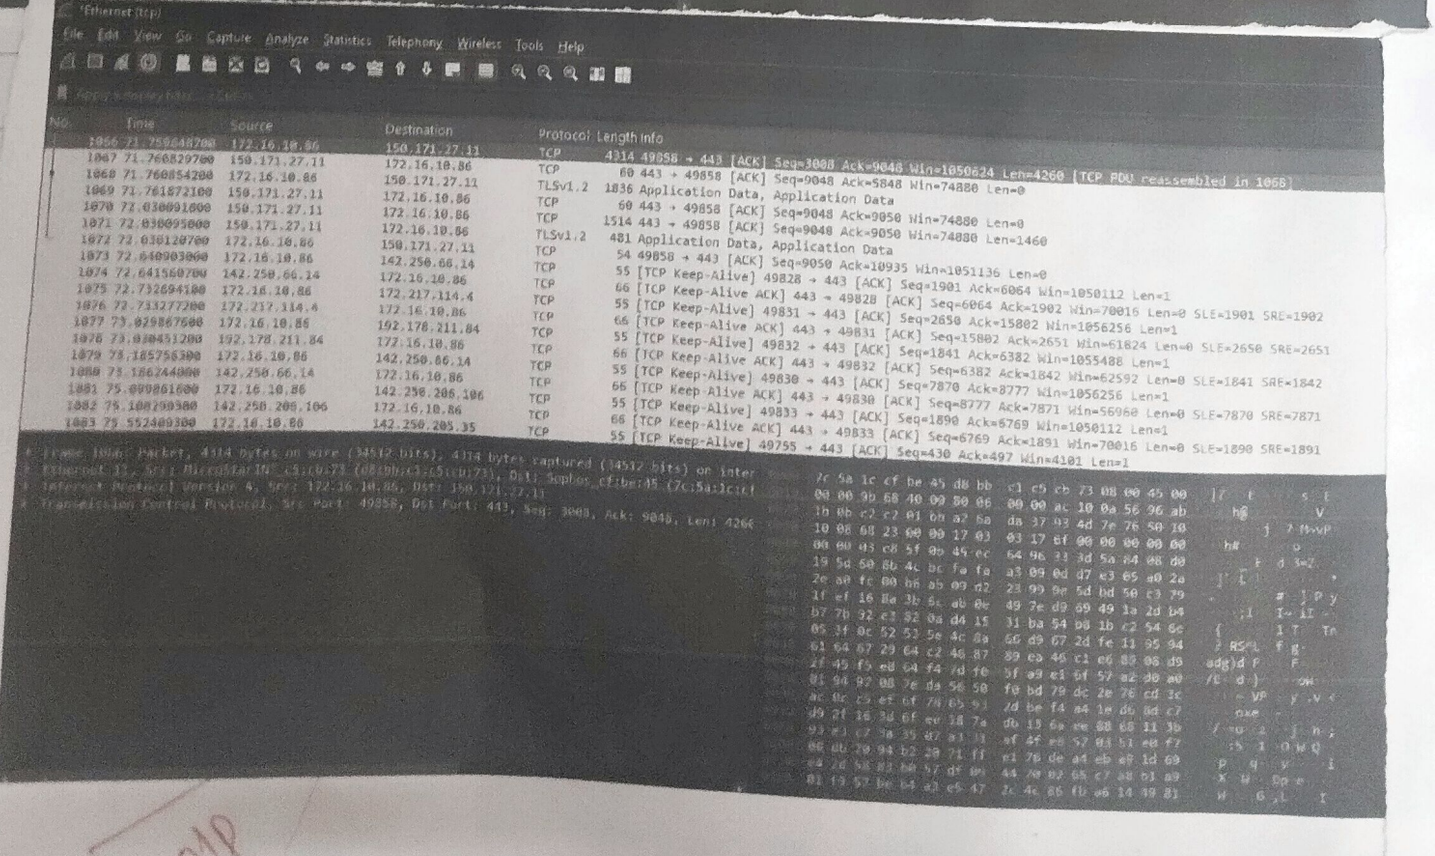

Capturing from Ethernet (tcp)
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
No. Time Source Destination Protocol Length Info
Frame 1: Packet, 156 bytes on wire (1248 bits), 156 bytes captured (1248 bits) on interface \C
Ethernet II, Src: MicroStarINT_c5:cb:73 (d8:bb:c1:c5:cb:73), Dst: Sophos_cf:be:45 (7c:5a:1c:cf
Internet Protocol Version 4, Src: 172.16.10.86, Dst: 142.250.205.35
Transmission Control Protocol, Src Port: 49755, Dst Port: 443, Seq: 1, Ack: 1, Len: 102
Transport Layer Security


Ethernet (tcp)
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
No. Time Source Destination Protocol Length Info
1066 71.759648700 172.16.10.86 150.171.27.11 TCP 4314 49858 → 443 [ACK] Seq=3000 Ack=9048 Win=1050624 Len=4260 [TCP PDU reassembled in 1068]
1067 71.760829700 150.171.27.11 172.16.10.86 TCP 60 443 → 49858 [ACK] Seq=9048 Ack=5848 Win=74880 Len=0
1068 71.760854200 172.16.10.86 150.171.27.11 TLSv1.2 1836 Application Data, Application Data
1069 71.761872100 150.171.27.11 172.16.10.86 TCP 60 443 → 49858 [ACK] Seq=9048 Ack=9050 Win=74880 Len=0
1070 72.030091800 150.171.27.11 172.16.10.86 TCP 1514 443 → 49858 [ACK] Seq=9048 Ack=9050 Win=74880 Len=1460
1071 72.030095000 150.171.27.11 172.16.10.86 TLSv1.2 481 Application Data, Application Data
1072 72.030120700 172.16.10.86 150.171.27.11 TCP 54 49858 → 443 [ACK] Seq=9050 Ack=10935 Win=1051136 Len=0
1073 72.040903000 172.16.10.86 142.250.66.14 TCP 55 [TCP Keep-Alive] 49828 → 443 [ACK] Seq=1901 Ack=6064 Win=1050112 Len=1
1074 72.041560700 142.250.66.14 172.16.10.86 TCP 66 [TCP Keep-Alive ACK] 443 → 49828 [ACK] Seq=6064 Ack=1902 Win=70016 Len=0 SLE=1901 SRE=1902
1075 72.732694100 172.16.10.86 172.217.114.4 TCP 55 [TCP Keep-Alive] 49831 → 443 [ACK] Seq=2650 Ack=15802 Win=1056256 Len=1
1076 72.733277200 172.217.114.4 172.16.10.86 TCP 66 [TCP Keep-Alive ACK] 443 → 49831 [ACK] Seq=15802 Ack=2651 Win=61824 Len=0 SLE=2650 SRE=2651
1077 73.029867600 172.16.10.86 192.178.211.84 TCP 55 [TCP Keep-Alive] 49832 → 443 [ACK] Seq=1841 Ack=6382 Win=1055488 Len=1
1078 73.030451200 192.178.211.84 172.16.10.86 TCP 66 [TCP Keep-Alive ACK] 443 → 49832 [ACK] Seq=6382 Ack=1842 Win=62592 Len=0 SLE=1841 SRE=1842
1079 73.185756300 172.16.10.86 142.250.66.14 TCP 55 [TCP Keep-Alive] 49830 → 443 [ACK] Seq=7870 Ack=8777 Win=1056256 Len=1
1080 73.186244800 142.250.66.14 172.16.10.86 TCP 66 [TCP Keep-Alive ACK] 443 → 49830 [ACK] Seq=8777 Ack=7871 Win=56960 Len=0 SLE=7870 SRE=7871
1081 75.099861600 172.16.10.86 142.250.206.106 TCP 55 [TCP Keep-Alive] 49833 → 443 [ACK] Seq=1890 Ack=6769 Win=1050112 Len=1
1082 75.100290300 142.250.206.106 172.16.10.86 TCP 66 [TCP Keep-Alive ACK] 443 → 49833 [ACK] Seq=6769 Ack=1891 Win=70016 Len=0 SLE=1890 SRE=1891
1083 75.552409300 172.16.10.86 142.250.205.35 TCP 55 [TCP Keep-Alive] 49755 → 443 [ACK] Seq=430 Ack=497 Win=4101 Len=1
Frame 1: Packet, 156 bytes on wire (1248 bits), 156 bytes captured (1248 bits) on interface \C
Ethernet II, Src: MicroStarINT_c5:cb:73 (d8:bb:c1:c5:cb:73), Dst: Sophos_cf:be:45 (7c:5a:1c:cf
Internet Protocol Version 4, Src: 172.16.10.86, Dst: 142.250.205.35
Transmission Control Protocol, Src Port: 49755, Dst Port: 443, Seq: 1, Ack: 1, Len: 102
Transport Layer Security


Ethernet (tcp)
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
No. Time Source Destination Protocol Length Info
1066 71.759648700 172.16.10.86 150.171.27.11 TCP 4314 49858 → 443 [ACK] Seq=3000 Ack=9048 Win=1050624 Len=4260 [TCP PDU reassembled in 1068]
1067 71.760829700 150.171.27.11 172.16.10.86 TCP 60 443 → 49858 [ACK] Seq=9048 Ack=5848 Win=74880 Len=0
1068 71.760854200 172.16.10.86 150.171.27.11 TLSv1.2 1836 Application Data, Application Data
1069 71.761872100 150.171.27.11 172.16.10.86 TCP 60 443 → 49858 [ACK] Seq=9048 Ack=9050 Win=74880 Len=0
1070 72.030091800 150.171.27.11 172.16.10.86 TCP 1514 443 → 49858 [ACK] Seq=9048 Ack=9050 Win=74880 Len=1460
1071 72.030095000 150.171.27.11 172.16.10.86 TLSv1.2 481 Application Data, Application Data
1072 72.030120700 172.16.10.86 150.171.27.11 TCP 54 49858 → 443 [ACK] Seq=9050 Ack=10935 Win=1051136 Len=0
1073 72.040903000 172.16.10.86 142.250.66.14 TCP 55 [TCP Keep-Alive] 49828 → 443 [ACK] Seq=1901 Ack=6064 Win=1050112 Len=1
1074 72.041560700 142.250.66.14 172.16.10.86 TCP 66 [TCP Keep-Alive ACK] 443 → 49828 [ACK] Seq=6064 Ack=1902 Win=70016 Len=0 SLE=1901 SRE=1902
1075 72.732694100 172.16.10.86 172.217.114.4 TCP 55 [TCP Keep-Alive] 49831 → 443 [ACK] Seq=2650 Ack=15802 Win=1056256 Len=1
1076 72.733277200 172.217.114.4 172.16.10.86 TCP 66 [TCP Keep-Alive ACK] 443 → 49831 [ACK] Seq=15802 Ack=2651 Win=61824 Len=0 SLE=2650 SRE=2651
1077 73.029867600 172.16.10.86 192.178.211.84 TCP 55 [TCP Keep-Alive] 49832 → 443 [ACK] Seq=1841 Ack=6382 Win=1055488 Len=1
1078 73.030451200 192.178.211.84 172.16.10.86 TCP 66 [TCP Keep-Alive ACK] 443 → 49832 [ACK] Seq=6382 Ack=1842 Win=62592 Len=0 SLE=1841 SRE=1842
1079 73.185756300 172.16.10.86 142.250.66.14 TCP 55 [TCP Keep-Alive] 49830 → 443 [ACK] Seq=7870 Ack=8777 Win=1056256 Len=1
1080 73.186244800 142.250.66.14 172.16.10.86 TCP 66 [TCP Keep-Alive ACK] 443 → 49830 [ACK] Seq=8777 Ack=7871 Win=56960 Len=0 SLE=7870 SRE=7871
1081 75.099861600 172.16.10.86 142.250.206.106 TCP 55 [TCP Keep-Alive] 49833 → 443 [ACK] Seq=1890 Ack=6769 Win=1050112 Len=1
1082 75.100290300 142.250.206.106 172.16.10.86 TCP 66 [TCP Keep-Alive ACK] 443 → 49833 [ACK] Seq=6769 Ack=1891 Win=70016 Len=0 SLE=1890 SRE=1891
1083 75.552409300 172.16.10.86 142.250.205.35 TCP 55 [TCP Keep-Alive] 49755 → 443 [ACK] Seq=430 Ack=497 Win=4101 Len=1
Frame 1066: Packet, 4314 bytes on wire (34512 bits), 4314 bytes captured (34512 bits) on inter
Ethernet II, Src: MicroStarINT_c5:cb:73 (d8:bb:c1:c5:cb:73), Dst: Sophos_cf:be:45 (7c:5a:1c:cf
Internet Protocol Version 4, Src: 172.16.10.86, Dst: 150.171.27.11
Transmission Control Protocol, Src Port: 49858, Dst Port: 443, Seq: 3000, Ack: 9048, Len: 4260

UDP

Ex: 5 : Packet capture tool: Wire Shark.

Aim:

Experiments on Packet capture tool: wireshark


Procedure:


1. Open wireshark.
   - Install and launch wireshark.
   - The list of available network interfaces will be displayed

2. Select the network Interface.
   - Select the active network interface.
   - Double click the interface to begin Packet capturing.

3. Configure capture Limit.
   - Click capture → options
   - Set Stop capture Automatically after 100 Packets
   - Click Start to begin capturing Packets

4. Save the captured Packet.
   - wait until 100 Packets are captured
   - Click file → Save AS
   - Save the capturefile.

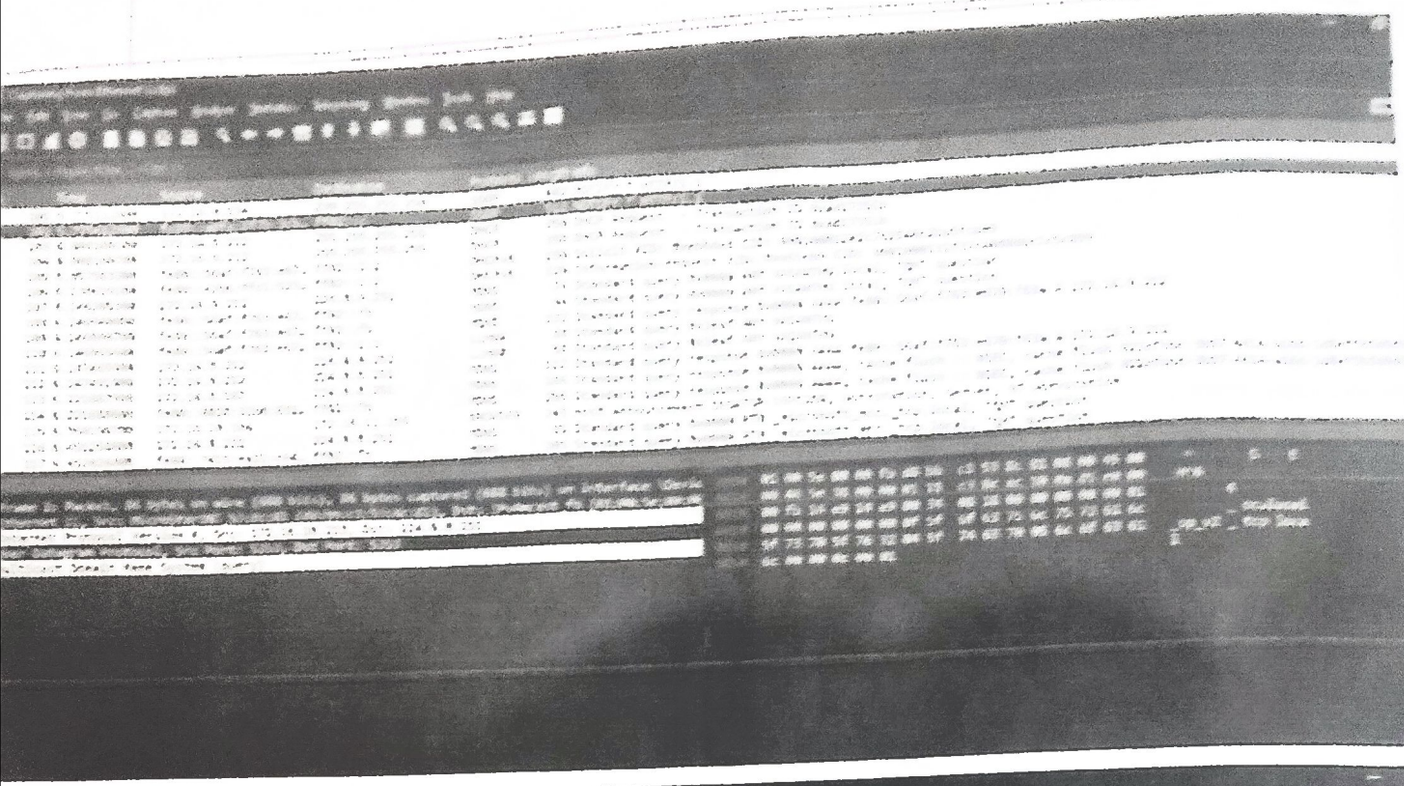

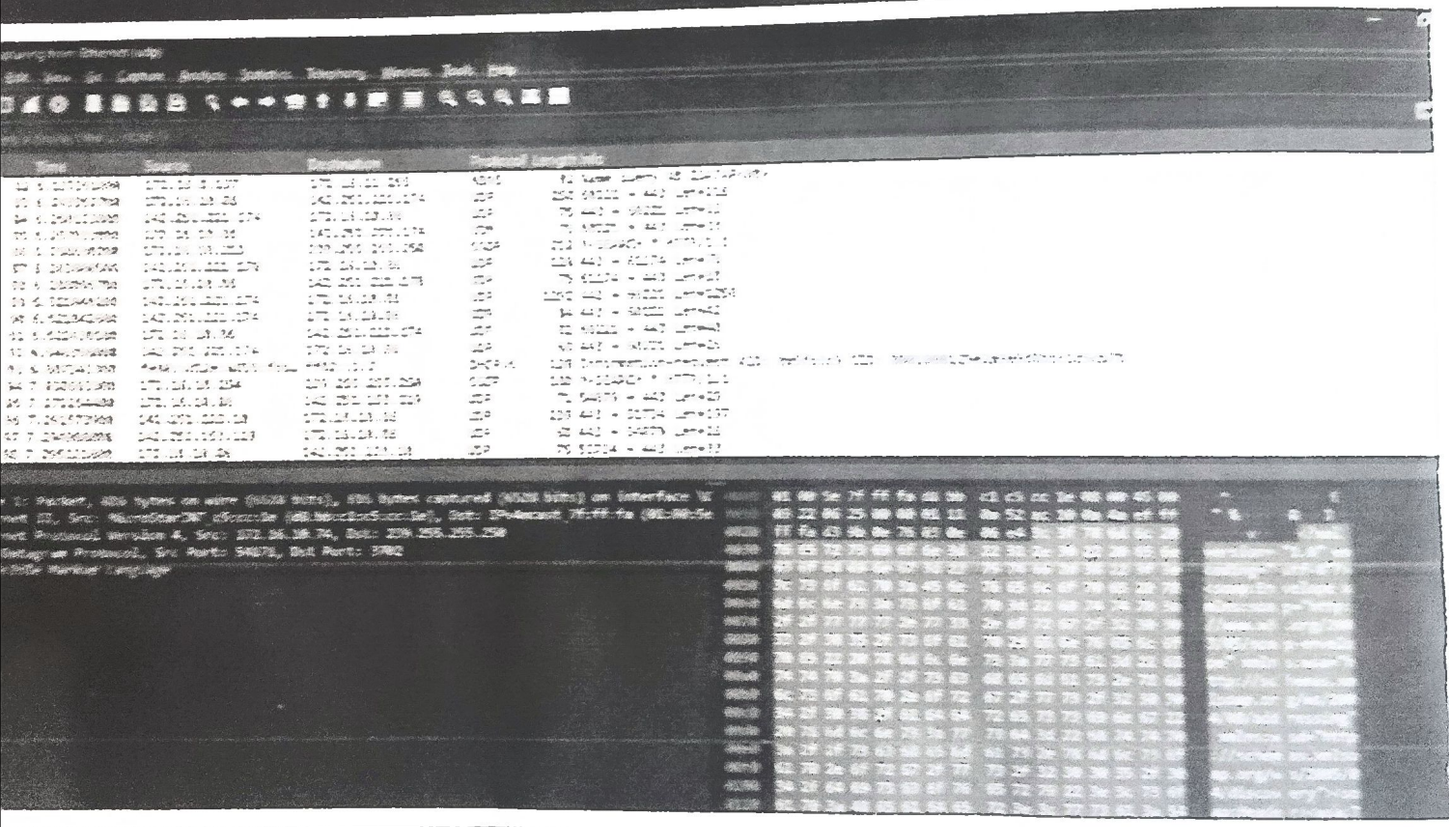

M T W T F S S
Page No
Date:
YOUVA

Result:

Successfully captured, filtered and analyzed TCP & UDP packets using wireshark