



USB-C Advanced Power Supply 5 / 9 / 12 / 20 / 28V

USB-C Connector

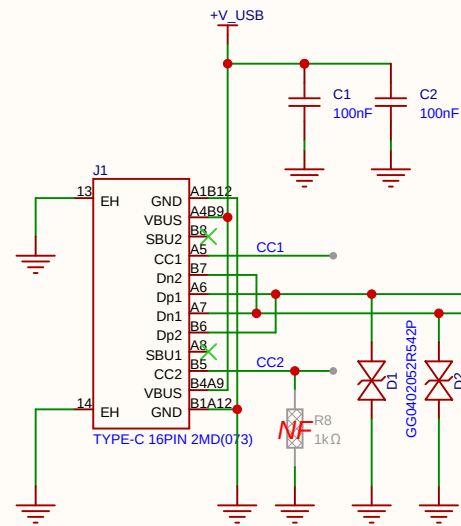


Design note:
CC2 pull down resistor should not be needed if the right cable is used.
Before fitting this resistor, be sure you know what you are doing.

USB PD Controller

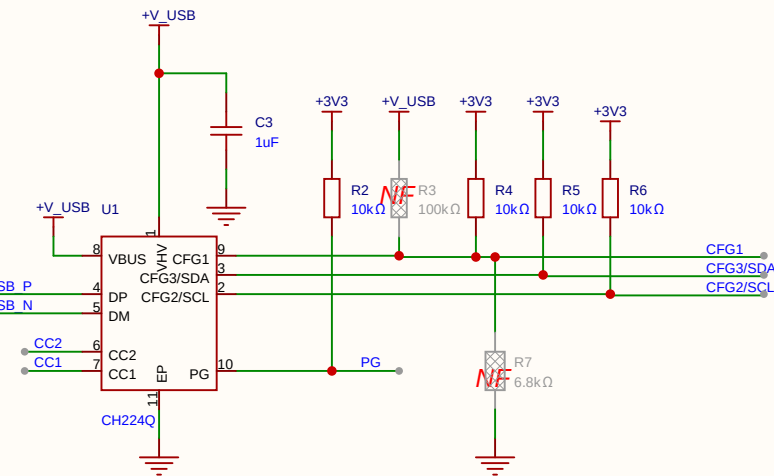


Design note:
The unfitted resistors on CFG1 are for experimenting

Error LED

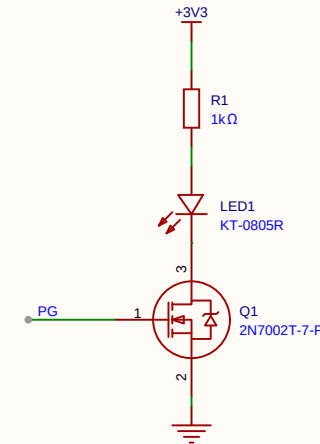


Output Connector




IMPORTANT!
The maximum output current and voltage depend on the power adapter, cable and selected voltage.


+3V3 POWER

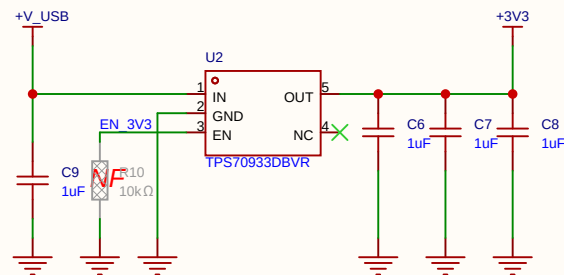


Output Voltage Selection Switches



Voltage LED Indicators

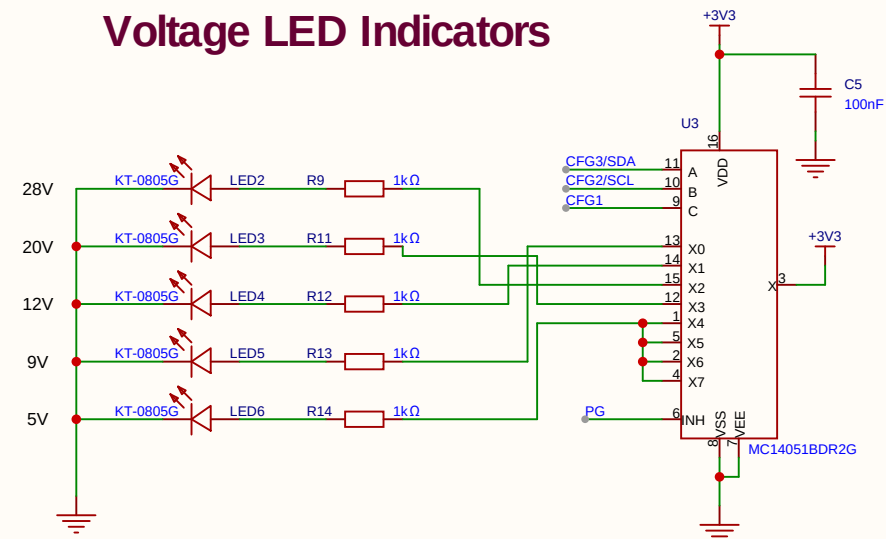


I2C Header



Design note:
For experimenting

Mounting Holes



CFG1	CFG2	CFG3	Output Voltage
1	X	X	5V
0	0	0	9V
0	0	1	12V
0	1	1	20V
0	1	0	28V

Schematic	USB-C_Advanced_Power_Supply			Create at	2026-08-06
				Update at	2026-09-09
Board	USB-C_Advanced_Power_Supply			Page	Schematic
Drawn		USB-C Advanced Power Supply – 4-Layer USB PD PCB			
Reviewed					
		Version	Size	Page 1 Total 1	
		V1.0	A3	Karthikeyan	