
OSPF Practical — Screenshot Evidence

Cisco Packet Tracer | 3 Cisco 2911 Routers | 2 Cisco 2960 Switches

1. OSPF Lab Topology

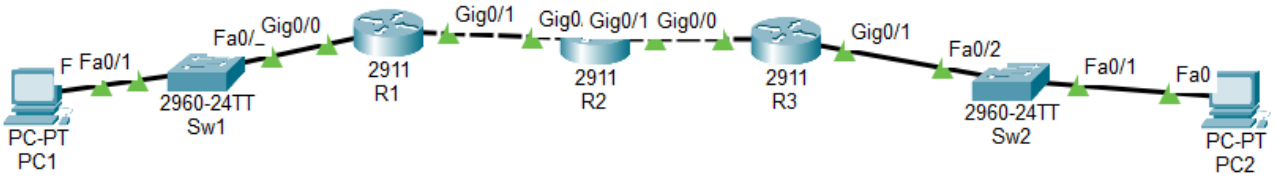

2. R1 Routing Table

```
R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

     10.0.0.0/8 is variably subnetted, 3 subnets, 2 masks
C       10.0.12.0/30 is directly connected, GigabitEthernet0/1
L       10.0.12.1/32 is directly connected, GigabitEthernet0/1
O       10.0.23.0/30 [110/2] via 10.0.12.2, 00:19:19, GigabitEthernet0/1
     192.168.1.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.1.0/24 is directly connected, GigabitEthernet0/0
L       192.168.1.1/32 is directly connected, GigabitEthernet0/0
O    192.168.2.0/24 [110/3] via 10.0.12.2, 00:18:35, GigabitEthernet0/1
```

3. PC1 to PC2 Ping Test

```
C:\>ping 192.168.2.10

Pinging 192.168.2.10 with 32 bytes of data:

Reply from 192.168.2.10: bytes=32 time<1ms TTL=125
Reply from 192.168.2.10: bytes=32 time<1ms TTL=125
Reply from 192.168.2.10: bytes=32 time<1ms TTL=125
Reply from 192.168.2.10: bytes=32 time<1ms TTL=125

Ping statistics for 192.168.2.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

4. OSPF Neighbor Check — R1

```
Neighbor ID     Pri   State           Dead Time   Address         Interface
2.2.2.2           1   FULL/BDR        00:00:32    10.0.12.2       GigabitEthernet0/1
```

5. OSPF Neighbor Check — R2

```
Neighbor ID     Pri   State           Dead Time   Address         Interface
1.1.1.1           1   FULL/DR         00:00:30    10.0.12.1       GigabitEthernet0/0
3.3.3.3           1   FULL/BDR        00:00:33    10.0.23.2       GigabitEthernet0/1
```