

DHCP


Step 1: Take 6 PC's, 3 Servers, 3 Switches and 1 Router and connect them with Universal cable

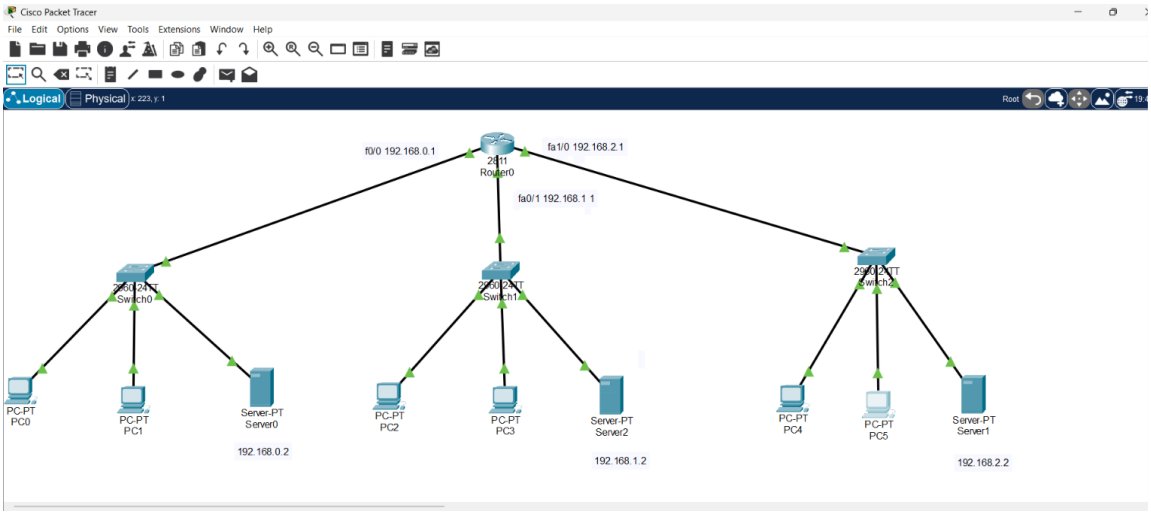



Step 2: Give the IP address to all the 3 Servers

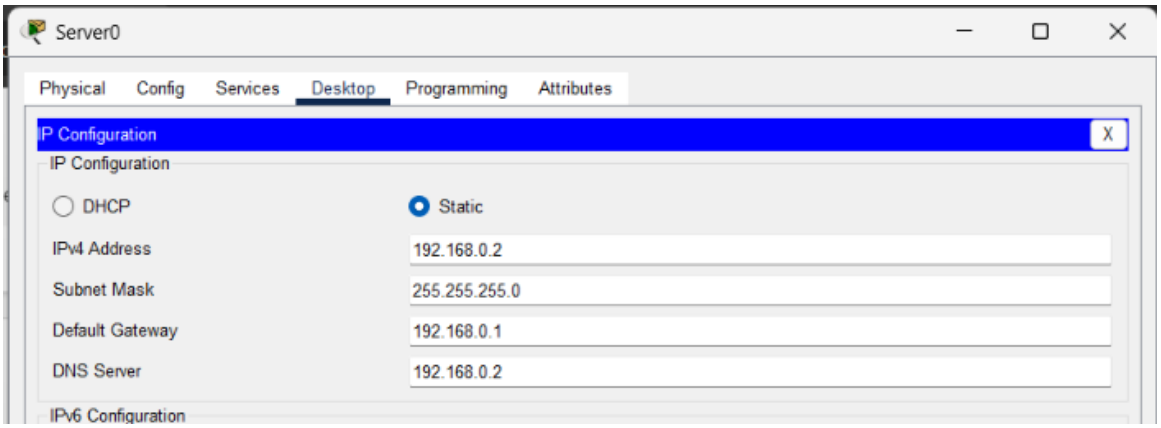

Step 3: Give the Router the IP address of all the 3 Servers

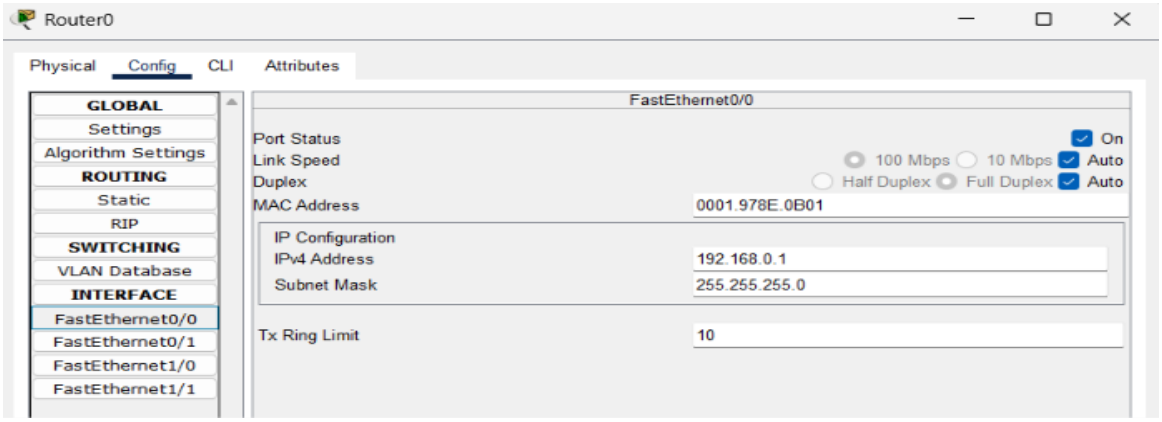

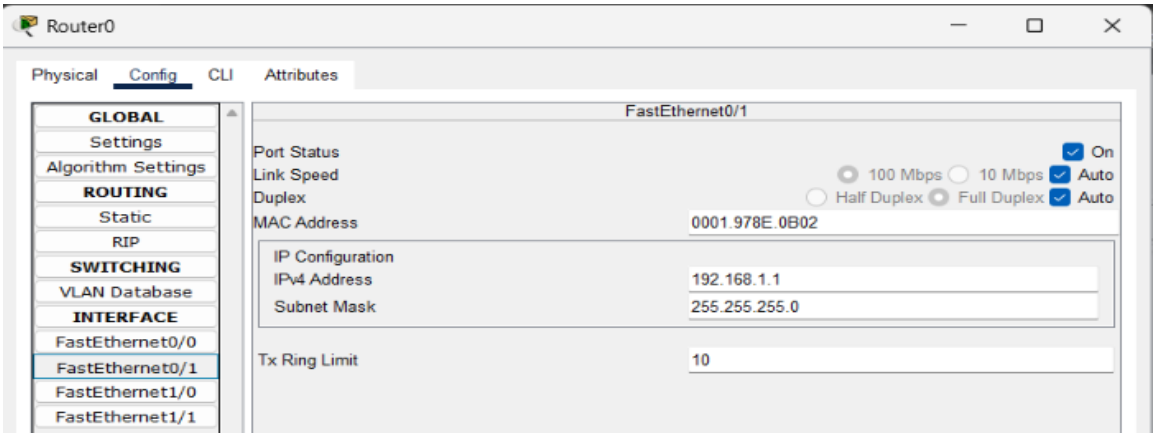


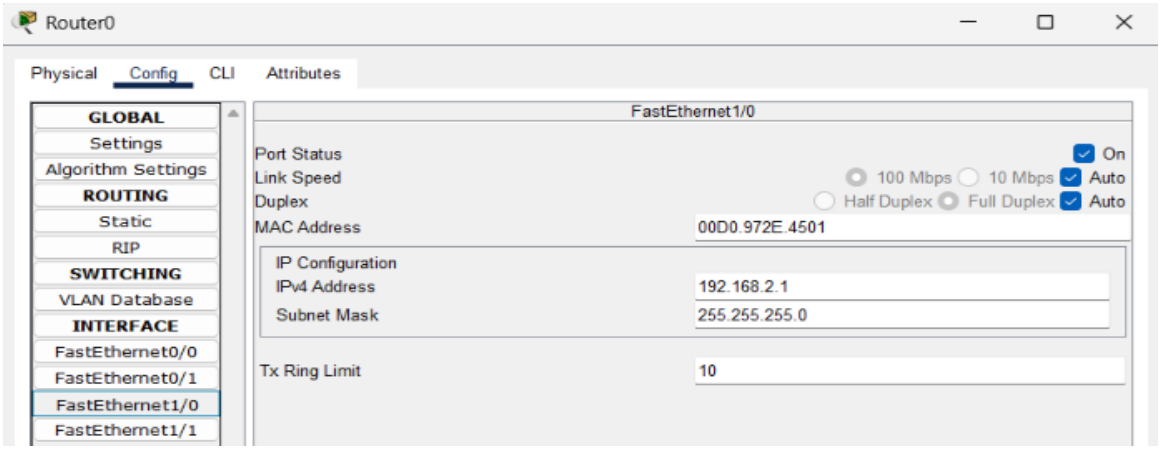



Step 4: Configure the Router by adding the **ip helper-address**

```
Router(config-if)#interface FastEthernet 0/0
Router(config-if)#ip helper-address 192.168.0.2
Router(config-if)#interface FastEthernet 0/1
Router(config-if)#ip helper-address 192.168.1.1
Router(config-if)#interface FastEthernet 1/0
Router(config-if)#ip helper-address 192.168.0.2
Router(config-if)#interface FastEthernet 0/1
Router(config-if)#ip helper-address 192.168.0.2
Router(config-if)#exit
Router(config)#
Router(config)#
Router(config)#
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet1/0
Router(config-if)#
```

Step 5: In the first Server ON the DHCP Service and add all the 3 ServerPool

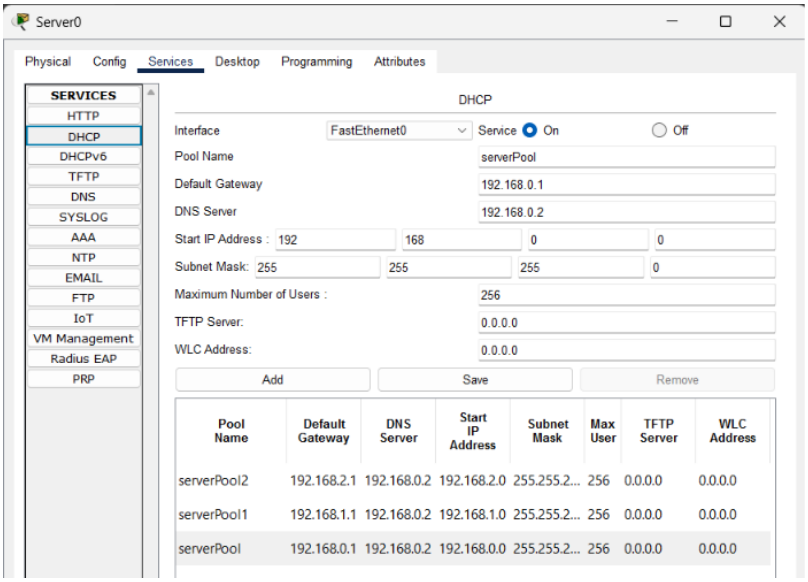

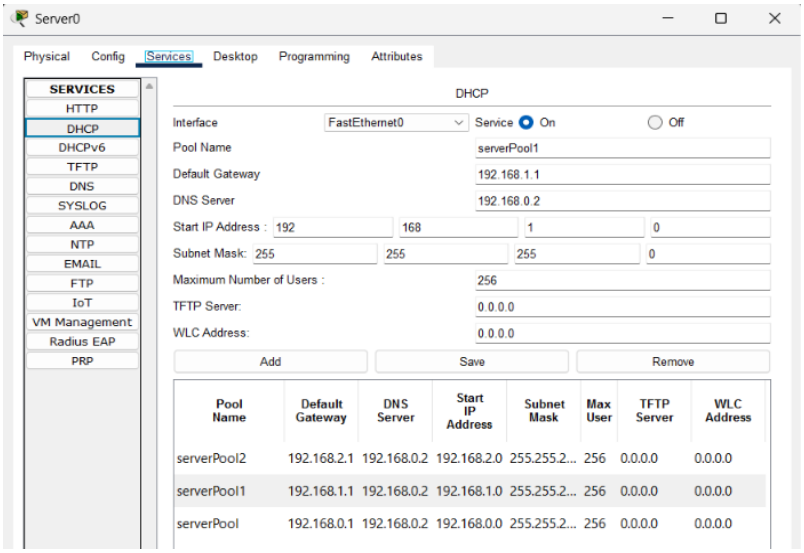

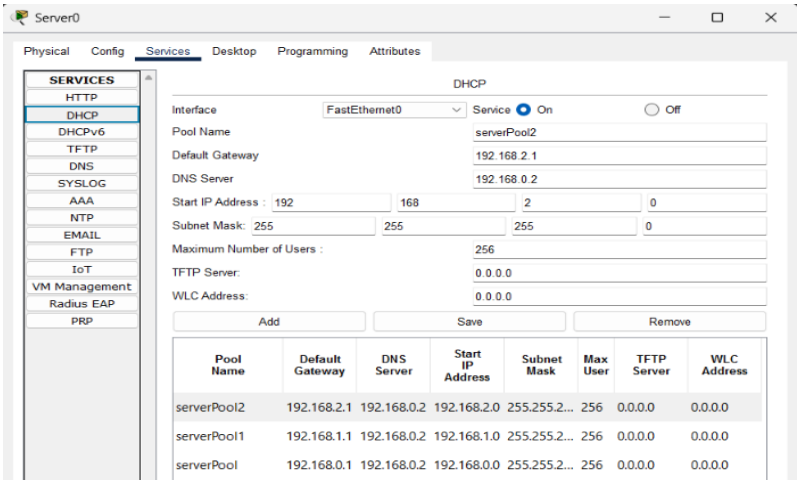

Step 6: Allocate the IP address to each PC in the network

