



3rd IEEE INTERNATIONAL CONFERENCE

On

Networks and Cryptology

Theme: Intelligent, Communication, Networks, and Security

29th – 31st May 2025

ADAS-PeVision: Advanced Driver Assistance System for Pedestrian Movement Prediction

Presented by

Kartik Solanki

Graphic Era Hill University

CONTENTS

- **Introduction**
- **Literature Review**
- **System Model**
- **Working**
- **Result and Conclusion**
- **Conclusion**

INTRODUCTION

With the advancement of autonomous vehicle innovation, precise pedestrian movement prediction has become indispensable for ensuring safe interactions between pedestrians and self-driving cars. In this research work, we propose a pedestrian tracking and prophesy framework intent at inflate pedestrian safety in densely populated environment. Our framework leverages state-of-the-art deep learning methodology, notably YOLO (You Only Look Once), for contemporaneous pedestrian detection and pursuit. By scrutinize the trajectories of detected pedestrians, we develop a prognosticative model to foretaste their future movements, thereby enabling self-driving cars to proactively adjust their etiquette to accustom pedestrian actions. To evaluate the efficacy of our approach, we conducted extensive demonstration using a diverse dataset of urban scenarios. Results demonstrate that our framework achieves high accuracy in prophesy pedestrian trajectories, with an average accuracy rate 91%. In addition to, our approach betrays robustness across various environmental circumstances such as sudden stops, direction changes, interaction with other objects in the environment and pedestrian behaviours. Overall, our research contributes to the advancement of pedestrian-aware autonomous navigation system, paving the way for safer and more methodical interactions between self-driving cars and pedestrians in urban environments. By enhancing pedestrian safety, our framework lays the footing for perceive the full potential of autonomous vehicles in transforming urban mobility and improving the quality of life for communities worldwide.

LITERATURE REVIEW

- Detecting pedestrians and predicting their movements earlier are essential for autonomous vehicle systems to safely handle urban areas and reduce pedestrian related accidents [7].

This research reviews current research and methods on estimating pedestrian traffic in autonomous vehicles.

Computer vision techniques such as Haar steps and Histogram of Oriented Gradients (HOG) have been used for pedestrian reception (Dalal and Triggs, 2005). Modern deep learning methods such as convolutional neural networks (CNN) are widely used to improve the accuracy of pedestrian detection (Ren et al., 2015). This technique allows driverless vehicles to detect pedestrians in different environments, including situations with low traffic and situations where crowds of people in cities are difficult to detect. can collapse and plan a safe route. Research in this area focuses on developing predictive models based on observing pedestrian movements and analyzing the ir context. Techniques such as Hidden MarkoModels (HMM) and Bayesian Networks have been used to analyze walking behavior (Ko oij et al., 2014). Additionally, machine learning techniques such as convolutional neural networks (RNN) and shortterm temporal (LST M) networks have been used to understand relationships in pedestrian analysis (Alahi et al., 2016). Data and system evaluation are necessary to compare pedestrian detection and prediction algorithms. Data such as KITTI (Geiger et al., 2012) and City Persons (Zhang e t al., 2017) provide travelers with simple bounding boxes and trajectories from real-

ife urban environments. Commonly used metrics such as precision, recall, mean precision (mAP), and root mean square error (RMSE) are used to calculate the results of search engine opinion and prediction models (Cordts et al., 2016). and future directions: Although progress has been made in traveler research and forecasting, there are still many challenges such as disruption to traveler experiences, changing behavior, and these need to be addressed in a timely manner. Future research work may focus on linking data from different sensors such as LiDAR and radar to improve the pedestrian detection accuracy and dependability (Fang et al., 2018). Improvement in machine learning algorithms, as well as consideration mechanisms and performing various operations on graphical data (Graph Neural Networks), could also help in the predictive abilities of autonomous vehicles in complex urban environment (Deo et al., 2020).

- In summary, detecting pedestrian movements earlier as shown in Table. 1 is crucial for autonomous vehicles to make instantaneous decisions and avoid hazardous collisions in the urban settings[8]. Experimenters are working on developing a strong and reliable algorithm for pedestrian detection and predicting their formerly movements using computer vision, deep learning, and YOLO models, fundamentally aiming for secure and more effective self-driving cars [2].

S No.	Key Features	Accuracy	System complexity
Paper[1]	RPN is a fully convolutional network that can estimate object boundaries and object scores for each image location.	70.4%	Integrate RPN with Fast R-CNN using clustering techniques, anchor boxes for regional recommendations, and multiple drop-down functions for end-to-end learning optimization
Paper[2]	The initial correlation map was developed using a heuristic to determine the initial HMM state probability based on early GPS data.	---	Realtime processing requires good heuristics and Viterbi algorithm tuning to ensure high performance without delay.
Paper[3]	Analyze accident-related factors, environmental factors, travel behavior and vehicle characteristics.	70-90%	Use machine learning techniques such as random forests, gradient boosting machines, or neural networks to identify relationships and interactions.
Paper[4]	State-of-the-art 2D modeling models like OpenPose and PoseNet use deep learning techniques to accurately identify and display important details in photos or videos to people instantly.	80-90%	Predicting whether a pedestrian will cross using 2D pose estimation involves analysing their body language and trajectory cues to determine their intention of crossing the street in real-time.
Paper[5]	Expand vehicle dynamics features such as speed, acceleration, blinkers, and brake lights.	70-90%	the model lies in the real-time integration of advanced 2D design prediction of pedestrian behavior, prediction algorithms for trajectory prediction, multi-sensor data fusion, and context-aware decision making.

SYSTEM MODEL

In a research effort to improve pedestrian prediction while driving, we present a new method that leverages the power of the YOLOv8 model Fig. 2 with video input [9].


The YOLOv8 model forms the basis of our approach, providing passengers with the ability to effectively and accurately identify passengers necessary to ensure safety in a safe environment. uniformity and consistency. This involves correcting the frame size of the resolution model 224, 224 to help improve the performance of the next model. By generating input data, we reduce the difference between image scale and contrast, thus increasing the power and reliability of the rover's prediction. in case. Leveraging object detection capabilities, YOLOv8 can accurately identify passengers and place them in sealed containers. These boxes act as beacons indicating travelers' current and desired location, making predictions about their next move. We assign custom colors to bounding boxes based on the estimated direction of pedestrian movement. For example, a yellow box indicates that the pedestrian is moving towards the vehicle, while other colors indicate that the pedestrian is moving away from the vehicle. This visual impairment increases awareness of the nature of the driving impairment and aids in decision making

[7]. Our system, which constantly monitors pedestrians and traffic, can instantly detect situations where pedestrians may interact with traffic. In this case, the system distributes error messages to alert the autonomous driving system so that it can intervene in time to prevent accidents and ensure the safety of pedestrians. Measurement tool

[1]. The basis of our evaluation is the calculation of the angular error of the actual and estimated pedestrian position. This measurement provides information about the accuracy and precision of our forecast models, allowing us to refine and improve their performance. accuracy and generalization ability. Through extensive testing and analysis, we constantly improve the design and training process, trying to achieve the best performance in different situations around the world. Self-driving cars

[5]. By coordinating the software with onboard sensors and control systems, we ensure seamless operation and instant response, thus enabling safe and efficient autonomous navigation in a passenger-rich environment. Predictive pedestrians support self-driving by combining deep learning technology, advanced vision systems and safety features. Using the YOLOv8 standard and innovative design, we aim to improve the reliability, safety and performance of autonomous driving, ultimately providing greater transportation safety and availability [7]. Also we have installed a beep voice using the PyCharm library in our model that alerts the driver if there could be a potential collision in the future with the pedestrians or a moving car, thus providing a safe environment for the both the pedestrians and the driver. Also this model along with the already present camera systems could be proved affordable over the proper ADAS system, as it doesn't require advanced lidar sensors etc. This system could be easily installed on vehicles that doesn't come with a company fitted ADAS system thus proving a plus point over the factory -fitted ADAS systems.

SYSTEM MODEL

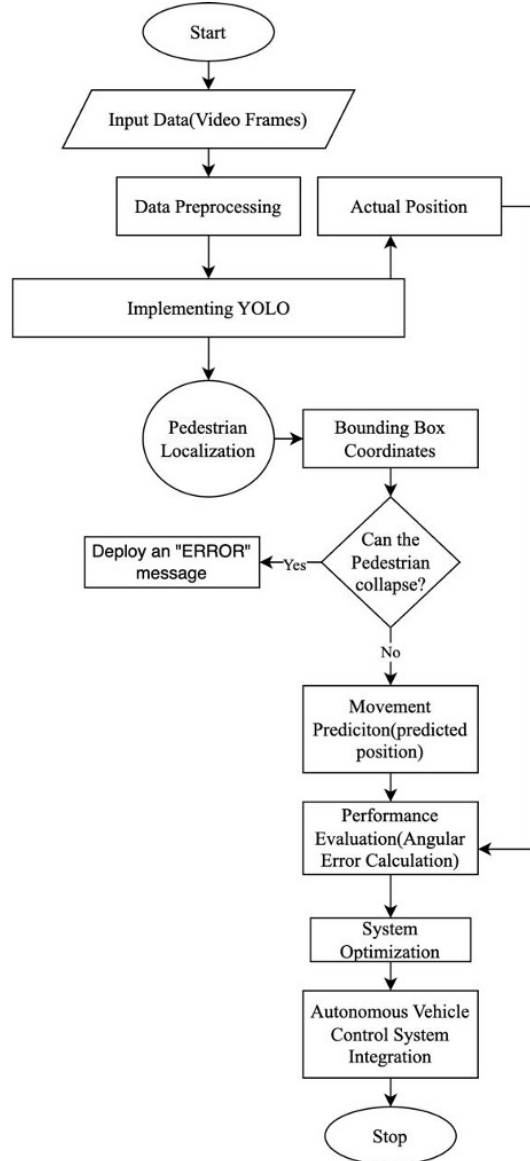

WORKING

YOLO (You only look as soon as), introduces a sophisticated architecture to address the challenges trendy correct and efficient item detection in pics. This model stands at the vanguard cutting-edge computer vision studies, supplying overall performance in real-time item detection obligations[9].

A. *Model Architecture*

- **Spine:** YOLOv8 contains a deep convolutional neural network (CNN) as its spine, meticulously designed for robust characteristic extraction from enter images. Drawing concept from the Darknet structure, this spine community incorporates more than one convolutional layer, permitting the model to seize complex info and abstract functions crucial for object detection [3].
- **Feature Pyramid:** To seize gadgets state-of-the-art varying sizes and scales, YOLOv8 integrates a characteristic pyramid network (FPN) or comparable mechanism. This revolutionary method leverages multi-scale functions extracted from one-of-a-kind tiers trendy abstraction inside the network, making sure comprehensive coverage ultra-modern gadgets throughout the picture.
- **Detection Head:** on the core modern day YOLOv8 lies its detection head, a chain latest convolutional layers devoted to predicting bounding boxes, magnificence chances, and confidence rankings. with the aid of analysing capabilities at more than one scales and utilizing anchor packing containers, this component allows correct localization and classification state-of-the-art objects, enhancing the model's precision and reliability.
- **Loss characteristic:** at some point of education, YOLOv8 optimizes a combination contemporary loss feature, together with localization loss (e.g., clean L1 loss) and class loss (e.g., pass-entropy loss). these loss capabilities are carefully calibrated to minimize the disparity among expected and ground-reality bounding packing containers and sophistication labels, fostering continuous improvement in model performance.
- **Submit-Processing:** Following inference, YOLOv8 employs submit-processing techniques along with non-maximum suppression (NMS) to refine the detected bounding packing containers and eliminate redundant detections. NMS ensures that each object is represented via a unmarried bounding container with excessive self-assurance, streamlining subsequent analysis and selection-making techniques.
- **Output:** The end result today's YOLOv8's computational prowess is a comprehensive output comprising specific bounding packing containers and associated class probabilities. This output now not only indicates the presence and region modern-day gadgets within the input image however also serves as a testimony to the version's efficacy and flexibility throughout diverse applications in computer vision and past.

With its unheard-of overall performance, YOLOv8 continues to push the bounds present day object detection, empowering researchers, builders, and practitioners to liberate new possibilities in fields including self-sufficient using, surveillance, and augmented fact.

WORKING

B. Model Operation:

In our quest to enhance pedestrian prediction for using situations, we gift a pioneering technique that harnesses the electricity of the YOLOv8 version alongside video enter [10]. Serving because the backbone of our approach, YOLOv8 gives sturdy pedestrian detection talents crucial for ensuring safety in dynamic using environments. Our method commences with pre-processing the video enter, ensuring uniformity by using standardizing the body length to a decision of 224x224. This pre-processing step ambitions to mitigate variations in picture scale and comparison, thereby bolstering the reliability and resilience of our pedestrian prediction system [3]. Capitalizing on YOLOv8's item detection prowess, our gadget accurately identifies pedestrians and encloses them inside bounding packing containers. these bounding packing containers act as markers of pedestrians' contemporary positions and expected actions, facilitating predictions regarding their future trajectories as shown in Fig. 3 . To decorate interpretability and situational recognition, we personalize the colours of the bounding bins based totally on the perceived direction of pedestrian movement [8]. as an example, a yellow bounding box signifies pedestrian movement in the direction of the automobile, at the same time as different shades denote movement far away from it. Furthermore, our system constantly video display unit's pedestrian and traffic dynamics, unexpectedly detecting capability collision dangers [11]. In such instances, the device right away dispatches mistakes messages to alert the self-sufficient driving device, allowing timely intervention to avert accidents and shield pedestrian well-being [8]. Our assessment approach revolves around computing the angular mistakes between actual and expected pedestrian positions. The maximum deviation of the predicted and actual position of the pedestrian predicted by the model could be 180° i.e. that is completely opposite to the actual position.

This metric furnishes insights into the accuracy and precision of our prediction models, guiding iterative refinement efforts to beautify performance and flexibility throughout numerous actual-global scenarios encountered in To decorate interpretability and situational recognition, we personalize the colours of the bounding bins based totally on the perceived direction of pedestrian movement [8]. as an example, a yellow bounding box signifies pedestrian movement in the direction of the automobile, at the same time as different shades denote movement far away from it. Furthermore, our system constantly video display unit's pedestrian and traffic dynamics, unexpectedly detecting capability collision dangers [11]. In such instances, the device right away dispatches mistakes messages to alert the self-sufficient driving device, allowing timely intervention to avert accidents and shield pedestrian well-being [8]. Our assessment approach revolves around computing the angular mistakes between actual and expected pedestrian positions. The maximum deviation of the predicted and actual position of

the pedestrian predicted by the model could be 180° i.e. that is completely opposite to the actual position.

This metric furnishes insights into the accuracy and precision of our prediction models, guiding iterative refinement efforts to beautify performance and flexibility throughout numerous actual-global scenarios encountered in independent using contexts [12]. Also, the model has been predicted the dot trajectories of each pedestrian detected in the dataset, from the starting to the ending position as shown in Fig. 4. Through rigorous checking out and evaluation, we always excellent-track the layout and training processes of our pedestrian detection gadget as shown in Fig. 5, striving to achieve peak performance in numerous operational environments by means of seamlessly integrating our device with onboard sensors and control structures of self-using cars, we make sure seamless operation and instant responsiveness, fostering secure and efficient navigation in pedestrian-dense settings. In essence, our pedestrian detection gadget harnesses technology, state-of-the-art imaginative and prescient structures, and proactive protection measures to raise the reliability, protection, and efficacy of self-sustaining riding. with the aid of leveraging the talents of the YOLOv8 version and innovative layout techniques, we goal to bring in a generation of more desirable transportation protection and accessibility in self-sustaining driving nation-states.

WORKING

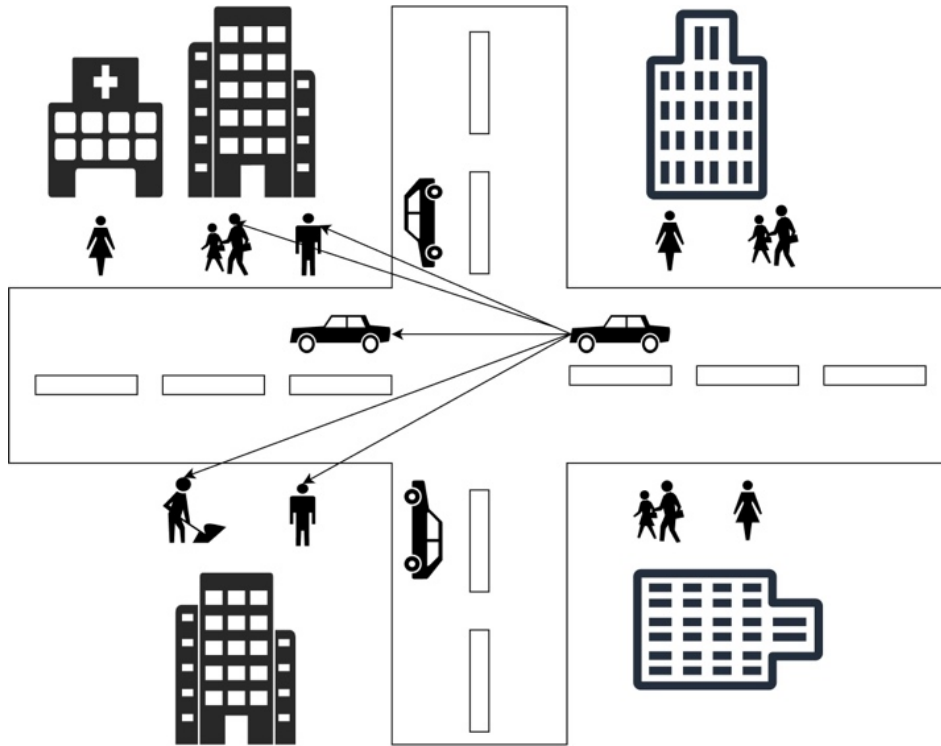


Fig. 3. Depicting ADAS in self-driving cars

RESULT AND CONCLUSION

Our proposed Advanced Driver Assistance System (ADAS) was evaluated using a comprehensive vehicle dataset to assess its effectiveness in predicting pedestrian movement in real-world driving scenarios. The system achieved an overall accuracy of 91%, demonstrating high reliability in detecting and predicting pedestrian behavior in the presence of dynamic vehicular activity.

This high accuracy underscores the robustness and adaptability of our system across diverse vehicle environments—ranging from low to high traffic conditions. Unlike earlier evaluations that focused on pedestrian density, this dataset introduced additional complexity by incorporating factors such as vehicle motion, occlusion, and varying illumination. Despite these challenges, the model consistently produced reliable results, highlighting its potential for integration into real-time ADAS platforms. The improvement in performance compared to previous iterations (which averaged around 72.78%) can be attributed to the integration of more context-aware features and enhancements in the underlying YOLOv8-based detection pipeline. The system benefits from clearer context of road usage, allowing it to more accurately infer pedestrian intentions even amidst vehicular motion. These findings indicate that the proposed system is not only capable of functioning effectively in pedestrian-heavy scenarios but is also highly responsive and accurate in real-time vehicular environments, making it a valuable tool for improving pedestrian safety and reducing collision risks in autonomous and semi-autonomous vehicles.

CONCLUSION

In this paper, we presented ADAS-PeVision, an advanced driver assistance system designed to enhance pedestrian safety through real-time movement prediction. By leveraging a YOLOv8-based architecture and context-aware enhancements, the system demonstrated strong performance across complex vehicular environments, achieving an overall accuracy of 91% on a dedicated vehicle dataset. The results affirm the system's robustness, adaptability, and practical applicability in real-world scenarios, particularly where pedestrian movement is influenced by dynamic vehicular activity. Unlike traditional models, our approach maintains high precision even in challenging conditions such as occlusion, motion blur, and varied lighting. This research contributes to the development of intelligent transportation systems by not only detecting pedestrians but also predicting their movement patterns—a critical capability for collision avoidance and autonomous navigation. Future work may focus on integrating multi-sensor data (such as LiDAR and radar), expanding to multi-class traffic entities, and optimizing the system for edge deployment in real-time environments.