



Biomass fired boilers

SZL Assembly Water Tube Boiler

Details

General description

Performance advantages

Project References

Parameters

Main specification

Technical Parameter

Contact ways



Catalogue




Details

GENERAL DESCRIPTION:

SZL type assembly water tube boiler adopts double drum longitudinal decoration, and combustion mode was chain grate. With the rate of 4 ~ 20 t/h, it uses the higher inlet to meet the needs of the biomass fuel.

SZL series Biomass fired boiler

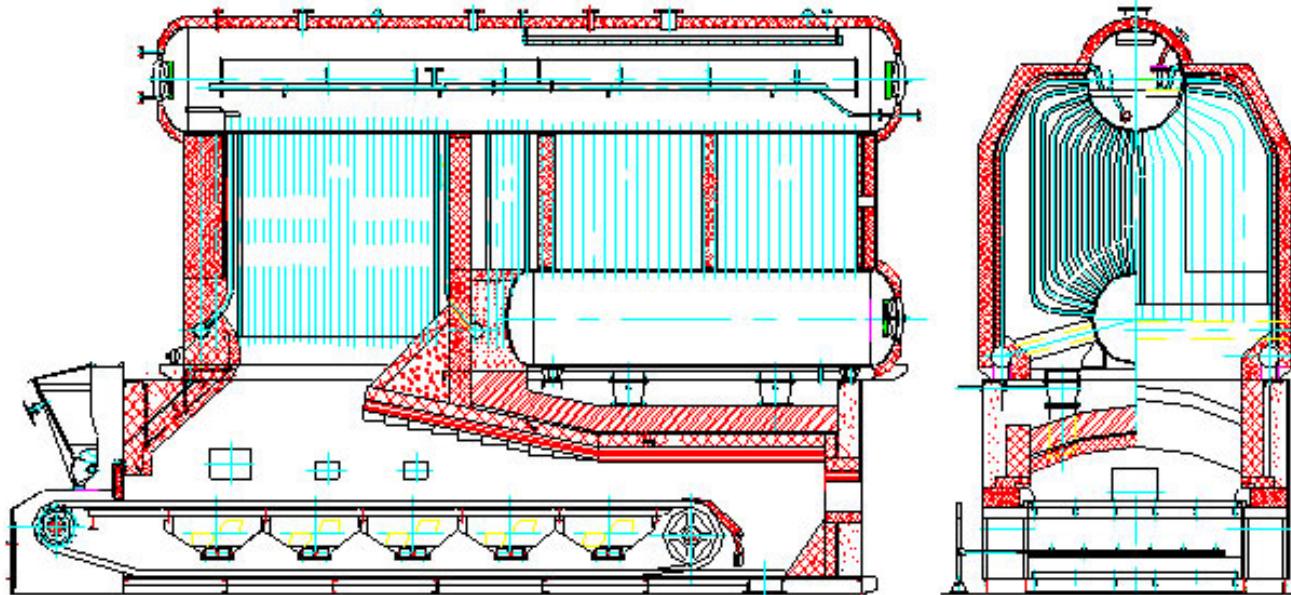

SZSL Biomass fired Boiler



Performance advantages

1. Inverted "o" arch furnace technology makes the front arch high and short
2. adopts membrane water wall structure
3. Furnace front and rear water wall tube extend down to the upper portion of the grate

Project References



20 ton biomass boiler exported to Mongolia



6t biomass boiler in china



20t szl boiler in china

Parameters

steam boiler

Model	Capacity(t/h)	Pressure(MPa)	Steam Temperature(°C)	Fuel	Factory mode
SZL6-1.25-T	6	1.25	194	Biomass pellet	Shop-Assembly
SZL10-1.25-T	10	1.25	194		Shop-Assembly
SZL10-2.5-T	10	2.5	226		Shop-Assembly
SZL15-1.25-T	15	1.25	194		Shop-Assembly
SZL15-1.6-T	15	1.6	204		Shop-Assembly

Hot water boiler

Model	Capacity(t/h)		Pressure(MPa)	Steam Temperature(°C)	Fuel	Factory mode
Model	Capacity (MW)	Pressure(MPa)	Hot Water Temperature (°C)	Return Water Temperature(°C)	Fuel	Shop-Assembly
SZL2.8-1.0/95/70-T	2.8	1	95	70	Biomass pellet	Shop-Assembly
SZL4.2-1.0/95/70-T	4.2	1	95	70		Shop-Assembly
SZL10.5-1.25/115/70-T	10.5	1.25	115	70		Shop-Assembly
SZL14-1.0/95/70-T	14	1	95	70		Shop-Assembly



Contact us

ZHENGZHOU BOILER(GROUP) CO.,LTD



-  Factory Address: NO.88 Science Road, High and New Technology Development District, Zhengzhou, China
-  Sales Tel: 0086-371-86062323
-  Fax: 0086-371-86062323
-  Skype: zgboiler
-  E-mail: sale@zgvessel.com
-  Website: <http://www.zgboilers.com/>

