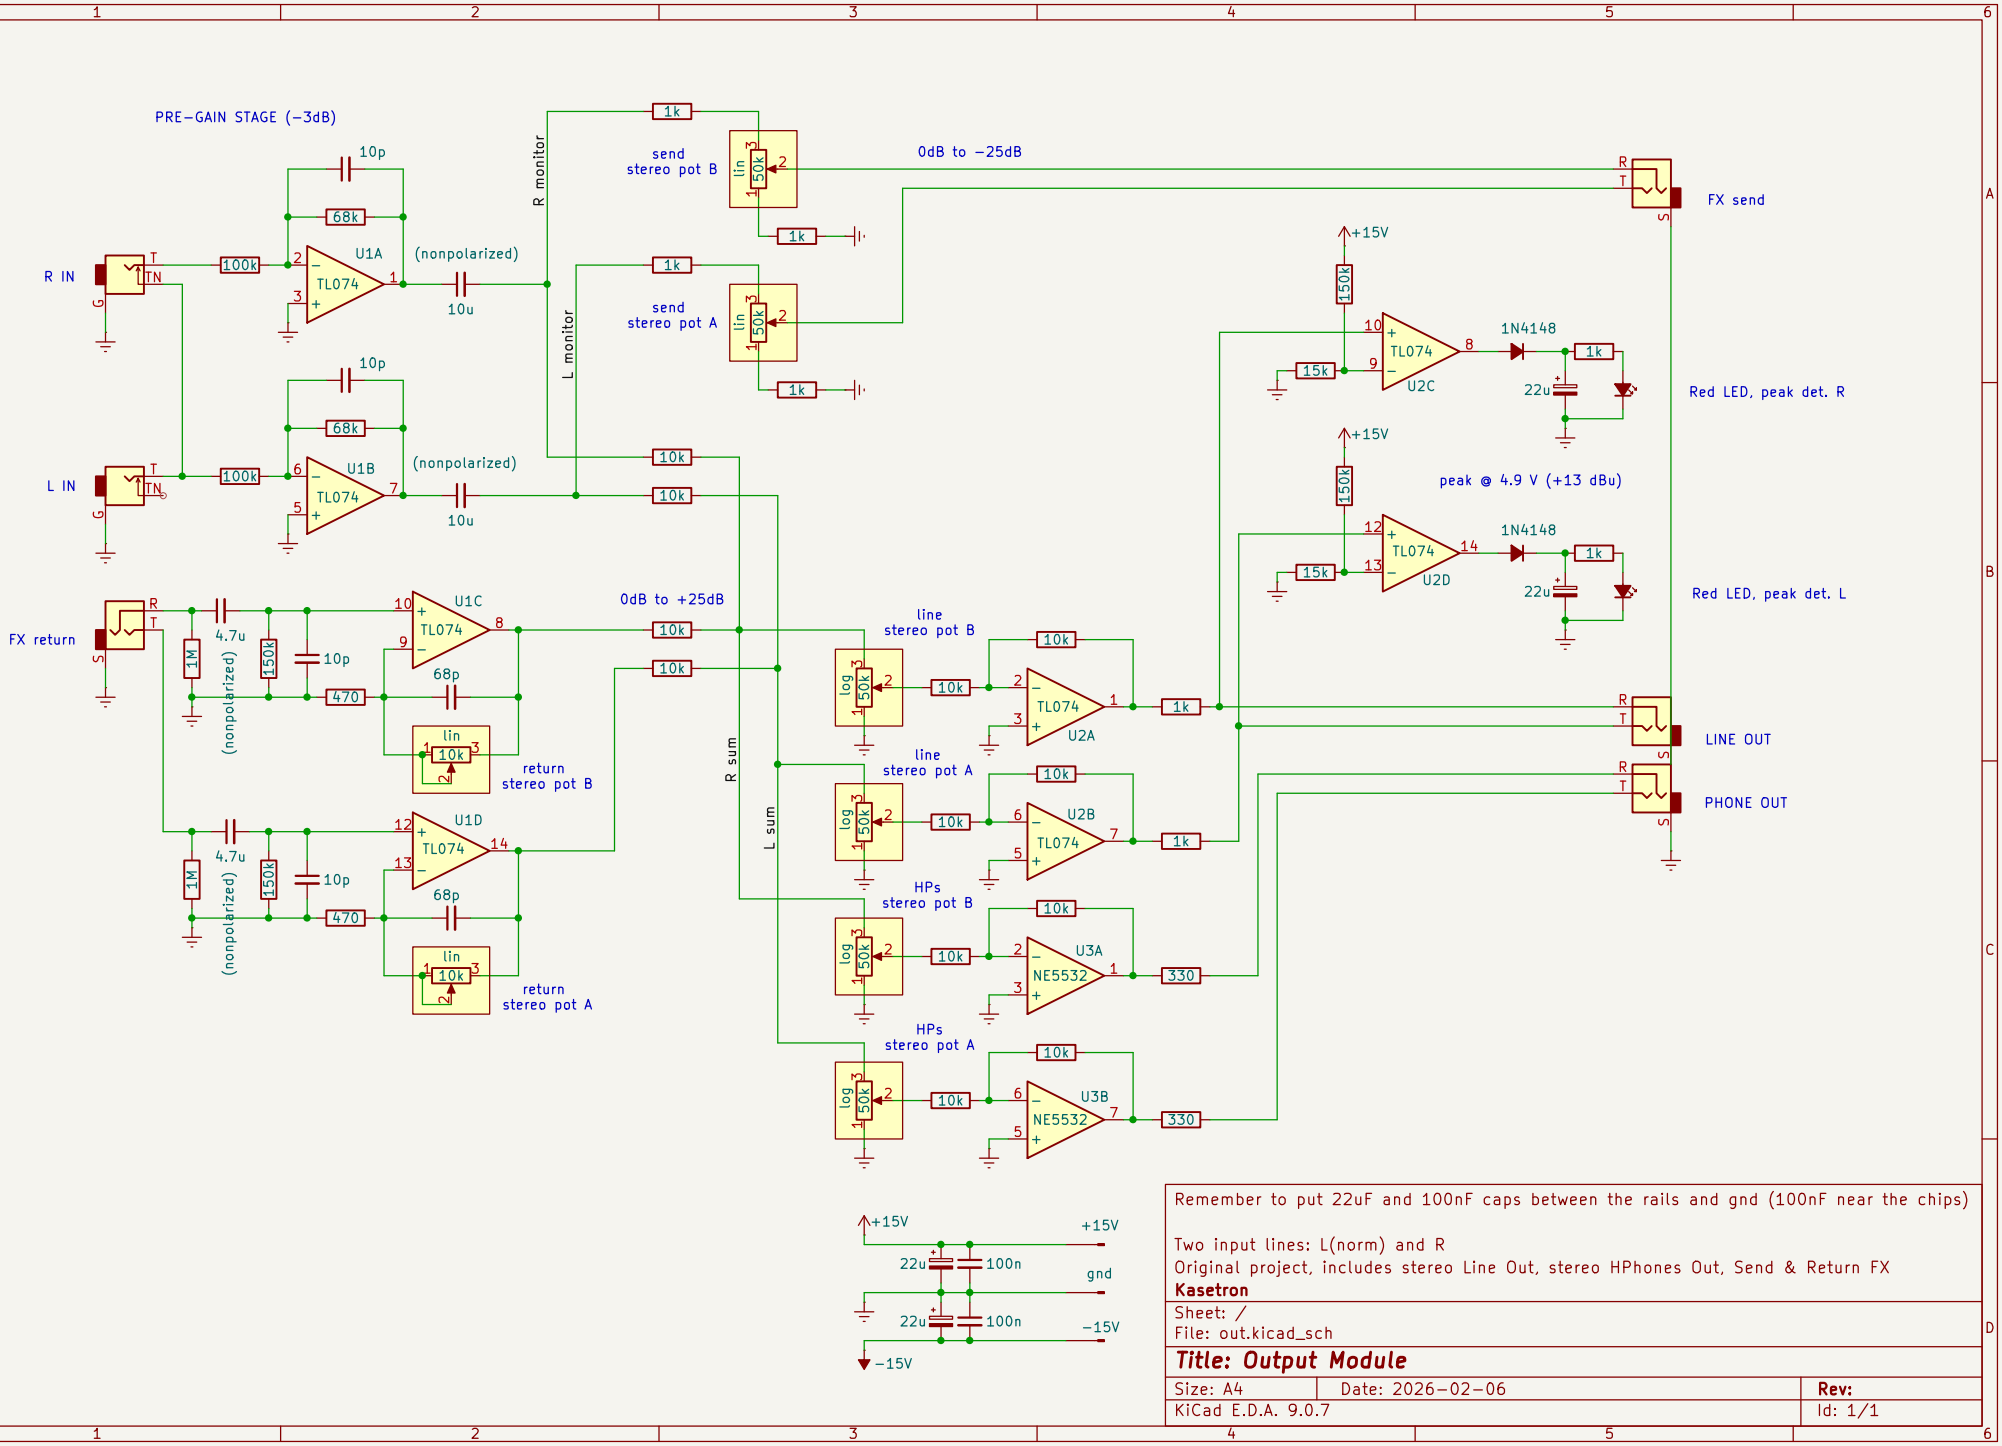
PRE-GAIN STAGE (-3dB)
R IN
L IN
FX return
FX send
LINE OUT
PHONE OUT
R monitor
L monitor
R sum
L sum
send stereo pot B
send stereo pot A
0dB to -25dB
0dB to +25dB
line stereo pot B
line stereo pot A
HPs stereo pot B
HPs stereo pot A
return stereo pot B
return stereo pot A
(nonpolarized)
peak @ 4.9 V (+13 dBu)
Red LED, peak det. R
Red LED, peak det. L
U1A
U1B
U1C
U1D
U2A
U2B
U2C
U2D
U3A
U3B
TL074
NE5532
1N4148
+15V
-15V
gnd
Remember to put 22uF and 100nF caps between the rails and gnd (100nF near the chips)
Two input lines: L(norm) and R
Original project, includes stereo Line Out, stereo HPhones Out, Send & Return FX
Kasetron
Sheet: /
File: out.kicad_sch
Title: Output Module
Size: A4
Date: 2026-02-06
Rev:
KiCad E.D.A. 9.0.7
Id: 1/1