



Static Compliance — Success Rate (%)

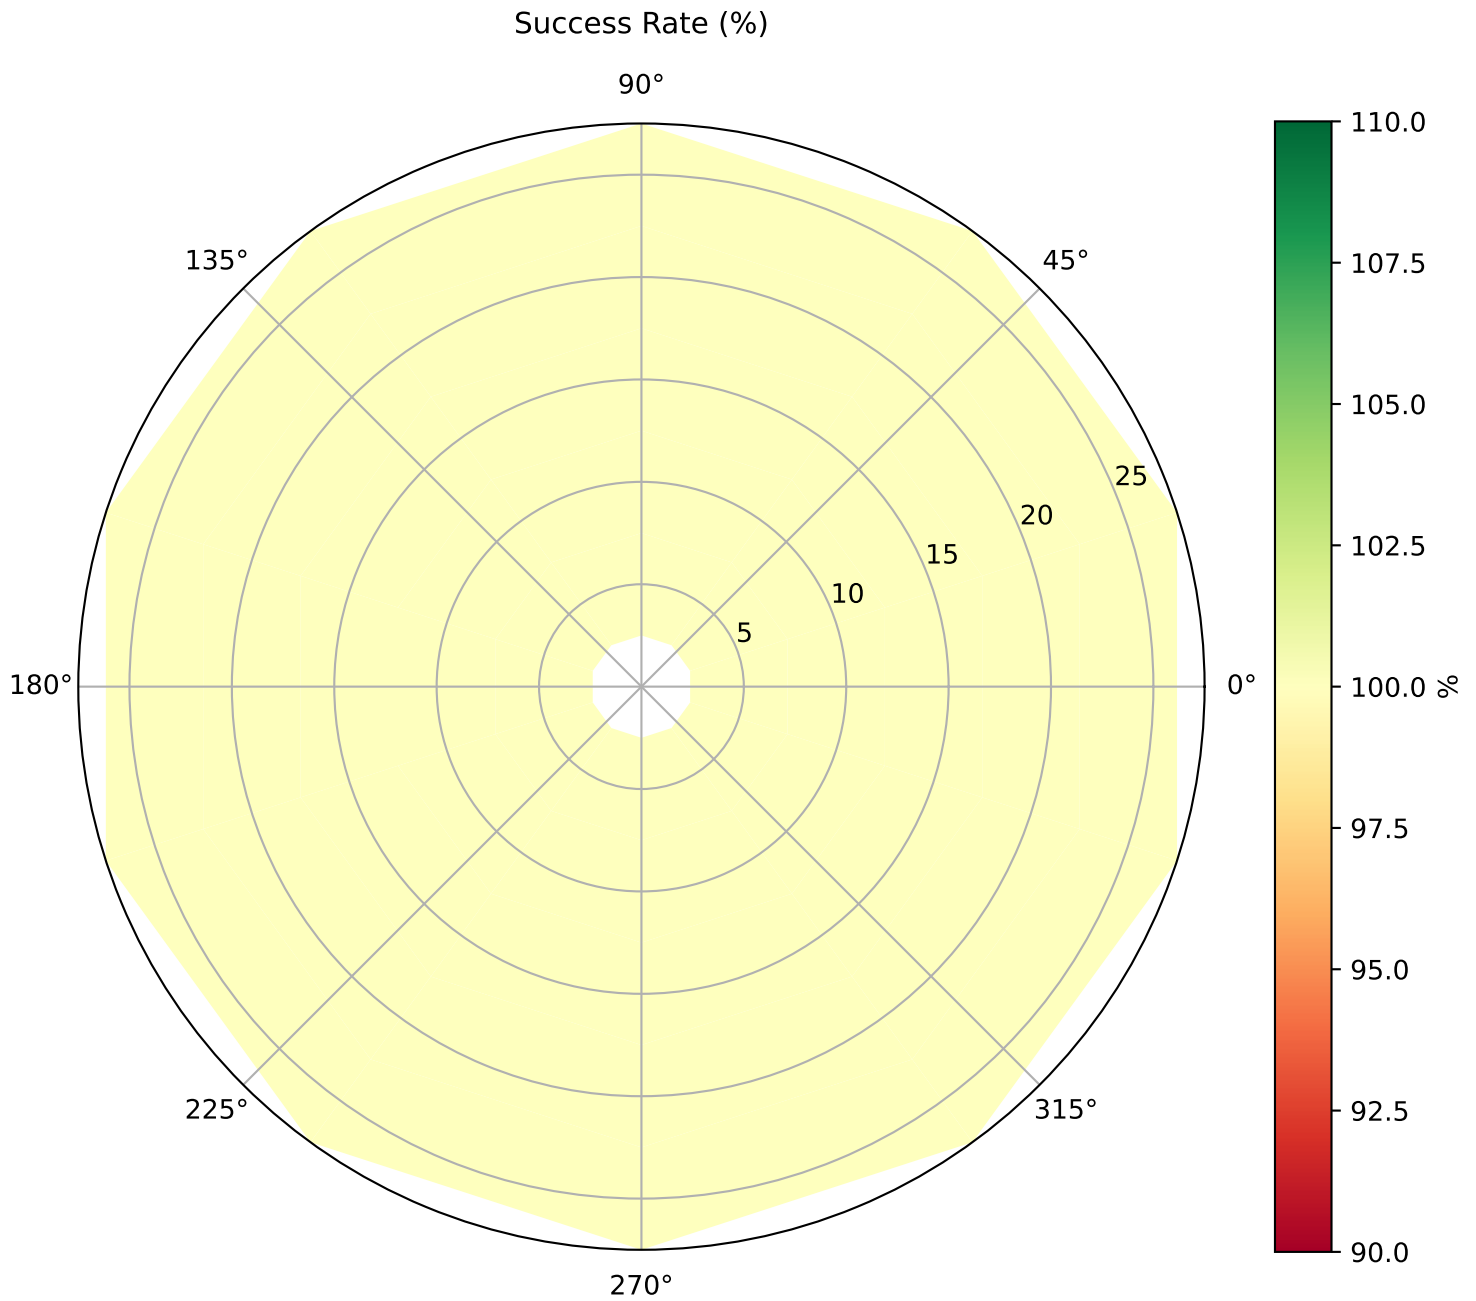


Effective Compliance vs Force Direction

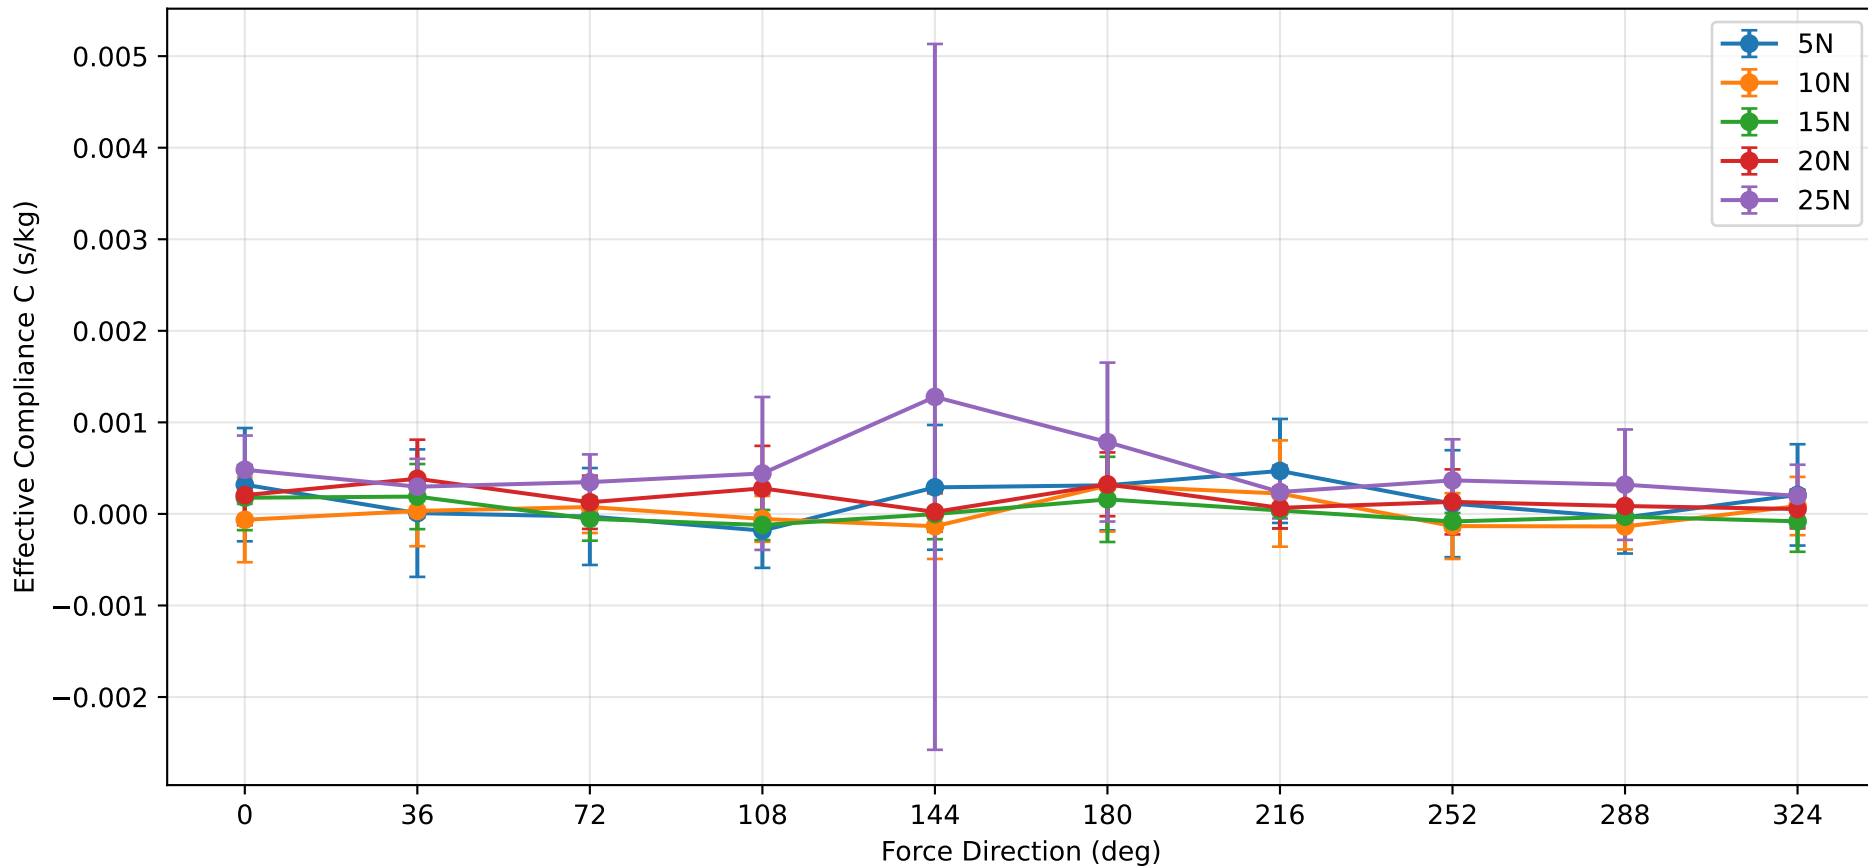


Peak Displacement by Direction


5N
(meters)

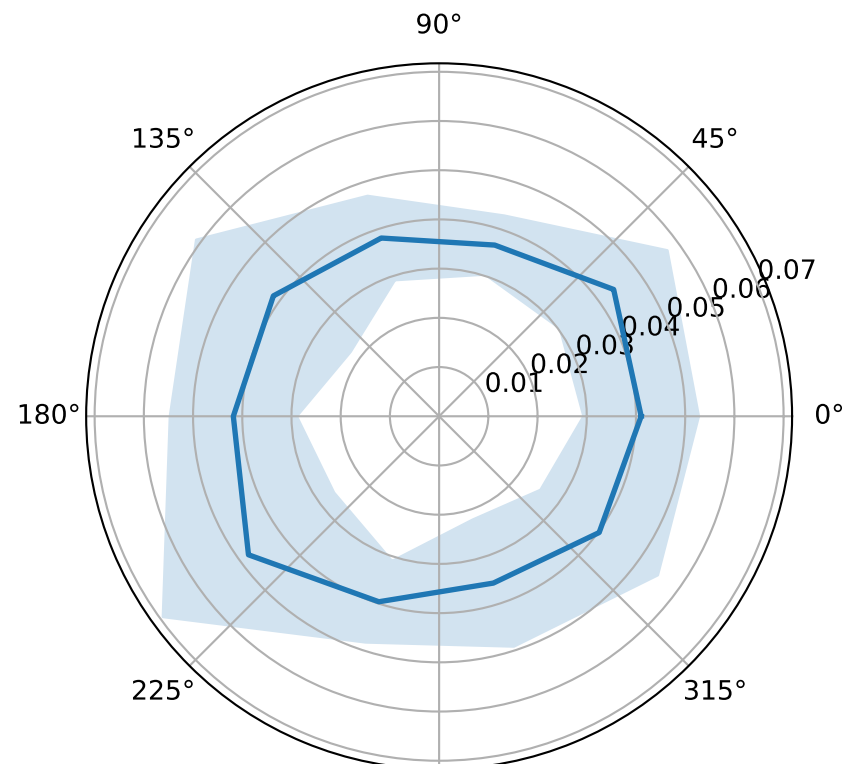


10N
(meters)

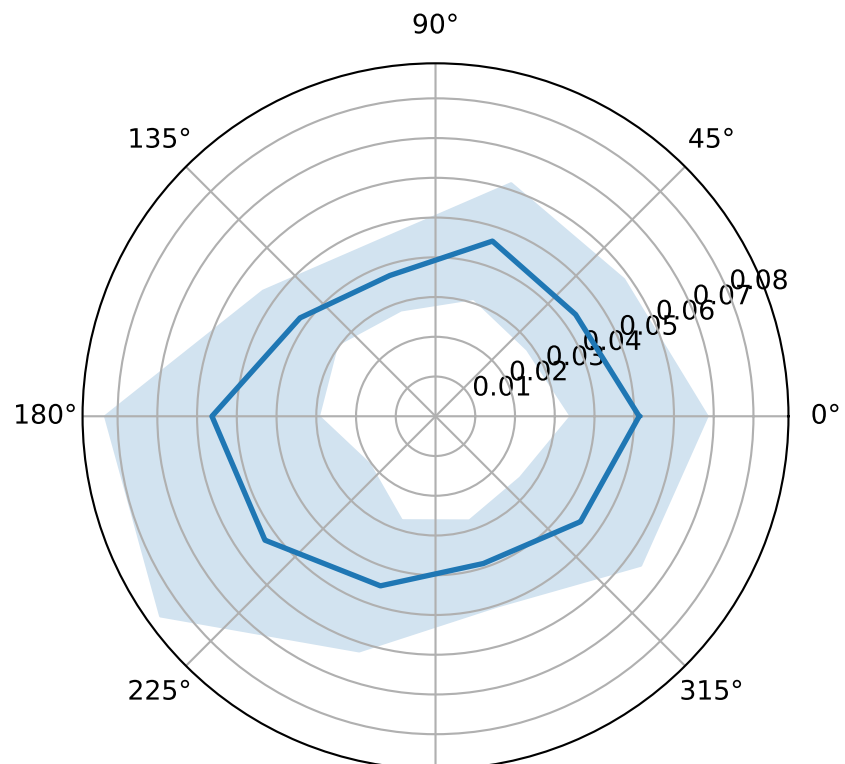


15N
(meters)

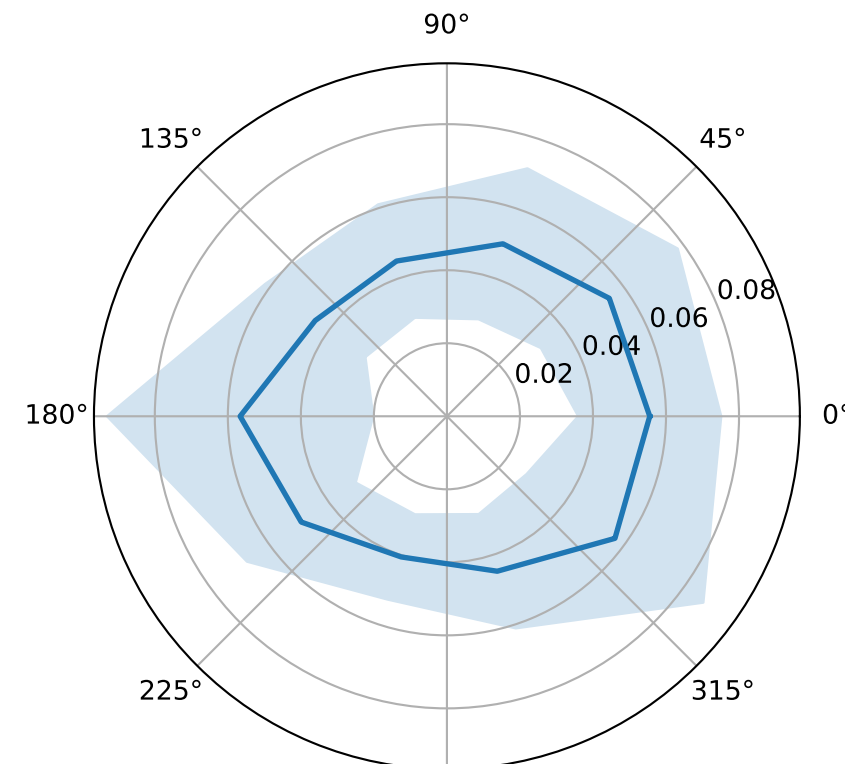

20N
(meters)

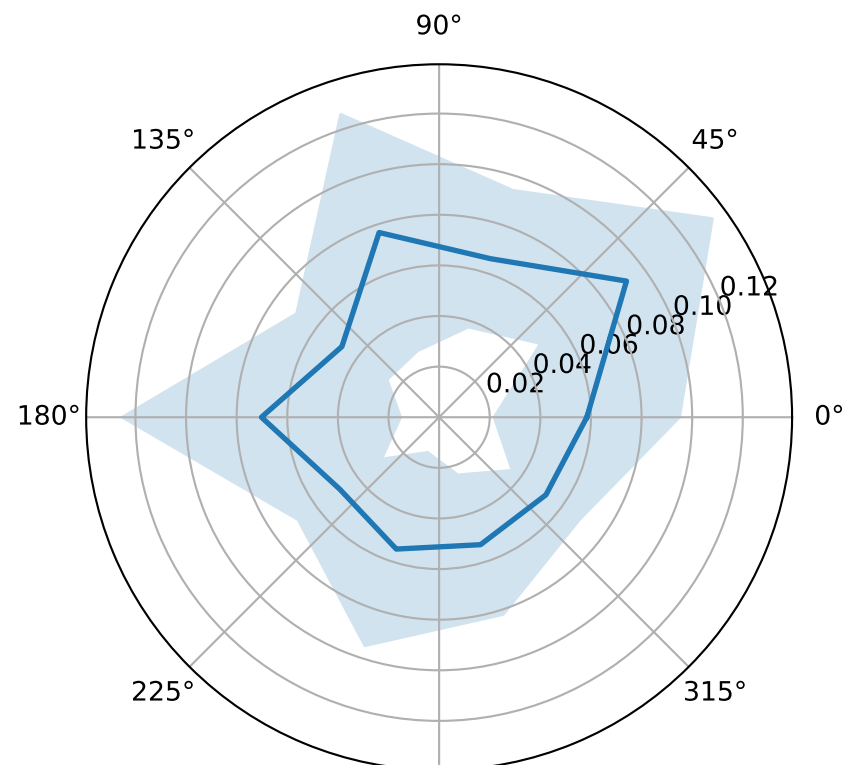


25N
(meters)

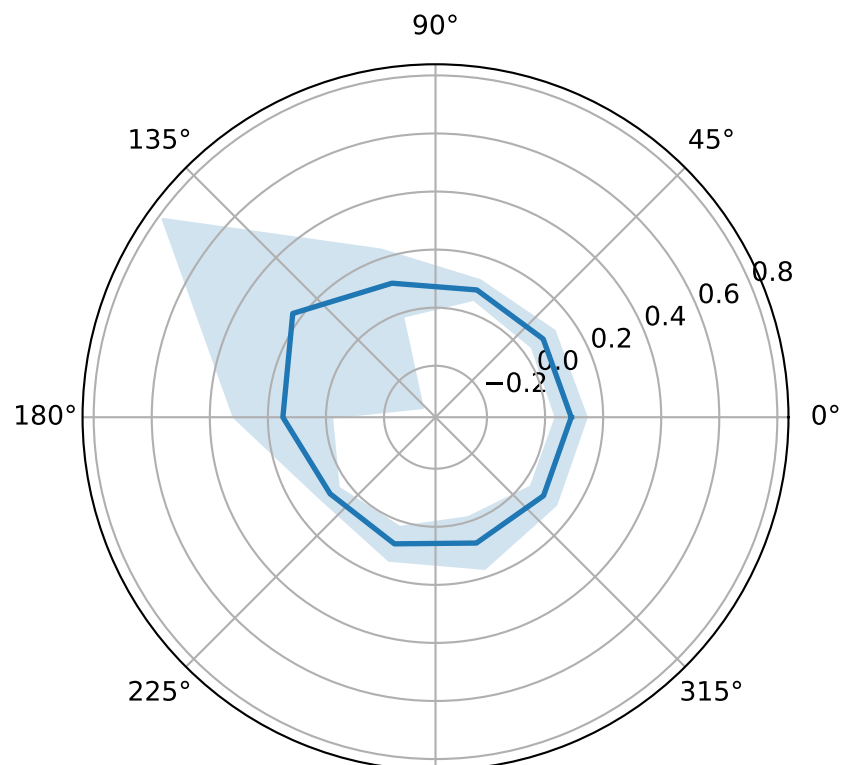

Effective Compliance by Direction


5N
(s/kg)

90°

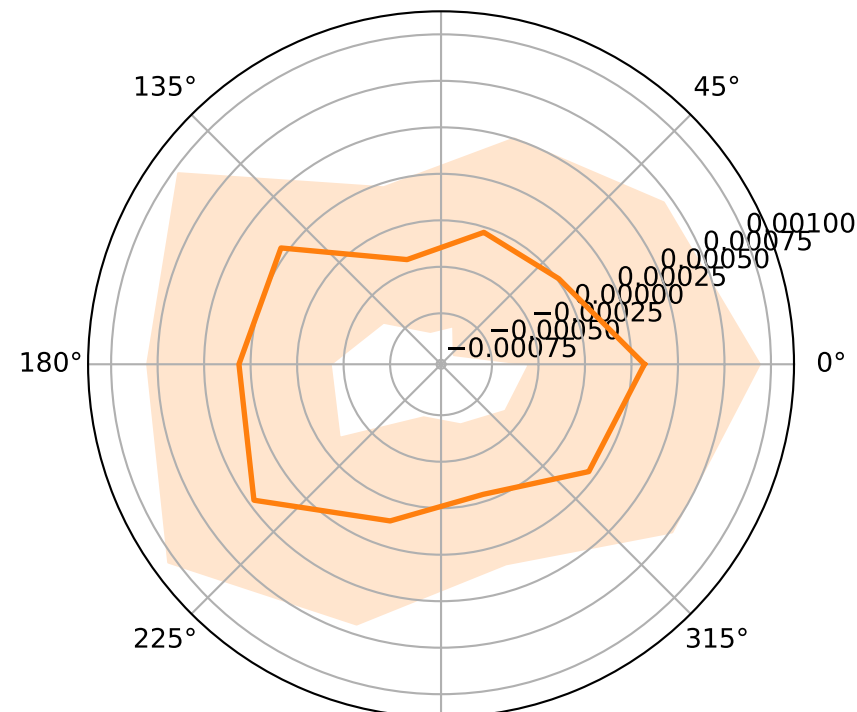


10N
(s/kg)

90°

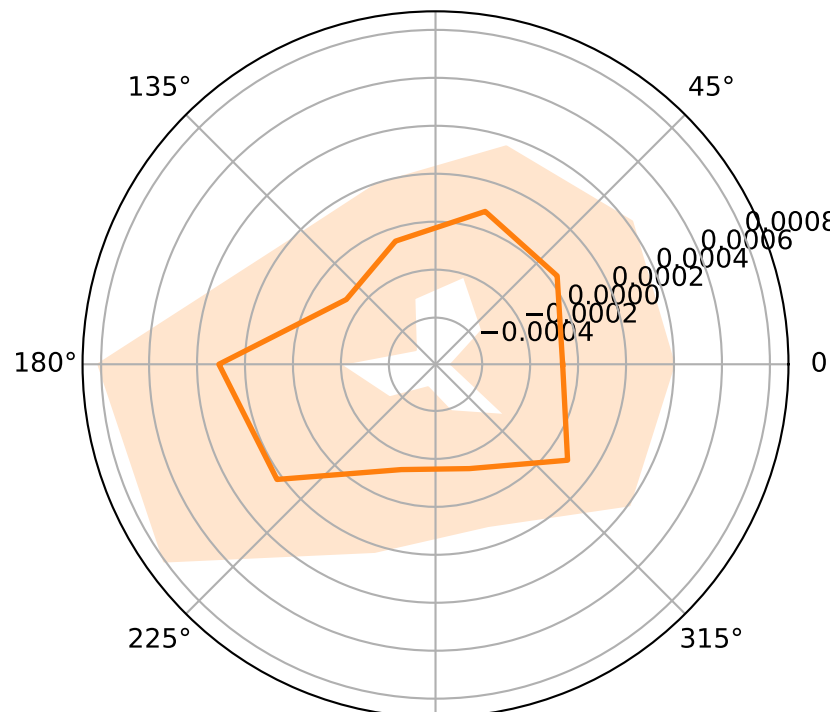


15N
(s/kg)

90°

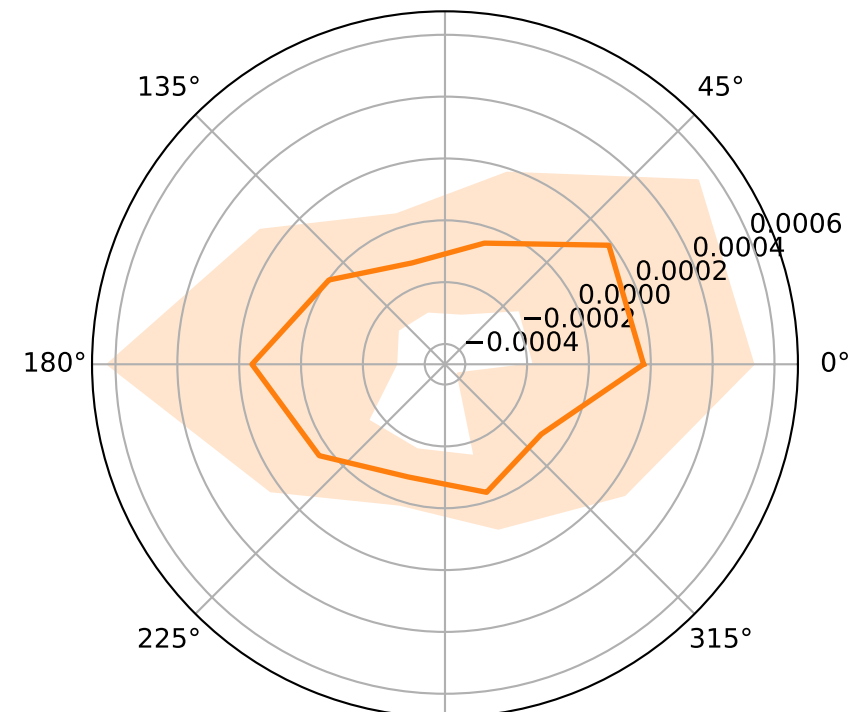


20N
(s/kg)

90°

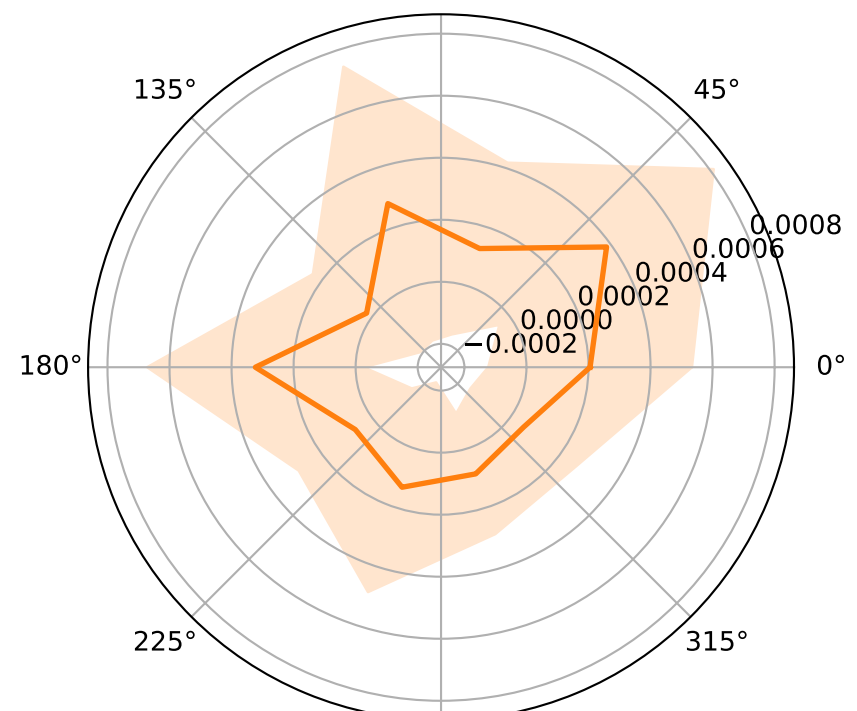


25N
(s/kg)


90°

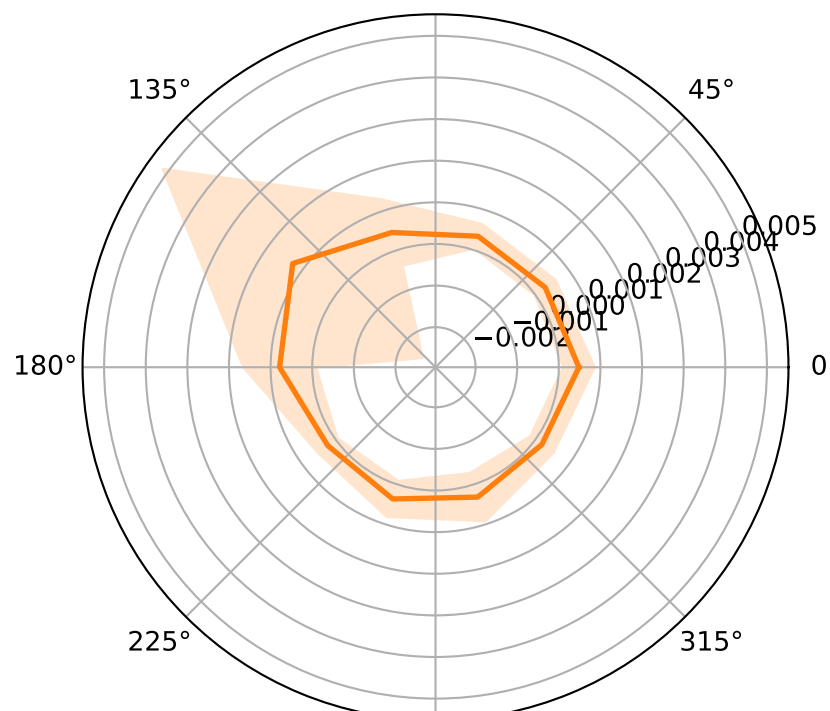











Velocity Magnitude During Force Application (largest mag: 25N)

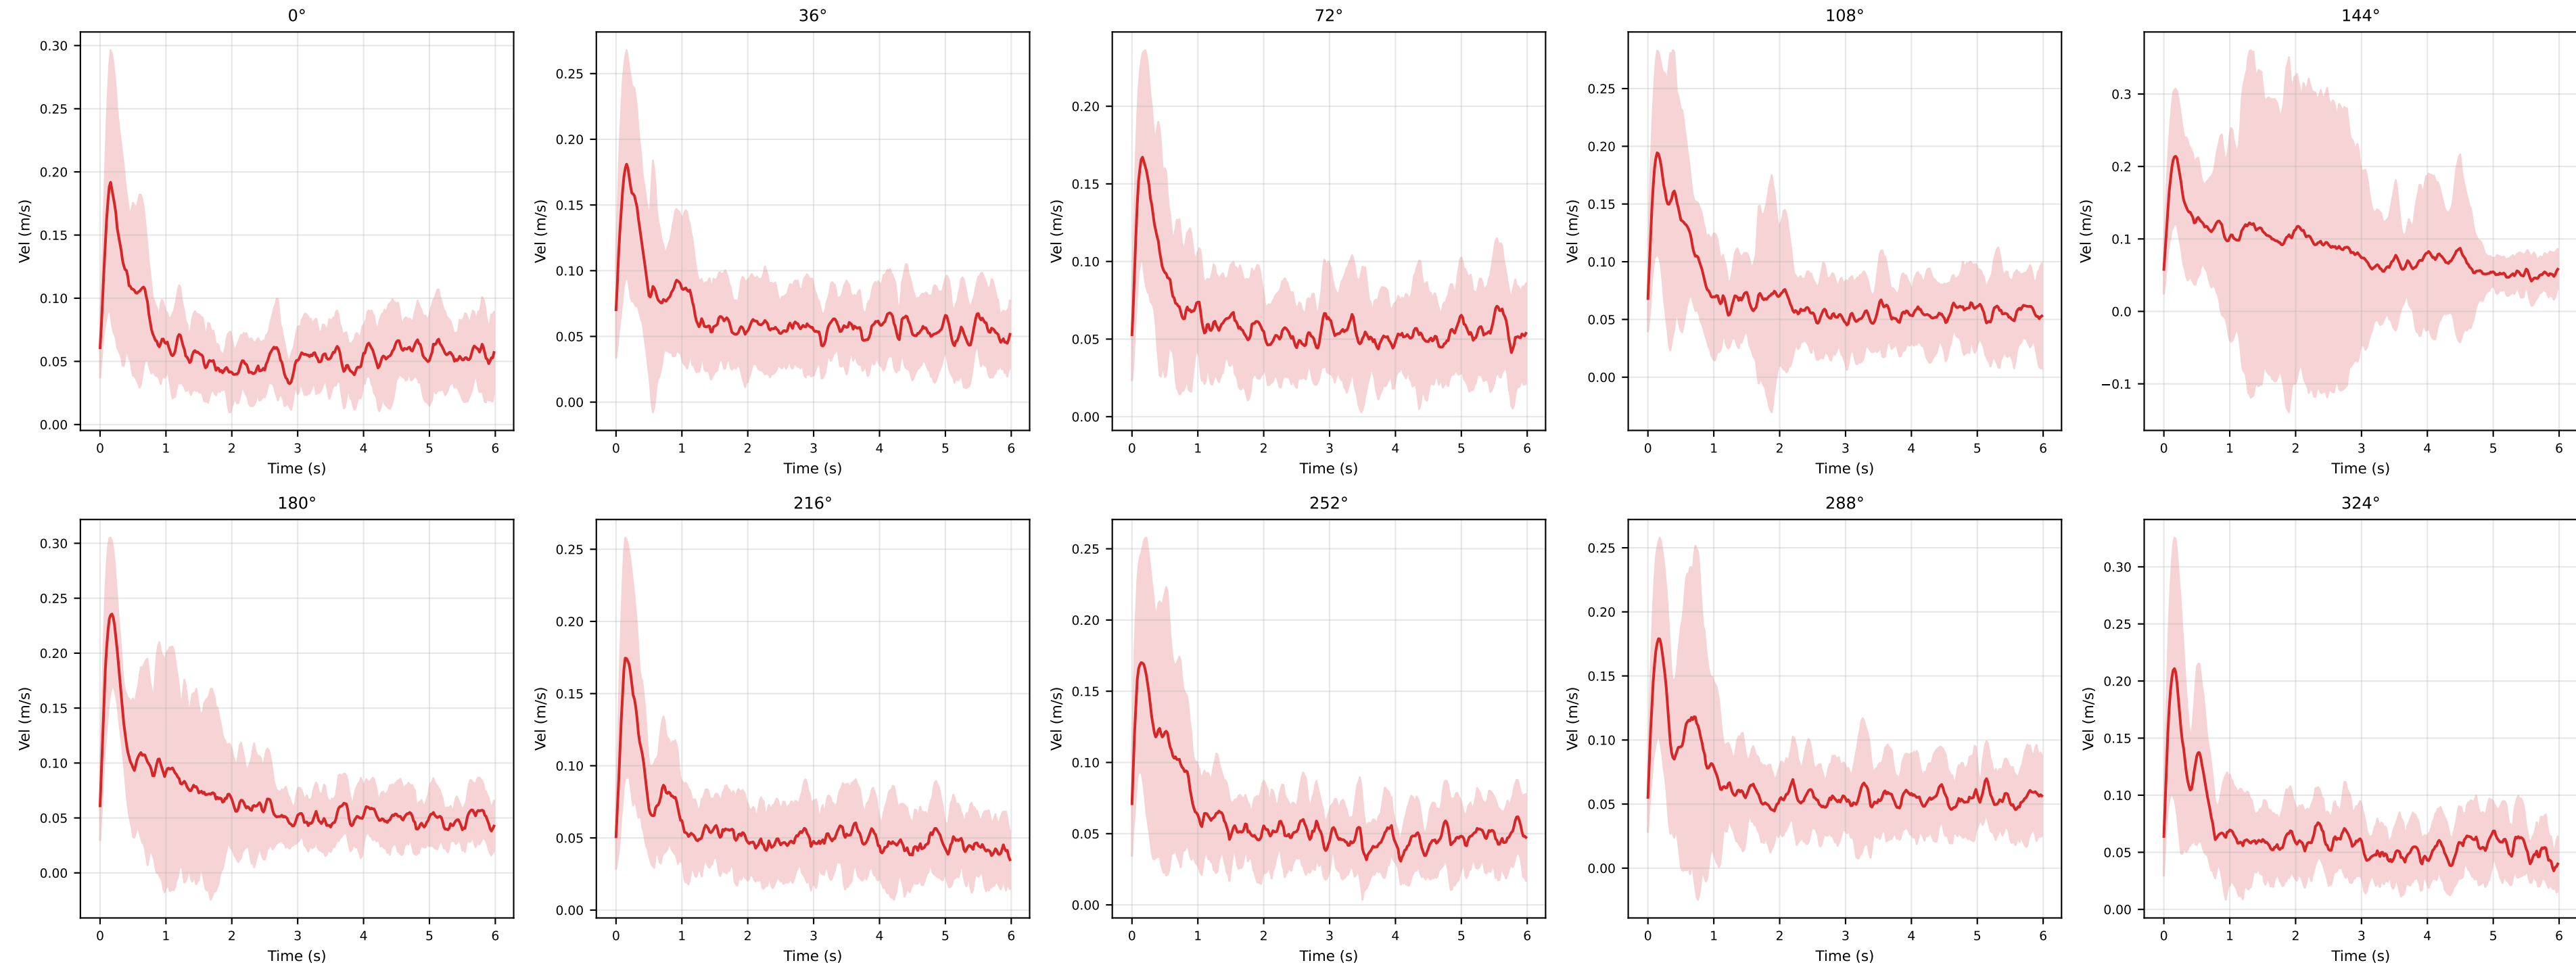


Force Estimator RMSE vs Direction

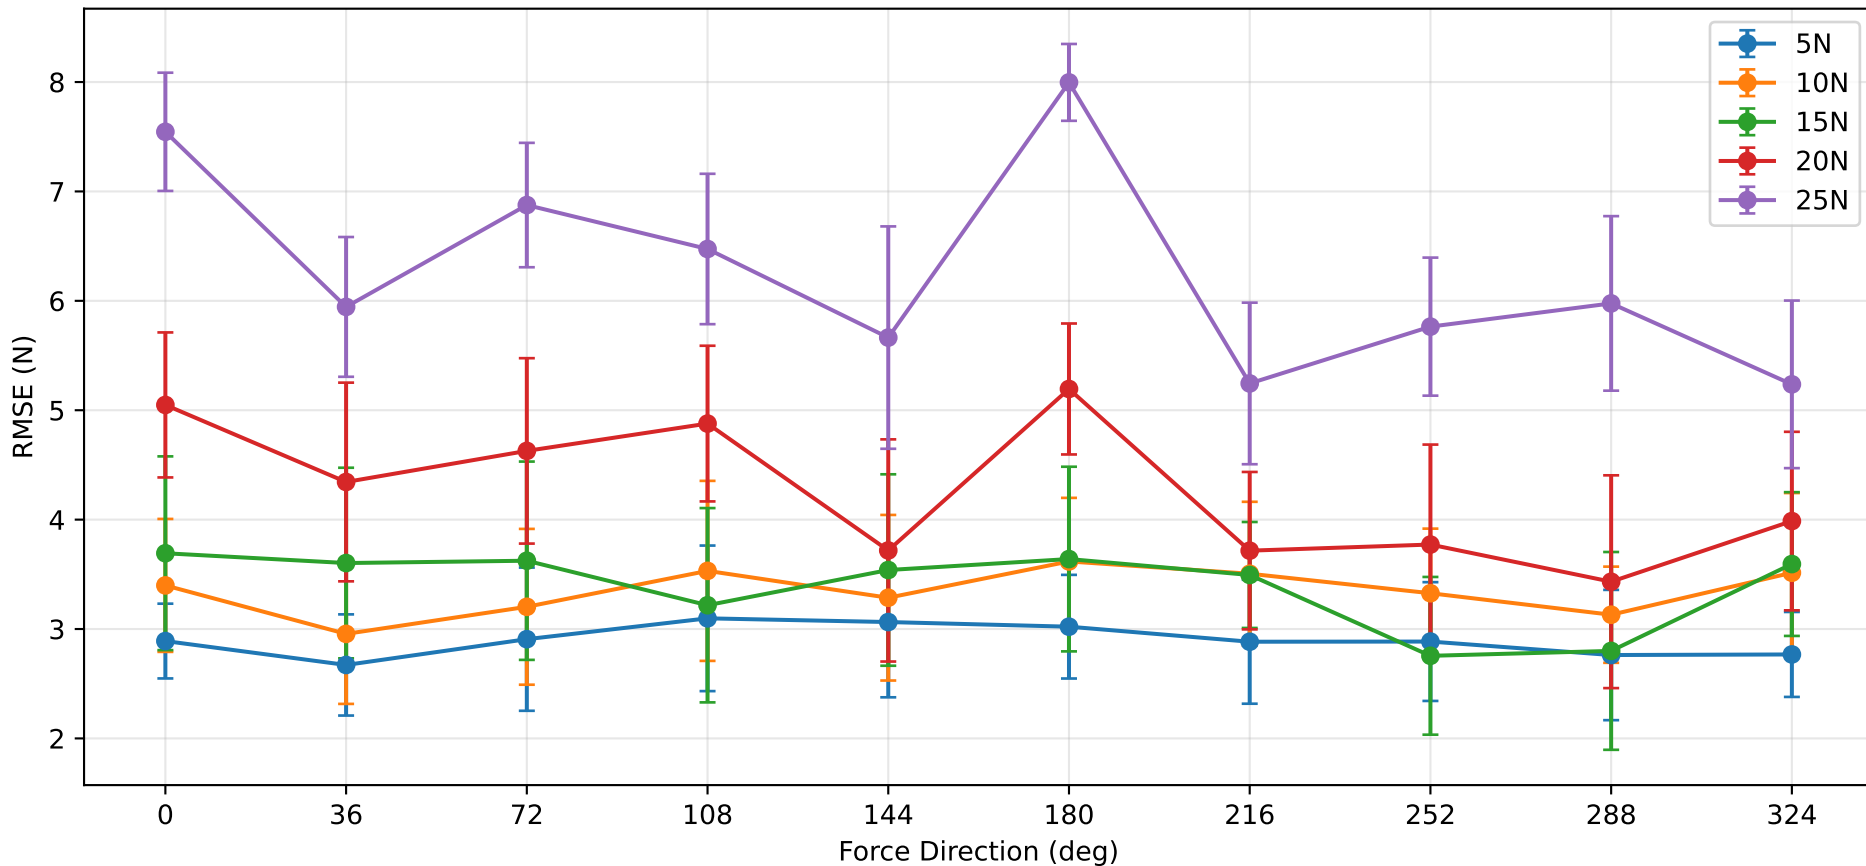

Force Estimator RMSE by Direction

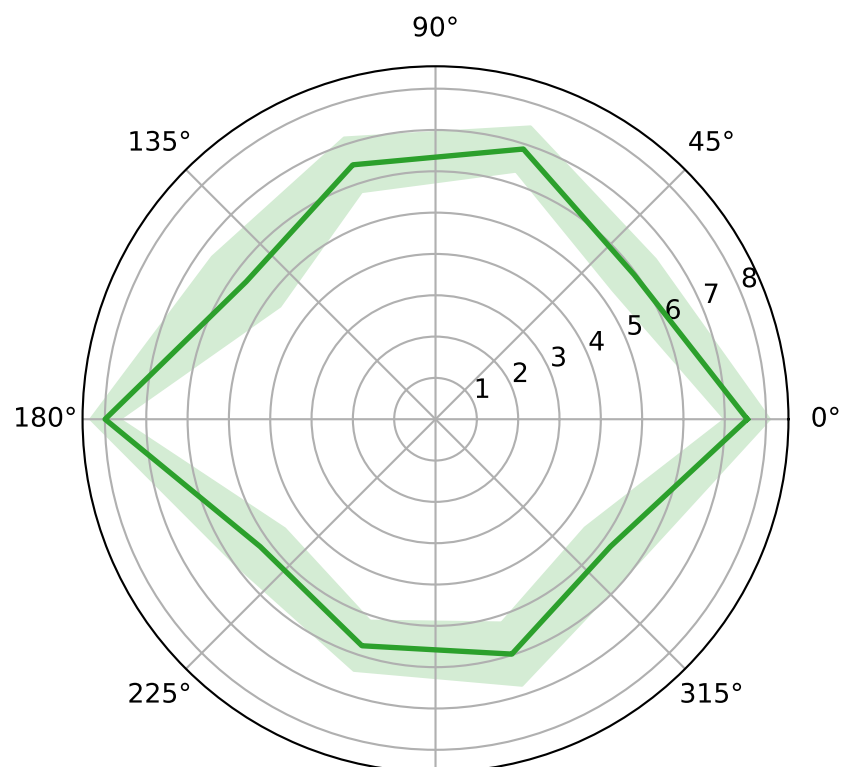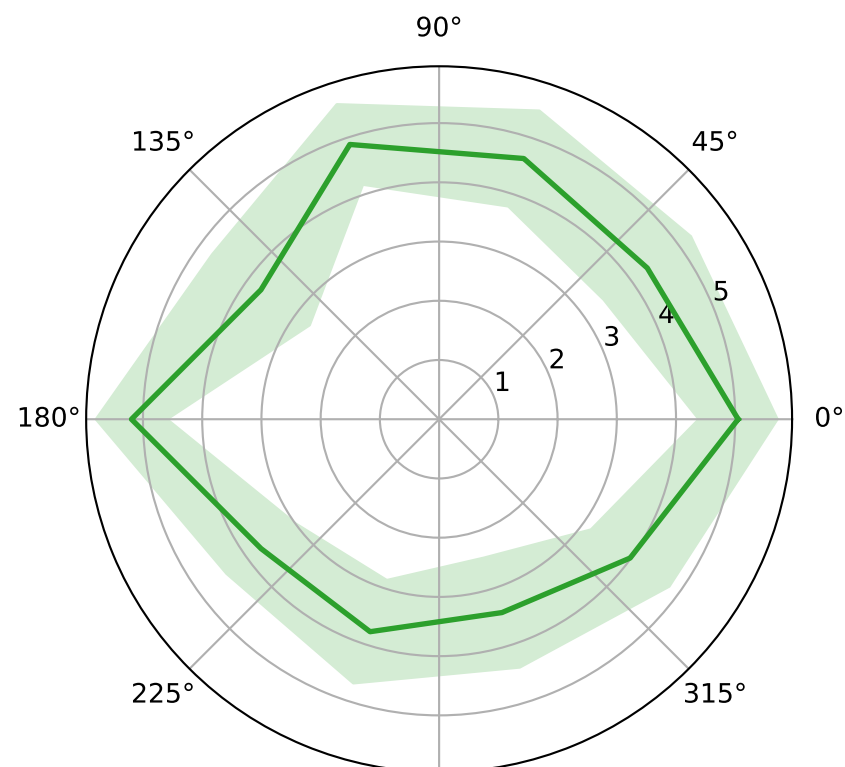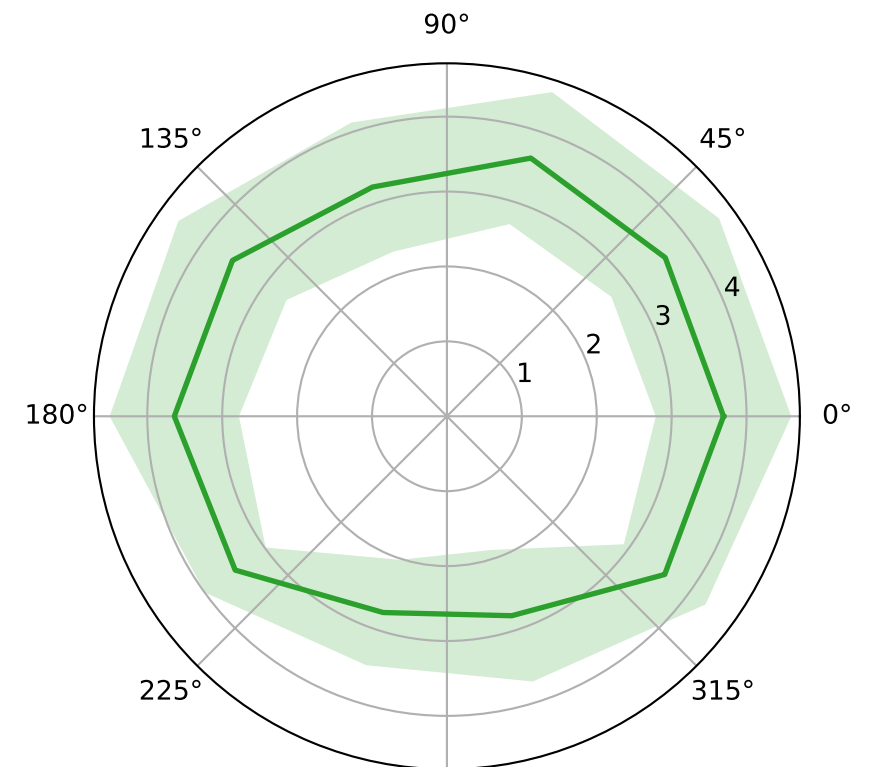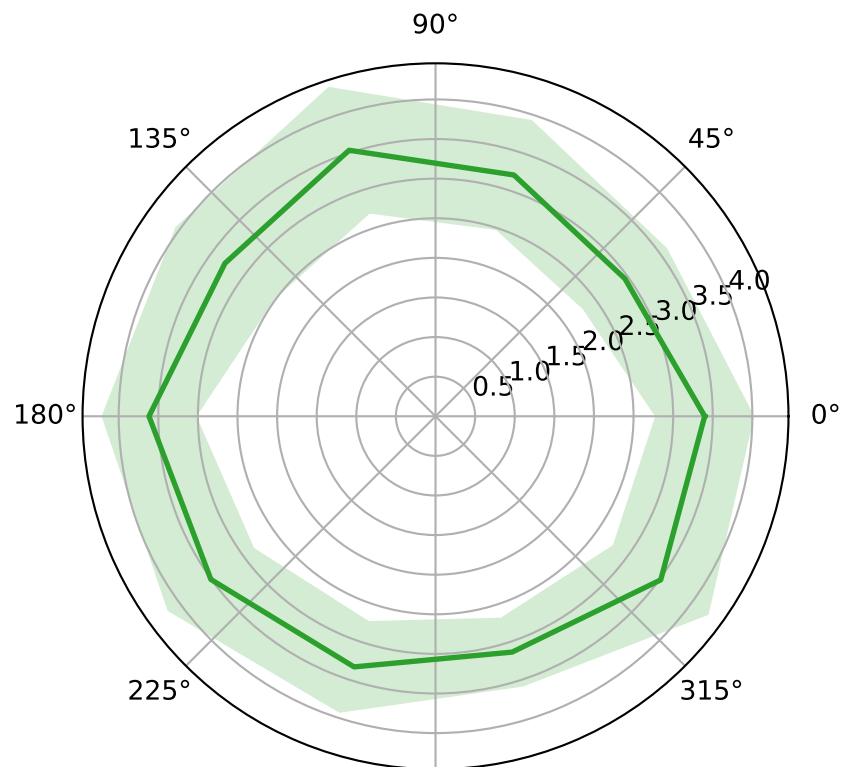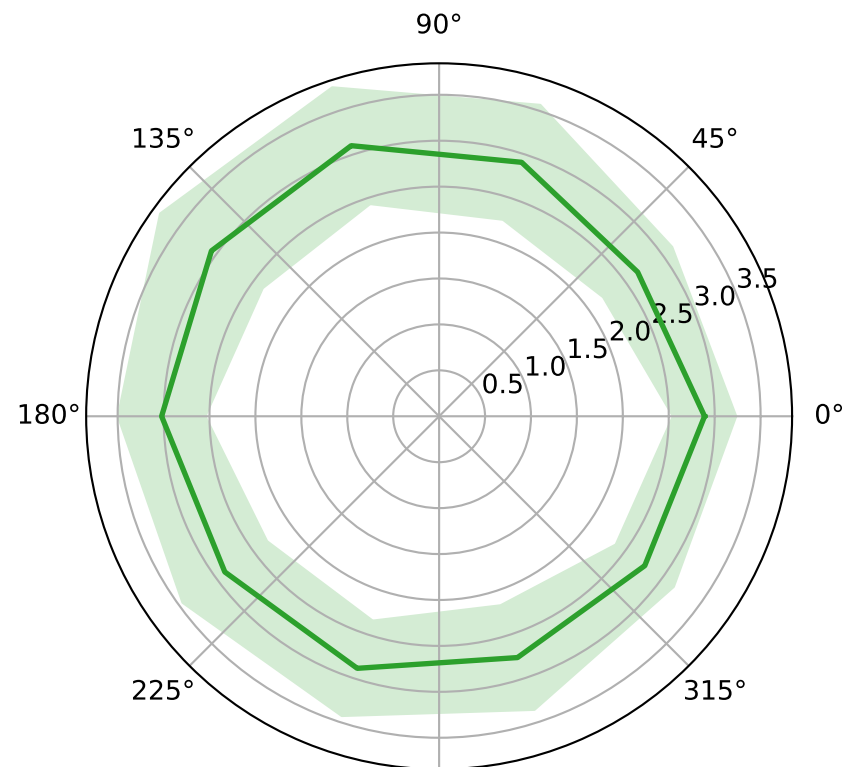

Force Estimate vs GT (25N) — Fx (blue) Fy (red)

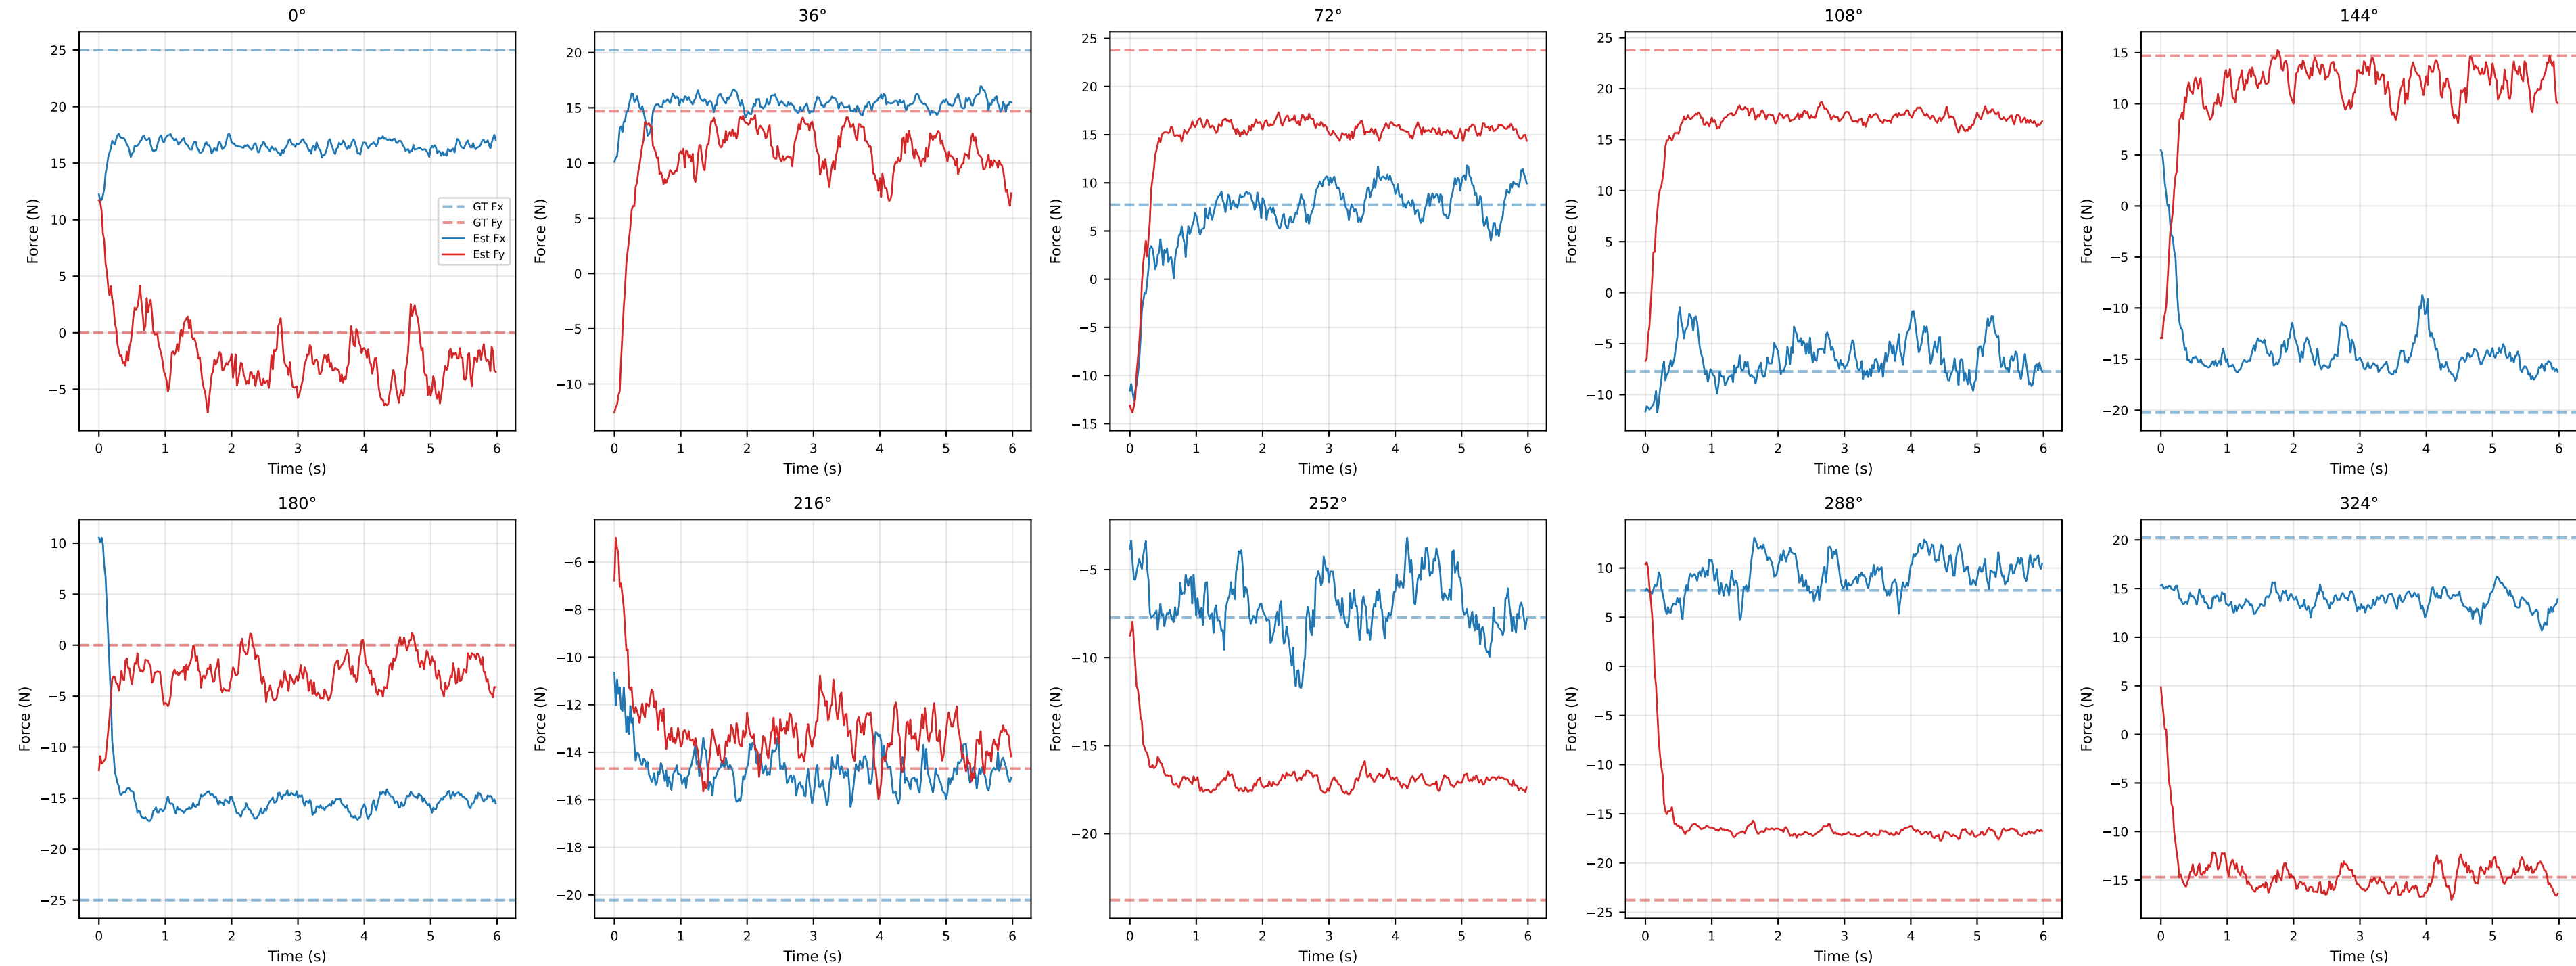

Static 360 Evaluation Summary

Mag (N)	Success %	Peak Disp (m)	Compliance (s/kg)	SS Vel (m/s)	Mean Disp (m)	Est RMSE (N)
5	100%	0.041 ± 0.014	0.0001 ± 0.0006	0.046 ± 0.013	0.022 ± 0.012	2.950
10	100%	0.046 ± 0.020	0.0000 ± 0.0004	0.048 ± 0.012	0.026 ± 0.017	3.417
15	100%	0.050 ± 0.023	0.0000 ± 0.0003	0.049 ± 0.012	0.028 ± 0.021	3.508
20	100%	0.062 ± 0.038	0.0002 ± 0.0003	0.050 ± 0.015	0.040 ± 0.037	4.392
25	100%	0.106 ± 0.198	0.0005 ± 0.0014	0.053 ± 0.015	0.084 ± 0.198	6.373