




Push Recovery Success Rate (%)

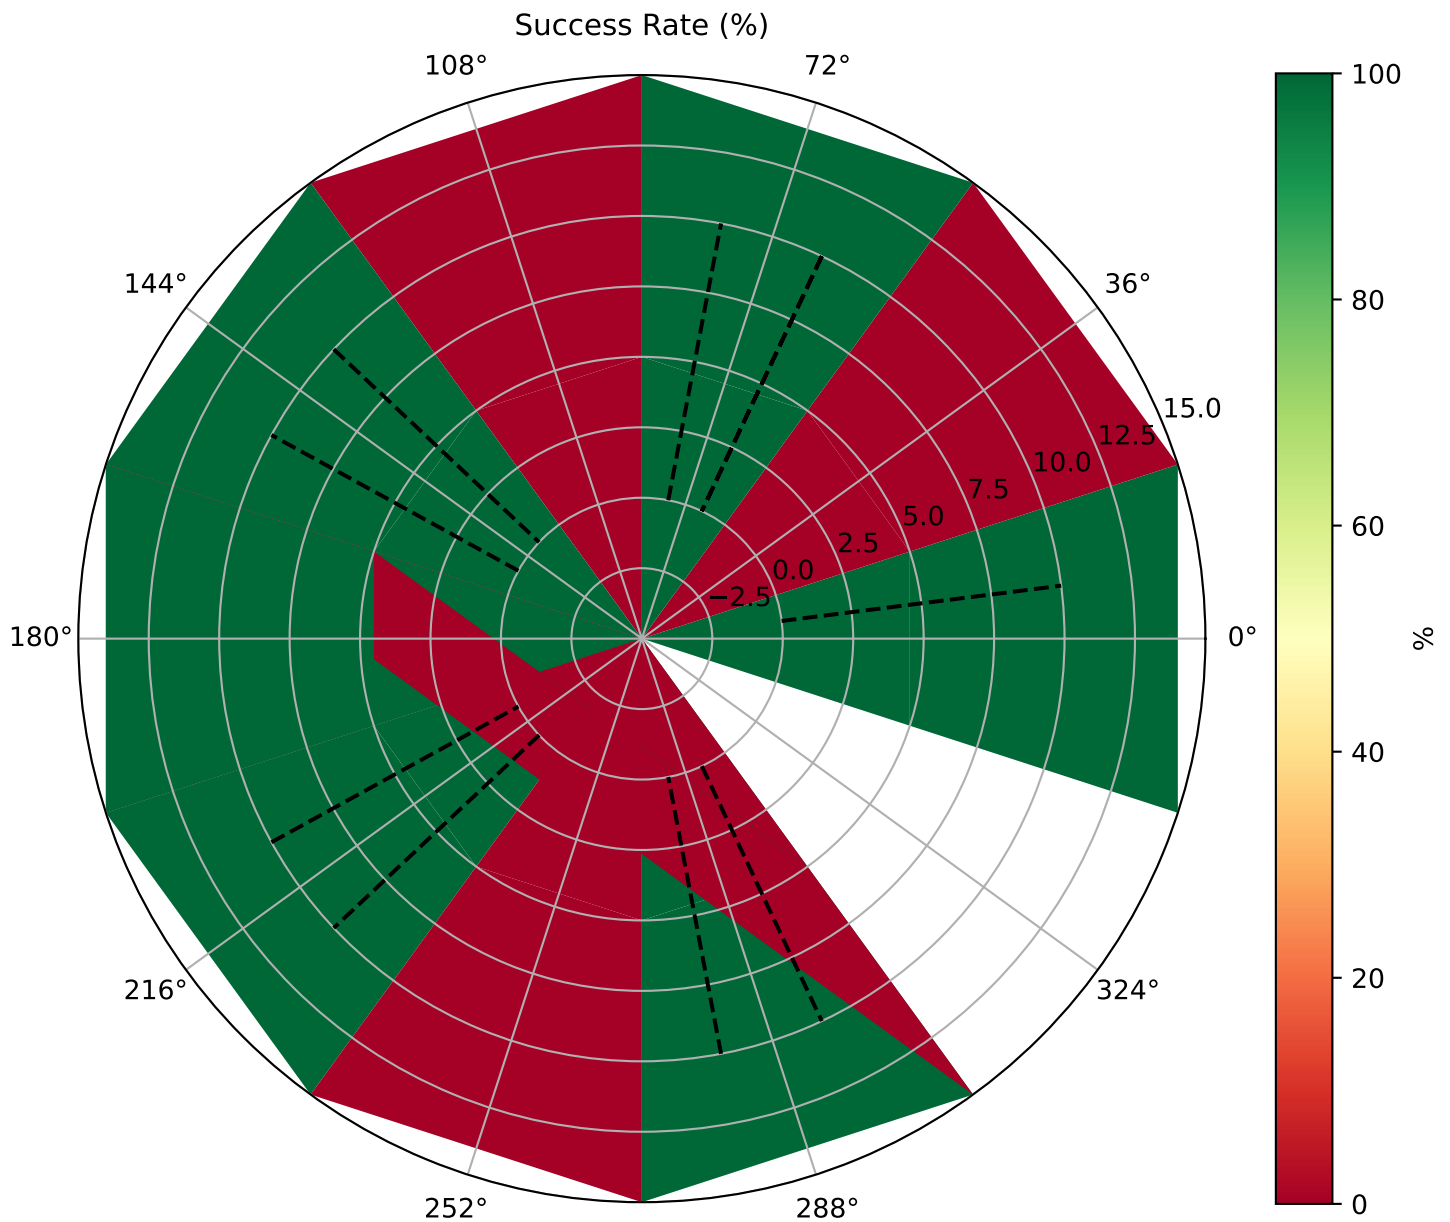


Decay Time by Direction

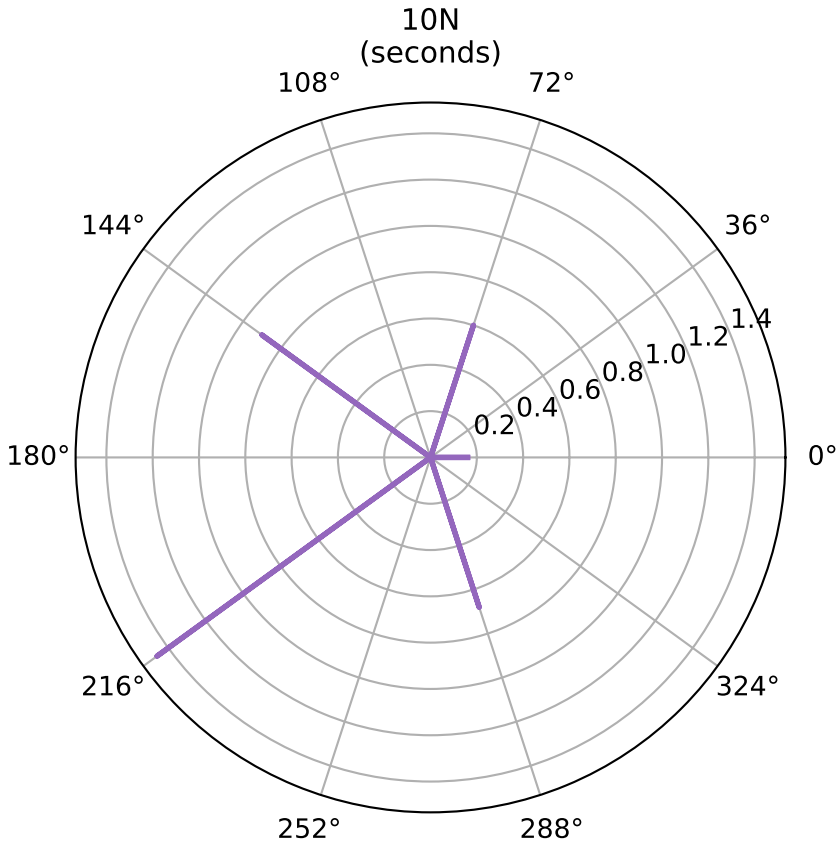

Effective Compliance vs Force Magnitude

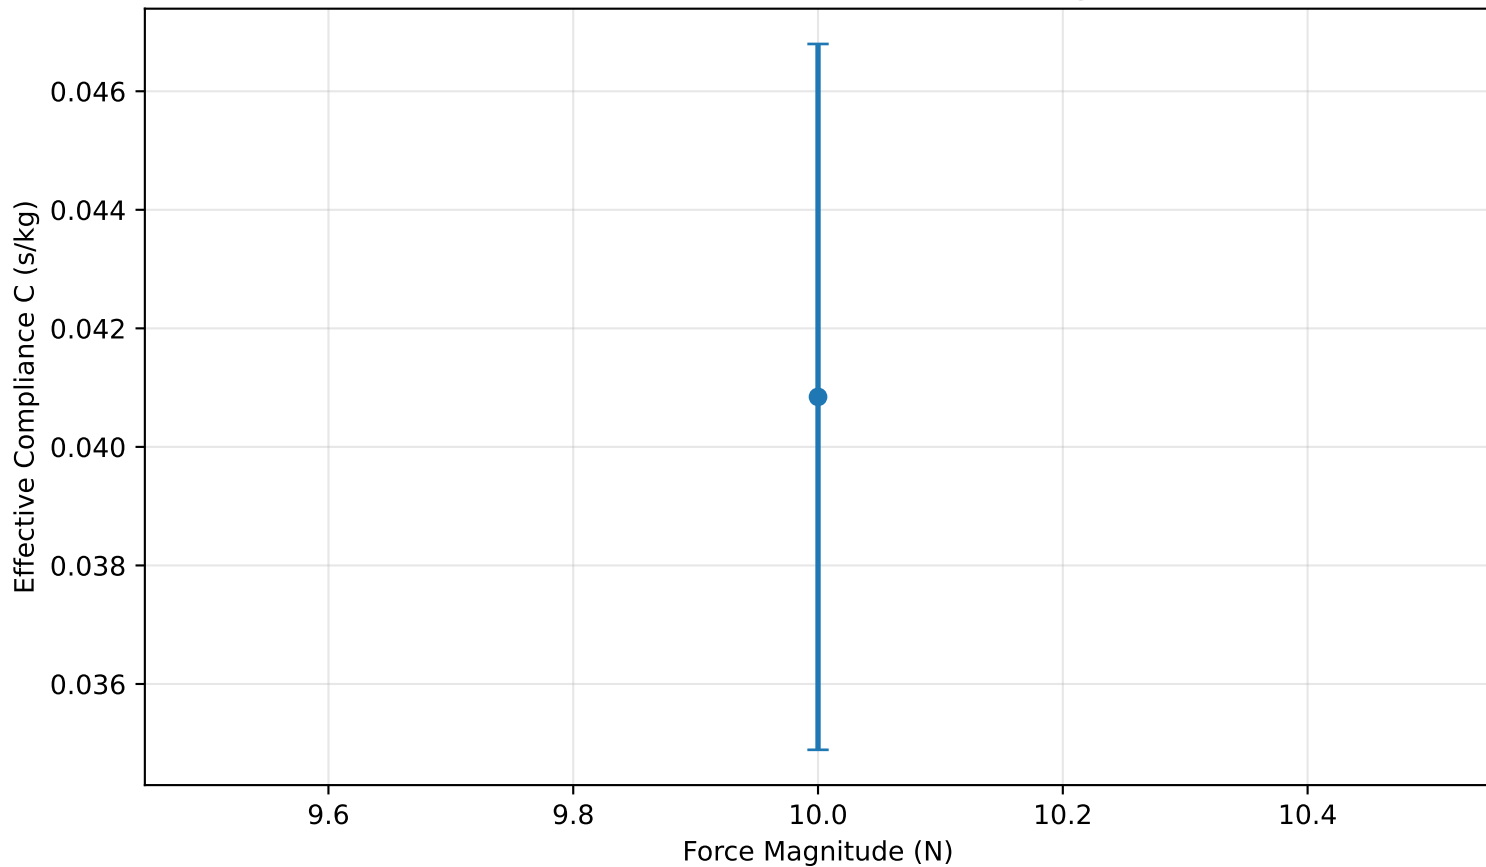

Peak Displacement by Direction

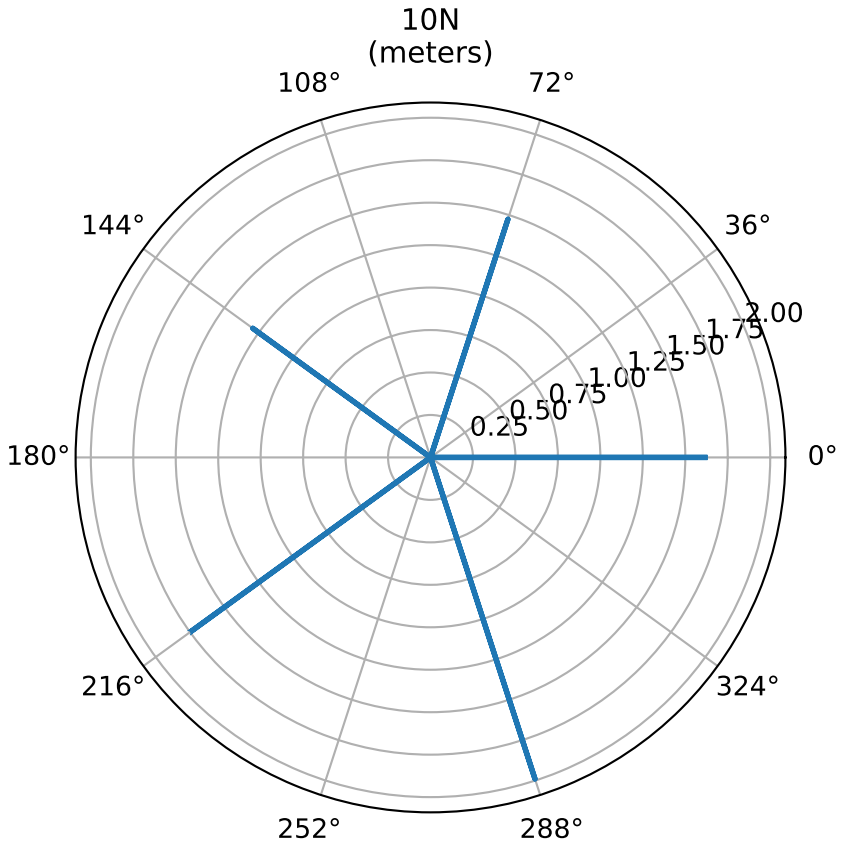

Static 360 Evaluation Summary

Magnitude (N)	Success %	Decay Time (s)	Peak Disp (m)	Settling Time (s)	Compliance C (s/kg)
10	50%	0.76 +/- 0.42	1.627 +/- 0.239	5.00 +/- 0.00	0.0408 +/- 0.0060