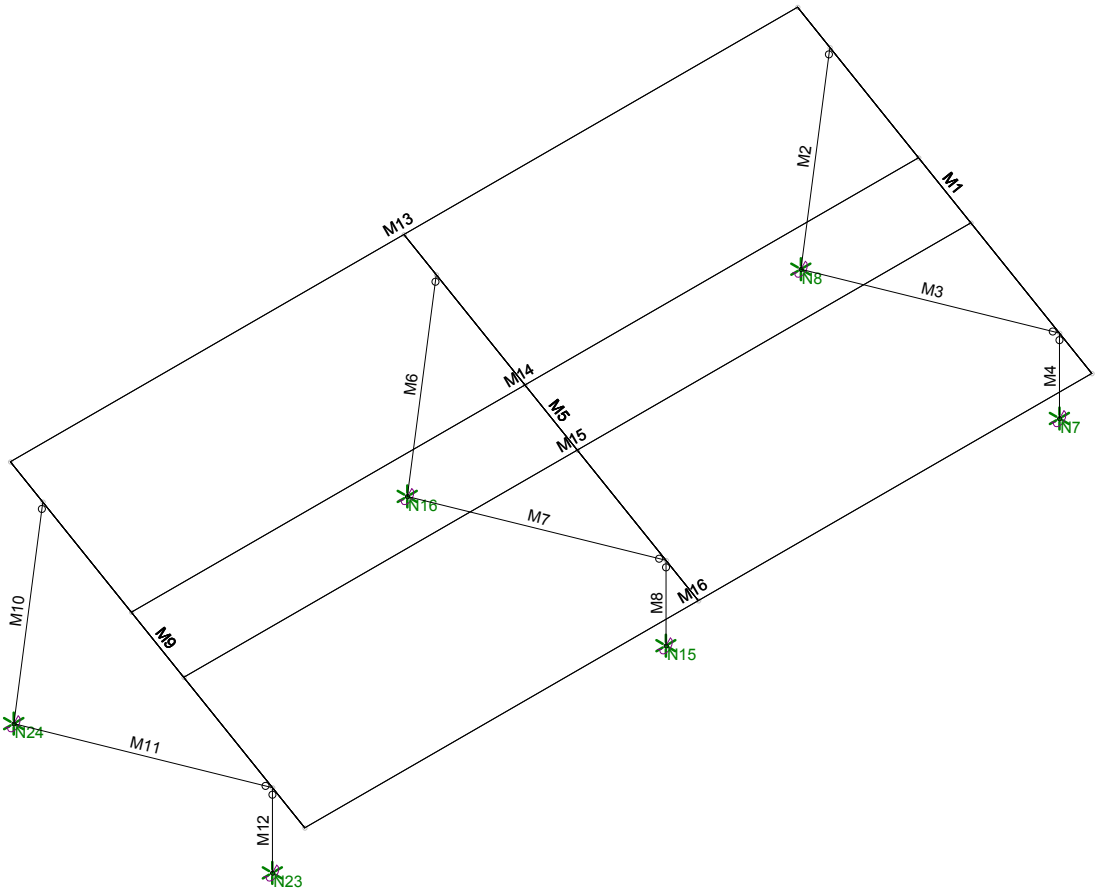

Schletter, Inc.		30° Tilt w/ Seismic Design
HCV	Standard PVMax Racking System	
	Representative Calculations - ASCE 7-10	

1. INTRODUCTION

1.1 Project Description

The following sections will cover the determination of forces and structural design calculations for the Schletter, Inc. PVMax ground mount system.

1.2 Construction

Photovoltaic modules are attached to aluminum purlins using clamp fasteners. Purlins are clamped to inclined aluminum girders, which are then connected to aluminum struts. Each support structure is equally spaced.

PV modules are required to meet the following specifications:

Maximum			Minimum		
Height =	1700	mm	Height =	1550	mm
Width =	1050	mm	Width =	970	mm
Dead Load =	3.00	psf	Dead Load =	1.75	psf

Modules Per Row =	2
Module Tilt =	30°
Maximum Height Above Grade =	3 ft

1.3 Technical Codes

- ASCE 7-10 - Chapter 26-31, Wind Loads
- ASCE 7-10 - Chapter 7, Snow Loads
- ASCE 7-10 - Chapter 2, Combination of Loads
- International Building Code, IBC, 2012, 2015
- Aluminum Design Manual, Eighth Edition, 2005

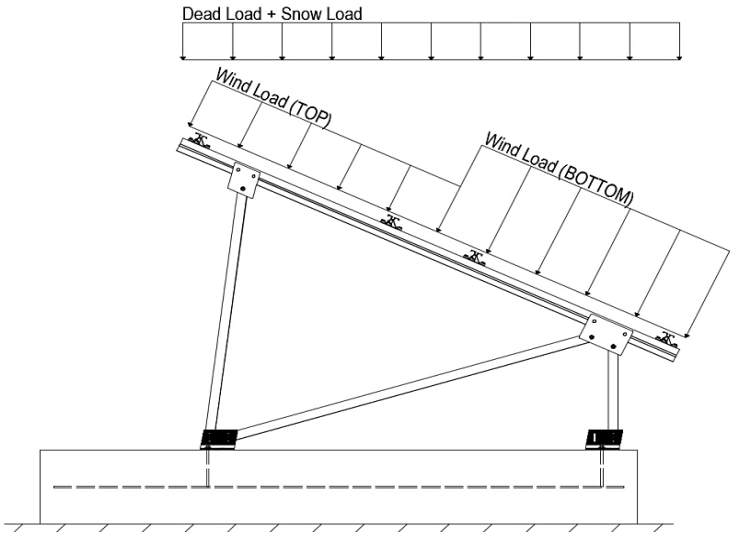

Typical loading conditions of the module dead loads, snow loads, and wind loads are shown on the left.

2. LOAD ACTIONS

2.1 Permanent Loads

g_{MAX} =	3.00	psf	*Self-weight of the PV modules.*
g_{MIN} =	1.75	psf	

2.2 Snow Loads

Ground Snow Load, P_g =	30.00	psf	
Sloped Roof Snow Load, P_s =	16.49	psf	*(ASCE 7-10, Eq. 7.4-1)*
I_s =	1.00		
C_s =	0.73		
C_e =	0.90		
C_t =	1.20		

2.3 Wind Loads

Design Wind Speed, V =	140	mph	Exposure Category = C
Height <	15	ft	Importance Category = II
Peak Velocity Pressure, q_z =	30.77	psf	*Including the gust factor, G=0.85. (ASCE 7-10, Eq. 27.3-1)*

Pressure Coefficients

$Cf+_{TOP}$ =	1.150	*(Pressure)*	*Provided pressure coefficients are the result of wind tunnel testing done by Ruscheweyh Consult. Coefficients are located in test report # 1127/0611-1e. Negative forces are applied away from the surface.*
$Cf+_{BOTTOM}$ =	1.850		
$Cf-_{TOP, OUTER PURLIN}$ =	-2.600		
$Cf-_{TOP, INNER PURLIN}$ =	-2.000	*(Suction)*	
$Cf-_{BOTTOM}$ =	-1.100		

2.4 Seismic Loads

S_S =	2.50	R =	1.25
S_{DS} =	1.67	C_S =	0.8
S_1 =	1.00	ρ =	1.3
S_{D1} =	1.00	Ω =	1.25
T_a =	0.06	C_d =	1.25

ASCE 7, Section 12.8.1.3: A maximum S_s of 1.5 may be used to calculate the base shear, C_s, of structures under five stories and with a period, T, of 0.5 or less. Therefore, a S_{ds} of 1.0 was used to calculate C_s.

2.5 Combination of Loads

ASCE 7 requires that all structures be checked by specified combinations of loads. Applicable load combinations are provided below.

Strength Design, LRFD

Component stresses are checked using the following LRFD load combinations:

1.2D + 1.6S + 0.5W	
1.2D + 1.0W + 0.5S	
0.9D + 1.0W [M]	
1.54D + 1.3E + 0.2S [R]	*(ASCE 7, Eq 2.3.2-1 through 2.3.2-7) & (ASCE 7, Section 12.4.3.2)*
0.56D + 1.3E [R]	
1.54D + 1.25E + 0.2S [O]	
0.56D + 1.25E [O]	

Allowable Stress Design, ASD

Member deflection checks and foundation designs are done according to the following ASD load combinations:

1.0D + 1.0S	
1.0D + 0.6W	
1.0D + 0.75L + 0.45W + 0.75S	
0.6D + 0.6W [M]	*(ASCE 7, Eq 2.4.1-1 through 2.4.1-8) & (ASCE 7, Section 12.4.3.2)*
1.238D + 0.875E [O]	
1.1785D + 0.65625E + 0.75S [O]	
0.362D + 0.875E [O]	

[M] *Uses the minimum allowable module dead load.*
[R] *Include redundancy factor of 1.3.*
[O] *Includes overstrength factor of 1.25. Used to check seismic drift.*

3. STRUCTURAL ANALYSIS

3.1 RISA Results

Appendix B.1 contains outputs from the structural analysis software package, RISA. These outputs are used to accurately determine resultant member and reaction forces from the loads seen throughout Section 2.

3.2 RISA Components

A member and node list has been provided below to correlate the RISA components with the design calculations in Section 4. Items of significance have been listed.

Purlins	Location
M13	Top
M14	Mid-Top
M15	Mid-Bottom
M16	Bottom

Diagonal Struts	Location
M3	Outer
M7	Inner
M11	Outer

Front Reactions	Location
N7	Outer
N15	Inner
N23	Outer

Girders	Location
M1	Outer
M5	Inner
M9	Outer

Rear Struts	Location
M2	Outer
M6	Inner
M10	Outer

Rear Reactions	Location
N8	Outer
N16	Inner
N24	Outer

Front Struts	Location
M4	Outer
M8	Inner
M12	Outer

4. MEMBER DESIGN CALCULATIONS

4.1 Purlin Design

Aluminum purlins are used to transfer loads to the support structure. Purlins are designed as continous beams with cantilevers. These are considered beams with internal hinges that can be joined with splices at 25% of the support respective span. See Appendix A.1 for detailed member calculations. Section units are in (mm).

Purlin Type =	**S1.5**	
Aluminum Type =	6105-T5	
F_{ty} =	35	ksi
L_b =	111	in
$\Phi F_{ty\ STRONG\text{-}AXIS}$ =	25.07	ksi
$\Phi F_{ty\ WEAK\text{-}AXIS}$ =	23.08	ksi
S_y =	1.33	in^3
S_x =	0.60	in^3
E =	10100	ksi
I_y =	2.16	in^4
I_x =	1.07	in^4
A =	1.25	in^2
g =	1.50	lbs/ft
M_y =	-2.333	k-ft
M_z =	0.013	k-ft
$M_{y\ allowable}$ =	2.779	k-ft
$M_{z\ allowable}$ =	1.154	k-ft
Utilization =	85%	

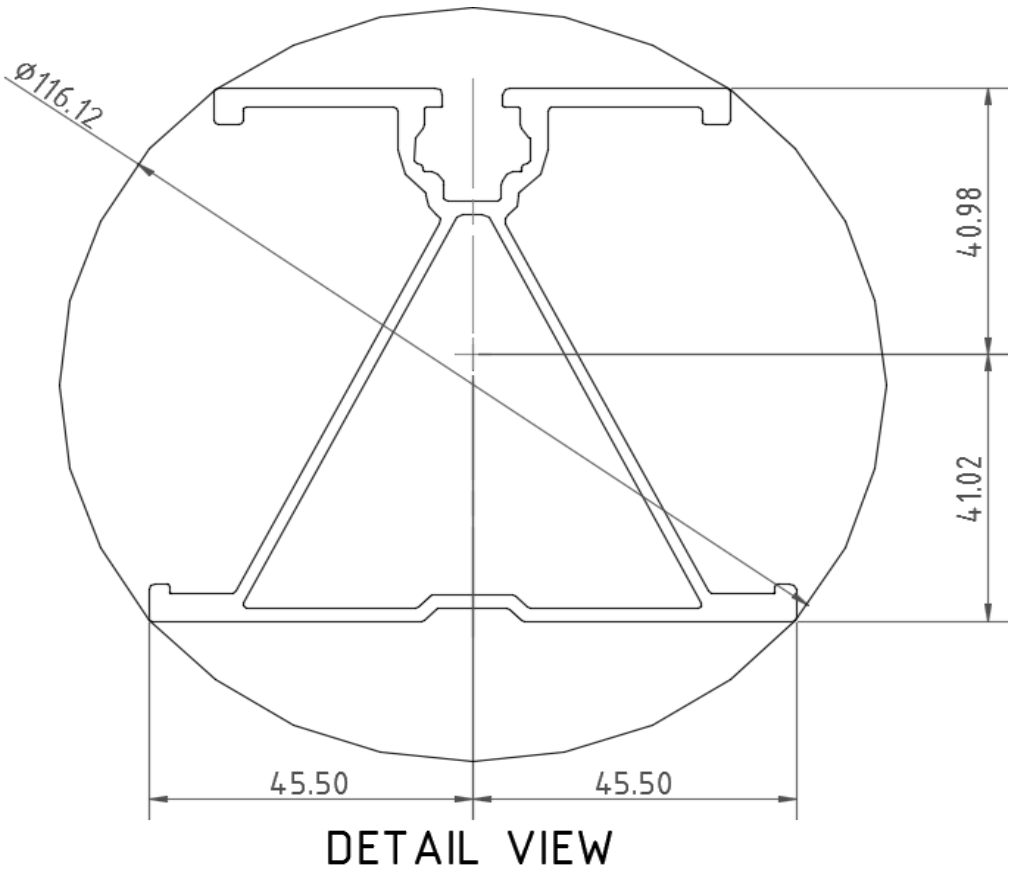

4.2 Girder Design

Loads from purlins are transferred using an inclined girder, which is connected to a set of aluminum struts. Loads on the girder result from the support reactions of the purlins. See Appendix A.2 for detailed member calculations. Section units are in (mm).

Girder Type =	**BF0**	
Aluminum Type =	6105-T5	
F_{ty} =	35	ksi
L_b =	88.90	in
$\Phi F_{ty\ AXIAL}$ =	31.09	ksi
$\Phi F_{ty\ STRONG\text{-}AXIS}$ =	29.35	ksi
$\Phi F_{ty\ WEAK\text{-}AXIS}$ =	33.25	ksi
S_y =	1.42	in^3
S_x =	1.41	in^3
E =	10100	ksi
I_y =	2.39	in^4
I_x =	2.22	in^4
A =	1.88	in^2
g =	2.26	lbs/ft
M_y =	-3.094	k-ft
M_z =	0.000	k-ft
P_n =	-0.923	k
$M_{y\ allowable}$ =	3.464	k-ft
$M_{z\ allowable}$ =	3.907	k-ft
$P_{n\ allowable}$ =	58.535	k
Utilization =	91%	

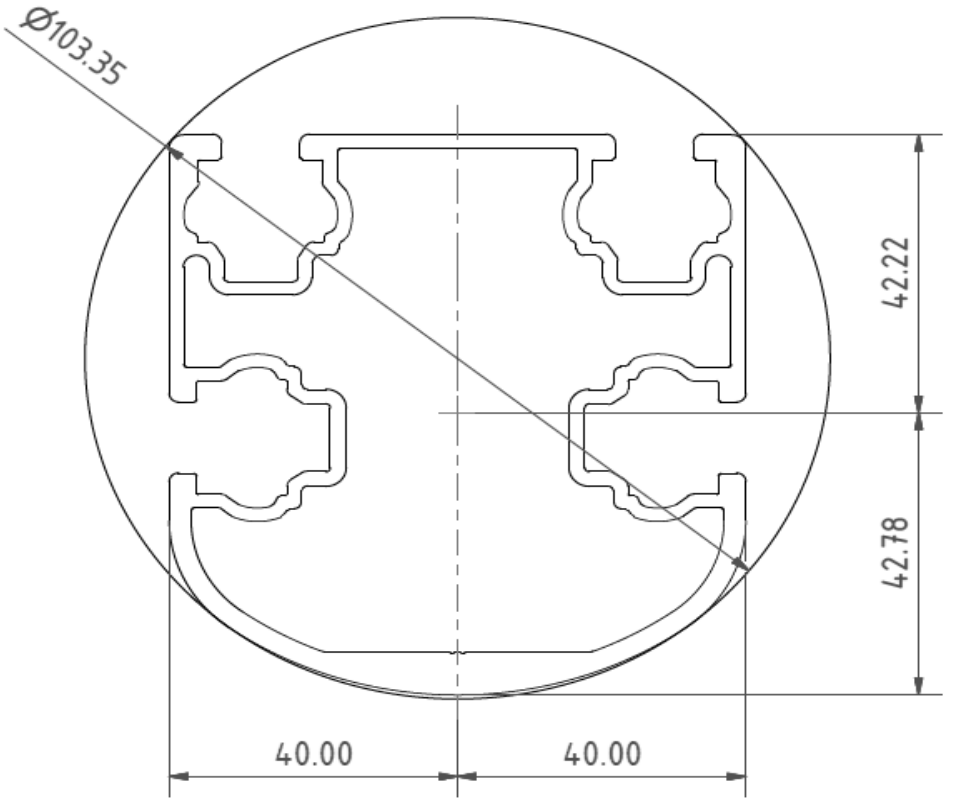

4.3 Front Strut Design

The front aluminum strut connects a portion of the girder to the foundation. Vertical girder forces are then transferred down through the strut into the foundation. The strut is attached with single M12 bolts at each end. See Appendix A.3 for detailed member calculations. Section units are in (mm).

Strut Type =	**55x55**	
Aluminum Type =	6105-T5	
F_{ty} =	35	ksi
L_b =	24.80	in
$\Phi F_{ty\ AXIAL}$ =	28.03	ksi
$\Phi F_{ty\ BENDING}$ =	28.22	ksi
S_y =	0.60	in^3
S_x =	0.60	in^3
E =	10100	ksi
I_y =	0.67	in^4
I_x =	0.67	in^4
A =	0.98	in^2
g =	1.18	lbs/ft
M_y =	0.000	k-ft
M_z =	-0.506	k-ft
P_n =	0.551	k
$M_{y\ allowable}$ =	1.408	k-ft
$M_{z\ allowable}$ =	1.408	k-ft
$P_{n\ allowable}$ =	27.532	k
Utilization =	38%	

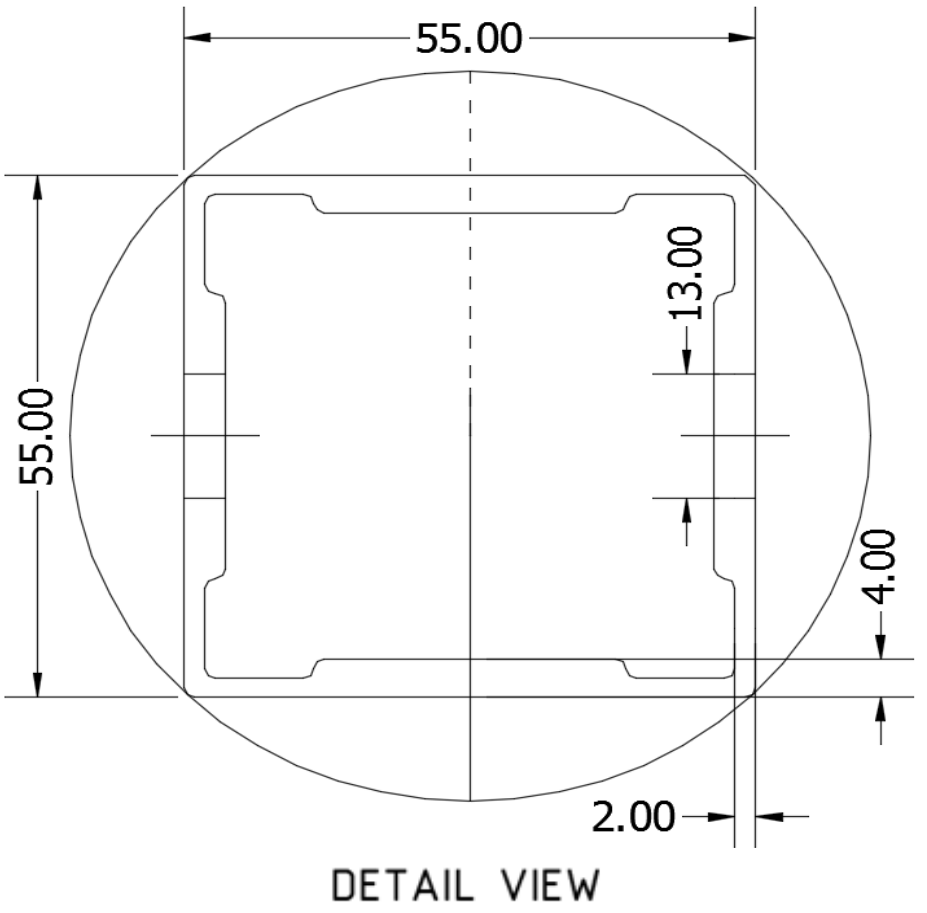

DETAIL VIEW

4.4 Diagonal Strut Design

A diagonal aluminum strut braces the support structure. It connects at a front portion of the girder and transfers horizontal forces to the rear foundation connection. The strut is attached with single M12 bolts at each end. See Appendix A.4 for detailed member calculations. Section units are in (mm).

Strut Type =	**55x55**	
Aluminum Type =	6105-T5	
F_{ty} =	35	ksi
L_b =	86.60	in
$\Phi F_{ty\ AXIAL}$ =	7.50	ksi
$\Phi F_{ty\ BENDING}$ =	28.22	ksi
S_y =	0.60	in^3
S_x =	0.60	in^3
E =	10100	ksi
I_y =	0.67	in^4
I_x =	0.67	in^4
A =	0.98	in^2
g =	1.18	lbs/ft
M_y =	0.010	k-ft
M_z =	0.000	k-ft
P_n =	2.687	k
$M_{y\ allowable}$ =	1.408	k-ft
$M_{z\ allowable}$ =	1.408	k-ft
$P_{n\ allowable}$ =	7.371	k
Utilization =	37%	

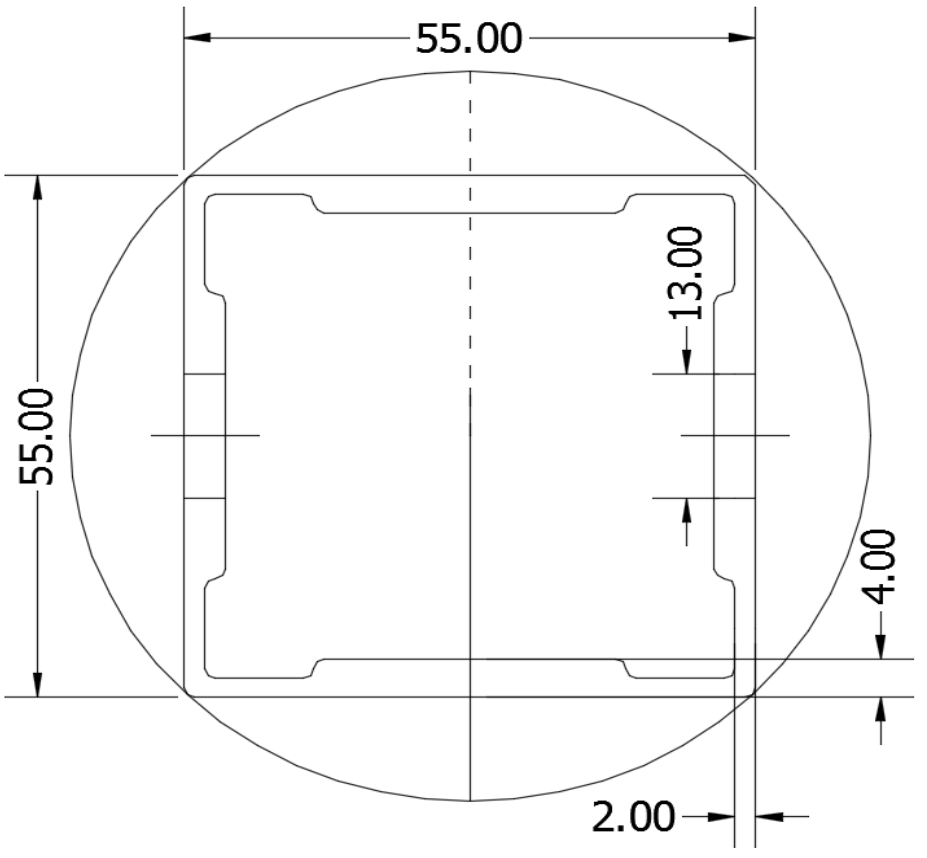

DETAIL VIEW

4.5 Rear Strut Design

An aluminum strut connects the rear portion of the girder to the rear foundation connection. Both vertical and horizontal forces are transferred from the girder. The strut is attached with single M12 bolts at each end. See Appendix A.5 for detailed member calculations. Section units are in (mm).

Strut Type	=	**55x55**	
Aluminum Type	=	6105-T5	
F_{ty}	=	35	ksi
L_b	=	70.83	in
$\Phi F_{ty\ AXIAL}$	=	10.55	ksi
$\Phi F_{ty\ BENDING}$	=	28.22	ksi
S_y	=	0.60	in^3
S_x	=	0.60	in^3
E	=	10100	ksi
I_y	=	0.67	in^4
I_x	=	0.67	in^4
A	=	0.98	in^2
g	=	1.18	lbs/ft
M_y	=	-0.010	k-ft
M_z	=	0.000	k-ft
P_n	=	3.308	k
$M_{y\ allowable}$	=	1.408	k-ft
$M_{z\ allowable}$	=	1.408	k-ft
$P_{n\ allowable}$	=	10.365	k
Utilization	=	33%	

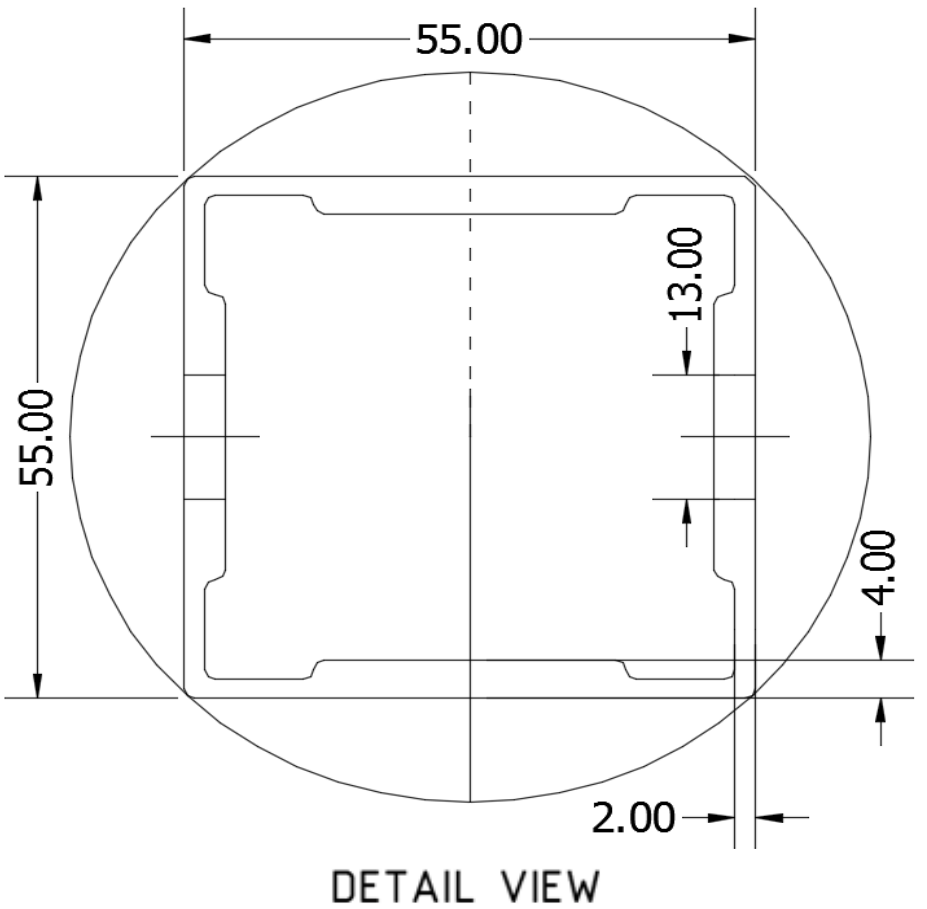

5. FOUNDATION DESIGN CALCULATIONS

5.1 Helical Pile Foundations

The following LRFD loads include a safety factor of 1.3, and are to be used in conjunction with a Schletter, Inc. Geotechnical Investigation Report. The forces below should fall within the guidelines provided in the Geotechnical Investigation Report. If a Geotechnical Investigation Report is not present, please proceed to Section 5.2 for a concrete foundation design.

Maximum		Front	Rear	
Tensile Load	=	265.00	6897.40	k
Compressive Load	=	3388.50	5227.29	k
Lateral Load	=	353.69	4296.42	k
Moment (Weak Axis)	=	0.68	0.24	k

5.2 Design of Ballast Foundations

Ballast foundations are used to secure the racking structure in place. The foundations are checked for potential overturning and sliding. Bearing pressures applied by the racking and ballast foundations are checked against the allowable bearing pressures provided by the IBC table 1806.2 (2012, 2015).

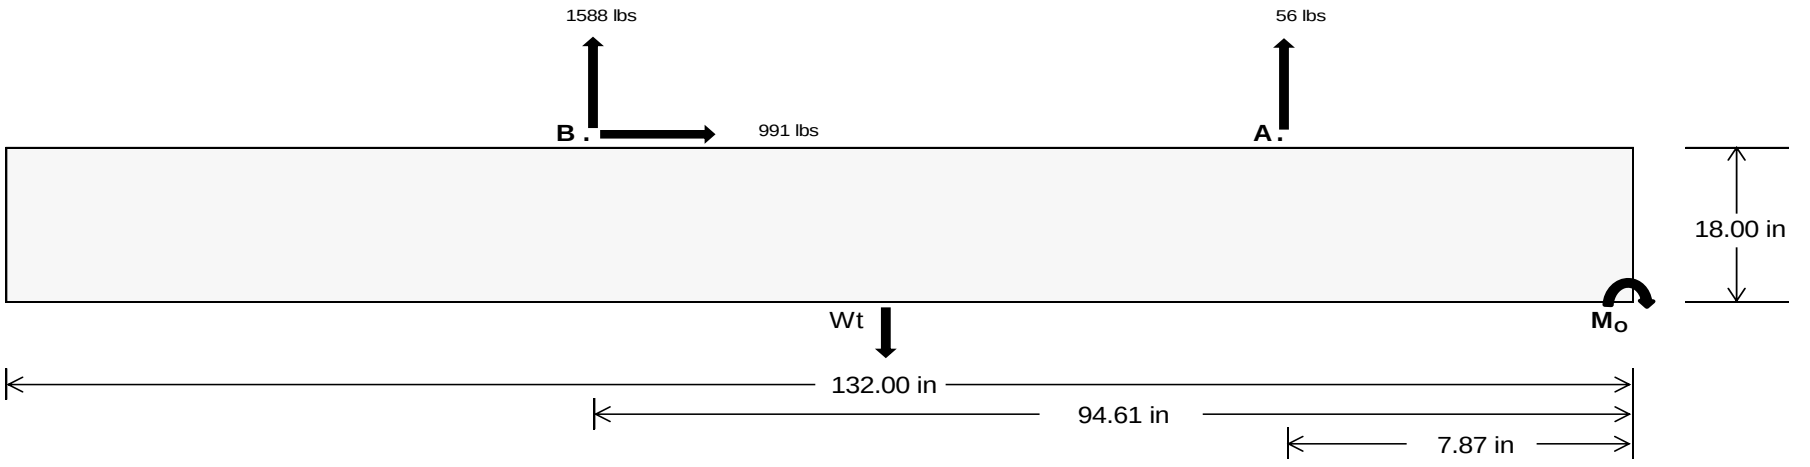

Concrete Properties

Weight of Concrete =	145	pcf
Compressive Strength =	2500	psi
Yield Strength =	60000	psi

Overturning Check

M_O =	168491.9	in-lbs
Resisting Force Required =	2552.91	lbs
S.F. =	1.67	
Weight Required =	4254.85	lbs
Minimum Width =	34 in	in
Weight Provided =	6778.75	lbs

Sliding

Force =	991.08	lbs
Friction =	0.4	
Weight Required =	2477.69	lbs
Resisting Weight =	6778.75	lbs
Additional Weight Required =	0	lbs

Cohesion

Sliding Force =	991.08	lbs
Cohesion =	130	psf
Area =	31.17	ft^2
Resisting =	3389.38	lbs
Additional Weight Required =	0	lbs

Shear Key

Additional Force =	0	lbs
Lateral Bearing Pressure =	200	psf/ft
Required Depth =	0.00	ft
f'_c =	2500	psi
Length =	8	in

Footing Reinforcement

Use fiber reinforcing with (2) #5 rebar.

A minimum 132in long x 34in wide x 18in tall ballast foundation is required to resist overturning.

Use a 132in long x 34in wide x 18in tall ballast foundation to resist sliding. Friction is OK.

Use a 132in long x 34in wide x 18in tall ballast foundation. Cohesion is OK.

Shear key is not required.

Bearing Pressure

	Ballast Width			
	34 in	35 in	36 in	37 in
P_{ftg} = (145 pcf)(11 ft)(1.5 ft)(2.83 ft) =	6779 lbs	6978 lbs	7178 lbs	7377 lbs

ASD LC	1.0D + 1.0S				1.0D + 0.6W				1.0D + 0.75L + 0.45W + 0.75S				0.6D + 0.6W			
Width	34 in	35 in	36 in	37 in	34 in	35 in	36 in	37 in	34 in	35 in	36 in	37 in	34 in	35 in	36 in	37 in
F_A	1136 lbs	1136 lbs	1136 lbs	1136 lbs	1307 lbs	1307 lbs	1307 lbs	1307 lbs	1711 lbs	1711 lbs	1711 lbs	1711 lbs	-113 lbs	-113 lbs	-113 lbs	-113 lbs
F_B	1077 lbs	1077 lbs	1077 lbs	1077 lbs	2222 lbs	2222 lbs	2222 lbs	2222 lbs	2360 lbs	2360 lbs	2360 lbs	2360 lbs	-3175 lbs	-3175 lbs	-3175 lbs	-3175 lbs
F_V	167 lbs	167 lbs	167 lbs	167 lbs	1792 lbs	1792 lbs	1792 lbs	1792 lbs	1453 lbs	1453 lbs	1453 lbs	1453 lbs	-1982 lbs	-1982 lbs	-1982 lbs	-1982 lbs
P_{total}	8992 lbs	9192 lbs	9391 lbs	9590 lbs	10308 lbs	10507 lbs	10706 lbs	10906 lbs	10850 lbs	11049 lbs	11248 lbs	11448 lbs	779 lbs	899 lbs	1018 lbs	1138 lbs
M	3186 lbs-ft	3186 lbs-ft	3186 lbs-ft	3186 lbs-ft	3725 lbs-ft	3725 lbs-ft	3725 lbs-ft	3725 lbs-ft	4843 lbs-ft	4843 lbs-ft	4843 lbs-ft	4843 lbs-ft	4050 lbs-ft	4050 lbs-ft	4050 lbs-ft	4050 lbs-ft
e	0.35 ft	0.35 ft	0.34 ft	0.33 ft	0.36 ft	0.35 ft	0.35 ft	0.34 ft	0.45 ft	0.44 ft	0.43 ft	0.42 ft	5.20 ft	4.51 ft	3.98 ft	3.56 ft
L/6	1.83 ft	1.83 ft	1.83 ft	1.83 ft	1.83 ft	1.83 ft	1.83 ft	1.83 ft	1.83 ft	1.83 ft	1.83 ft	1.83 ft	1.83 ft	1.83 ft	1.83 ft	1.83 ft
f_{min}	232.8 psf	232.3 psf	231.9 psf	231.5 psf	265.5 psf	264.2 psf	262.9 psf	261.6 psf	263.3 psf	262.0 psf	260.8 psf	259.6 psf	0.0 psf	0.0 psf	0.0 psf	0.0 psf
f_{max}	344.3 psf	340.7 psf	337.2 psf	334.0 psf	395.9 psf	390.8 psf	386.0 psf	381.4 psf	432.9 psf	426.7 psf	420.9 psf	415.4 psf	609.2 psf	206.8 psf	148.6 psf	126.8 psf

Maximum Bearing Pressure = 609 psf
Allowable Bearing Pressure = 1500 psf

Use a 132in long x 34in wide x 18in tall ballast foundation for an acceptable bearing pressure.

Seismic Design

Overturning Check

M_O =	2068.7	ft-lbs
Resisting Force Required =	1460.23	lbs
S.F. =	1.67	
Weight Required =	2433.72	lbs
Minimum Width =	34 in	in
Weight Provided =	6778.75	lbs

A minimum 132in long x 34in wide x 18in tall ballast foundation is required to resist overturning.

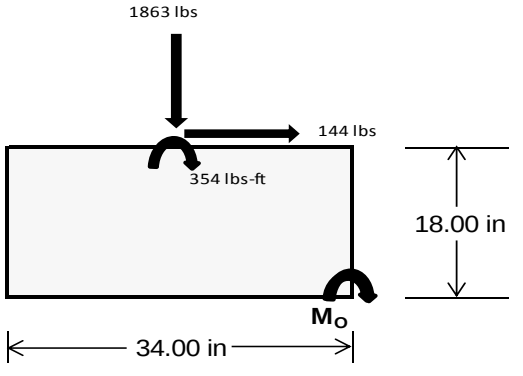

Bearing Pressure

ASD LC	1.238D + 0.875E			1.1785D + 0.65625E + 0.75S			0.362D + 0.875E		
Width	34 in			34 in			34 in		
Support	Outer	Inner	Outer	Outer	Inner	Outer	Outer	Inner	Outer
F_Y	282 lbs	584 lbs	188 lbs	713 lbs	1863 lbs	640 lbs	116 lbs	171 lbs	22 lbs
F_V	199 lbs	195 lbs	202 lbs	146 lbs	144 lbs	157 lbs	200 lbs	196 lbs	201 lbs
P_{total}	8674 lbs	8976 lbs	8580 lbs	8701 lbs	9851 lbs	8629 lbs	2569 lbs	2625 lbs	2476 lbs
M	764 lbs-ft	755 lbs-ft	776 lbs-ft	569 lbs-ft	570 lbs-ft	603 lbs-ft	764 lbs-ft	753 lbs-ft	768 lbs-ft
e	0.09 ft	0.08 ft	0.09 ft	0.07 ft	0.06 ft	0.07 ft	0.30 ft	0.29 ft	0.31 ft
L/6	0.47 ft	0.47 ft	0.47 ft	0.47 ft	0.47 ft	0.47 ft	0.47 ft	0.47 ft	0.47 ft
f_{min}	226.4 psf	236.7 psf	222.6 psf	240.5 psf	277.4 psf	235.9 psf	30.5 psf	33.1 psf	27.2 psf
f_{max}	330.3 psf	339.3 psf	328.0 psf	317.9 psf	354.8 psf	317.9 psf	134.4 psf	135.4 psf	131.6 psf

Maximum Bearing Pressure = 355 psf
Allowable Bearing Pressure = 1500 psf

Use a 132in long x 34in wide x 18in tall ballast foundation for an acceptable bearing pressure.

Foundation Requirements: 132in long x 34in wide x 18in tall ballast foundation and fiber reinforcing with (2) #5 rebar.

5.3 Foundation Anchors

Threaded rods are anchored to the the ballast foundations using the Simpson AT-XP epoxy solution. LRFD load results are compared to the allowable strengths of the epoxy solution. Please see the supplementary calculations provided by the Simpson Anchor Designer software.

6. DESIGN OF JOINTS AND CONNECTIONS

6.1 Anchorage of Modules to Purlins and Connection of Purlins to Girders

Modules are secured to the purlins with Schletter, Inc. Rapid2+ mounting clamps. Purlins are secured to the girders with the use of 80mm mounting clamps. The reliability of calculations is uncertain due to limited standards, therefore the strength of the clamp fasteners has been evaluated by load testing.

Fastening of Modules to Purlins

Maximum Uplifting Force	=	0.754 k
Allowable Uplift	=	1.214 k
Utilization	=	62%

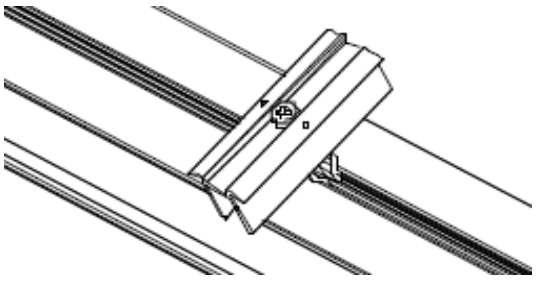

Fastening of Purlins to Girders

Maximum Uplifting Force	=	2.492 k
Allowable Uplift	=	4.357 k
Utilization	=	57%

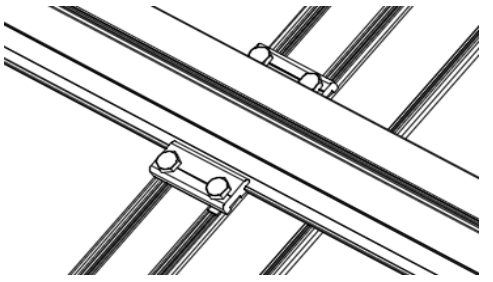

6.2 Strut Connections

The aluminum struts connect the aluminum girder ends to custom brackets with mounting holes. Single M12 bolts are used to attach each end of the strut to the girder and post. ASTM A193/A193M-86 equivalent stainless steel bolts are used.

Front Strut

Maximum Axial Load	=	2.607 k
M12 Bolt Capacity	=	12.808 k
Strut Bearing Capacity	=	7.421 k
Utilization	=	35%

Rear Strut

Maximum Axial Load	=	4.599 k
M12 Bolt Capacity	=	12.808 k
Strut Bearing Capacity	=	7.421 k
Utilization	=	62%

Diagonal Strut

Maximum Axial Load	=	2.772 k
M12 Bolt Shear Capacity	=	12.808 k
Strut Bearing Capacity	=	7.421 k
Utilization	=	37%

Bolt and bearing capacities are accounting for double shear. (ASCE 8-02, Eq. 5.3.4-1)

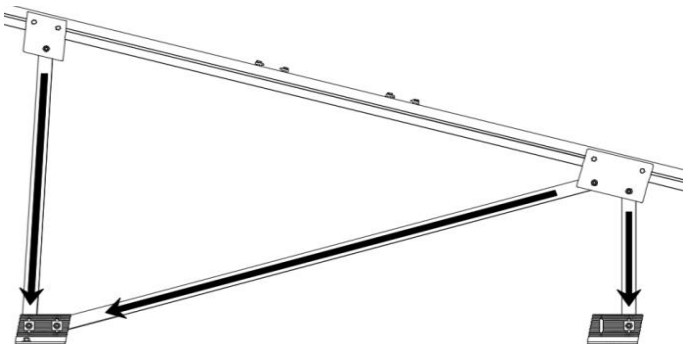

Struts under compression are shown to demonstrate the load transfer from the girder. Single M12 bolts are located at each end of the strut and are subjected to double shear.

7. SEISMIC DESIGN

7.1 Seismic Drift

The racking structure has been analyzed under seismic loading. The allowable story drift of the structure must fall within the limits provided by (ASCE 7, Table 12.12-1).

Mean Height, h_{sx}	=	48.27 in
Allowable Story Drift for All Other Structures, Δ	= {	$0.020h_{sx}$ 0.965 in
Max Drift, Δ_{MAX}	=	0.595 in

0.595 ≤ 0.965, OK.

The racking structure's reaction to seismic loads is shown to the right. The deflections have been magnified to provide a clear portrayal of potential story drift.

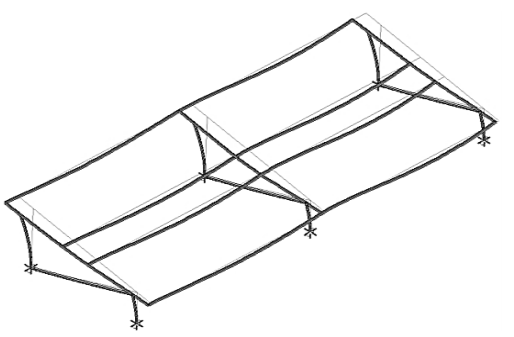

APPENDIX A

A.1 Design of Aluminum Purlins - Aluminum Design Manual, 2005 Edition

Purlin = **S1.5**

Strong Axis:

3.4.14

L_b = 111 in

J = 0.432

307.078

$$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$$

S1 = 0.51461

$$S2 = \left(\frac{C_c}{1.6}\right)^2$$

S2 = 1701.56

φF_L= φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]

φF_L= 27.6 ksi

3.4.16

b/t = 32.195

$$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$$

S1 = 12.2

$$S2 = \frac{k_1 Bp}{1.6Dp}$$

S2 = 46.7

φF_L= φb[Bp-1.6Dp*b/t]

φF_L= 25.1 ksi

3.4.16.1 Not Used

Rb/t =

$$S1 = \left(\frac{Bt - 1.17\frac{\theta_y}{\theta_b} Fcy}{1.6Dt}\right)^2$$

S1 = 1.1

$$S2 = C_t$$

S2 = 141.0

φF_L= 1.17φyFcy

φF_L= 38.9 ksi

3.4.18

h/t = 37.0588

$$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b} 1.3Fcy}{mDbr}$$

S1 = 36.9

m = 0.65

C_0 = 40.985

Cc = 41.015

$$S2 = \frac{k_1 Bbr}{mDbr}$$

S2 = 77.2

φF_L= φb[Bbr-mDbr*h/t]

φF_L= 43.2 ksi

φF_LSt= 25.1 ksi

Ix = 897074 mm^4

2.155 in^4

y = 41.015 mm

Sx = 1.335 in^3

M_{max}St = 2.788 k-ft

Weak Axis:

3.4.14

L_b = 111

J = 0.432

195.283

$$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$$

S1 = 0.51461

$$S2 = \left(\frac{C_c}{1.6}\right)^2$$

S2 = 1701.56

φF_L= φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]

φF_L= 28.8

3.4.16

b/t = 37.0588

$$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$$

S1 = 12.2

$$S2 = \frac{k_1 Bp}{1.6Dp}$$

S2 = 46.7

φF_L= φb[Bp-1.6Dp*b/t]

φF_L= 23.1 ksi

3.4.16.1

N/A for Weak Direction

3.4.18

h/t = 32.195

$$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b} 1.3Fcy}{mDbr}$$

S1 = 36.9

m = 0.65

C_0 = 45.5

Cc = 45.5

$$S2 = \frac{k_1 Bbr}{mDbr}$$

S2 = 77.3

φF_L= 1.3φyFcy

φF_L= 43.2 ksi

φF_LWk= 23.1 ksi

Iy = 446476 mm^4

1.073 in^4

x = 45.5 mm

Sy = 0.599 in^3

M_{max}Wk = 1.152 k-ft

Compression

3.4.9

b/t = 32.195
S1 = 12.21 (See 3.4.16 above for formula)
S2 = 32.70 (See 3.4.16 above for formula)
φF_L = φc[Bp-1.6Dp*b/t]
φF_L = 25.1 ksi

b/t = 37.0588
S1 = 12.21
S2 = 32.70
φF_L = (φck2*√(BpE))/(1.6b/t)
φF_L = 21.9 ksi

3.4.10

Rb/t = 0.0

$$S1 = \left(\frac{Bt - \frac{\theta_y}{\theta_b} Fcy}{Dt}\right)^2$$

S1 = 6.87
S2 = 131.3
φF_L = φyFcy
φF_L = 33.25 ksi

φF_L = 21.94 ksi
A = 1215.13 mm^2
1.88 in^2
P_{max} = 41.32 kips

A.2 Design of Aluminum Girders - Aluminum Design Manual, 2005 Edition

Girder = **BF0**

Strong Axis:

3.4.14

L_b = 88.9 in
J = 1.08
152.913

$$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$$

S1 = 0.51461

$$S2 = \left(\frac{C_c}{1.6}\right)^2$$

S2 = 1701.56
φF_L = φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]
φF_L = 29.4 ksi

3.4.16

b/t = 16.2

$$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$$

S1 = 12.2

$$S2 = \frac{k_1 Bp}{1.6Dp}$$

S2 = 46.7
φF_L = φb[Bp-1.6Dp*b/t]
φF_L = 31.6 ksi

Weak Axis:

3.4.14

L_b = 88.9
J = 1.08
161.829

$$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$$

S1 = 0.51461

$$S2 = \left(\frac{C_c}{1.6}\right)^2$$

S2 = 1701.56
φF_L = φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]
φF_L = 29.2

3.4.16

b/t = 7.4

$$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$$

S1 = 12.2

$$S2 = \frac{k_1 Bp}{1.6Dp}$$

S2 = 46.7
φF_L = φyFcy
φF_L = 33.3 ksi

3.4.16.1 Used

Rb/t = 18.1

$$S1 = \left(\frac{Bt - 1.17\frac{\theta_y}{\theta_b}Fcy}{1.6Dt}\right)^2$$

S1 = 1.1

$$S2 = C_t$$

S2 = 141.0

φF_L = φb[Bt-Dt*√(Rb/t)]

φF_L = 31.1 ksi

3.4.16.1

N/A for Weak Direction

3.4.18

h/t = 7.4

$$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b}1.3Fcy}{mDbr}$$

S1 = 35.2

m = 0.68

C_0 = 41.067

Cc = 43.717

$$S2 = \frac{k_1 Bbr}{mDbr}$$

S2 = 73.8

φF_L = 1.3φyFcy

φF_L = 43.2 ksi

$\varphi F_L St$ = 29.4 ksi

Ix = 984962 mm^4

2.366 in^4

y = 43.717 mm

Sx = 1.375 in^3

$M_{max}St$ = 3.363 k-ft

3.4.18

h/t = 16.2

$$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b}1.3Fcy}{mDbr}$$

S1 = 36.9

m = 0.65

C_0 = 40

Cc = 40

$$S2 = \frac{k_1 Bbr}{mDbr}$$

S2 = 77.3

φF_L = 1.3φyFcy

φF_L = 43.2 ksi

$\varphi F_L Wk$ = 33.3 ksi

Iy = 923544 mm^4

2.219 in^4

x = 40 mm

Sy = 1.409 in^3

$M_{max}Wk$ = 3.904 k-ft

Compression

3.4.9

b/t = 16.2

S1 = 12.21 (See 3.4.16 above for formula)

S2 = 32.70 (See 3.4.16 above for formula)

φF_L = φc[Bp-1.6Dp*b/t]

φF_L = 31.6 ksi

b/t = 7.4

S1 = 12.21

S2 = 32.70

φF_L = φyFcy

φF_L = 33.3 ksi

3.4.10

Rb/t = 18.1

$$S1 = \left(\frac{Bt - \frac{\theta_y}{\theta_b}Fcy}{Dt}\right)^2$$

S1 = 6.87

S2 = 131.3

φF_L = φc[Bt-Dt*√(Rb/t)]

φF_L = 31.09 ksi

φF_L = 31.09 ksi

A = 1215.13 mm^2

1.88 in^2

P_{max} = 58.55 kips

A.3 Design of Aluminum Struts (Front) - Aluminum Design Manual, 2005 Edition

Strut = **55x55**

Strong Axis:

3.4.14

L_b = 24.8 in

J = 0.942

38.7028

$$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$$

S1 = 0.51461

$$S2 = \left(\frac{C_c}{1.6}\right)^2$$

S2 = 1701.56

φF_L= φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]

φF_L= 31.4 ksi

3.4.16

b/t = 24.5

$$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$$

S1 = 12.2

$$S2 = \frac{k_1 Bp}{1.6Dp}$$

S2 = 46.7

φF_L= φb[Bp-1.6Dp*b/t]

φF_L= 28.2 ksi

3.4.16.1 Not Used

Rb/t = 0.0

$$S1 = \left(\frac{Bt - 1.17\frac{\theta_y}{\theta_b} Fcy}{1.6Dt}\right)^2$$

S1 = 1.1

$$S2 = C_t$$

S2 = 141.0

φF_L= 1.17φyFcy

φF_L= 38.9 ksi

3.4.18

h/t = 24.5

$$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b} 1.3Fcy}{mDbr}$$

S1 = 36.9

m = 0.65

C_0 = 27.5

Cc = 27.5

$$S2 = \frac{k_1 Bbr}{mDbr}$$

S2 = 77.3

φF_L= 1.3φyFcy

φF_L= 43.2 ksi

$\varphi F_L St$= 28.2 ksi

Ix = 279836 mm^4

0.672 in^4

y = 27.5 mm

Sx = 0.621 in^3

$M_{max}St$ = 1.460 k-ft

Weak Axis:

3.4.14

L_b = 24.8

J = 0.942

38.7028

$$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$$

S1 = 0.51461

$$S2 = \left(\frac{C_c}{1.6}\right)^2$$

S2 = 1701.56

φF_L= φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]

φF_L= 31.4

3.4.16

b/t = 24.5

$$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$$

S1 = 12.2

$$S2 = \frac{k_1 Bp}{1.6Dp}$$

S2 = 46.7

φF_L= φb[Bp-1.6Dp*b/t]

φF_L= 28.2 ksi

3.4.16.1

N/A for Weak Direction

3.4.18

h/t = 24.5

$$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b} 1.3Fcy}{mDbr}$$

S1 = 36.9

m = 0.65

C_0 = 27.5

Cc = 27.5

$$S2 = \frac{k_1 Bbr}{mDbr}$$

S2 = 77.3

φF_L= 1.3φyFcy

φF_L= 43.2 ksi

$\varphi F_L Wk$= 28.2 ksi

Iy = 279836 mm^4

0.672 in^4

x = 27.5 mm

Sy = 0.621 in^3

$M_{max}Wk$ = 1.460 k-ft

Compression

3.4.7

λ = 0.57371

r = 0.81 in

$$S1^* = \frac{Bc - Fcy}{1.6Dc^*}$$

S1* = 0.33515

$$S2^* = \frac{Cc}{\pi}\sqrt{Fcy/E}$$

S2* = 1.23671

φcc = 0.87952

φF_L = φcc(Bc-Dc*λ)

φF_L = 28.0279 ksi

3.4.9

b/t = 24.5

S1 = 12.21 (See 3.4.16 above for formula)

S2 = 32.70 (See 3.4.16 above for formula)

φF_L = φc[Bp-1.6Dp*b/t]

φF_L = 28.2 ksi

b/t = 24.5

S1 = 12.21

S2 = 32.70

φF_L = φc[Bp-1.6Dp*b/t]

φF_L = 28.2 ksi

3.4.10

Rb/t = 0.0

$$S1 = \left(\frac{Bt - \frac{\theta_y}{\theta_b}Fcy}{Dt}\right)^2$$

S1 = 6.87

S2 = 131.3

φF_L = φyFcy

φF_L = 33.25 ksi

φF_L = 28.03 ksi

A = 663.99 mm^2

1.03 in^2

P_{max} = 28.85 kips

A.4 Design of Aluminum Struts (Diagonal) - Aluminum Design Manual, 2005 Edition

Strut = **55x55**

Strong Axis:

3.4.14

L_b = 86.60 in

J = 0.942

135.148

$$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b}Fcy}{1.6Dc}\right)^2$$

S1 = 0.51461

$$S2 = \left(\frac{C_c}{1.6}\right)^2$$

S2 = 1701.56

φF_L = φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]

φF_L = 29.6 ksi

Weak Axis:

3.4.14

L_b = 86.6

J = 0.942

135.148

$$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b}Fcy}{1.6Dc}\right)^2$$

S1 = 0.51461

$$S2 = \left(\frac{C_c}{1.6}\right)^2$$

S2 = 1701.56

φF_L = φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]

φF_L = 29.6

3.4.16

b/t = 24.5

$$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$$

S1 = 12.2

$$S2 = \frac{k_1 Bp}{1.6Dp}$$

S2 = 46.7

φF_L= φb[Bp-1.6Dp*b/t]

φF_L= 28.2 ksi

3.4.16

b/t = 24.5

$$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$$

S1 = 12.2

$$S2 = \frac{k_1 Bp}{1.6Dp}$$

S2 = 46.7

φF_L= φb[Bp-1.6Dp*b/t]

φF_L= 28.2 ksi

3.4.16.1 Not Used

Rb/t = 0.0

$$S1 = \left(\frac{Bt - 1.17\frac{\theta_y}{\theta_b} Fcy}{1.6Dt}\right)^2$$

S1 = 1.1

$$S2 = C_t$$

S2 = 141.0

φF_L= 1.17φyFcy

φF_L= 38.9 ksi

3.4.16.1

N/A for Weak Direction

3.4.18

h/t = 24.5

$$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b} 1.3Fcy}{mDbr}$$

S1 = 36.9

m = 0.65

C_0 = 27.5

Cc = 27.5

$$S2 = \frac{k_1 Bbr}{mDbr}$$

S2 = 77.3

φF_L= 1.3φyFcy

φF_L= 43.2 ksi

3.4.18

h/t = 24.5

$$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b} 1.3Fcy}{mDbr}$$

S1 = 36.9

m = 0.65

C_0 = 27.5

Cc = 27.5

$$S2 = \frac{k_1 Bbr}{mDbr}$$

S2 = 77.3

φF_L= 1.3φyFcy

φF_L= 43.2 ksi

$\varphi F_L St$= 28.2 ksi

Ix = 279836 mm^4

0.672 in^4

y = 27.5 mm

Sx = 0.621 in^3

$M_{max}St$ = 1.460 k-ft

$\varphi F_L Wk$= 28.2 ksi

Iy = 279836 mm^4

0.672 in^4

x = 27.5 mm

Sy = 0.621 in^3

$M_{max}Wk$ = 1.460 k-ft

Compression

3.4.7

λ = 2.00335

r = 0.81 in

$$S1^* = \frac{Bc - Fcy}{1.6Dc^*}$$

$S1^*$ = 0.33515

$$S2^* = \frac{Cc}{\pi}\sqrt{Fcy/E}$$

$S2^*$ = 1.23671

φcc = 0.86047

φF_L= (φccFcy)/(λ²)

φF_L= 7.50396 ksi

3.4.9

b/t = 24.5
S1 = 12.21 (See 3.4.16 above for formula)
S2 = 32.70 (See 3.4.16 above for formula)
φF_L = φc[Bp-1.6Dp*b/t]
φF_L = 28.2 ksi

b/t = 24.5
S1 = 12.21
S2 = 32.70
φF_L = φc[Bp-1.6Dp*b/t]
φF_L = 28.2 ksi

3.4.10

Rb/t = 0.0

$$S1 = \left(\frac{Bt - \frac{\theta_y}{\theta_b} Fcy}{Dt}\right)^2$$

S1 = 6.87
S2 = 131.3
φF_L = φyFcy
φF_L = 33.25 ksi

φF_L = 7.50 ksi
A = 663.99 mm^2
1.03 in^2
P_{max} = 7.72 kips

A.5 Design of Aluminum Struts (Rear) - Aluminum Design Manual, 2005 Edition

Strut = **55x55**

Strong Axis:

3.4.14

L_b = 70.83 in
J = 0.942
110.537

$$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$$

S1 = 0.51461

$$S2 = \left(\frac{C_c}{1.6}\right)^2$$

S2 = 1701.56
φF_L = φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]
φF_L = 30.0 ksi

3.4.16

b/t = 24.5

$$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$$

S1 = 12.2

$$S2 = \frac{k_1 Bp}{1.6Dp}$$

S2 = 46.7
φF_L = φb[Bp-1.6Dp*b/t]
φF_L = 28.2 ksi

Weak Axis:

3.4.14

L_b = 70.83
J = 0.942
110.537

$$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$$

S1 = 0.51461

$$S2 = \left(\frac{C_c}{1.6}\right)^2$$

S2 = 1701.56
φF_L = φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]
φF_L = 30.0

3.4.16

b/t = 24.5

$$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$$

S1 = 12.2

$$S2 = \frac{k_1 Bp}{1.6Dp}$$

S2 = 46.7
φF_L = φb[Bp-1.6Dp*b/t]
φF_L = 28.2 ksi

3.4.16.1 Not Used

Rb/t = 0.0

$$S1 = \left(\frac{Bt - 1.17\frac{\theta_y}{\theta_b}Fcy}{1.6Dt}\right)^2$$

S1 = 1.1

$$S2 = C_t$$

S2 = 141.0

φF_L= 1.17φyFcy

φF_L= 38.9 ksi

3.4.16.1

N/A for Weak Direction

3.4.18

h/t = 24.5

$$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b}1.3Fcy}{mDbr}$$

S1 = 36.9

m = 0.65

C_0 = 27.5

Cc = 27.5

$$S2 = \frac{k_1 Bbr}{mDbr}$$

S2 = 77.3

φF_L= 1.3φyFcy

φF_L= 43.2 ksi

$\varphi F_L St$= 28.2 ksi

Ix = 279836 mm^4

0.672 in^4

y = 27.5 mm

Sx = 0.621 in^3

$M_{max}St$ = 1.460 k-ft

3.4.18

h/t = 24.5

$$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b}1.3Fcy}{mDbr}$$

S1 = 36.9

m = 0.65

C_0 = 27.5

Cc = 27.5

$$S2 = \frac{k_1 Bbr}{mDbr}$$

S2 = 77.3

φF_L= 1.3φyFcy

φF_L= 43.2 ksi

$\varphi F_L Wk$= 28.2 ksi

Iy = 279836 mm^4

0.672 in^4

x = 27.5 mm

Sy = 0.621 in^3

$M_{max}Wk$ = 1.460 k-ft

Compression

3.4.7

λ = 1.63853

r = 0.81 in

$$S1^* = \frac{Bc - Fcy}{1.6Dc^*}$$

$S1^*$ = 0.33515

$$S2^* = \frac{Cc}{\pi}\sqrt{Fcy/E}$$

$S2^*$ = 1.23671

φcc = 0.80939

φF_L= (φccFcy)/(λ²)

φF_L= 10.5516 ksi

3.4.9

b/t = 24.5

S1 = 12.21 (See 3.4.16 above for formula)

S2 = 32.70 (See 3.4.16 above for formula)

φF_L= φc[Bp-1.6Dp*b/t]

φF_L= 28.2 ksi

b/t = 24.5

S1 = 12.21

S2 = 32.70

φF_L= φc[Bp-1.6Dp*b/t]

φF_L= 28.2 ksi

3.4.10

Rb/t = 0.0

$$S1 = \left(\frac{Bt - \frac{\theta_y}{\theta_b} Fcy}{Dt}\right)^2$$

S1 = 6.87

S2 = 131.3

$\varphi F_L = \varphi y Fcy$

φF_L = 33.25 ksi

φF_L = 10.55 ksi

A = 663.99 mm^2

1.03 in^2

P_{max} = 10.86 kips

APPENDIX B

B.1

The following pages will contain the results from RISA. Please refer back to Section 2 for load information and Section 4-5 for member and foundation design.

Basic Load Cases

	BLC Description	Category	X Gravity	Y Gravity	Z Gravity	Joint	Point	Distribut...	Area(Me...	Surface(...
1	Dead Load, Max	DL		-1				4		
2	Dead Load, Min	DL		-1				4		
3	Snow Load	SL						4		
4	Wind Load - Pressure	WL						4		
5	Wind Load - Suction	WL						4		
6	Seismic - Lateral	EL			.8			8		

Member Distributed Loads (BLC 1 : Dead Load, Max)

	Member Label	Direction	Start Magnitude[lb/ft,F]	End Magnitude[lb/ft,F]	Start Location[ft,%]	End Location[ft,%]
1	M13	Y	-8.366	-8.366	0	0
2	M14	Y	-8.366	-8.366	0	0
3	M15	Y	-8.366	-8.366	0	0
4	M16	Y	-8.366	-8.366	0	0

Member Distributed Loads (BLC 2 : Dead Load, Min)

	Member Label	Direction	Start Magnitude[lb/ft,F]	End Magnitude[lb/ft,F]	Start Location[ft,%]	End Location[ft,%]
1	M13	Y	-4.45	-4.45	0	0
2	M14	Y	-4.45	-4.45	0	0
3	M15	Y	-4.45	-4.45	0	0
4	M16	Y	-4.45	-4.45	0	0

Member Distributed Loads (BLC 3 : Snow Load)

	Member Label	Direction	Start Magnitude[lb/ft,F]	End Magnitude[lb/ft,F]	Start Location[ft,%]	End Location[ft,%]
1	M13	Y	-39.836	-39.836	0	0
2	M14	Y	-39.836	-39.836	0	0
3	M15	Y	-39.836	-39.836	0	0
4	M16	Y	-39.836	-39.836	0	0

Member Distributed Loads (BLC 4 : Wind Load - Pressure)

	Member Label	Direction	Start Magnitude[lb/ft,F]	End Magnitude[lb/ft,F]	Start Location[ft,%]	End Location[ft,%]
1	M13	y	-98.692	-98.692	0	0
2	M14	y	-98.692	-98.692	0	0
3	M15	y	-158.766	-158.766	0	0
4	M16	y	-158.766	-158.766	0	0

Member Distributed Loads (BLC 5 : Wind Load - Suction)

	Member Label	Direction	Start Magnitude[lb/ft,F]	End Magnitude[lb/ft,F]	Start Location[ft,%]	End Location[ft,%]
1	M13	y	223.131	223.131	0	0
2	M14	y	171.639	171.639	0	0
3	M15	y	94.402	94.402	0	0
4	M16	y	94.402	94.402	0	0

Member Distributed Loads (BLC 6 : Seismic - Lateral)

	Member Label	Direction	Start Magnitude[lb/ft,F]	End Magnitude[lb/ft,F]	Start Location[ft,%]	End Location[ft,%]
1	M13	Z	6.693	6.693	0	0
2	M14	Z	6.693	6.693	0	0
3	M15	Z	6.693	6.693	0	0
4	M16	Z	6.693	6.693	0	0
5	M13	Z	0	0	0	0
6	M14	Z	0	0	0	0
7	M15	Z	0	0	0	0
8	M16	Z	0	0	0	0

Load Combinations

	Description	S...	P...	S...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...
1	LRFD 1.2D + 1.6S + 0.5W	Yes	Y		1	1.2	3	1.6	4	.5														
2	LRFD 1.2D + 1.0W + 0.5S	Yes	Y		1	1.2	3	.5	4	1														
3	LRFD 0.9D + 1.0W	Yes	Y		2	.9					5	1												
4	LATERAL - LRFD 1.54D + 1.3E ...	Yes	Y		1	1.54	3	.2			6	1.3												
5	LATERAL - LRFD 0.56D + 1.3E	Yes	Y		1	.56					6	1.3												
6	LATERAL - LRFD 1.54D + 1.25...	Yes	Y		1	1.54	3	.2			6	1.25												
7	LATERAL - LRFD 0.56D + 1.25E	Yes	Y		1	.56					6	1.25												
8																								
9	ASD 1.0D + 1.0S	Yes	Y		1	1	3	1																
10	ASD 1.0D + 0.6W	Yes	Y		1	1			4	.6														
11	ASD 1.0D + 0.75L + 0.45W + 0....	Yes	Y		1	1	3	.75	4	.45														
12	ASD 0.6D + 0.6W	Yes	Y		2	.6					5	.6												
13	LATERAL - ASD 1.238D + 0.875E	Yes	Y		1	1.2...					6	.875												
14	LATERAL - ASD 1.1785D + 0.65...	Yes	Y		1	1.1...	3	.75			6	.656												
15	LATERAL - ASD 0.362D + 0.875E	Yes	Y		1	.362					6	.875												

Envelope Joint Reactions

	Joint		X [lb]	LC	Y [lb]	LC	Z [lb]	LC	MX [k-ft]	LC	MY [k-ft]	LC	MZ [k-ft]	LC
1	N8	max	862.805	2	1244.709	2	.571	1	.002	1	0	1	0	1
2		min	-1046.449	3	-1635.222	3	-31.169	5	-.184	4	0	1	0	1
3	N7	max	.03	9	999.065	1	-.621	12	-.001	12	0	1	0	1
4		min	-.213	2	-41.605	5	-272.071	4	-.523	4	0	1	0	1
5	N15	max	.028	9	2606.542	1	0	3	0	3	0	1	0	1
6		min	-2.28	2	-203.845	3	-259.93	4	-.506	4	0	1	0	1
7	N16	max	3040.07	2	4020.995	2	0	1	0	1	0	1	0	1
8		min	-3304.935	3	-5305.694	3	-31.156	5	-.186	4	0	1	0	1
9	N23	max	.036	14	999.065	1	9.791	1	.019	1	0	1	0	1
10		min	-.213	2	-31.862	3	-264.645	5	-.511	4	0	1	0	1
11	N24	max	862.805	2	1244.709	2	-.043	12	0	12	0	1	0	1
12		min	-1046.449	3	-1635.222	3	-31.781	5	-.186	4	0	1	0	1
13	Totals:	max	4762.973	2	10746.041	2	0	3						
14		min	-5398.06	3	-8843.707	3	-886.113	5						

Envelope Member Section Forces

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
1	M13	1	max	93.757	1	431.334	2	-8.939	12	0	3	.224	1	0	4
2			min	6.312	12	-758.332	3	-167.188	1	-.014	2	.015	12	0	3
3		2	max	93.757	1	301.63	2	-7.103	12	0	3	.112	4	.664	3
4			min	6.312	12	-533.773	3	-128.347	1	-.014	2	.007	12	-.377	2
5		3	max	93.757	1	171.926	2	-5.267	12	0	3	.062	5	1.097	3
6			min	6.312	12	-309.213	3	-89.507	1	-.014	2	-.04	1	-.62	2
7		4	max	93.757	1	42.222	2	-3.431	12	0	3	.032	5	1.3	3
8			min	6.312	12	-84.654	3	-50.667	1	-.014	2	-.112	1	-.73	2
9		5	max	93.757	1	139.906	3	-.864	10	0	3	.006	5	1.271	3
10			min	6.312	12	-87.482	2	-27.58	4	-.014	2	-.144	1	-.707	2
11		6	max	93.757	1	364.465	3	27.013	1	0	3	-.007	12	1.012	3
12			min	2.179	15	-217.186	2	-21.478	5	-.014	2	-.136	1	-.55	2
13		7	max	93.757	1	589.024	3	65.854	1	0	3	-.006	12	.522	3
14			min	-7.036	5	-346.891	2	-18.637	5	-.014	2	-.089	1	-.26	2
15		8	max	93.757	1	813.584	3	104.694	1	0	3	.002	2	.163	2
16			min	-17.587	5	-476.595	2	-15.797	5	-.014	2	-.058	4	-.199	3
17		9	max	93.757	1	1038.143	3	143.534	1	0	3	.127	1	.719	2
18			min	-28.137	5	-606.299	2	-12.956	5	-.014	2	-.071	5	-1.15	3

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
19		10	max	93.757	1	1262.702	3	182.374	1	.014	2	.294	1	1.409	2
20			min	6.312	12	-736.003	2	-111.983	14	0	3	.009	12	-2.333	3
21		11	max	93.757	1	606.299	2	-5.748	12	.014	2	.127	1	.719	2
22			min	6.312	12	-1038.143	3	-143.534	1	0	3	.002	12	-1.15	3
23		12	max	93.757	1	476.595	2	-3.912	12	.014	2	.056	4	.163	2
24			min	6.312	12	-813.584	3	-104.694	1	0	3	-.005	3	-.199	3
25		13	max	93.757	1	346.891	2	-2.076	12	.014	2	.025	5	.522	3
26			min	6.312	12	-589.024	3	-65.854	1	0	3	-.089	1	-.26	2
27		14	max	93.757	1	217.186	2	-.195	3	.014	2	-.001	15	1.012	3
28			min	6.312	12	-364.465	3	-31.843	4	0	3	-.136	1	-.55	2
29		15	max	93.757	1	87.482	2	11.827	1	.014	2	-.007	12	1.271	3
30			min	-.372	15	-139.906	3	-22.495	5	0	3	-.144	1	-.707	2
31		16	max	93.757	1	84.654	3	50.667	1	.014	2	-.004	12	1.3	3
32			min	-10.878	5	-42.222	2	-19.654	5	0	3	-.112	1	-.73	2
33		17	max	93.757	1	309.213	3	89.507	1	.014	2	.001	3	1.097	3
34			min	-21.429	5	-171.926	2	-16.814	5	0	3	-.077	4	-.62	2
35		18	max	93.757	1	533.773	3	128.347	1	.014	2	.072	1	.664	3
36			min	-31.979	5	-301.63	2	-13.974	5	0	3	-.083	5	-.377	2
37		19	max	93.757	1	758.332	3	167.188	1	.014	2	.224	1	0	2
38			min	-42.53	5	-431.334	2	-11.133	5	0	3	-.096	5	0	3
39	M14	1	max	51.343	4	466.367	2	-9.193	12	.01	3	.258	1	0	4
40			min	2.739	12	-601.231	3	-172.715	1	-.011	2	.017	12	0	3
41		2	max	45.631	1	336.662	2	-7.357	12	.01	3	.164	4	.53	3
42			min	2.739	12	-429.594	3	-133.874	1	-.011	2	.008	12	-.413	2
43		3	max	45.631	1	206.958	2	-5.521	12	.01	3	.092	5	.883	3
44			min	2.739	12	-257.957	3	-95.034	1	-.011	2	-.017	1	-.692	2
45		4	max	45.631	1	77.254	2	-3.685	12	.01	3	.05	5	1.06	3
46			min	2.739	12	-86.319	3	-56.194	1	-.011	2	-.095	1	-.838	2
47		5	max	45.631	1	85.318	3	-1.569	10	.01	3	.01	5	1.06	3
48			min	-1.549	5	-52.45	2	-41.939	4	-.011	2	-.133	1	-.851	2
49		6	max	45.631	1	256.955	3	21.487	1	.01	3	-.007	12	.885	3
50			min	-12.1	5	-182.154	2	-34.338	5	-.011	2	-.131	1	-.73	2
51		7	max	45.631	1	428.592	3	60.327	1	.01	3	-.006	12	.532	3
52			min	-22.65	5	-311.858	2	-31.497	5	-.011	2	-.089	1	-.476	2
53		8	max	45.631	1	600.229	3	99.167	1	.01	3	0	10	.004	3
54			min	-33.2	5	-441.562	2	-28.657	5	-.011	2	-.095	4	-.089	2
55		9	max	45.631	1	771.866	3	138.007	1	.01	3	.115	1	.431	2
56			min	-43.751	5	-571.267	2	-25.816	5	-.011	2	-.119	5	-.702	3
57		10	max	71.471	4	943.503	3	176.847	1	.011	2	.277	1	1.085	2
58			min	2.739	12	-700.971	2	-115.431	14	-.01	3	.008	12	-1.583	3
59		11	max	60.921	4	571.267	2	-5.494	12	.011	2	.164	4	.431	2
60			min	2.739	12	-771.866	3	-138.007	1	-.01	3	.002	12	-.702	3
61		12	max	50.37	4	441.562	2	-3.658	12	.011	2	.09	5	.004	3
62			min	2.739	12	-600.229	3	-99.167	1	-.01	3	-.007	1	-.089	2
63		13	max	45.631	1	311.858	2	-1.822	12	.011	2	.047	5	.532	3
64			min	2.739	12	-428.592	3	-60.327	1	-.01	3	-.089	1	-.476	2
65		14	max	45.631	1	182.154	2	.185	3	.011	2	.007	5	.885	3
66			min	2.739	12	-256.955	3	-42.806	4	-.01	3	-.131	1	-.73	2
67		15	max	45.631	1	52.45	2	17.354	1	.011	2	-.006	12	1.06	3
68			min	2.739	12	-85.318	3	-34.545	5	-.01	3	-.133	1	-.851	2
69		16	max	45.631	1	86.319	3	56.194	1	.011	2	-.003	12	1.06	3
70			min	-2.671	5	-77.254	2	-31.705	5	-.01	3	-.095	1	-.838	2
71		17	max	45.631	1	257.957	3	95.034	1	.011	2	.003	3	.883	3
72			min	-13.221	5	-206.958	2	-28.864	5	-.01	3	-.1	4	-.692	2
73		18	max	45.631	1	429.594	3	133.874	1	.011	2	.1	1	.53	3
74			min	-23.771	5	-336.662	2	-26.024	5	-.01	3	-.123	5	-.413	2
75		19	max	45.631	1	601.231	3	172.715	1	.011	2	.258	1	0	1

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
76			min	-34.322	5	-466.367	2	-23.183	5	-.01	3	-.148	5	0	3
77	M15	1	max	79.629	5	674.781	2	-9.113	12	.012	2	.298	4	0	2
78			min	-47.719	1	-333.561	3	-172.703	1	-.009	3	.017	12	0	3
79		2	max	69.079	5	483.334	2	-7.277	12	.012	2	.202	4	.295	3
80			min	-47.719	1	-241.307	3	-133.863	1	-.009	3	.008	12	-.595	2
81		3	max	58.528	5	291.887	2	-5.441	12	.012	2	.119	5	.496	3
82			min	-47.719	1	-149.052	3	-95.022	1	-.009	3	-.018	1	-.994	2
83		4	max	47.978	5	100.44	2	-3.605	12	.012	2	.066	5	.602	3
84			min	-47.719	1	-56.797	3	-64.121	4	-.009	3	-.095	1	-1.195	2
85		5	max	37.427	5	35.457	3	-1.606	10	.012	2	.016	5	.613	3
86			min	-47.719	1	-91.007	2	-52.216	4	-.009	3	-.133	1	-1.2	2
87		6	max	26.877	5	127.712	3	21.498	1	.012	2	-.007	12	.529	3
88			min	-47.719	1	-282.454	2	-44.578	5	-.009	3	-.131	1	-1.008	2
89		7	max	16.327	5	219.966	3	60.338	1	.012	2	-.006	12	.35	3
90			min	-47.719	1	-473.901	2	-41.737	5	-.009	3	-.097	4	-.619	2
91		8	max	5.776	5	312.221	3	99.179	1	.012	2	0	10	.077	3
92			min	-47.719	1	-665.347	2	-38.897	5	-.009	3	-.12	4	-.04	1
93		9	max	-3.106	15	404.475	3	138.019	1	.012	2	.115	1	.748	2
94			min	-47.719	1	-856.794	2	-36.057	5	-.009	3	-.155	5	-.292	3
95		10	max	-3.315	12	496.73	3	176.859	1	.009	3	.298	4	1.727	2
96			min	-47.719	1	-1048.241	2	-120.673	14	-.012	2	.009	12	-.755	3
97		11	max	-1.68	15	856.794	2	-5.574	12	.009	3	.2	4	.748	2
98			min	-47.719	1	-404.475	3	-138.019	1	-.012	2	.002	12	-.292	3
99		12	max	-3.315	12	665.347	2	-3.738	12	.009	3	.116	5	.077	3
100			min	-47.719	1	-312.221	3	-99.179	1	-.012	2	-.007	1	-.04	1
101		13	max	-3.315	12	473.901	2	-1.902	12	.009	3	.062	5	.35	3
102			min	-47.719	1	-219.966	3	-65.016	4	-.012	2	-.089	1	-.619	2
103		14	max	-3.315	12	282.454	2	.052	3	.009	3	.012	5	.529	3
104			min	-47.719	1	-127.712	3	-53.11	4	-.012	2	-.131	1	-1.008	2
105		15	max	-3.315	12	91.007	2	17.342	1	.009	3	-.006	12	.613	3
106			min	-56.776	4	-35.457	3	-44.79	5	-.012	2	-.133	1	-1.2	2
107		16	max	-3.315	12	56.797	3	56.182	1	.009	3	-.003	12	.602	3
108			min	-67.326	4	-100.44	2	-41.949	5	-.012	2	-.103	4	-1.195	2
109		17	max	-3.315	12	149.052	3	95.022	1	.009	3	.003	3	.496	3
110			min	-77.876	4	-291.887	2	-39.109	5	-.012	2	-.127	4	-.994	2
111		18	max	-3.315	12	241.307	3	133.863	1	.009	3	.1	1	.295	3
112			min	-88.427	4	-483.334	2	-36.268	5	-.012	2	-.161	5	-.595	2
113		19	max	-3.315	12	333.561	3	172.703	1	.009	3	.258	1	0	2
114			min	-98.977	4	-674.781	2	-33.428	5	-.012	2	-.196	5	0	5
115	M16	1	max	77.716	5	641.091	2	-8.671	12	.01	2	.235	4	0	2
116			min	-100.889	1	-305.448	3	-167.482	1	-.012	3	.014	12	0	3
117		2	max	67.166	5	449.644	2	-6.835	12	.01	2	.152	4	.267	3
118			min	-100.889	1	-213.194	3	-128.642	1	-.012	3	.006	12	-.561	2
119		3	max	56.616	5	258.197	2	-4.999	12	.01	2	.09	5	.438	3
120			min	-100.889	1	-120.939	3	-89.802	1	-.012	3	-.039	1	-.924	2
121		4	max	46.065	5	66.75	2	-3.163	12	.01	2	.05	5	.515	3
122			min	-100.889	1	-28.685	3	-50.962	1	-.012	3	-.111	1	-1.091	2
123		5	max	35.515	5	63.57	3	-1.037	10	.01	2	.013	5	.497	3
124			min	-100.889	1	-124.697	2	-38.218	4	-.012	3	-.144	1	-1.061	2
125		6	max	24.965	5	155.824	3	26.719	1	.01	2	-.007	12	.384	3
126			min	-100.889	1	-316.144	2	-31.977	5	-.012	3	-.136	1	-.835	2
127		7	max	14.414	5	248.079	3	65.559	1	.01	2	-.006	12	.177	3
128			min	-100.889	1	-507.591	2	-29.136	5	-.012	3	-.089	1	-.412	2
129		8	max	3.864	5	340.334	3	104.399	1	.01	2	.002	2	.208	2
130			min	-100.889	1	-699.037	2	-26.296	5	-.012	3	-.083	4	-.125	3
131		9	max	-4.348	15	432.588	3	143.239	1	.01	2	.126	1	1.025	2
132			min	-100.889	1	-890.484	2	-23.455	5	-.012	3	-.107	5	-.523	3

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
133		10	max	-6.314	12	524.843	3	182.08	1	.012	3	.293	1	2.039	2
134			min	-100.889	1	-1081.931	2	-117.282	14	-.01	2	.01	12	-1.015	3
135		11	max	-5.325	15	890.484	2	-6.016	12	.012	3	.155	4	1.025	2
136			min	-100.889	1	-432.588	3	-143.239	1	-.01	2	.003	12	-.523	3
137		12	max	-6.314	12	699.037	2	-4.18	12	.012	3	.081	4	.208	2
138			min	-100.889	1	-340.334	3	-104.399	1	-.01	2	-.004	3	-.125	3
139		13	max	-6.314	12	507.591	2	-2.345	12	.012	3	.04	5	.177	3
140			min	-100.889	1	-248.079	3	-65.559	1	-.01	2	-.089	1	-.412	2
141		14	max	-6.314	12	316.144	2	-.509	12	.012	3	.001	5	.384	3
142			min	-100.889	1	-155.824	3	-42.383	4	-.01	2	-.136	1	-.835	2
143		15	max	-6.314	12	124.697	2	12.121	1	.012	3	-.007	12	.497	3
144			min	-100.889	1	-63.57	3	-32.975	5	-.01	2	-.144	1	-1.061	2
145		16	max	-6.314	12	28.685	3	50.962	1	.012	3	-.004	12	.515	3
146			min	-100.889	1	-66.75	2	-30.135	5	-.01	2	-.111	1	-1.091	2
147		17	max	-6.314	12	120.939	3	89.802	1	.012	3	0	3	.438	3
148			min	-100.889	1	-258.197	2	-27.294	5	-.01	2	-.106	4	-.924	2
149		18	max	-6.314	12	213.194	3	128.642	1	.012	3	.073	1	.267	3
150			min	-106.631	4	-449.644	2	-24.454	5	-.01	2	-.122	5	-.561	2
151		19	max	-6.314	12	305.448	3	167.482	1	.012	3	.225	1	0	2
152			min	-117.182	4	-641.091	2	-21.613	5	-.01	2	-.146	5	0	5
153	M2	1	max	1034.602	2	1.959	4	.433	1	0	3	0	3	0	1
154			min	-1416.682	3	.474	15	-29.532	4	0	4	0	2	0	1
155		2	max	1035.078	2	1.874	4	.433	1	0	3	0	1	0	15
156			min	-1416.325	3	.454	15	-29.949	4	0	4	-.01	4	0	4
157		3	max	1035.554	2	1.788	4	.433	1	0	3	0	1	0	15
158			min	-1415.968	3	.434	15	-30.365	4	0	4	-.019	4	-.001	4
159		4	max	1036.029	2	1.703	4	.433	1	0	3	0	1	0	15
160			min	-1415.611	3	.413	15	-30.782	4	0	4	-.029	4	-.002	4
161		5	max	1036.505	2	1.617	4	.433	1	0	3	0	1	0	15
162			min	-1415.255	3	.393	15	-31.198	4	0	4	-.039	4	-.002	4
163		6	max	1036.981	2	1.531	4	.433	1	0	3	0	1	0	15
164			min	-1414.898	3	.373	15	-31.614	4	0	4	-.049	4	-.003	4
165		7	max	1037.457	2	1.446	4	.433	1	0	3	0	1	0	15
166			min	-1414.541	3	.353	15	-32.031	4	0	4	-.06	4	-.003	4
167		8	max	1037.932	2	1.36	4	.433	1	0	3	0	1	0	15
168			min	-1414.184	3	.327	12	-32.447	4	0	4	-.07	4	-.004	4
169		9	max	1038.408	2	1.275	4	.433	1	0	3	.001	1	-.001	15
170			min	-1413.827	3	.294	12	-32.863	4	0	4	-.081	4	-.004	4
171		10	max	1038.884	2	1.189	4	.433	1	0	3	.001	1	-.001	15
172			min	-1413.471	3	.261	12	-33.28	4	0	4	-.092	4	-.005	4
173		11	max	1039.36	2	1.104	4	.433	1	0	3	.001	1	-.001	15
174			min	-1413.114	3	.227	12	-33.696	4	0	4	-.102	4	-.005	4
175		12	max	1039.835	2	1.018	4	.433	1	0	3	.002	1	-.001	15
176			min	-1412.757	3	.194	12	-34.112	4	0	4	-.113	4	-.005	4
177		13	max	1040.311	2	.938	2	.433	1	0	3	.002	1	-.001	15
178			min	-1412.4	3	.16	12	-34.529	4	0	4	-.124	4	-.006	4
179		14	max	1040.787	2	.871	2	.433	1	0	3	.002	1	-.001	15
180			min	-1412.043	3	.127	12	-34.945	4	0	4	-.136	4	-.006	4
181		15	max	1041.263	2	.805	2	.433	1	0	3	.002	1	-.001	12
182			min	-1411.687	3	.094	12	-35.361	4	0	4	-.147	4	-.006	4
183		16	max	1041.738	2	.738	2	.433	1	0	3	.002	1	-.002	12
184			min	-1411.33	3	.059	3	-35.778	4	0	4	-.159	4	-.006	4
185		17	max	1042.214	2	.671	2	.433	1	0	3	.002	1	-.002	12
186			min	-1410.973	3	.009	3	-36.194	4	0	4	-.17	4	-.007	4
187		18	max	1042.69	2	.605	2	.433	1	0	3	.002	1	-.002	12
188			min	-1410.616	3	-.042	3	-36.61	4	0	4	-.182	4	-.007	4
189		19	max	1043.166	2	.538	2	.433	1	0	3	.003	1	-.002	12

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
190			min	-1410.259	3	-.092	3	-37.027	4	0	4	-.194	4	-.007	4
191	M3	1	max	748.135	2	7.802	4	5.1	4	0	12	0	1	.007	4
192			min	-883.15	3	1.844	15	.014	12	0	4	-.028	4	.002	12
193		2	max	747.964	2	7.038	4	5.637	4	0	12	0	1	.004	2
194			min	-883.277	3	1.665	15	.014	12	0	4	-.026	4	0	12
195		3	max	747.794	2	6.273	4	6.174	4	0	12	0	1	.002	2
196			min	-883.405	3	1.485	15	.014	12	0	4	-.023	4	-.001	3
197		4	max	747.623	2	5.509	4	6.711	4	0	12	0	1	0	2
198			min	-883.533	3	1.305	15	.014	12	0	4	-.021	4	-.002	3
199		5	max	747.453	2	4.744	4	7.248	4	0	12	0	1	0	15
200			min	-883.661	3	1.125	15	.014	12	0	4	-.018	4	-.004	3
201		6	max	747.283	2	3.98	4	7.785	4	0	12	0	1	-.001	15
202			min	-883.788	3	.946	15	.014	12	0	4	-.015	5	-.005	6
203		7	max	747.112	2	3.215	4	8.322	4	0	12	0	1	-.002	15
204			min	-883.916	3	.766	15	.014	12	0	4	-.011	5	-.007	6
205		8	max	746.942	2	2.451	4	8.859	4	0	12	.001	1	-.002	15
206			min	-884.044	3	.586	15	.014	12	0	4	-.008	5	-.008	6
207		9	max	746.772	2	1.686	4	9.396	4	0	12	.001	1	-.002	15
208			min	-884.172	3	.407	15	.014	12	0	4	-.004	5	-.009	6
209		10	max	746.601	2	.922	4	9.933	4	0	12	.001	1	-.002	15
210			min	-884.299	3	.202	12	.014	12	0	4	0	5	-.009	6
211		11	max	746.431	2	.287	2	10.47	4	0	12	.005	4	-.002	15
212			min	-884.427	3	-.169	3	.014	12	0	4	0	12	-.01	6
213		12	max	746.261	2	-.132	15	11.007	4	0	12	.009	4	-.002	15
214			min	-884.555	3	-.615	3	.014	12	0	4	0	12	-.01	6
215		13	max	746.09	2	-.312	15	11.544	4	0	12	.014	4	-.002	15
216			min	-884.683	3	-1.372	6	.014	12	0	4	0	12	-.009	6
217		14	max	745.92	2	-.492	15	12.081	4	0	12	.019	4	-.002	15
218			min	-884.81	3	-2.137	6	.014	12	0	4	0	12	-.008	6
219		15	max	745.75	2	-.671	15	12.618	4	0	12	.024	4	-.002	15
220			min	-884.938	3	-2.901	6	.014	12	0	4	0	12	-.007	6
221		16	max	745.579	2	-.851	15	13.154	4	0	12	.029	4	-.001	15
222			min	-885.066	3	-3.666	6	.014	12	0	4	0	12	-.006	6
223		17	max	745.409	2	-1.031	15	13.691	4	0	12	.035	4	-.001	15
224			min	-885.194	3	-4.43	6	.014	12	0	4	0	12	-.004	6
225		18	max	745.239	2	-1.211	15	14.228	4	0	12	.041	4	0	15
226			min	-885.321	3	-5.194	6	.014	12	0	4	0	12	-.002	6
227		19	max	745.068	2	-1.39	15	14.765	4	0	12	.047	4	0	1
228			min	-885.449	3	-5.959	6	.014	12	0	4	0	12	0	1
229	M4	1	max	995.998	1	0	1	-.621	12	0	1	.039	4	0	1
230			min	-43.036	5	0	1	-270.478	4	0	1	0	12	0	1
231		2	max	996.169	1	0	1	-.621	12	0	1	.008	4	0	1
232			min	-42.957	5	0	1	-270.626	4	0	1	0	12	0	1
233		3	max	996.339	1	0	1	-.621	12	0	1	0	12	0	1
234			min	-42.877	5	0	1	-270.773	4	0	1	-.023	4	0	1
235		4	max	996.509	1	0	1	-.621	12	0	1	0	12	0	1
236			min	-42.798	5	0	1	-270.921	4	0	1	-.055	4	0	1
237		5	max	996.68	1	0	1	-.621	12	0	1	0	12	0	1
238			min	-42.718	5	0	1	-271.068	4	0	1	-.086	4	0	1
239		6	max	996.85	1	0	1	-.621	12	0	1	0	12	0	1
240			min	-42.639	5	0	1	-271.216	4	0	1	-.117	4	0	1
241		7	max	997.02	1	0	1	-.621	12	0	1	0	12	0	1
242			min	-42.559	5	0	1	-271.364	4	0	1	-.148	4	0	1
243		8	max	997.191	1	0	1	-.621	12	0	1	0	12	0	1
244			min	-42.48	5	0	1	-271.511	4	0	1	-.179	4	0	1
245		9	max	997.361	1	0	1	-.621	12	0	1	0	12	0	1
246			min	-42.4	5	0	1	-271.659	4	0	1	-.21	4	0	1

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
247		10	max	997.531	1	0	1	-.621	12	0	1	0	12	0	1
248			min	-42.321	5	0	1	-271.807	4	0	1	-.241	4	0	1
249		11	max	997.702	1	0	1	-.621	12	0	1	0	12	0	1
250			min	-42.241	5	0	1	-271.954	4	0	1	-.273	4	0	1
251		12	max	997.872	1	0	1	-.621	12	0	1	0	12	0	1
252			min	-42.162	5	0	1	-272.102	4	0	1	-.304	4	0	1
253		13	max	998.042	1	0	1	-.621	12	0	1	0	12	0	1
254			min	-42.082	5	0	1	-272.249	4	0	1	-.335	4	0	1
255		14	max	998.213	1	0	1	-.621	12	0	1	0	12	0	1
256			min	-42.003	5	0	1	-272.397	4	0	1	-.366	4	0	1
257		15	max	998.383	1	0	1	-.621	12	0	1	0	12	0	1
258			min	-41.923	5	0	1	-272.545	4	0	1	-.398	4	0	1
259		16	max	998.553	1	0	1	-.621	12	0	1	0	12	0	1
260			min	-41.844	5	0	1	-272.692	4	0	1	-.429	4	0	1
261		17	max	998.724	1	0	1	-.621	12	0	1	-.001	12	0	1
262			min	-41.764	5	0	1	-272.84	4	0	1	-.46	4	0	1
263		18	max	998.894	1	0	1	-.621	12	0	1	-.001	12	0	1
264			min	-41.685	5	0	1	-272.988	4	0	1	-.492	4	0	1
265		19	max	999.065	1	0	1	-.621	12	0	1	-.001	12	0	1
266			min	-41.605	5	0	1	-273.135	4	0	1	-.523	4	0	1
267	M6	1	max	3299.273	2	2.314	2	0	1	0	1	0	4	0	1
268			min	-4599.487	3	.109	3	-29.844	4	0	4	0	1	0	1
269		2	max	3299.749	2	2.247	2	0	1	0	1	0	1	0	3
270			min	-4599.13	3	.059	3	-30.26	4	0	4	-.01	4	0	2
271		3	max	3300.225	2	2.18	2	0	1	0	1	0	1	0	3
272			min	-4598.773	3	.009	3	-30.676	4	0	4	-.02	4	-.001	2
273		4	max	3300.701	2	2.114	2	0	1	0	1	0	1	0	3
274			min	-4598.417	3	-.041	3	-31.093	4	0	4	-.03	4	-.002	2
275		5	max	3301.176	2	2.047	2	0	1	0	1	0	1	0	3
276			min	-4598.06	3	-.091	3	-31.509	4	0	4	-.04	4	-.003	2
277		6	max	3301.652	2	1.98	2	0	1	0	1	0	1	0	3
278			min	-4597.703	3	-.141	3	-31.925	4	0	4	-.05	4	-.003	2
279		7	max	3302.128	2	1.914	2	0	1	0	1	0	1	0	3
280			min	-4597.346	3	-.191	3	-32.342	4	0	4	-.06	4	-.004	2
281		8	max	3302.604	2	1.847	2	0	1	0	1	0	1	0	3
282			min	-4596.989	3	-.241	3	-32.758	4	0	4	-.071	4	-.005	2
283		9	max	3303.079	2	1.78	2	0	1	0	1	0	1	0	3
284			min	-4596.633	3	-.291	3	-33.174	4	0	4	-.082	4	-.005	2
285		10	max	3303.555	2	1.714	2	0	1	0	1	0	1	0	3
286			min	-4596.276	3	-.341	3	-33.591	4	0	4	-.092	4	-.006	2
287		11	max	3304.031	2	1.647	2	0	1	0	1	0	1	0	3
288			min	-4595.919	3	-.391	3	-34.007	4	0	4	-.103	4	-.006	2
289		12	max	3304.507	2	1.58	2	0	1	0	1	0	1	0	3
290			min	-4595.562	3	-.441	3	-34.424	4	0	4	-.114	4	-.007	2
291		13	max	3304.982	2	1.514	2	0	1	0	1	0	1	0	3
292			min	-4595.205	3	-.491	3	-34.84	4	0	4	-.126	4	-.007	2
293		14	max	3305.458	2	1.447	2	0	1	0	1	0	1	0	3
294			min	-4594.848	3	-.541	3	-35.256	4	0	4	-.137	4	-.008	2
295		15	max	3305.934	2	1.38	2	0	1	0	1	0	1	.001	3
296			min	-4594.492	3	-.591	3	-35.673	4	0	4	-.149	4	-.008	2
297		16	max	3306.41	2	1.313	2	0	1	0	1	0	1	.001	3
298			min	-4594.135	3	-.641	3	-36.089	4	0	4	-.16	4	-.009	2
299		17	max	3306.885	2	1.247	2	0	1	0	1	0	1	.002	3
300			min	-4593.778	3	-.691	3	-36.505	4	0	4	-.172	4	-.009	2
301		18	max	3307.361	2	1.18	2	0	1	0	1	0	1	.002	3
302			min	-4593.421	3	-.741	3	-36.922	4	0	4	-.184	4	-.01	2
303		19	max	3307.837	2	1.113	2	0	1	0	1	0	1	.002	3

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
304			min	-4593.064	3	-.791	3	-37.338	4	0	4	-.196	4	-.01	2
305	M7	1	max	2686.623	2	7.808	6	4.812	4	0	1	0	1	.01	2
306			min	-2769.282	3	1.833	15	0	1	0	4	-.028	4	-.002	3
307		2	max	2686.453	2	7.044	6	5.349	4	0	1	0	1	.007	2
308			min	-2769.41	3	1.654	15	0	1	0	4	-.026	4	-.003	3
309		3	max	2686.282	2	6.279	6	5.886	4	0	1	0	1	.005	2
310			min	-2769.538	3	1.474	15	0	1	0	4	-.024	4	-.005	3
311		4	max	2686.112	2	5.515	6	6.423	4	0	1	0	1	.003	2
312			min	-2769.665	3	1.294	15	0	1	0	4	-.021	4	-.006	3
313		5	max	2685.942	2	4.751	6	6.96	4	0	1	0	1	0	2
314			min	-2769.793	3	1.115	15	0	1	0	4	-.018	4	-.007	3
315		6	max	2685.771	2	3.986	6	7.496	4	0	1	0	1	0	2
316			min	-2769.921	3	.935	15	0	1	0	4	-.015	4	-.007	3
317		7	max	2685.601	2	3.222	6	8.033	4	0	1	0	1	-.002	15
318			min	-2770.049	3	.755	15	0	1	0	4	-.012	4	-.008	3
319		8	max	2685.431	2	2.52	2	8.57	4	0	1	0	1	-.002	15
320			min	-2770.176	3	.472	12	0	1	0	4	-.009	4	-.008	3
321		9	max	2685.26	2	1.924	2	9.107	4	0	1	0	1	-.002	15
322			min	-2770.304	3	.175	12	0	1	0	4	-.005	5	-.009	4
323		10	max	2685.09	2	1.329	2	9.644	4	0	1	0	1	-.002	15
324			min	-2770.432	3	-.264	3	0	1	0	4	-.001	5	-.009	4
325		11	max	2684.92	2	.733	2	10.181	4	0	1	.003	4	-.002	15
326			min	-2770.56	3	-.711	3	0	1	0	4	0	1	-.01	4
327		12	max	2684.749	2	.137	2	10.718	4	0	1	.007	4	-.002	15
328			min	-2770.687	3	-1.158	3	0	1	0	4	0	1	-.01	4
329		13	max	2684.579	2	-.323	15	11.255	4	0	1	.012	4	-.002	15
330			min	-2770.815	3	-1.605	3	0	1	0	4	0	1	-.009	4
331		14	max	2684.409	2	-.503	15	11.792	4	0	1	.017	4	-.002	15
332			min	-2770.943	3	-2.129	4	0	1	0	4	0	1	-.008	4
333		15	max	2684.238	2	-.682	15	12.329	4	0	1	.022	4	-.002	15
334			min	-2771.071	3	-2.894	4	0	1	0	4	0	1	-.007	4
335		16	max	2684.068	2	-.862	15	12.866	4	0	1	.027	4	-.001	15
336			min	-2771.198	3	-3.658	4	0	1	0	4	0	1	-.006	4
337		17	max	2683.898	2	-1.042	15	13.403	4	0	1	.033	4	-.001	15
338			min	-2771.326	3	-4.423	4	0	1	0	4	0	1	-.004	4
339		18	max	2683.727	2	-1.221	15	13.94	4	0	1	.038	4	0	15
340			min	-2771.454	3	-5.187	4	0	1	0	4	0	1	-.002	4
341		19	max	2683.557	2	-1.401	15	14.477	4	0	1	.044	4	0	1
342			min	-2771.582	3	-5.952	4	0	1	0	4	0	1	0	1
343	M8	1	max	2603.476	1	0	1	0	1	0	1	.037	4	0	1
344			min	-206.145	3	0	1	-261.352	4	0	1	0	1	0	1
345		2	max	2603.646	1	0	1	0	1	0	1	.007	4	0	1
346			min	-206.017	3	0	1	-261.5	4	0	1	0	1	0	1
347		3	max	2603.816	1	0	1	0	1	0	1	0	1	0	1
348			min	-205.889	3	0	1	-261.648	4	0	1	-.023	4	0	1
349		4	max	2603.987	1	0	1	0	1	0	1	0	1	0	1
350			min	-205.761	3	0	1	-261.795	4	0	1	-.053	4	0	1
351		5	max	2604.157	1	0	1	0	1	0	1	0	1	0	1
352			min	-205.634	3	0	1	-261.943	4	0	1	-.083	4	0	1
353		6	max	2604.327	1	0	1	0	1	0	1	0	1	0	1
354			min	-205.506	3	0	1	-262.091	4	0	1	-.114	4	0	1
355		7	max	2604.498	1	0	1	0	1	0	1	0	1	0	1
356			min	-205.378	3	0	1	-262.238	4	0	1	-.144	4	0	1
357		8	max	2604.668	1	0	1	0	1	0	1	0	1	0	1
358			min	-205.25	3	0	1	-262.386	4	0	1	-.174	4	0	1
359		9	max	2604.838	1	0	1	0	1	0	1	0	1	0	1
360			min	-205.123	3	0	1	-262.533	4	0	1	-.204	4	0	1

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
361		10	max	2605.009	1	0	1	0	1	0	1	0	1	0	1
362			min	-204.995	3	0	1	-262.681	4	0	1	-.234	4	0	1
363		11	max	2605.179	1	0	1	0	1	0	1	0	1	0	1
364			min	-204.867	3	0	1	-262.829	4	0	1	-.264	4	0	1
365		12	max	2605.349	1	0	1	0	1	0	1	0	1	0	1
366			min	-204.739	3	0	1	-262.976	4	0	1	-.294	4	0	1
367		13	max	2605.52	1	0	1	0	1	0	1	0	1	0	1
368			min	-204.612	3	0	1	-263.124	4	0	1	-.325	4	0	1
369		14	max	2605.69	1	0	1	0	1	0	1	0	1	0	1
370			min	-204.484	3	0	1	-263.272	4	0	1	-.355	4	0	1
371		15	max	2605.86	1	0	1	0	1	0	1	0	1	0	1
372			min	-204.356	3	0	1	-263.419	4	0	1	-.385	4	0	1
373		16	max	2606.031	1	0	1	0	1	0	1	0	1	0	1
374			min	-204.228	3	0	1	-263.567	4	0	1	-.415	4	0	1
375		17	max	2606.201	1	0	1	0	1	0	1	0	1	0	1
376			min	-204.101	3	0	1	-263.715	4	0	1	-.446	4	0	1
377		18	max	2606.372	1	0	1	0	1	0	1	0	1	0	1
378			min	-203.973	3	0	1	-263.862	4	0	1	-.476	4	0	1
379		19	max	2606.542	1	0	1	0	1	0	1	0	1	0	1
380			min	-203.845	3	0	1	-264.01	4	0	1	-.506	4	0	1
381	M10	1	max	1034.602	2	1.901	6	-.026	12	0	1	0	2	0	1
382			min	-1416.682	3	.434	15	-29.801	4	0	5	0	3	0	1
383		2	max	1035.078	2	1.815	6	-.026	12	0	1	0	10	0	15
384			min	-1416.325	3	.414	15	-30.217	4	0	5	-.01	4	0	6
385		3	max	1035.554	2	1.73	6	-.026	12	0	1	0	10	0	15
386			min	-1415.968	3	.394	15	-30.633	4	0	5	-.02	4	-.001	6
387		4	max	1036.029	2	1.644	6	-.026	12	0	1	0	12	0	15
388			min	-1415.611	3	.374	15	-31.05	4	0	5	-.03	4	-.002	6
389		5	max	1036.505	2	1.559	6	-.026	12	0	1	0	12	0	15
390			min	-1415.255	3	.354	15	-31.466	4	0	5	-.04	4	-.002	6
391		6	max	1036.981	2	1.473	6	-.026	12	0	1	0	12	0	15
392			min	-1414.898	3	.334	15	-31.882	4	0	5	-.05	4	-.003	6
393		7	max	1037.457	2	1.387	6	-.026	12	0	1	0	12	0	15
394			min	-1414.541	3	.314	15	-32.299	4	0	5	-.06	4	-.003	6
395		8	max	1037.932	2	1.302	6	-.026	12	0	1	0	12	0	15
396			min	-1414.184	3	.293	15	-32.715	4	0	5	-.071	4	-.004	6
397		9	max	1038.408	2	1.216	6	-.026	12	0	1	0	12	0	15
398			min	-1413.827	3	.273	15	-33.131	4	0	5	-.082	4	-.004	6
399		10	max	1038.884	2	1.138	2	-.026	12	0	1	0	12	-.001	15
400			min	-1413.471	3	.253	15	-33.548	4	0	5	-.092	4	-.004	6
401		11	max	1039.36	2	1.071	2	-.026	12	0	1	0	12	-.001	15
402			min	-1413.114	3	.227	12	-33.964	4	0	5	-.103	4	-.005	6
403		12	max	1039.835	2	1.005	2	-.026	12	0	1	0	12	-.001	15
404			min	-1412.757	3	.194	12	-34.381	4	0	5	-.114	4	-.005	6
405		13	max	1040.311	2	.938	2	-.026	12	0	1	0	12	-.001	15
406			min	-1412.4	3	.16	12	-34.797	4	0	5	-.126	4	-.005	6
407		14	max	1040.787	2	.871	2	-.026	12	0	1	0	12	-.001	15
408			min	-1412.043	3	.127	12	-35.213	4	0	5	-.137	4	-.006	6
409		15	max	1041.263	2	.805	2	-.026	12	0	1	0	12	-.001	15
410			min	-1411.687	3	.094	12	-35.63	4	0	5	-.148	4	-.006	6
411		16	max	1041.738	2	.738	2	-.026	12	0	1	0	12	-.001	15
412			min	-1411.33	3	.059	3	-36.046	4	0	5	-.16	4	-.006	6
413		17	max	1042.214	2	.671	2	-.026	12	0	1	0	12	-.001	15
414			min	-1410.973	3	.009	3	-36.462	4	0	5	-.172	4	-.006	6
415		18	max	1042.69	2	.605	2	-.026	12	0	1	0	12	-.001	15
416			min	-1410.616	3	-.042	3	-36.879	4	0	5	-.184	4	-.006	6
417		19	max	1043.166	2	.538	2	-.026	12	0	1	0	12	-.001	15

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
418			min	-1410.259	3	-.092	3	-37.295	4	0	5	-.196	4	-.007	2
419	M11	1	max	748.135	2	7.757	6	4.965	4	0	1	0	12	.007	2
420			min	-883.15	3	1.814	15	-.218	1	0	4	-.028	4	.001	15
421		2	max	747.964	2	6.992	6	5.502	4	0	1	0	12	.004	2
422			min	-883.277	3	1.634	15	-.218	1	0	4	-.026	4	0	12
423		3	max	747.794	2	6.228	6	6.039	4	0	1	0	12	.002	2
424			min	-883.405	3	1.454	15	-.218	1	0	4	-.024	4	-.001	3
425		4	max	747.623	2	5.463	6	6.576	4	0	1	0	12	0	2
426			min	-883.533	3	1.275	15	-.218	1	0	4	-.021	4	-.002	3
427		5	max	747.453	2	4.699	6	7.113	4	0	1	0	12	0	15
428			min	-883.661	3	1.095	15	-.218	1	0	4	-.018	4	-.004	4
429		6	max	747.283	2	3.934	6	7.65	4	0	1	0	12	-.001	15
430			min	-883.788	3	.915	15	-.218	1	0	4	-.015	4	-.006	4
431		7	max	747.112	2	3.17	6	8.187	4	0	1	0	12	-.002	15
432			min	-883.916	3	.735	15	-.218	1	0	4	-.012	4	-.007	4
433		8	max	746.942	2	2.406	6	8.724	4	0	1	0	12	-.002	15
434			min	-884.044	3	.556	15	-.218	1	0	4	-.008	4	-.008	4
435		9	max	746.772	2	1.641	6	9.261	4	0	1	0	12	-.002	15
436			min	-884.172	3	.376	15	-.218	1	0	4	-.004	4	-.009	4
437		10	max	746.601	2	.882	2	9.798	4	0	1	0	12	-.002	15
438			min	-884.299	3	.196	15	-.218	1	0	4	-.001	1	-.01	4
439		11	max	746.431	2	.287	2	10.335	4	0	1	.004	5	-.002	15
440			min	-884.427	3	-.169	3	-.218	1	0	4	-.001	1	-.01	4
441		12	max	746.261	2	-.163	15	10.872	4	0	1	.008	5	-.002	15
442			min	-884.555	3	-.653	4	-.218	1	0	4	-.001	1	-.01	4
443		13	max	746.09	2	-.343	15	11.409	4	0	1	.013	5	-.002	15
444			min	-884.683	3	-1.418	4	-.218	1	0	4	-.001	1	-.009	4
445		14	max	745.92	2	-.522	15	11.946	4	0	1	.018	5	-.002	15
446			min	-884.81	3	-2.182	4	-.218	1	0	4	-.002	1	-.009	4
447		15	max	745.75	2	-.702	15	12.483	4	0	1	.023	5	-.002	15
448			min	-884.938	3	-2.946	4	-.218	1	0	4	-.002	1	-.007	4
449		16	max	745.579	2	-.882	15	13.02	4	0	1	.028	5	-.001	15
450			min	-885.066	3	-3.711	4	-.218	1	0	4	-.002	1	-.006	4
451		17	max	745.409	2	-1.061	15	13.557	4	0	1	.034	5	-.001	15
452			min	-885.194	3	-4.475	4	-.218	1	0	4	-.002	1	-.004	4
453		18	max	745.239	2	-1.241	15	14.093	4	0	1	.039	4	0	15
454			min	-885.321	3	-5.24	4	-.218	1	0	4	-.002	1	-.002	4
455		19	max	745.068	2	-1.421	15	14.63	4	0	1	.045	4	0	1
456			min	-885.449	3	-6.004	4	-.218	1	0	4	-.002	1	0	1
457	M12	1	max	995.998	1	0	1	10.071	1	0	1	.038	4	0	1
458			min	-34.161	3	0	1	-264.231	4	0	1	-.002	1	0	1
459		2	max	996.169	1	0	1	10.071	1	0	1	.007	5	0	1
460			min	-34.034	3	0	1	-264.379	4	0	1	0	1	0	1
461		3	max	996.339	1	0	1	10.071	1	0	1	0	1	0	1
462			min	-33.906	3	0	1	-264.527	4	0	1	-.023	4	0	1
463		4	max	996.509	1	0	1	10.071	1	0	1	.002	1	0	1
464			min	-33.778	3	0	1	-264.674	4	0	1	-.053	4	0	1
465		5	max	996.68	1	0	1	10.071	1	0	1	.003	1	0	1
466			min	-33.65	3	0	1	-264.822	4	0	1	-.084	4	0	1
467		6	max	996.85	1	0	1	10.071	1	0	1	.004	1	0	1
468			min	-33.523	3	0	1	-264.97	4	0	1	-.114	4	0	1
469		7	max	997.02	1	0	1	10.071	1	0	1	.005	1	0	1
470			min	-33.395	3	0	1	-265.117	4	0	1	-.145	4	0	1
471		8	max	997.191	1	0	1	10.071	1	0	1	.006	1	0	1
472			min	-33.267	3	0	1	-265.265	4	0	1	-.175	4	0	1
473		9	max	997.361	1	0	1	10.071	1	0	1	.008	1	0	1
474			min	-33.139	3	0	1	-265.412	4	0	1	-.206	4	0	1

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
475		10	max	997.531	1	0	1	10.071	1	0	1	.009	1	0	1
476			min	-33.012	3	0	1	-265.56	4	0	1	-.236	4	0	1
477		11	max	997.702	1	0	1	10.071	1	0	1	.01	1	0	1
478			min	-32.884	3	0	1	-265.708	4	0	1	-.267	4	0	1
479		12	max	997.872	1	0	1	10.071	1	0	1	.011	1	0	1
480			min	-32.756	3	0	1	-265.855	4	0	1	-.297	4	0	1
481		13	max	998.042	1	0	1	10.071	1	0	1	.012	1	0	1
482			min	-32.628	3	0	1	-266.003	4	0	1	-.328	4	0	1
483		14	max	998.213	1	0	1	10.071	1	0	1	.013	1	0	1
484			min	-32.5	3	0	1	-266.151	4	0	1	-.358	4	0	1
485		15	max	998.383	1	0	1	10.071	1	0	1	.015	1	0	1
486			min	-32.373	3	0	1	-266.298	4	0	1	-.389	4	0	1
487		16	max	998.553	1	0	1	10.071	1	0	1	.016	1	0	1
488			min	-32.245	3	0	1	-266.446	4	0	1	-.419	4	0	1
489		17	max	998.724	1	0	1	10.071	1	0	1	.017	1	0	1
490			min	-32.117	3	0	1	-266.594	4	0	1	-.45	4	0	1
491		18	max	998.894	1	0	1	10.071	1	0	1	.018	1	0	1
492			min	-31.989	3	0	1	-266.741	4	0	1	-.481	4	0	1
493		19	max	999.065	1	0	1	10.071	1	0	1	.019	1	0	1
494			min	-31.862	3	0	1	-266.889	4	0	1	-.511	4	0	1
495	M1	1	max	167.194	1	758.292	3	42.499	5	0	2	.224	1	0	3
496			min	-11.133	5	-430.697	2	-93.648	1	0	3	-.096	5	-.014	2
497		2	max	167.91	1	757.362	3	43.74	5	0	2	.174	1	.213	2
498			min	-10.799	5	-431.938	2	-93.648	1	0	3	-.073	5	-.399	3
499		3	max	546.295	3	522.646	2	16.099	5	0	3	.125	1	.43	2
500			min	-315.726	2	-560.403	3	-93.381	1	0	2	-.05	5	-.783	3
501		4	max	546.832	3	521.406	2	17.341	5	0	3	.076	1	.154	2
502			min	-315.01	2	-561.333	3	-93.381	1	0	2	-.041	5	-.487	3
503		5	max	547.369	3	520.165	2	18.582	5	0	3	.026	1	-.003	15
504			min	-314.294	2	-562.263	3	-93.381	1	0	2	-.032	5	-.19	3
505		6	max	547.906	3	518.925	2	19.824	5	0	3	-.001	12	.107	3
506			min	-313.577	2	-563.194	3	-93.381	1	0	2	-.027	4	-.394	2
507		7	max	548.443	3	517.684	2	21.065	5	0	3	-.005	12	.404	3
508			min	-312.861	2	-564.124	3	-93.381	1	0	2	-.072	1	-.668	2
509		8	max	548.98	3	516.444	2	22.307	5	0	3	0	5	.702	3
510			min	-312.145	2	-565.055	3	-93.381	1	0	2	-.121	1	-.941	2
511		9	max	563.471	3	52.172	2	57.762	5	0	9	.073	1	.819	3
512			min	-239.877	2	.375	15	-139.051	1	0	3	-.125	5	-1.078	2
513		10	max	564.008	3	50.931	2	59.003	5	0	9	0	10	.798	3
514			min	-239.161	2	0	5	-139.051	1	0	3	-.095	4	-1.105	2
515		11	max	564.545	3	49.691	2	60.245	5	0	9	-.005	12	.779	3
516			min	-238.445	2	-1.544	4	-139.051	1	0	3	-.08	4	-1.131	2
517		12	max	578.904	3	373.953	3	148.42	5	0	2	.12	1	.679	3
518			min	-166.13	2	-624.735	2	-91.37	1	0	3	-.208	5	-1.003	2
519		13	max	579.441	3	373.023	3	149.662	5	0	2	.072	1	.482	3
520			min	-165.414	2	-625.975	2	-91.37	1	0	3	-.13	5	-.673	2
521		14	max	579.979	3	372.093	3	150.903	5	0	2	.024	1	.286	3
522			min	-164.698	2	-627.216	2	-91.37	1	0	3	-.05	5	-.343	2
523		15	max	580.516	3	371.162	3	152.145	5	0	2	.03	5	.09	3
524			min	-163.981	2	-628.456	2	-91.37	1	0	3	-.025	1	-.032	1
525		16	max	581.053	3	370.232	3	153.386	5	0	2	.11	5	.32	2
526			min	-163.265	2	-629.697	2	-91.37	1	0	3	-.073	1	-.106	3
527		17	max	581.59	3	369.301	3	154.628	5	0	2	.191	5	.653	2
528			min	-162.549	2	-630.937	2	-91.37	1	0	3	-.121	1	-.301	3
529		18	max	21.279	5	642.876	2	-6.314	12	0	5	.195	5	.329	2
530			min	-168.193	1	-304.602	3	-118.504	4	0	2	-.172	1	-.149	3
531		19	max	21.613	5	641.636	2	-6.314	12	0	5	.146	5	.012	3

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
532			min	-167.477	1	-305.532	3	-117.263	4	0	2	-.225	1	-.01	2
533	M5	1	max	364.735	1	2525.29	3	91.18	5	0	1	0	1	.029	2
534			min	15.169	12	-1468.39	2	0	1	0	4	-.211	4	-.001	3
535		2	max	365.452	1	2524.359	3	92.422	5	0	1	0	1	.804	2
536			min	15.527	12	-1469.631	2	0	1	0	4	-.163	4	-1.334	3
537		3	max	1745.396	3	1555.448	2	67.295	4	0	4	0	1	1.543	2
538			min	-1079.525	2	-1774.966	3	0	1	0	1	-.114	4	-2.614	3
539		4	max	1745.933	3	1554.207	2	68.537	4	0	4	0	1	.723	2
540			min	-1078.808	2	-1775.896	3	0	1	0	1	-.078	4	-1.677	3
541		5	max	1746.47	3	1552.967	2	69.778	4	0	4	0	1	.009	9
542			min	-1078.092	2	-1776.827	3	0	1	0	1	-.042	4	-.74	3
543		6	max	1747.007	3	1551.726	2	71.02	4	0	4	0	1	.198	3
544			min	-1077.376	2	-1777.757	3	0	1	0	1	-.005	5	-.916	2
545		7	max	1747.544	3	1550.486	2	72.261	4	0	4	.033	4	1.137	3
546			min	-1076.66	2	-1778.688	3	0	1	0	1	0	1	-1.734	2
547		8	max	1748.082	3	1549.245	2	73.502	4	0	4	.072	4	2.075	3
548			min	-1075.943	2	-1779.618	3	0	1	0	1	0	1	-2.552	2
549		9	max	1770.28	3	175.017	2	190.247	4	0	1	0	1	2.386	3
550			min	-924.532	2	.374	15	0	1	0	1	-.187	4	-2.911	2
551		10	max	1770.817	3	173.776	2	191.488	4	0	1	0	1	2.313	3
552			min	-923.816	2	0	15	0	1	0	1	-.086	4	-3.003	2
553		11	max	1771.354	3	172.536	2	192.73	4	0	1	.015	4	2.24	3
554			min	-923.1	2	-1.413	6	0	1	0	1	0	1	-3.094	2
555		12	max	1793.816	3	1167.35	3	216.776	4	0	1	0	1	1.969	3
556			min	-771.783	2	-1903.983	2	0	1	0	4	-.305	4	-2.772	2
557		13	max	1794.353	3	1166.42	3	218.017	4	0	1	0	1	1.353	3
558			min	-771.067	2	-1905.223	2	0	1	0	4	-.191	4	-1.767	2
559		14	max	1794.891	3	1165.489	3	219.258	4	0	1	0	1	.738	3
560			min	-770.351	2	-1906.464	2	0	1	0	4	-.075	4	-.762	2
561		15	max	1795.428	3	1164.559	3	220.5	4	0	1	.041	4	.245	2
562			min	-769.635	2	-1907.704	2	0	1	0	4	0	1	-.003	13
563		16	max	1795.965	3	1163.629	3	221.741	4	0	1	.157	4	1.252	2
564			min	-768.918	2	-1908.945	2	0	1	0	4	0	1	-.491	3
565		17	max	1796.502	3	1162.698	3	222.983	4	0	1	.275	4	2.259	2
566			min	-768.202	2	-1910.185	2	0	1	0	4	0	1	-1.105	3
567		18	max	-16.061	12	2167.995	2	0	1	0	4	.316	4	1.164	2
568			min	-364.886	1	-1049.2	3	-20.847	5	0	1	0	1	-.578	3
569		19	max	-15.703	12	2166.754	2	0	1	0	4	.306	4	.02	2
570			min	-364.17	1	-1050.13	3	-19.605	5	0	1	0	1	-.025	3
571	M9	1	max	167.194	1	758.292	3	93.648	1	0	3	-.015	12	0	3
572			min	8.938	12	-430.697	2	6.311	12	0	4	-.224	1	-.014	2
573		2	max	167.91	1	757.362	3	93.648	1	0	3	-.012	12	.213	2
574			min	9.296	12	-431.938	2	6.311	12	0	4	-.174	1	-.399	3
575		3	max	546.295	3	522.646	2	93.381	1	0	2	-.008	12	.43	2
576			min	-315.726	2	-560.403	3	6.285	12	0	3	-.125	1	-.783	3
577		4	max	546.832	3	521.406	2	93.381	1	0	2	-.005	12	.154	2
578			min	-315.01	2	-561.333	3	6.285	12	0	3	-.076	1	-.487	3
579		5	max	547.369	3	520.165	2	93.381	1	0	2	-.002	12	-.003	15
580			min	-314.294	2	-562.263	3	6.285	12	0	3	-.042	4	-.19	3
581		6	max	547.906	3	518.925	2	93.381	1	0	2	.023	1	.107	3
582			min	-313.577	2	-563.194	3	6.285	12	0	3	-.018	5	-.394	2
583		7	max	548.443	3	517.684	2	93.381	1	0	2	.072	1	.404	3
584			min	-312.861	2	-564.124	3	6.285	12	0	3	0	15	-.668	2
585		8	max	548.98	3	516.444	2	93.381	1	0	2	.121	1	.702	3
586			min	-312.145	2	-565.055	3	6.285	12	0	3	.008	12	-.941	2
587		9	max	563.471	3	52.172	2	139.051	1	0	3	-.005	12	.819	3
588			min	-239.877	2	.382	15	9.018	12	0	9	-.154	4	-1.078	2

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
589		10	max	564.008	3	50.931	2	139.051	1	0	3	0	1	.798	3
590			min	-239.161	2	.008	15	9.018	12	0	9	-.094	4	-1.105	2
591		11	max	564.545	3	49.691	2	139.051	1	0	3	.074	1	.779	3
592			min	-238.445	2	-1.494	6	9.018	12	0	9	-.052	5	-1.131	2
593		12	max	578.904	3	373.953	3	185.341	4	0	3	-.008	12	.679	3
594			min	-166.13	2	-624.735	2	5.708	12	0	2	-.257	4	-1.003	2
595		13	max	579.441	3	373.023	3	186.582	4	0	3	-.005	12	.482	3
596			min	-165.414	2	-625.975	2	5.708	12	0	2	-.159	4	-.673	2
597		14	max	579.979	3	372.093	3	187.823	4	0	3	-.002	12	.286	3
598			min	-164.698	2	-627.216	2	5.708	12	0	2	-.06	4	-.343	2
599		15	max	580.516	3	371.162	3	189.065	4	0	3	.04	4	.09	3
600			min	-163.981	2	-628.456	2	5.708	12	0	2	.001	12	-.032	1
601		16	max	581.053	3	370.232	3	190.306	4	0	3	.14	4	.32	2
602			min	-163.265	2	-629.697	2	5.708	12	0	2	.004	12	-.106	3
603		17	max	581.59	3	369.301	3	191.548	4	0	3	.24	4	.653	2
604			min	-162.549	2	-630.937	2	5.708	12	0	2	.007	12	-.301	3
605		18	max	-9.029	12	642.876	2	100.994	1	0	2	.264	4	.329	2
606			min	-168.193	1	-304.602	3	-79.152	5	0	3	.011	12	-.149	3
607		19	max	-8.671	12	641.636	2	100.994	1	0	2	.235	4	.012	3
608			min	-167.477	1	-305.532	3	-77.911	5	0	3	.014	12	-.01	2

Envelope Member Section Deflections

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
1	M13	1	max	0	1	.113	2	.01	3	9.409e-3	2	NC	1	NC	1
2			min	-.618	4	-.021	3	-.005	2	-2.104e-3	3	NC	1	NC	1
3		2	max	0	1	.263	3	.031	1	1.071e-2	2	NC	5	NC	2
4			min	-.618	4	-.037	1	-.018	5	-2.166e-3	3	779.972	3	7319.036	1
5		3	max	0	1	.494	3	.074	1	1.201e-2	2	NC	5	NC	3
6			min	-.618	4	-.139	1	-.022	5	-2.227e-3	3	430.896	3	3027.423	1
7		4	max	0	1	.634	3	.11	1	1.331e-2	2	NC	5	NC	3
8			min	-.618	4	-.199	2	-.015	5	-2.289e-3	3	338.711	3	2015.669	1
9		5	max	0	1	.667	3	.129	1	1.462e-2	2	NC	5	NC	3
10			min	-.618	4	-.198	2	-.003	5	-2.35e-3	3	322.524	3	1725.994	1
11		6	max	0	1	.595	3	.124	1	1.592e-2	2	NC	5	NC	3
12			min	-.618	4	-.144	1	.006	15	-2.411e-3	3	360.231	3	1799.412	1
13		7	max	0	1	.44	3	.096	1	1.722e-2	2	NC	5	NC	5
14			min	-.618	4	-.051	1	.003	10	-2.473e-3	3	481.56	3	2319.555	1
15		8	max	0	1	.242	3	.054	1	1.852e-2	2	NC	2	NC	2
16			min	-.618	4	.002	15	-.004	10	-2.534e-3	3	842.226	3	4136.951	1
17		9	max	0	1	.201	2	.03	3	1.982e-2	2	NC	4	NC	1
18			min	-.618	4	.004	15	-.012	2	-2.595e-3	3	2506.128	2	9294.166	4
19		10	max	0	1	.251	2	.03	3	2.112e-2	2	NC	3	NC	1
20			min	-.618	4	-.018	3	-.021	2	-2.657e-3	3	1609.451	2	NC	1
21		11	max	0	12	.201	2	.03	3	1.982e-2	2	NC	4	NC	1
22			min	-.618	4	.004	15	-.015	5	-2.595e-3	3	2506.128	2	NC	1
23		12	max	0	12	.242	3	.054	1	1.852e-2	2	NC	2	NC	2
24			min	-.618	4	.001	15	-.014	5	-2.534e-3	3	842.226	3	4136.951	1
25		13	max	0	12	.44	3	.096	1	1.722e-2	2	NC	5	NC	4
26			min	-.618	4	-.051	1	-.005	5	-2.473e-3	3	481.56	3	2319.555	1
27		14	max	0	12	.595	3	.124	1	1.592e-2	2	NC	5	NC	3
28			min	-.618	4	-.144	1	.006	15	-2.411e-3	3	360.231	3	1799.412	1
29		15	max	0	12	.667	3	.129	1	1.462e-2	2	NC	5	NC	3
30			min	-.618	4	-.198	2	.009	10	-2.35e-3	3	322.524	3	1725.994	1
31		16	max	0	12	.634	3	.11	1	1.331e-2	2	NC	5	NC	3
32			min	-.618	4	-.199	2	.008	10	-2.289e-3	3	338.711	3	2015.669	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
33		17	max	0	12	.494	3	.074	1	1.201e-2	2	NC	5	NC	3
34			min	-.618	4	-.139	1	.005	10	-2.227e-3	3	430.896	3	3027.423	1
35		18	max	0	12	.263	3	.031	4	1.071e-2	2	NC	5	NC	2
36			min	-.618	4	-.037	1	0	10	-2.166e-3	3	779.972	3	7001.223	4
37		19	max	0	12	.113	2	.01	3	9.409e-3	2	NC	1	NC	1
38			min	-.618	4	-.021	3	-.005	2	-2.104e-3	3	NC	1	NC	1
39	M14	1	max	0	1	.248	3	.009	3	5.452e-3	2	NC	1	NC	1
40			min	-.463	4	-.363	2	-.005	2	-4.317e-3	3	NC	1	NC	1
41		2	max	0	1	.541	3	.021	1	6.491e-3	2	NC	5	NC	1
42			min	-.463	4	-.626	2	-.027	5	-5.224e-3	3	758.409	3	7809.002	5
43		3	max	0	1	.79	3	.058	1	7.529e-3	2	NC	5	NC	3
44			min	-.463	4	-.855	2	-.032	5	-6.131e-3	3	409.394	3	3825.838	1
45		4	max	0	1	.967	3	.094	1	8.568e-3	2	NC	15	NC	3
46			min	-.463	4	-1.027	2	-.022	5	-7.039e-3	3	308.752	3	2377.546	1
47		5	max	0	1	1.056	3	.114	1	9.606e-3	2	NC	15	NC	3
48			min	-.463	4	-1.13	2	-.003	5	-7.946e-3	3	274.697	3	1960.276	1
49		6	max	0	1	1.058	3	.112	1	1.064e-2	2	NC	15	NC	3
50			min	-.463	4	-1.163	2	.007	10	-8.853e-3	3	274.196	3	1994.825	1
51		7	max	0	1	.986	3	.088	1	1.168e-2	2	NC	15	NC	3
52			min	-.463	4	-1.135	2	.003	10	-9.76e-3	3	287.389	2	2527.118	1
53		8	max	0	1	.871	3	.054	4	1.272e-2	2	NC	15	NC	2
54			min	-.463	4	-1.068	2	-.003	10	-1.067e-2	3	314.556	2	4244.346	4
55		9	max	0	1	.758	3	.035	4	1.376e-2	2	NC	5	NC	1
56			min	-.463	4	-.995	2	-.011	2	-1.157e-2	3	350.992	2	6512.207	4
57		10	max	0	1	.704	3	.026	3	1.48e-2	2	NC	5	NC	1
58			min	-.463	4	-.959	2	-.019	2	-1.248e-2	3	372.29	2	NC	1
59		11	max	0	12	.758	3	.027	3	1.376e-2	2	NC	5	NC	1
60			min	-.463	4	-.995	2	-.027	5	-1.157e-2	3	350.992	2	8326.136	5
61		12	max	0	12	.871	3	.05	1	1.272e-2	2	NC	15	NC	2
62			min	-.463	4	-1.068	2	-.03	5	-1.067e-2	3	314.556	2	4439.277	1
63		13	max	0	12	.986	3	.088	1	1.168e-2	2	NC	15	NC	3
64			min	-.463	4	-1.135	2	-.019	5	-9.76e-3	3	287.389	2	2527.118	1
65		14	max	0	12	1.058	3	.112	1	1.064e-2	2	NC	15	NC	3
66			min	-.463	4	-1.163	2	0	15	-8.853e-3	3	274.196	3	1994.825	1
67		15	max	0	12	1.056	3	.114	1	9.606e-3	2	NC	15	NC	3
68			min	-.463	4	-1.13	2	.008	10	-7.946e-3	3	274.697	3	1960.276	1
69		16	max	0	12	.967	3	.094	1	8.568e-3	2	NC	15	NC	3
70			min	-.463	4	-1.027	2	.007	10	-7.039e-3	3	308.752	3	2377.546	1
71		17	max	0	12	.79	3	.058	1	7.529e-3	2	NC	5	NC	3
72			min	-.463	4	-.855	2	.003	10	-6.131e-3	3	409.394	3	3825.838	1
73		18	max	0	12	.541	3	.037	4	6.491e-3	2	NC	5	NC	1
74			min	-.463	4	-.626	2	0	10	-5.224e-3	3	758.409	3	6050.056	4
75		19	max	0	12	.248	3	.009	3	5.452e-3	2	NC	1	NC	1
76			min	-.463	4	-.363	2	-.005	2	-4.317e-3	3	NC	1	NC	1
77	M15	1	max	0	12	.253	3	.008	3	3.748e-3	3	NC	1	NC	1
78			min	-.379	4	-.362	2	-.005	2	-5.704e-3	2	NC	1	NC	1
79		2	max	0	12	.446	3	.021	1	4.541e-3	3	NC	5	NC	1
80			min	-.379	4	-.703	2	-.036	5	-6.796e-3	2	651.099	2	5971.127	5
81		3	max	0	12	.616	3	.059	1	5.333e-3	3	NC	5	NC	3
82			min	-.379	4	-.995	2	-.043	5	-7.888e-3	2	350.483	2	3813.25	1
83		4	max	0	12	.744	3	.094	1	6.126e-3	3	NC	15	NC	3
84			min	-.379	4	-1.206	2	-.031	5	-8.98e-3	2	263.047	2	2370.962	1
85		5	max	0	12	.823	3	.114	1	6.918e-3	3	NC	15	NC	3
86			min	-.379	4	-1.317	2	-.007	5	-1.007e-2	2	232.293	2	1954.906	1
87		6	max	0	12	.851	3	.112	1	7.711e-3	3	NC	15	NC	3
88			min	-.379	4	-1.33	2	.007	10	-1.116e-2	2	229.288	2	1988.59	1
89		7	max	0	12	.835	3	.089	1	8.504e-3	3	NC	15	NC	3

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
90			min	-.379	4	-1.259	2	.003	10	-1.226e-2	2	247.322	2	2516.381	1
91		8	max	0	12	.791	3	.063	4	9.296e-3	3	NC	15	NC	2
92			min	-.379	4	-1.138	2	-.003	10	-1.335e-2	2	285.91	2	3590.194	4
93		9	max	0	12	.741	3	.043	4	1.009e-2	3	NC	5	NC	1
94			min	-.379	4	-1.015	2	-.01	2	-1.444e-2	2	339.525	2	5296.579	4
95		10	max	0	1	.716	3	.025	3	1.088e-2	3	NC	5	NC	1
96			min	-.379	4	-.957	2	-.018	2	-1.553e-2	2	372.896	2	NC	1
97		11	max	0	1	.741	3	.025	3	1.009e-2	3	NC	5	NC	1
98			min	-.379	4	-1.015	2	-.034	5	-1.444e-2	2	339.525	2	6443.613	5
99		12	max	0	1	.791	3	.051	1	9.296e-3	3	NC	15	NC	2
100			min	-.379	4	-1.138	2	-.04	5	-1.335e-2	2	285.91	2	4404.853	1
101		13	max	0	1	.835	3	.089	1	8.504e-3	3	NC	15	NC	3
102			min	-.379	4	-1.259	2	-.026	5	-1.226e-2	2	247.322	2	2516.381	1
103		14	max	0	1	.851	3	.112	1	7.711e-3	3	NC	15	NC	3
104			min	-.379	4	-1.33	2	-.002	5	-1.116e-2	2	229.288	2	1988.59	1
105		15	max	0	1	.823	3	.114	1	6.918e-3	3	NC	15	NC	3
106			min	-.379	4	-1.317	2	.009	10	-1.007e-2	2	232.293	2	1954.906	1
107		16	max	0	1	.744	3	.094	1	6.126e-3	3	NC	15	NC	3
108			min	-.378	4	-1.206	2	.007	10	-8.98e-3	2	263.047	2	2370.962	1
109		17	max	0	1	.616	3	.068	4	5.333e-3	3	NC	5	NC	3
110			min	-.378	4	-.995	2	.003	10	-7.888e-3	2	350.483	2	3271.316	4
111		18	max	0	1	.446	3	.045	4	4.541e-3	3	NC	5	NC	1
112			min	-.378	4	-.703	2	0	10	-6.796e-3	2	651.099	2	4874.779	4
113		19	max	0	1	.253	3	.008	3	3.748e-3	3	NC	1	NC	1
114			min	-.378	4	-.362	2	-.005	2	-5.704e-3	2	NC	1	NC	1
115	M16	1	max	0	12	.1	2	.007	3	6.682e-3	3	NC	1	NC	1
116			min	-.135	4	-.083	3	-.004	2	-7.761e-3	2	NC	1	NC	1
117		2	max	0	12	.013	3	.03	1	7.791e-3	3	NC	5	NC	2
118			min	-.135	4	-.124	2	-.028	5	-8.676e-3	2	991.935	2	7361.659	1
119		3	max	0	12	.087	3	.073	1	8.899e-3	3	NC	5	NC	3
120			min	-.135	4	-.302	2	-.035	5	-9.591e-3	2	552.239	2	3033.191	1
121		4	max	0	12	.125	3	.11	1	1.001e-2	3	NC	5	NC	3
122			min	-.135	4	-.405	2	-.026	5	-1.051e-2	2	440.394	2	2014.617	1
123		5	max	0	12	.121	3	.129	1	1.112e-2	3	NC	5	NC	3
124			min	-.135	4	-.417	2	-.009	5	-1.142e-2	2	430.158	2	1721.121	1
125		6	max	0	12	.075	3	.124	1	1.222e-2	3	NC	5	NC	3
126			min	-.135	4	-.341	2	.006	15	-1.234e-2	2	503.992	2	1788.832	1
127		7	max	0	12	.002	12	.097	1	1.333e-2	3	NC	5	NC	3
128			min	-.135	4	-.197	2	.005	10	-1.325e-2	2	749.333	2	2293.13	1
129		8	max	0	12	.019	9	.055	1	1.444e-2	3	NC	3	NC	2
130			min	-.135	4	-.093	3	-.001	10	-1.417e-2	2	1866.88	2	4029.364	1
131		9	max	0	12	.139	2	.031	4	1.555e-2	3	NC	4	NC	1
132			min	-.135	4	-.173	3	-.008	2	-1.508e-2	2	2447.152	3	7474.225	4
133		10	max	0	1	.21	2	.021	3	1.666e-2	3	NC	4	NC	1
134			min	-.135	4	-.209	3	-.016	2	-1.6e-2	2	1757.349	3	NC	1
135		11	max	0	1	.139	2	.022	3	1.555e-2	3	NC	4	NC	1
136			min	-.135	4	-.173	3	-.022	5	-1.508e-2	2	2447.152	3	NC	1
137		12	max	0	1	.019	9	.055	1	1.444e-2	3	NC	3	NC	2
138			min	-.135	4	-.093	3	-.023	5	-1.417e-2	2	1866.88	2	4029.364	1
139		13	max	0	1	.002	12	.097	1	1.333e-2	3	NC	5	NC	3
140			min	-.135	4	-.197	2	-.01	5	-1.325e-2	2	749.333	2	2293.13	1
141		14	max	0	1	.075	3	.124	1	1.222e-2	3	NC	5	NC	3
142			min	-.135	4	-.341	2	.006	15	-1.234e-2	2	503.992	2	1788.832	1
143		15	max	0	1	.121	3	.129	1	1.112e-2	3	NC	5	NC	3
144			min	-.135	4	-.417	2	.011	10	-1.142e-2	2	430.158	2	1721.121	1
145		16	max	0	1	.125	3	.11	1	1.001e-2	3	NC	5	NC	3
146			min	-.135	4	-.405	2	.01	10	-1.051e-2	2	440.394	2	2014.617	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
147		17	max	0	1	.087	3	.073	1	8.899e-3	3	NC	5	NC	3
148			min	-.135	4	-.302	2	.006	10	-9.591e-3	2	552.239	2	3033.191	1
149		18	max	0	1	.013	3	.041	4	7.791e-3	3	NC	5	NC	2
150			min	-.134	4	-.124	2	0	10	-8.676e-3	2	991.935	2	5396.337	4
151		19	max	0	1	.1	2	.007	3	6.682e-3	3	NC	1	NC	1
152			min	-.134	4	-.083	3	-.004	2	-7.761e-3	2	NC	1	NC	1
153	M2	1	max	.007	2	.009	2	.007	1	1.503e-3	5	NC	1	NC	2
154			min	-.01	3	-.014	3	-.58	4	-2.022e-4	1	8063.612	2	120.587	4
155		2	max	.007	2	.008	2	.007	1	1.579e-3	5	NC	1	NC	1
156			min	-.009	3	-.014	3	-.533	4	-1.907e-4	1	9299.589	2	131.191	4
157		3	max	.006	2	.006	2	.006	1	1.654e-3	5	NC	1	NC	1
158			min	-.008	3	-.013	3	-.487	4	-1.792e-4	1	NC	1	143.765	4
159		4	max	.006	2	.005	2	.005	1	1.73e-3	5	NC	1	NC	1
160			min	-.008	3	-.013	3	-.44	4	-1.677e-4	1	NC	1	158.816	4
161		5	max	.005	2	.004	2	.005	1	1.805e-3	5	NC	1	NC	1
162			min	-.007	3	-.012	3	-.395	4	-1.562e-4	1	NC	1	177.035	4
163		6	max	.005	2	.003	2	.004	1	1.881e-3	5	NC	1	NC	1
164			min	-.007	3	-.011	3	-.351	4	-1.447e-4	1	NC	1	199.376	4
165		7	max	.005	2	.002	2	.004	1	1.957e-3	5	NC	1	NC	1
166			min	-.006	3	-.011	3	-.308	4	-1.332e-4	1	NC	1	227.186	4
167		8	max	.004	2	.001	2	.003	1	2.032e-3	5	NC	1	NC	1
168			min	-.006	3	-.01	3	-.267	4	-1.217e-4	1	NC	1	262.426	4
169		9	max	.004	2	0	2	.003	1	2.108e-3	5	NC	1	NC	1
170			min	-.005	3	-.009	3	-.227	4	-1.102e-4	1	NC	1	308.033	4
171		10	max	.003	2	0	2	.002	1	2.183e-3	5	NC	1	NC	1
172			min	-.005	3	-.009	3	-.19	4	-9.866e-5	1	NC	1	368.574	4
173		11	max	.003	2	0	2	.002	1	2.262e-3	4	NC	1	NC	1
174			min	-.004	3	-.008	3	-.155	4	-8.715e-5	1	NC	1	451.476	4
175		12	max	.003	2	0	15	.001	1	2.342e-3	4	NC	1	NC	1
176			min	-.004	3	-.007	3	-.123	4	-7.565e-5	1	NC	1	569.491	4
177		13	max	.002	2	0	15	.001	1	2.421e-3	4	NC	1	NC	1
178			min	-.003	3	-.006	3	-.094	4	-6.414e-5	1	NC	1	746.075	4
179		14	max	.002	2	0	15	0	1	2.501e-3	4	NC	1	NC	1
180			min	-.003	3	-.005	3	-.068	4	-5.264e-5	1	NC	1	1028.386	4
181		15	max	.002	2	0	15	0	1	2.58e-3	4	NC	1	NC	1
182			min	-.002	3	-.004	3	-.046	4	-4.113e-5	1	NC	1	1523.442	4
183		16	max	.001	2	0	15	0	1	2.66e-3	4	NC	1	NC	1
184			min	-.002	3	-.003	3	-.028	4	-2.963e-5	1	NC	1	2520.555	4
185		17	max	0	2	0	15	0	1	2.739e-3	4	NC	1	NC	1
186			min	-.001	3	-.002	3	-.014	4	-1.812e-5	1	NC	1	5055.69	4
187		18	max	0	2	0	15	0	1	2.819e-3	4	NC	1	NC	1
188			min	0	3	-.001	3	-.004	4	-6.619e-6	1	NC	1	NC	1
189		19	max	0	1	0	1	0	1	2.898e-3	4	NC	1	NC	1
190			min	0	1	0	1	0	1	6.942e-8	12	NC	1	NC	1
191	M3	1	max	0	1	0	1	0	1	-8.415e-8	12	NC	1	NC	1
192			min	0	1	0	1	0	1	-7.284e-4	4	NC	1	NC	1
193		2	max	0	3	0	15	.014	4	1.747e-5	1	NC	1	NC	1
194			min	0	2	-.002	6	0	12	-1.173e-4	5	NC	1	6608.493	4
195		3	max	0	3	0	15	.026	4	5.011e-4	4	NC	1	NC	1
196			min	0	2	-.004	6	0	12	2.299e-6	12	NC	1	3449.125	4
197		4	max	.001	3	-.001	15	.038	4	1.116e-3	4	NC	1	NC	1
198			min	-.001	2	-.006	6	0	12	3.491e-6	12	NC	1	2397.838	4
199		5	max	.002	3	-.002	15	.048	4	1.731e-3	4	NC	1	NC	1
200			min	-.001	2	-.008	6	0	12	4.682e-6	12	NC	1	1872.694	4
201		6	max	.002	3	-.002	15	.058	4	2.345e-3	4	NC	1	NC	1
202			min	-.002	2	-.009	6	0	12	5.874e-6	12	9777.265	6	1557.121	4
203		7	max	.003	3	-.002	15	.067	4	2.96e-3	4	NC	1	NC	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
204			min	-.002	2	-.011	6	0	12	7.066e-6	12	8411.693	6	1345.434	4
205		8	max	.003	3	-.003	15	.076	4	3.575e-3	4	NC	1	NC	1
206			min	-.003	2	-.012	6	0	12	8.257e-6	12	7569.792	6	1192.204	4
207		9	max	.003	3	-.003	15	.084	4	4.189e-3	4	NC	2	NC	1
208			min	-.003	2	-.013	6	0	12	9.449e-6	12	7074.149	6	1074.616	4
209		10	max	.004	3	-.003	15	.092	4	4.804e-3	4	NC	5	NC	1
210			min	-.003	2	-.013	6	0	12	1.064e-5	12	6838.871	6	979.927	4
211		11	max	.004	3	-.003	15	.1	4	5.419e-3	4	NC	5	NC	1
212			min	-.004	2	-.013	6	0	12	1.183e-5	12	6829.441	6	900.468	4
213		12	max	.005	3	-.003	15	.109	4	6.034e-3	4	NC	2	NC	1
214			min	-.004	2	-.013	6	0	12	1.302e-5	12	7049.483	6	831.382	4
215		13	max	.005	3	-.003	15	.117	4	6.648e-3	4	NC	1	NC	1
216			min	-.004	2	-.012	6	0	12	1.422e-5	12	7543.871	6	769.499	4
217		14	max	.006	3	-.002	15	.127	4	7.263e-3	4	NC	1	NC	1
218			min	-.005	2	-.011	6	0	12	1.541e-5	12	8421.782	6	712.733	4
219		15	max	.006	3	-.002	15	.137	4	7.878e-3	4	NC	1	NC	1
220			min	-.005	2	-.009	6	0	12	1.66e-5	12	9924.43	6	659.734	4
221		16	max	.006	3	-.001	15	.148	4	8.493e-3	4	NC	1	NC	1
222			min	-.005	2	-.007	6	0	12	1.779e-5	12	NC	1	609.672	4
223		17	max	.007	3	0	15	.16	4	9.107e-3	4	NC	1	NC	1
224			min	-.006	2	-.005	1	0	12	1.898e-5	12	NC	1	562.081	4
225		18	max	.007	3	0	15	.175	4	9.722e-3	4	NC	1	NC	1
226			min	-.006	2	-.004	1	0	12	2.017e-5	12	NC	1	516.753	4
227		19	max	.008	3	0	5	.19	4	1.034e-2	4	NC	1	NC	1
228			min	-.006	2	-.002	3	0	12	2.136e-5	12	NC	1	473.647	4
229	M4	1	max	.002	1	.006	2	0	12	3.988e-4	4	NC	1	NC	3
230			min	0	5	-.008	3	-.19	4	5.759e-6	12	NC	1	130.23	4
231		2	max	.002	1	.006	2	0	12	3.988e-4	4	NC	1	NC	3
232			min	0	5	-.008	3	-.175	4	5.759e-6	12	NC	1	141.457	4
233		3	max	.002	1	.005	2	0	12	3.988e-4	4	NC	1	NC	2
234			min	0	5	-.007	3	-.16	4	5.759e-6	12	NC	1	154.827	4
235		4	max	.002	1	.005	2	0	12	3.988e-4	4	NC	1	NC	2
236			min	0	5	-.007	3	-.145	4	5.759e-6	12	NC	1	170.896	4
237		5	max	.002	1	.005	2	0	12	3.988e-4	4	NC	1	NC	2
238			min	0	5	-.006	3	-.13	4	5.759e-6	12	NC	1	190.417	4
239		6	max	.002	1	.004	2	0	12	3.988e-4	4	NC	1	NC	2
240			min	0	5	-.006	3	-.116	4	5.759e-6	12	NC	1	214.438	4
241		7	max	.002	1	.004	2	0	12	3.988e-4	4	NC	1	NC	2
242			min	0	5	-.005	3	-.101	4	5.759e-6	12	NC	1	244.443	4
243		8	max	.001	1	.004	2	0	12	3.988e-4	4	NC	1	NC	2
244			min	0	5	-.005	3	-.088	4	5.759e-6	12	NC	1	282.597	4
245		9	max	.001	1	.003	2	0	12	3.988e-4	4	NC	1	NC	2
246			min	0	5	-.004	3	-.075	4	5.759e-6	12	NC	1	332.162	4
247		10	max	.001	1	.003	2	0	12	3.988e-4	4	NC	1	NC	1
248			min	0	5	-.004	3	-.062	4	5.759e-6	12	NC	1	398.232	4
249		11	max	.001	1	.003	2	0	12	3.988e-4	4	NC	1	NC	1
250			min	0	5	-.004	3	-.051	4	5.759e-6	12	NC	1	489.141	4
251		12	max	0	1	.002	2	0	12	3.988e-4	4	NC	1	NC	1
252			min	0	5	-.003	3	-.04	4	5.759e-6	12	NC	1	619.302	4
253		13	max	0	1	.002	2	0	12	3.988e-4	4	NC	1	NC	1
254			min	0	5	-.003	3	-.03	4	5.759e-6	12	NC	1	815.459	4
255		14	max	0	1	.002	2	0	12	3.988e-4	4	NC	1	NC	1
256			min	0	5	-.002	3	-.022	4	5.759e-6	12	NC	1	1132.007	4
257		15	max	0	1	.001	2	0	12	3.988e-4	4	NC	1	NC	1
258			min	0	5	-.002	3	-.015	4	5.759e-6	12	NC	1	1694.289	4
259		16	max	0	1	.001	2	0	12	3.988e-4	4	NC	1	NC	1
260			min	0	5	-.001	3	-.009	4	5.759e-6	12	NC	1	2848.643	4

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
261		17	max	0	1	0	2	0	12	3.988e-4	4	NC	1	NC	1
262			min	0	5	0	3	-.004	4	5.759e-6	12	NC	1	5878.378	4
263		18	max	0	1	0	2	0	12	3.988e-4	4	NC	1	NC	1
264			min	0	5	0	3	-.001	4	5.759e-6	12	NC	1	NC	1
265		19	max	0	1	0	1	0	1	3.988e-4	4	NC	1	NC	1
266			min	0	1	0	1	0	1	5.759e-6	12	NC	1	NC	1
267	M6	1	max	.022	2	.031	2	0	1	1.586e-3	4	NC	4	NC	1
268			min	-.031	3	-.044	3	-.585	4	0	1	1574.915	3	119.471	4
269		2	max	.021	2	.029	2	0	1	1.66e-3	4	NC	4	NC	1
270			min	-.029	3	-.042	3	-.538	4	0	1	1669.724	3	129.98	4
271		3	max	.02	2	.026	2	0	1	1.733e-3	4	NC	4	NC	1
272			min	-.027	3	-.039	3	-.491	4	0	1	1776.709	3	142.439	4
273		4	max	.019	2	.023	2	0	1	1.807e-3	4	NC	4	NC	1
274			min	-.026	3	-.037	3	-.445	4	0	1	1898.394	3	157.355	4
275		5	max	.017	2	.021	2	0	1	1.88e-3	4	NC	4	NC	1
276			min	-.024	3	-.034	3	-.399	4	0	1	2038.023	3	175.41	4
277		6	max	.016	2	.018	2	0	1	1.954e-3	4	NC	4	NC	1
278			min	-.022	3	-.032	3	-.354	4	0	1	2199.842	3	197.55	4
279		7	max	.015	2	.016	2	0	1	2.028e-3	4	NC	1	NC	1
280			min	-.021	3	-.029	3	-.311	4	0	1	2389.515	3	225.113	4
281		8	max	.014	2	.014	2	0	1	2.101e-3	4	NC	1	NC	1
282			min	-.019	3	-.027	3	-.269	4	0	1	2614.771	3	260.04	4
283		9	max	.012	2	.012	2	0	1	2.175e-3	4	NC	1	NC	1
284			min	-.017	3	-.024	3	-.229	4	0	1	2886.435	3	305.243	4
285		10	max	.011	2	.01	2	0	1	2.248e-3	4	NC	1	NC	1
286			min	-.015	3	-.022	3	-.192	4	0	1	3220.153	3	365.251	4
287		11	max	.01	2	.008	2	0	1	2.322e-3	4	NC	1	NC	1
288			min	-.014	3	-.019	3	-.156	4	0	1	3639.404	3	447.427	4
289		12	max	.009	2	.006	2	0	1	2.395e-3	4	NC	1	NC	1
290			min	-.012	3	-.017	3	-.124	4	0	1	4181.101	3	564.417	4
291		13	max	.007	2	.004	2	0	1	2.469e-3	4	NC	1	NC	1
292			min	-.01	3	-.014	3	-.095	4	0	1	4906.784	3	739.481	4
293		14	max	.006	2	.003	2	0	1	2.543e-3	4	NC	1	NC	1
294			min	-.009	3	-.012	3	-.069	4	0	1	5927.259	3	1019.392	4
295		15	max	.005	2	.002	2	0	1	2.616e-3	4	NC	1	NC	1
296			min	-.007	3	-.009	3	-.046	4	0	1	7464.18	3	1510.31	4
297		16	max	.004	2	.001	2	0	1	2.69e-3	4	NC	1	NC	1
298			min	-.005	3	-.007	3	-.028	4	0	1	NC	1	2499.293	4
299		17	max	.002	2	0	2	0	1	2.763e-3	4	NC	1	NC	1
300			min	-.003	3	-.005	3	-.014	4	0	1	NC	1	5014.601	4
301		18	max	.001	2	0	2	0	1	2.837e-3	4	NC	1	NC	1
302			min	-.002	3	-.002	3	-.005	4	0	1	NC	1	NC	1
303		19	max	0	1	0	1	0	1	2.91e-3	4	NC	1	NC	1
304			min	0	1	0	1	0	1	0	1	NC	1	NC	1
305	M7	1	max	0	1	0	1	0	1	0	1	NC	1	NC	1
306			min	0	1	0	1	0	1	-7.311e-4	4	NC	1	NC	1
307		2	max	.001	3	0	2	.014	4	0	1	NC	1	NC	1
308			min	-.001	2	-.003	3	0	1	-1.323e-4	4	NC	1	6582.255	4
309		3	max	.003	3	0	2	.026	4	4.666e-4	4	NC	1	NC	1
310			min	-.003	2	-.006	3	0	1	0	1	NC	1	3437.06	4
311		4	max	.004	3	-.001	15	.038	4	1.065e-3	4	NC	1	NC	1
312			min	-.004	2	-.008	3	0	1	0	1	NC	1	2391.05	4
313		5	max	.005	3	-.002	15	.048	4	1.664e-3	4	NC	1	NC	1
314			min	-.005	2	-.01	3	0	1	0	1	NC	1	1869.045	4
315		6	max	.007	3	-.002	15	.058	4	2.263e-3	4	NC	1	NC	1
316			min	-.006	2	-.012	3	0	1	0	1	8668.378	3	1555.827	4
317		7	max	.008	3	-.003	15	.067	4	2.862e-3	4	NC	1	NC	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
318			min	-.008	2	-.014	3	0	1	0	1	7747.993	3	1346.16	4
319		8	max	.009	3	-.003	15	.076	4	3.461e-3	4	NC	1	NC	1
320			min	-.009	2	-.015	3	0	1	0	1	7204.265	3	1194.8	4
321		9	max	.011	3	-.003	15	.084	4	4.06e-3	4	NC	1	NC	1
322			min	-.01	2	-.016	3	0	1	0	1	6924.778	3	1079.01	4
323		10	max	.012	3	-.003	15	.091	4	4.658e-3	4	NC	1	NC	1
324			min	-.012	2	-.016	3	0	1	0	1	6859.23	3	986.074	4
325		11	max	.013	3	-.003	15	.099	4	5.257e-3	4	NC	1	NC	1
326			min	-.013	2	-.016	3	0	1	0	1	6853.438	4	908.318	4
327		12	max	.015	3	-.003	15	.107	4	5.856e-3	4	NC	1	NC	1
328			min	-.014	2	-.016	3	0	1	0	1	7073.143	4	840.861	4
329		13	max	.016	3	-.003	15	.116	4	6.455e-3	4	NC	1	NC	1
330			min	-.016	2	-.016	3	0	1	0	1	7568.189	4	780.492	4
331		14	max	.017	3	-.003	15	.124	4	7.054e-3	4	NC	1	NC	1
332			min	-.017	2	-.015	3	0	1	0	1	8448	4	725.08	4
333		15	max	.019	3	-.002	15	.134	4	7.653e-3	4	NC	1	NC	1
334			min	-.018	2	-.013	3	0	1	0	1	9954.431	4	673.229	4
335		16	max	.02	3	-.002	15	.145	4	8.251e-3	4	NC	1	NC	1
336			min	-.019	2	-.012	3	0	1	0	1	NC	1	624.067	4
337		17	max	.021	3	-.001	15	.156	4	8.85e-3	4	NC	1	NC	1
338			min	-.021	2	-.01	3	0	1	0	1	NC	1	577.103	4
339		18	max	.023	3	0	10	.17	4	9.449e-3	4	NC	1	NC	1
340			min	-.022	2	-.008	3	0	1	0	1	NC	1	532.115	4
341		19	max	.024	3	0	10	.184	4	1.005e-2	4	NC	1	NC	1
342			min	-.023	2	-.006	3	0	1	0	1	NC	1	489.066	4
343	M8	1	max	.006	1	.023	2	0	1	2.829e-4	4	NC	1	NC	1
344			min	0	3	-.025	3	-.184	4	0	1	NC	1	134.47	4
345		2	max	.006	1	.021	2	0	1	2.829e-4	4	NC	1	NC	1
346			min	0	3	-.023	3	-.17	4	0	1	NC	1	146.071	4
347		3	max	.006	1	.02	2	0	1	2.829e-4	4	NC	1	NC	1
348			min	0	3	-.022	3	-.155	4	0	1	NC	1	159.887	4
349		4	max	.005	1	.019	2	0	1	2.829e-4	4	NC	1	NC	1
350			min	0	3	-.021	3	-.141	4	0	1	NC	1	176.491	4
351		5	max	.005	1	.018	2	0	1	2.829e-4	4	NC	1	NC	1
352			min	0	3	-.019	3	-.126	4	0	1	NC	1	196.662	4
353		6	max	.004	1	.016	2	0	1	2.829e-4	4	NC	1	NC	1
354			min	0	3	-.018	3	-.112	4	0	1	NC	1	221.481	4
355		7	max	.004	1	.015	2	0	1	2.829e-4	4	NC	1	NC	1
356			min	0	3	-.017	3	-.098	4	0	1	NC	1	252.483	4
357		8	max	.004	1	.014	2	0	1	2.829e-4	4	NC	1	NC	1
358			min	0	3	-.015	3	-.085	4	0	1	NC	1	291.906	4
359		9	max	.003	1	.013	2	0	1	2.829e-4	4	NC	1	NC	1
360			min	0	3	-.014	3	-.072	4	0	1	NC	1	343.118	4
361		10	max	.003	1	.011	2	0	1	2.829e-4	4	NC	1	NC	1
362			min	0	3	-.012	3	-.06	4	0	1	NC	1	411.384	4
363		11	max	.003	1	.01	2	0	1	2.829e-4	4	NC	1	NC	1
364			min	0	3	-.011	3	-.049	4	0	1	NC	1	505.314	4
365		12	max	.002	1	.009	2	0	1	2.829e-4	4	NC	1	NC	1
366			min	0	3	-.01	3	-.039	4	0	1	NC	1	639.803	4
367		13	max	.002	1	.008	2	0	1	2.829e-4	4	NC	1	NC	1
368			min	0	3	-.008	3	-.029	4	0	1	NC	1	842.484	4
369		14	max	.002	1	.006	2	0	1	2.829e-4	4	NC	1	NC	1
370			min	0	3	-.007	3	-.021	4	0	1	NC	1	1169.565	4
371		15	max	.001	1	.005	2	0	1	2.829e-4	4	NC	1	NC	1
372			min	0	3	-.006	3	-.014	4	0	1	NC	1	1750.566	4
373		16	max	.001	1	.004	2	0	1	2.829e-4	4	NC	1	NC	1
374			min	0	3	-.004	3	-.008	4	0	1	NC	1	2943.375	4

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
375		17	max	0	1	.003	2	0	1	2.829e-4	4	NC	1	NC	1
376			min	0	3	-.003	3	-.004	4	0	1	NC	1	6074.134	4
377		18	max	0	1	.001	2	0	1	2.829e-4	4	NC	1	NC	1
378			min	0	3	-.001	3	-.001	4	0	1	NC	1	NC	1
379		19	max	0	1	0	1	0	1	2.829e-4	4	NC	1	NC	1
380			min	0	1	0	1	0	1	0	1	NC	1	NC	1
381	M10	1	max	.007	2	.009	2	0	12	1.593e-3	4	NC	1	NC	2
382			min	-.01	3	-.014	3	-.585	4	1.448e-5	12	8063.612	2	119.654	4
383		2	max	.007	2	.008	2	0	12	1.665e-3	4	NC	1	NC	1
384			min	-.009	3	-.014	3	-.537	4	1.367e-5	12	9299.589	2	130.179	4
385		3	max	.006	2	.006	2	0	12	1.737e-3	4	NC	1	NC	1
386			min	-.008	3	-.013	3	-.49	4	1.286e-5	12	NC	1	142.658	4
387		4	max	.006	2	.005	2	0	12	1.81e-3	4	NC	1	NC	1
388			min	-.008	3	-.013	3	-.444	4	1.205e-5	12	NC	1	157.597	4
389		5	max	.005	2	.004	2	0	12	1.882e-3	4	NC	1	NC	1
390			min	-.007	3	-.012	3	-.398	4	1.124e-5	12	NC	1	175.682	4
391		6	max	.005	2	.003	2	0	12	1.954e-3	4	NC	1	NC	1
392			min	-.007	3	-.011	3	-.354	4	1.044e-5	12	NC	1	197.858	4
393		7	max	.005	2	.002	2	0	12	2.027e-3	4	NC	1	NC	1
394			min	-.006	3	-.011	3	-.31	4	9.627e-6	12	NC	1	225.465	4
395		8	max	.004	2	.001	2	0	12	2.099e-3	4	NC	1	NC	1
396			min	-.006	3	-.01	3	-.269	4	8.819e-6	12	NC	1	260.45	4
397		9	max	.004	2	0	2	0	12	2.172e-3	4	NC	1	NC	1
398			min	-.005	3	-.009	3	-.229	4	8.011e-6	12	NC	1	305.729	4
399		10	max	.003	2	0	2	0	12	2.244e-3	4	NC	1	NC	1
400			min	-.005	3	-.009	3	-.191	4	7.203e-6	12	NC	1	365.839	4
401		11	max	.003	2	0	2	0	12	2.316e-3	4	NC	1	NC	1
402			min	-.004	3	-.008	3	-.156	4	6.395e-6	12	NC	1	448.158	4
403		12	max	.003	2	-.001	2	0	12	2.389e-3	4	NC	1	NC	1
404			min	-.004	3	-.007	3	-.124	4	5.587e-6	12	NC	1	565.357	4
405		13	max	.002	2	-.001	2	0	12	2.461e-3	4	NC	1	NC	1
406			min	-.003	3	-.006	3	-.094	4	4.779e-6	12	NC	1	740.743	4
407		14	max	.002	2	-.001	15	0	12	2.533e-3	4	NC	1	NC	1
408			min	-.003	3	-.005	3	-.068	4	3.971e-6	12	NC	1	1021.19	4
409		15	max	.002	2	-.001	15	0	12	2.606e-3	4	NC	1	NC	1
410			min	-.002	3	-.004	3	-.046	4	3.163e-6	12	NC	1	1513.098	4
411		16	max	.001	2	0	15	0	12	2.678e-3	4	NC	1	NC	1
412			min	-.002	3	-.003	3	-.028	4	2.355e-6	12	NC	1	2504.228	4
413		17	max	0	2	0	15	0	12	2.75e-3	4	NC	1	NC	1
414			min	-.001	3	-.002	4	-.014	4	1.547e-6	12	NC	1	5025.632	4
415		18	max	0	2	0	15	0	12	2.823e-3	4	NC	1	NC	1
416			min	0	3	-.001	4	-.005	4	6.617e-7	10	NC	1	NC	1
417		19	max	0	1	0	1	0	1	2.895e-3	4	NC	1	NC	1
418			min	0	1	0	1	0	1	-4.886e-6	1	NC	1	NC	1
419	M11	1	max	0	1	0	1	0	1	2.344e-6	1	NC	1	NC	1
420			min	0	1	0	1	0	1	-7.27e-4	4	NC	1	NC	1
421		2	max	0	3	0	15	.014	4	-1.107e-6	12	NC	1	NC	1
422			min	0	2	-.002	4	0	1	-1.245e-4	4	NC	1	6617.729	4
423		3	max	0	3	0	15	.026	4	4.795e-4	5	NC	1	NC	1
424			min	0	2	-.004	4	0	1	-3.728e-5	1	NC	1	3455.816	4
425		4	max	.001	3	-.001	15	.038	4	1.08e-3	4	NC	1	NC	1
426			min	-.001	2	-.006	4	0	1	-5.71e-5	1	NC	1	2404.054	4
427		5	max	.002	3	-.002	15	.048	4	1.683e-3	4	NC	1	NC	1
428			min	-.001	2	-.008	4	0	1	-7.691e-5	1	NC	1	1878.992	4
429		6	max	.002	3	-.002	15	.058	4	2.285e-3	4	NC	1	NC	1
430			min	-.002	2	-.01	4	0	1	-9.673e-5	1	9486.126	4	1563.753	4
431		7	max	.003	3	-.003	15	.067	4	2.888e-3	4	NC	1	NC	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
432			min	-.002	2	-.011	4	0	1	-1.165e-4	1	8180.158	4	1352.545	4
433		8	max	.003	3	-.003	15	.075	4	3.49e-3	4	NC	1	NC	1
434			min	-.003	2	-.013	4	0	1	-1.364e-4	1	7375.575	4	1199.886	4
435		9	max	.003	3	-.003	15	.083	4	4.093e-3	4	NC	2	NC	1
436			min	-.003	2	-.014	4	-.001	1	-1.562e-4	1	6903.727	4	1082.923	4
437		10	max	.004	3	-.003	15	.091	4	4.695e-3	4	NC	5	NC	1
438			min	-.003	2	-.014	4	-.001	1	-1.76e-4	1	6683.155	4	988.88	4
439		11	max	.004	3	-.004	15	.099	4	5.298e-3	4	NC	5	NC	1
440			min	-.004	2	-.014	4	-.002	1	-1.958e-4	1	6681.582	4	910.057	4
441		12	max	.005	3	-.003	15	.107	4	5.9e-3	4	NC	2	NC	1
442			min	-.004	2	-.014	4	-.002	1	-2.156e-4	1	6903.542	4	841.565	4
443		13	max	.005	3	-.003	15	.116	4	6.502e-3	4	NC	1	NC	1
444			min	-.004	2	-.013	4	-.003	1	-2.354e-4	1	7393.723	4	780.2	4
445		14	max	.006	3	-.003	15	.125	4	7.105e-3	4	NC	1	NC	1
446			min	-.005	2	-.012	4	-.003	1	-2.552e-4	1	8259.776	4	723.845	4
447		15	max	.006	3	-.003	15	.134	4	7.707e-3	4	NC	1	NC	1
448			min	-.005	2	-.01	4	-.004	1	-2.751e-4	1	9738.93	4	671.125	4
449		16	max	.006	3	-.002	15	.145	4	8.31e-3	4	NC	1	NC	1
450			min	-.005	2	-.008	4	-.004	1	-2.949e-4	1	NC	1	621.19	4
451		17	max	.007	3	-.002	15	.157	4	8.912e-3	4	NC	1	NC	1
452			min	-.006	2	-.006	4	-.005	1	-3.147e-4	1	NC	1	573.567	4
453		18	max	.007	3	-.001	15	.171	4	9.515e-3	4	NC	1	NC	1
454			min	-.006	2	-.004	4	-.006	1	-3.345e-4	1	NC	1	528.05	4
455		19	max	.008	3	0	10	.186	4	1.012e-2	4	NC	1	NC	1
456			min	-.006	2	-.002	3	-.007	1	-3.543e-4	1	NC	1	484.609	4
457	M12	1	max	.002	1	.006	2	.007	1	3.579e-4	5	NC	1	NC	3
458			min	0	3	-.008	3	-.186	4	-8.871e-5	1	NC	1	133.244	4
459		2	max	.002	1	.006	2	.006	1	3.579e-4	5	NC	1	NC	3
460			min	0	3	-.008	3	-.171	4	-8.871e-5	1	NC	1	144.732	4
461		3	max	.002	1	.005	2	.006	1	3.579e-4	5	NC	1	NC	2
462			min	0	3	-.007	3	-.157	4	-8.871e-5	1	NC	1	158.414	4
463		4	max	.002	1	.005	2	.005	1	3.579e-4	5	NC	1	NC	2
464			min	0	3	-.007	3	-.142	4	-8.871e-5	1	NC	1	174.856	4
465		5	max	.002	1	.005	2	.005	1	3.579e-4	5	NC	1	NC	2
466			min	0	3	-.006	3	-.127	4	-8.871e-5	1	NC	1	194.832	4
467		6	max	.002	1	.004	2	.004	1	3.579e-4	5	NC	1	NC	2
468			min	0	3	-.006	3	-.113	4	-8.871e-5	1	NC	1	219.411	4
469		7	max	.002	1	.004	2	.004	1	3.579e-4	5	NC	1	NC	2
470			min	0	3	-.005	3	-.099	4	-8.871e-5	1	NC	1	250.114	4
471		8	max	.001	1	.004	2	.003	1	3.579e-4	5	NC	1	NC	2
472			min	0	3	-.005	3	-.086	4	-8.871e-5	1	NC	1	289.156	4
473		9	max	.001	1	.003	2	.003	1	3.579e-4	5	NC	1	NC	2
474			min	0	3	-.004	3	-.073	4	-8.871e-5	1	NC	1	339.873	4
475		10	max	.001	1	.003	2	.002	1	3.579e-4	5	NC	1	NC	1
476			min	0	3	-.004	3	-.061	4	-8.871e-5	1	NC	1	407.479	4
477		11	max	.001	1	.003	2	.002	1	3.579e-4	5	NC	1	NC	1
478			min	0	3	-.004	3	-.05	4	-8.871e-5	1	NC	1	500.502	4
479		12	max	0	1	.002	2	.001	1	3.579e-4	5	NC	1	NC	1
480			min	0	3	-.003	3	-.039	4	-8.871e-5	1	NC	1	633.689	4
481		13	max	0	1	.002	2	.001	1	3.579e-4	5	NC	1	NC	1
482			min	0	3	-.003	3	-.03	4	-8.871e-5	1	NC	1	834.408	4
483		14	max	0	1	.002	2	0	1	3.579e-4	5	NC	1	NC	1
484			min	0	3	-.002	3	-.021	4	-8.871e-5	1	NC	1	1158.317	4
485		15	max	0	1	.001	2	0	1	3.579e-4	5	NC	1	NC	1
486			min	0	3	-.002	3	-.014	4	-8.871e-5	1	NC	1	1733.677	4
487		16	max	0	1	.001	2	0	1	3.579e-4	5	NC	1	NC	1
488			min	0	3	-.001	3	-.009	4	-8.871e-5	1	NC	1	2914.884	4

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
489		17	max	0	1	0	2	0	1	3.579e-4	5	NC	1	NC	1
490			min	0	3	0	3	-.004	4	-8.871e-5	1	NC	1	6015.111	4
491		18	max	0	1	0	2	0	1	3.579e-4	5	NC	1	NC	1
492			min	0	3	0	3	-.001	4	-8.871e-5	1	NC	1	NC	1
493		19	max	0	1	0	1	0	1	3.579e-4	5	NC	1	NC	1
494			min	0	1	0	1	0	1	-8.871e-5	1	NC	1	NC	1
495	M1	1	max	.01	3	.113	2	.618	4	1.194e-2	2	NC	1	NC	1
496			min	-.005	2	-.021	3	0	12	-2.395e-2	3	NC	1	NC	1
497		2	max	.009	3	.053	2	.599	4	6.908e-3	4	NC	4	NC	1
498			min	-.005	2	-.007	3	-.005	1	-1.185e-2	3	1929.147	2	NC	1
499		3	max	.009	3	.015	3	.58	4	1.17e-2	4	NC	5	NC	1
500			min	-.005	2	-.011	2	-.007	1	-1.377e-4	1	930.842	2	6855.126	5
501		4	max	.009	3	.051	3	.559	4	1.014e-2	4	NC	5	NC	1
502			min	-.005	2	-.083	2	-.007	1	-4.627e-3	3	588.576	2	4944.325	5
503		5	max	.009	3	.098	3	.539	4	8.573e-3	4	NC	5	NC	1
504			min	-.005	2	-.158	2	-.005	1	-9.126e-3	3	425.379	2	3986.296	5
505		6	max	.009	3	.148	3	.517	4	1.215e-2	2	NC	15	NC	1
506			min	-.005	2	-.231	2	-.002	1	-1.363e-2	3	335.391	2	3407.231	5
507		7	max	.009	3	.196	3	.495	4	1.619e-2	2	NC	15	NC	1
508			min	-.005	2	-.296	2	0	3	-1.813e-2	3	282.229	2	2994.739	4
509		8	max	.009	3	.236	3	.473	4	2.024e-2	2	NC	15	NC	1
510			min	-.005	2	-.347	2	0	12	-2.262e-2	3	250.765	2	2687.228	4
511		9	max	.008	3	.261	3	.449	4	2.309e-2	2	9407.26	15	NC	1
512			min	-.005	2	-.38	2	0	1	-2.285e-2	3	234.379	2	2486.778	4
513		10	max	.008	3	.271	3	.424	4	2.514e-2	2	9207.805	15	NC	1
514			min	-.005	2	-.39	2	0	12	-2.024e-2	3	229.586	2	2421.687	4
515		11	max	.008	3	.264	3	.396	4	2.718e-2	2	9406.825	15	NC	1
516			min	-.005	2	-.379	2	0	12	-1.764e-2	3	235.232	2	2463.616	4
517		12	max	.008	3	.242	3	.366	4	2.634e-2	2	NC	15	NC	1
518			min	-.005	2	-.345	2	0	1	-1.488e-2	3	253.357	2	2621.245	4
519		13	max	.008	3	.206	3	.333	4	2.112e-2	2	NC	15	NC	1
520			min	-.005	2	-.291	2	0	1	-1.191e-2	3	288.531	2	3054.786	4
521		14	max	.007	3	.16	3	.298	4	1.591e-2	2	NC	15	NC	1
522			min	-.004	2	-.224	2	0	12	-8.943e-3	3	348.842	2	3972.562	4
523		15	max	.007	3	.109	3	.261	4	1.07e-2	2	NC	5	NC	1
524			min	-.004	2	-.149	2	0	12	-5.972e-3	3	453.031	2	5967.008	4
525		16	max	.007	3	.056	3	.225	4	8.409e-3	4	NC	5	NC	1
526			min	-.004	2	-.075	2	0	12	-3.002e-3	3	646.809	2	NC	1
527		17	max	.007	3	.005	3	.191	4	9.582e-3	4	NC	5	NC	1
528			min	-.004	2	-.006	2	0	12	-3.154e-5	3	1062.759	2	NC	1
529		18	max	.007	3	.05	2	.161	4	9.412e-3	2	NC	4	NC	1
530			min	-.004	2	-.04	3	0	12	-3.992e-3	3	2264.865	2	NC	1
531		19	max	.007	3	.1	2	.134	4	1.888e-2	2	NC	1	NC	1
532			min	-.004	2	-.083	3	0	1	-8.115e-3	3	NC	1	NC	1
533	M5	1	max	.03	3	.251	2	.618	4	0	1	NC	1	NC	1
534			min	-.021	2	-.018	3	0	1	-6.049e-6	4	NC	1	NC	1
535		2	max	.03	3	.115	2	.603	4	6.01e-3	4	NC	5	NC	1
536			min	-.021	2	.001	3	0	1	0	1	856.452	2	9508.394	4
537		3	max	.03	3	.047	3	.585	4	1.184e-2	4	NC	5	NC	1
538			min	-.021	2	-.036	2	0	1	0	1	403.756	2	5565.301	4
539		4	max	.029	3	.142	3	.564	4	9.646e-3	4	NC	15	NC	1
540			min	-.02	2	-.216	2	0	1	0	1	247.794	2	4301.391	4
541		5	max	.028	3	.27	3	.542	4	7.452e-3	4	7962.822	15	NC	1
542			min	-.02	2	-.41	2	0	1	0	1	174.787	2	3696.486	4
543		6	max	.028	3	.413	3	.518	4	5.258e-3	4	6127.547	15	NC	1
544			min	-.02	2	-.603	2	0	1	0	1	135.32	2	3325.477	4
545		7	max	.027	3	.552	3	.495	4	3.065e-3	4	5068.304	15	NC	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
546			min	-.019	2	-.777	2	0	1	0	1	112.384	2	3030.148	4
547		8	max	.027	3	.668	3	.472	4	8.713e-4	4	4452.686	15	NC	1
548			min	-.019	2	-.917	2	0	1	0	1	98.988	2	2735.419	4
549		9	max	.026	3	.742	3	.449	4	0	1	4137.094	15	NC	1
550			min	-.019	2	-1.005	2	0	1	-4.332e-6	5	92.096	2	2480.784	4
551		10	max	.025	3	.769	3	.423	4	0	1	4042.042	15	NC	1
552			min	-.018	2	-1.035	2	0	1	-4.201e-6	5	90.085	2	2437.656	4
553		11	max	.025	3	.749	3	.396	4	0	1	4137.265	15	NC	1
554			min	-.018	2	-1.005	2	0	1	-4.069e-6	5	92.448	2	2492.676	4
555		12	max	.024	3	.684	3	.367	4	6.784e-4	4	4453.087	15	NC	1
556			min	-.018	2	-.912	2	0	1	0	1	100.142	2	2573.811	4
557		13	max	.024	3	.58	3	.334	4	2.387e-3	4	5069.111	15	NC	1
558			min	-.018	2	-.764	2	0	1	0	1	115.377	2	3003.976	4
559		14	max	.023	3	.449	3	.297	4	4.096e-3	4	6129.111	15	NC	1
560			min	-.017	2	-.581	2	0	1	0	1	142.069	2	4143.766	4
561		15	max	.023	3	.303	3	.258	4	5.805e-3	4	7965.896	15	NC	1
562			min	-.017	2	-.382	2	0	1	0	1	189.502	2	7376.412	4
563		16	max	.022	3	.154	3	.22	4	7.514e-3	4	NC	15	NC	1
564			min	-.017	2	-.189	2	0	1	0	1	281.061	2	NC	1
565		17	max	.021	3	.016	3	.185	4	9.223e-3	4	NC	5	NC	1
566			min	-.017	2	-.02	2	0	1	0	1	485.816	2	NC	1
567		18	max	.021	3	.107	2	.157	4	4.683e-3	4	NC	5	NC	1
568			min	-.016	2	-.102	3	0	1	0	1	1079.01	2	NC	1
569		19	max	.021	3	.21	2	.135	4	0	1	NC	1	NC	1
570			min	-.016	2	-.209	3	0	1	-3.595e-6	4	NC	1	NC	1
571	M9	1	max	.01	3	.113	2	.618	4	2.395e-2	3	NC	1	NC	1
572			min	-.005	2	-.021	3	0	1	-1.194e-2	2	NC	1	NC	1
573		2	max	.009	3	.053	2	.603	4	1.185e-2	3	NC	4	NC	1
574			min	-.005	2	-.007	3	0	12	-5.859e-3	2	1929.147	2	9962.273	4
575		3	max	.009	3	.015	3	.584	4	1.181e-2	4	NC	5	NC	1
576			min	-.005	2	-.011	2	0	12	-2.473e-5	10	930.842	2	5744.725	4
577		4	max	.009	3	.051	3	.564	4	9.316e-3	5	NC	5	NC	1
578			min	-.005	2	-.083	2	0	12	-4.052e-3	2	588.576	2	4370.673	4
579		5	max	.009	3	.098	3	.541	4	9.126e-3	3	NC	5	NC	1
580			min	-.005	2	-.158	2	0	12	-8.099e-3	2	425.379	2	3702.279	4
581		6	max	.009	3	.148	3	.518	4	1.363e-2	3	NC	15	NC	1
582			min	-.005	2	-.231	2	0	12	-1.215e-2	2	335.391	2	3295.47	4
583		7	max	.009	3	.196	3	.495	4	1.813e-2	3	NC	15	NC	1
584			min	-.005	2	-.296	2	0	1	-1.619e-2	2	282.229	2	2990.593	4
585		8	max	.009	3	.236	3	.472	4	2.262e-2	3	NC	15	NC	1
586			min	-.005	2	-.347	2	0	1	-2.024e-2	2	250.765	2	2712.987	4
587		9	max	.008	3	.261	3	.449	4	2.285e-2	3	9384.87	15	NC	1
588			min	-.005	2	-.38	2	0	12	-2.309e-2	2	234.379	2	2479.459	4
589		10	max	.008	3	.271	3	.424	4	2.024e-2	3	9185.951	15	NC	1
590			min	-.005	2	-.39	2	0	1	-2.514e-2	2	229.586	2	2422.933	4
591		11	max	.008	3	.264	3	.396	4	1.764e-2	3	9384.426	15	NC	1
592			min	-.005	2	-.379	2	0	1	-2.718e-2	2	235.232	2	2472.845	4
593		12	max	.008	3	.242	3	.367	4	1.488e-2	3	NC	15	NC	1
594			min	-.005	2	-.345	2	0	12	-2.634e-2	2	253.357	2	2597.405	4
595		13	max	.008	3	.206	3	.333	4	1.191e-2	3	NC	15	NC	1
596			min	-.005	2	-.291	2	0	12	-2.112e-2	2	288.531	2	3055.037	4
597		14	max	.007	3	.16	3	.296	4	8.943e-3	3	NC	15	NC	1
598			min	-.004	2	-.224	2	-.002	1	-1.591e-2	2	348.842	2	4113.671	5
599		15	max	.007	3	.109	3	.258	4	5.972e-3	3	NC	5	NC	1
600			min	-.004	2	-.149	2	-.004	1	-1.07e-2	2	453.031	2	6638.691	5
601		16	max	.007	3	.056	3	.221	4	7.43e-3	5	NC	5	NC	1
602			min	-.004	2	-.075	2	-.006	1	-5.487e-3	2	646.809	2	NC	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
603		17	max	.007	3	.005	3	.187	4	9.317e-3	4	NC	5	NC	1
604			min	-.004	2	-.006	2	-.007	1	-4.79e-4	1	1062.759	2	NC	1
605		18	max	.007	3	.05	2	.158	4	4.492e-3	5	NC	4	NC	1
606			min	-.004	2	-.04	3	-.005	1	-9.412e-3	2	2264.865	2	NC	1
607		19	max	.007	3	.1	2	.135	4	8.115e-3	3	NC	1	NC	1
608			min	-.004	2	-.083	3	0	12	-1.888e-2	2	NC	1	NC	1

1.Project information

Customer company:
Customer contact name:
Customer e-mail:
Comment:

Project description:
Location:
Fastening description:

2. Input Data & Anchor Parameters

General
Design method:ACI 318-05
Units: Imperial units

Anchor Information:
Anchor type: Bonded anchor
Material: A193 Grade B8/B8M (304/316SS)
Diameter (inch): 0.500
Effective Embedment depth, h_{ef} (inch): 6.000
Code report: IAPMO UES ER-263
Anchor category: -
Anchor ductility: Yes
h_{min} (inch): 8.50
c_{ac} (inch): 9.67
C_{min} (inch): 1.75
S_{min} (inch): 3.00

Load and Geometry
Load factor source: ACI 318 Section 9.2
Load combination: not set
Seismic design: No
Anchors subjected to sustained tension: No
Apply entire shear load at front row: No
Anchors only resisting wind and/or seismic loads: No

Base Material
Concrete: Normal-weight
Concrete thickness, h (inch): 18.00
State: Cracked
Compressive strength, f'_c (psi): 2500
$\Psi_{c,V}$: 1.0
Reinforcement condition: B tension, B shear
Supplemental reinforcement: Not applicable
Reinforcement provided at corners: No
Do not evaluate concrete breakout in tension: No
Do not evaluate concrete breakout in shear: No
Hole condition: Dry concrete
Inspection: Periodic
Temperature range, Short/Long: 110/75°F
Ignore 6do requirement: Not applicable
Build-up grout pad: No

Base Plate
Length x Width x Thickness (inch): 4.00 x 4.00 x 0.28

<Figure 1>

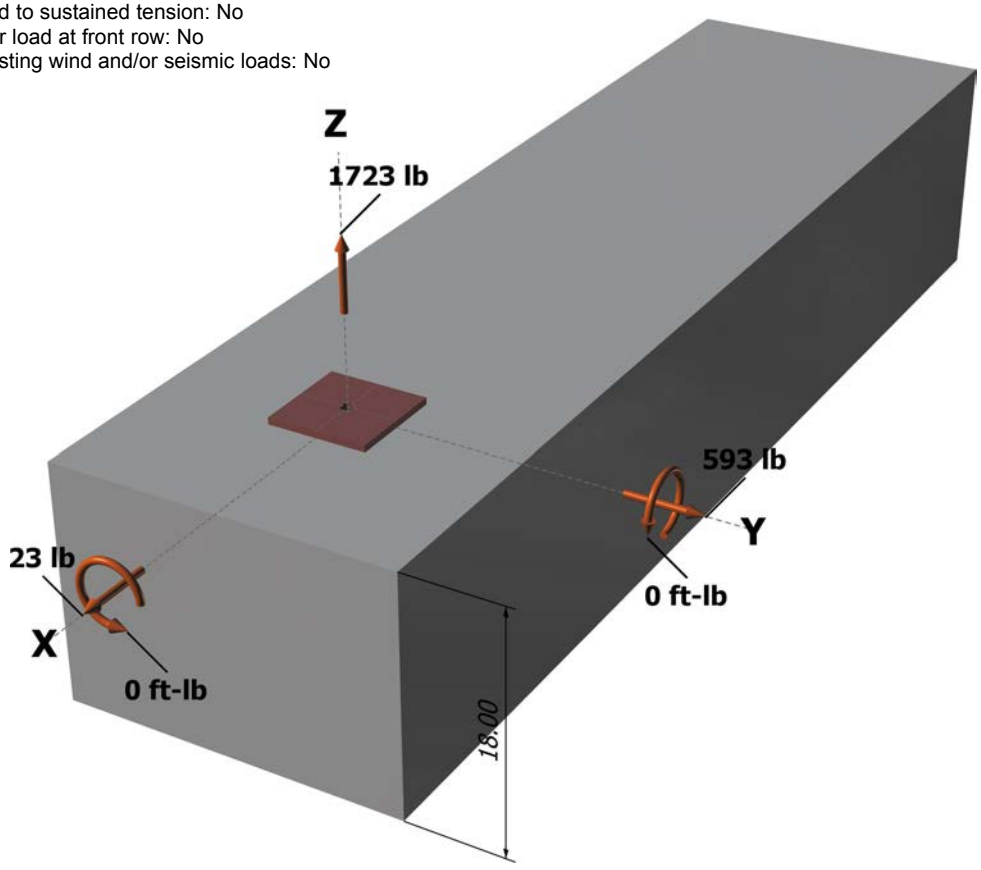

<Figure 2>

Recommended Anchor
Anchor Name: AT-XP® - AT-XP w/ 1/2"Ø A193 Gr. B8/B8M (304/316SS)
Code Report: IAPMO UES ER-263

3. Resulting Anchor Forces

Anchor	Tension load, N_{ua} (lb)	Shear load x, V_{uax} (lb)	Shear load y, V_{uay} (lb)	Shear load combined, $\sqrt{(V_{uax})^2+(V_{uay})^2}$ (lb)
1	1723.0	23.0	593.0	593.4
Sum	1723.0	23.0	593.0	593.4

Maximum concrete compression strain (‰): 0.00
Maximum concrete compression stress (psi): 0
Resultant tension force (lb): 1723
Resultant compression force (lb): 0
Eccentricity of resultant tension forces in x-axis, e'_{Nx} (inch): 0.00
Eccentricity of resultant tension forces in y-axis, e'_{Ny} (inch): 0.00
Eccentricity of resultant shear forces in x-axis, e'_{Vx} (inch): 0.00
Eccentricity of resultant shear forces in y-axis, e'_{Vy} (inch): 0.00

<Figure 3>

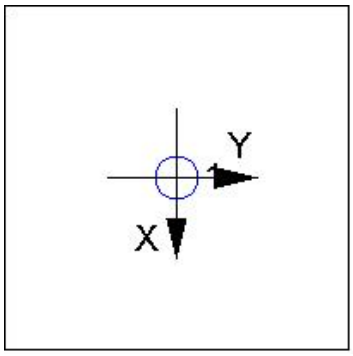

4. Steel Strength of Anchor in Tension(Sec. D.5.1)

N_{sa} (lb)	ϕ	ϕN_{sa} (lb)
8095	0.75	6071

5. Concrete Breakout Strength of Anchor in Tension (Sec. D.5.2)

$N_b = k_c \lambda \sqrt{f'_c} h_{ef}^{1.5}$ (Eq. D-7)

k_c	λ	f'_c (psi)	h_{ef} (in)	N_b (lb)
17.0	1.00	2500	5.247	10215

$\phi N_{cb} = \phi \, (A_{Nc} / A_{Nco}) \, \Psi_{ed,N} \, \Psi_{c,N} \, \Psi_{cp,N} N_b$ (Sec. D.4.1 & Eq. D-4)

A_{Nc} (in²)	A_{Nco} (in²)	$\Psi_{ed,N}$	$\Psi_{c,N}$	$\Psi_{cp,N}$	N_b (lb)	ϕ	ϕN_{cb} (lb)
220.36	247.75	0.967	1.00	1.000	10215	0.65	5710

6. Adhesive Strength of Anchor in Tension (AC308 Sec. 3.3)

$\tau_{k,cr} = \tau_{k,cr} f_{short\text{-}term} K_{sat}$

$\tau_{k,cr}$ (psi)	$f_{short\text{-}term}$	K_{sat}	$\tau_{k,cr}$ (psi)
1035	1.00	1.00	1035

$N_{a0} = \tau_{k,cr} \pi d_a h_{ef}$ (Eq. D-16f)

$\tau_{k,cr}$ (psi)	d_a (in)	h_{ef} (in)	N_{a0} (lb)
1035	0.50	6.000	9755

$\phi N_a = \phi \, (A_{Na} / A_{Na0}) \, \Psi_{ed,Na} \, \Psi_{p,Na} N_{a0}$ (Sec. D.4.1 & Eq. D-16a)

A_{Na} (in²)	A_{Na0} (in²)	$\Psi_{ed,Na}$	$\Psi_{p,Na}$	N_{a0} (lb)	ϕ	ϕN_a (lb)
109.66	109.66	1.000	1.000	9755	0.55	5365

8. Steel Strength of Anchor in Shear (Sec. D.6.1)

V_{sa} (lb)	ϕ_{grout}	ϕ	$\phi_{grout}\phi V_{sa}$ (lb)
4855	1.0	0.65	3156

9. Concrete Breakout Strength of Anchor in Shear (Sec. D.6.2)

Shear perpendicular to edge in y-direction:

$V_{by} = 7(l_e / d_a)^{0.2}\sqrt{d_a}\lambda\sqrt{f'_c}c_{a1}^{1.5}$ (Eq. D-24)

l_e (in)	d_a (in)	λ	f'_c (psi)	c_{a1} (in)	V_{by} (lb)
4.00	0.50	1.00	2500	7.00	6947

$\phi V_{cby} = \phi\,(A_{Vc} / A_{Vco})\,\Psi_{ed,V}\,\Psi_{c,V}\,\Psi_{h,V}V_{by}$ (Sec. D.4.1 & Eq. D-21)

A_{Vc} (in^2)	A_{Vco} (in^2)	$\Psi_{ed,V}$	$\Psi_{c,V}$	$\Psi_{h,V}$	V_{by} (lb)	ϕ	ϕV_{cby} (lb)
192.89	220.50	0.925	1.000	1.000	6947	0.70	3934

Shear perpendicular to edge in x-direction:

$V_{bx} = 7(l_e / d_a)^{0.2}\sqrt{d_a}\lambda\sqrt{f'_c}c_{a1}^{1.5}$ (Eq. D-24)

l_e (in)	d_a (in)	λ	f'_c (psi)	c_{a1} (in)	V_{bx} (lb)
4.00	0.50	1.00	2500	7.87	8282

$\phi V_{cbx} = \phi\,(A_{Vc} / A_{Vco})\,\Psi_{ed,V}\,\Psi_{c,V}\,\Psi_{h,V}V_{bx}$ (Sec. D.4.1 & Eq. D-21)

A_{Vc} (in^2)	A_{Vco} (in^2)	$\Psi_{ed,V}$	$\Psi_{c,V}$	$\Psi_{h,V}$	V_{bx} (lb)	ϕ	ϕV_{cbx} (lb)
165.27	278.72	0.878	1.000	1.000	8282	0.70	3018

Shear parallel to edge in x-direction:

$V_{by} = 7(l_e / d_a)^{0.2}\sqrt{d_a}\lambda\sqrt{f'_c}c_{a1}^{1.5}$ (Eq. D-24)

l_e (in)	d_a (in)	λ	f'_c (psi)	c_{a1} (in)	V_{by} (lb)
4.00	0.50	1.00	2500	7.00	6947

$\phi V_{cbx} = \phi\,(2)(A_{Vc} / A_{Vco})\,\Psi_{ed,V}\,\Psi_{c,V}\,\Psi_{h,V}V_{by}$ (Sec. D.4.1, D.6.2.1(c) & Eq. D-21)

A_{Vc} (in^2)	A_{Vco} (in^2)	$\Psi_{ed,V}$	$\Psi_{c,V}$	$\Psi_{h,V}$	V_{by} (lb)	ϕ	ϕV_{cbx} (lb)
192.89	220.50	1.000	1.000	1.000	6947	0.70	8508

Shear parallel to edge in y-direction:

$V_{bx} = 7(l_e / d_a)^{0.2}\sqrt{d_a}\lambda\sqrt{f'_c}c_{a1}^{1.5}$ (Eq. D-24)

l_e (in)	d_a (in)	λ	f'_c (psi)	c_{a1} (in)	V_{bx} (lb)
4.00	0.50	1.00	2500	7.87	8282

$\phi V_{cby} = \phi\,(2)(A_{Vc} / A_{Vco})\,\Psi_{ed,V}\,\Psi_{c,V}\,\Psi_{h,V}V_{bx}$ (Sec. D.4.1, D.6.2.1(c) & Eq. D-21)

A_{Vc} (in^2)	A_{Vco} (in^2)	$\Psi_{ed,V}$	$\Psi_{c,V}$	$\Psi_{h,V}$	V_{bx} (lb)	ϕ	ϕV_{cby} (lb)
165.27	278.72	1.000	1.000	1.000	8282	0.70	6875

10. Concrete Pryout Strength of Anchor in Shear (Sec. D.6.3)

$\phi V_{cp} = \phi \min|k_{cp}N_a\,;\,k_{cp}N_{cb}| = \phi \min|k_{cp}(A_{Na} / A_{Na0})\,\Psi_{ed,Na}\,\Psi_{p,Na}N_{a0}\,;\,k_{cp}(A_{Nc} / A_{Nco})\,\Psi_{ed,N}\,\Psi_{c,N}\,\Psi_{cp,N}N_b|$ (Eq. D-30a)

k_{cp}	A_{Na} (in^2)	A_{Na0} (in^2)	$\Psi_{ed,Na}$	$\Psi_{p,Na}$	N_{a0} (lb)	N_a (lb)
2.0	109.66	109.66	1.000	1.000	9755	9755

A_{Nc} (in^2)	A_{Nco} (in^2)	$\Psi_{ed,N}$	$\Psi_{c,N}$	$\Psi_{cp,N}$	N_b (lb)	N_{cb} (lb)	ϕ	ϕV_{cp} (lb)
220.36	247.75	0.967	1.000	1.000	10215	8785	0.70	12298

11. Results

Interaction of Tensile and Shear Forces (Sec. D.7)

Tension	Factored Load, N_{ua} (lb)	Design Strength, ϕN_n (lb)	Ratio	Status
Steel	1723	6071	0.28	Pass
Concrete breakout	1723	5710	0.30	Pass
Adhesive	**1723**	**5365**	**0.32**	**Pass (Governs)**

Shear	Factored Load, V_{ua} (lb)	Design Strength, ϕV_n (lb)	Ratio	Status
Steel	**593**	**3156**	**0.19**	**Pass (Governs)**
T Concrete breakout y+	593	3934	0.15	Pass
T Concrete breakout x+	23	3018	0.01	Pass
|| Concrete breakout y+	23	8508	0.00	Pass
|| Concrete breakout x+	593	6875	0.09	Pass
Concrete breakout, combined	-	-	0.15	Pass
Pryout	593	12298	0.05	Pass

Interaction check	$N_{ua}/\phi N_n$	$V_{ua}/\phi V_n$	Combined Ratio	Permissible	Status
Sec. D.7.1	0.32	0.00	32.1 %	1.0	Pass

AT-XP w/ 1/2"Ø A193 Gr. B8/B8M (304/316SS) with hef = 6.000 inch meets the selected design criteria.

12. Warnings

- This temperature range is currently outside the scope of ACI 318-11 and ACI 355.4, and is provided for historical purposes.

- Designer must exercise own judgement to determine if this design is suitable.

- Refer to manufacturer's product literature for hole cleaning and installation instructions.

1.Project information

Customer company:
Customer contact name:
Customer e-mail:
Comment:

Project description:
Location:
Fastening description:

2. Input Data & Anchor Parameters

General
Design method:ACI 318-05
Units: Imperial units

Anchor Information:
Anchor type: Bonded anchor
Material: A193 Grade B8/B8M (304/316SS)
Diameter (inch): 0.500
Effective Embedment depth, h_{ef} (inch): 6.000
Code report: IAPMO UES ER-263
Anchor category: -
Anchor ductility: Yes
h_{min} (inch): 8.50
c_{ac} (inch): 9.67
C_{min} (inch): 1.75
S_{min} (inch): 3.00

Load and Geometry
Load factor source: ACI 318 Section 9.2
Load combination: not set
Seismic design: No
Anchors subjected to sustained tension: No
Apply entire shear load at front row: No
Anchors only resisting wind and/or seismic loads: No

<Figure 1>

Base Material
Concrete: Normal-weight
Concrete thickness, h (inch): 18.00
State: Cracked
Compressive strength, f'_c (psi): 2500
$\Psi_{c,V}$: 1.0
Reinforcement condition: B tension, B shear
Supplemental reinforcement: Not applicable
Reinforcement provided at corners: No
Do not evaluate concrete breakout in tension: No
Do not evaluate concrete breakout in shear: No
Hole condition: Dry concrete
Inspection: Periodic
Temperature range, Short/Long: 110/75°F
Ignore 6do requirement: Not applicable
Build-up grout pad: No

Base Plate
Length x Width x Thickness (inch): 4.00 x 7.00 x 0.28

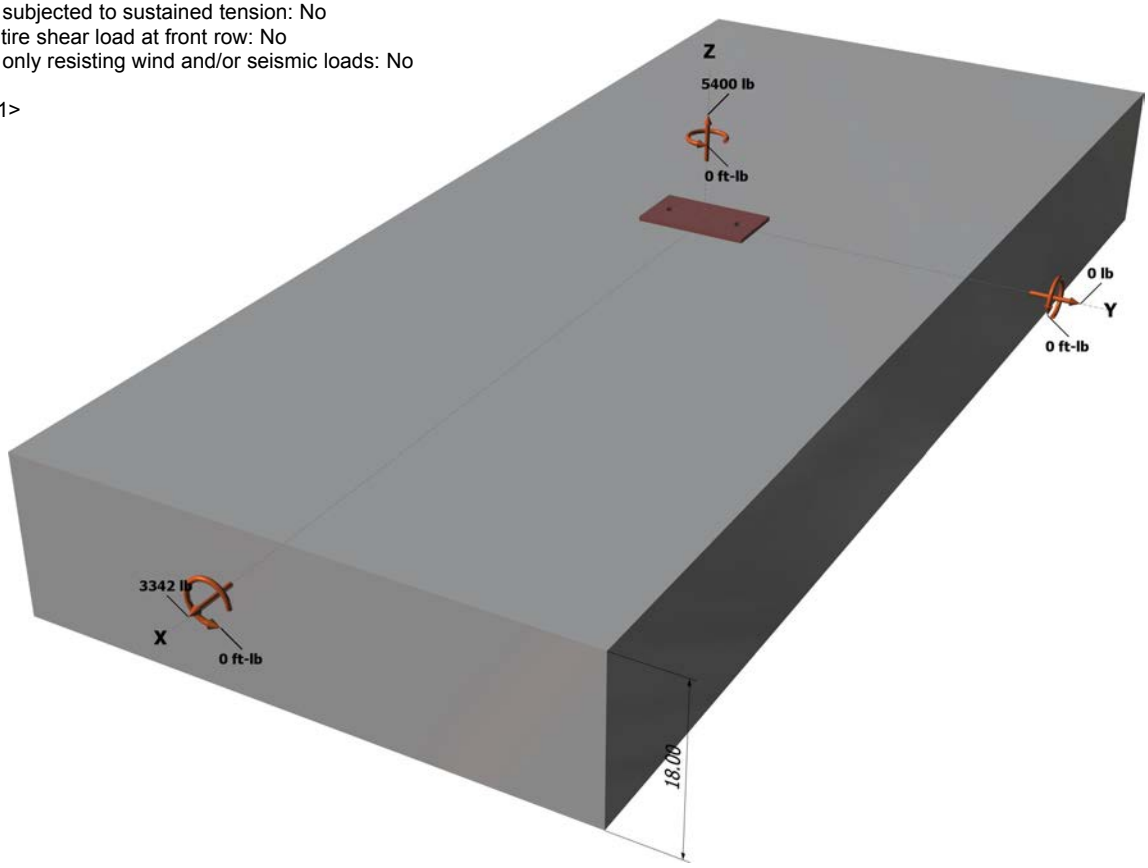

<Figure 2>

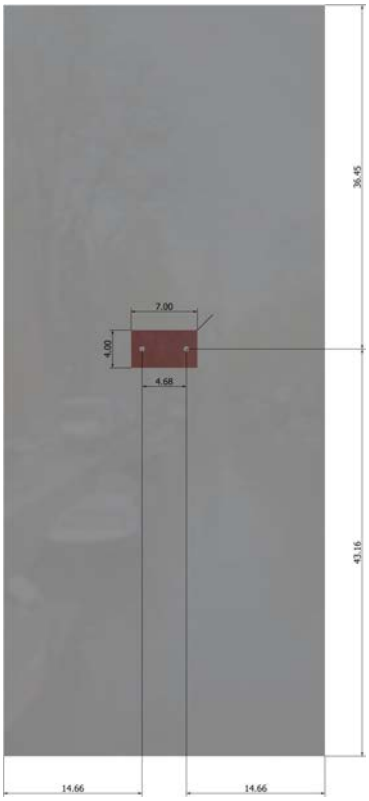

Recommended Anchor
Anchor Name: AT-XP® - AT-XP w/ 1/2"Ø A193 Gr. B8/B8M (304/316SS)
Code Report: IAPMO UES ER-263

3. Resulting Anchor Forces

Anchor	Tension load, N_{ua} (lb)	Shear load x, V_{uax} (lb)	Shear load y, V_{uay} (lb)	Shear load combined, $\sqrt{(V_{uax})^2+(V_{uay})^2}$ (lb)
1	2700.0	1671.0	0.0	1671.0
2	2700.0	1671.0	0.0	1671.0
Sum	5400.0	3342.0	0.0	3342.0

Maximum concrete compression strain (‰): 0.00
Maximum concrete compression stress (psi): 0
Resultant tension force (lb): 5400
Resultant compression force (lb): 0
Eccentricity of resultant tension forces in x-axis, e'_{Nx} (inch): 0.00
Eccentricity of resultant tension forces in y-axis, e'_{Ny} (inch): 0.00
Eccentricity of resultant shear forces in x-axis, e'_{Vx} (inch): 0.00
Eccentricity of resultant shear forces in y-axis, e'_{Vy} (inch): 0.00

<Figure 3>

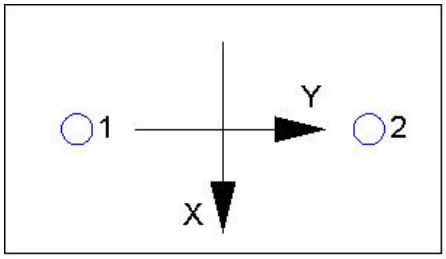

4. Steel Strength of Anchor in Tension(Sec. D.5.1)

N_{sa} (lb)	ϕ	ϕN_{sa} (lb)
8095	0.75	6071

5. Concrete Breakout Strength of Anchor in Tension (Sec. D.5.2)

$N_b = k_c \lambda \sqrt{f'_c} h_{ef}^{1.5}$ (Eq. D-7)

k_c	λ	f'_c (psi)	h_{ef} (in)	N_b (lb)
17.0	1.00	2500	6.000	12492

$\phi N_{cbg} = \phi (A_{Nc} / A_{Nco}) \Psi_{ec,N} \Psi_{ed,N} \Psi_{c,N} \Psi_{cp,N} N_b$ (Sec. D.4.1 & Eq. D-5)

A_{Nc} (in²)	A_{Nco} (in²)	$\Psi_{ec,N}$	$\Psi_{ed,N}$	$\Psi_{c,N}$	$\Psi_{cp,N}$	N_b (lb)	ϕ	ϕN_{cbg} (lb)
408.24	324.00	1.000	1.000	1.00	1.000	12492	0.65	10231

6. Adhesive Strength of Anchor in Tension (AC308 Sec. 3.3)

$\tau_{k,cr} = \tau_{k,cr} f_{short\text{-}term} K_{sat}$

$\tau_{k,cr}$ (psi)	$f_{short\text{-}term}$	K_{sat}	$\tau_{k,cr}$ (psi)
1035	1.00	1.00	1035

$N_{a0} = \tau_{k,cr} \pi d_a h_{ef}$ (Eq. D-16f)

$\tau_{k,cr}$ (psi)	d_a (in)	h_{ef} (in)	N_{a0} (lb)
1035	0.50	6.000	9755

$\phi N_{ag} = \phi (A_{Na} / A_{Na0}) \Psi_{ed,Na} \Psi_{g,Na} \Psi_{ec,Na} \Psi_{p,Na} N_{a0}$ (Sec. D.4.1 & Eq. D-16b)

A_{Na} (in²)	A_{Na0} (in²)	$\Psi_{ed,Na}$	$\Psi_{g,Na}$	$\Psi_{ec,Na}$	$\Psi_{p,Na}$	N_{a0}(lb)	ϕ	ϕN_{ag} (lb)
158.66	109.66	1.000	1.043	1.000	1.000	9755	0.55	8093

8. Steel Strength of Anchor in Shear (Sec. D.6.1)

V_{sa} (lb)	ϕ_{grout}	ϕ	$\phi_{grout}\phi V_{sa}$ (lb)
4855	1.0	0.65	3156

9. Concrete Breakout Strength of Anchor in Shear (Sec. D.6.2)

Shear perpendicular to edge in x-direction:

$V_{bx} = 7(l_e / d_a)^{0.2}\sqrt{d_a}\lambda\sqrt{f'_c}c_{a1}^{1.5}$ (Eq. D-24)

l_e (in)	d_a (in)	λ	f'_c (psi)	c_{a1} (in)	V_{bx} (lb)
4.00	0.50	1.00	2500	12.00	15593

$\phi V_{cbgx} = \phi\,(A_{Vc} / A_{Vco})\,\Psi_{ec,V}\,\Psi_{ed,V}\,\Psi_{c,V}\,\Psi_{h,V}V_{bx}$ (Sec. D.4.1 & Eq. D-22)

A_{Vc} (in^2)	A_{Vco} (in^2)	$\Psi_{ec,V}$	$\Psi_{ed,V}$	$\Psi_{c,V}$	$\Psi_{h,V}$	V_{bx} (lb)	ϕ	ϕV_{cbgx} (lb)
612.00	648.00	1.000	0.944	1.000	1.000	15593	0.70	9735

Shear parallel to edge in x-direction:

$V_{by} = 7(l_e / d_a)^{0.2}\sqrt{d_a}\lambda\sqrt{f'_c}c_{a1}^{1.5}$ (Eq. D-24)

l_e (in)	d_a (in)	λ	f'_c (psi)	c_{a1} (in)	V_{by} (lb)
4.00	0.50	1.00	2500	14.66	21056

$\phi V_{cbx} = \phi\,(2)(A_{Vc} / A_{Vco})\,\Psi_{ed,V}\,\Psi_{c,V}\,\Psi_{h,V}V_{by}$ (Sec. D.4.1, D.6.2.1(c) & Eq. D-21)

A_{Vc} (in^2)	A_{Vco} (in^2)	$\Psi_{ed,V}$	$\Psi_{c,V}$	$\Psi_{h,V}$	V_{by} (lb)	ϕ	ϕV_{cbx} (lb)
791.64	967.12	1.000	1.000	1.000	21056	0.70	24129

10. Concrete Pryout Strength of Anchor in Shear (Sec. D.6.3)

$\phi V_{cpg} = \phi \min|k_{cp}N_{ag}\,;\, k_{cp}N_{cbg}| = \phi \min|k_{cp}(A_{Na} / A_{Na0})\,\Psi_{ed,Na}\,\Psi_{g,Na}\,\Psi_{ec,Na}\,\Psi_{p,Na}N_{a0}\,;\, k_{cp}(A_{Nc} / A_{Nco})\,\Psi_{ec,N}\,\Psi_{ed,N}\,\Psi_{c,N}\,\Psi_{cp,N}N_b|$ (Eq. D-30b)

k_{cp}	A_{Na} (in^2)	A_{Na0} (in^2)	$\Psi_{ed,Na}$	$\Psi_{g,Na}$	$\Psi_{ec,Na}$	$\Psi_{p,Na}$	N_{a0} (lb)	N_a (lb)
2.0	158.66	109.66	1.000	1.043	1.000	1.000	9755	14715

A_{Nc} (in^2)	A_{Nco} (in^2)	$\Psi_{ec,N}$	$\Psi_{ed,N}$	$\Psi_{c,N}$	$\Psi_{cp,N}$	N_b (lb)	N_{cb} (lb)	ϕ
408.24	324.00	1.000	1.000	1.000	1.000	12492	15740	0.70

ϕV_{cpg} (lb)
20601

11. Results

Interaction of Tensile and Shear Forces (Sec. D.7)

Tension	Factored Load, N_{ua} (lb)	Design Strength, øN_n (lb)	Ratio	Status
Steel	2700	6071	0.44	Pass
Concrete breakout	5400	10231	0.53	Pass
Adhesive	**5400**	**8093**	**0.67**	**Pass (Governs)**

Shear	Factored Load, V_{ua} (lb)	Design Strength, øV_n (lb)	Ratio	Status
Steel	**1671**	**3156**	**0.53**	**Pass (Governs)**
T Concrete breakout x+	3342	9735	0.34	Pass
|| Concrete breakout y-	1671	24129	0.07	Pass
Pryout	3342	20601	0.16	Pass

Interaction check	$N_{ua}/\phi N_n$	$V_{ua}/\phi V_n$	Combined Ratio	Permissible	Status

Sec. D.7.3	0.67	0.53	119.7 %	1.2	Pass

AT-XP w/ 1/2"Ø A193 Gr. B8/B8M (304/316SS) with hef = 6.000 inch meets the selected design criteria.

12. Warnings

- This temperature range is currently outside the scope of ACI 318-11 and ACI 355.4, and is provided for historical purposes.

- Designer must exercise own judgement to determine if this design is suitable.

- Refer to manufacturer's product literature for hole cleaning and installation instructions.