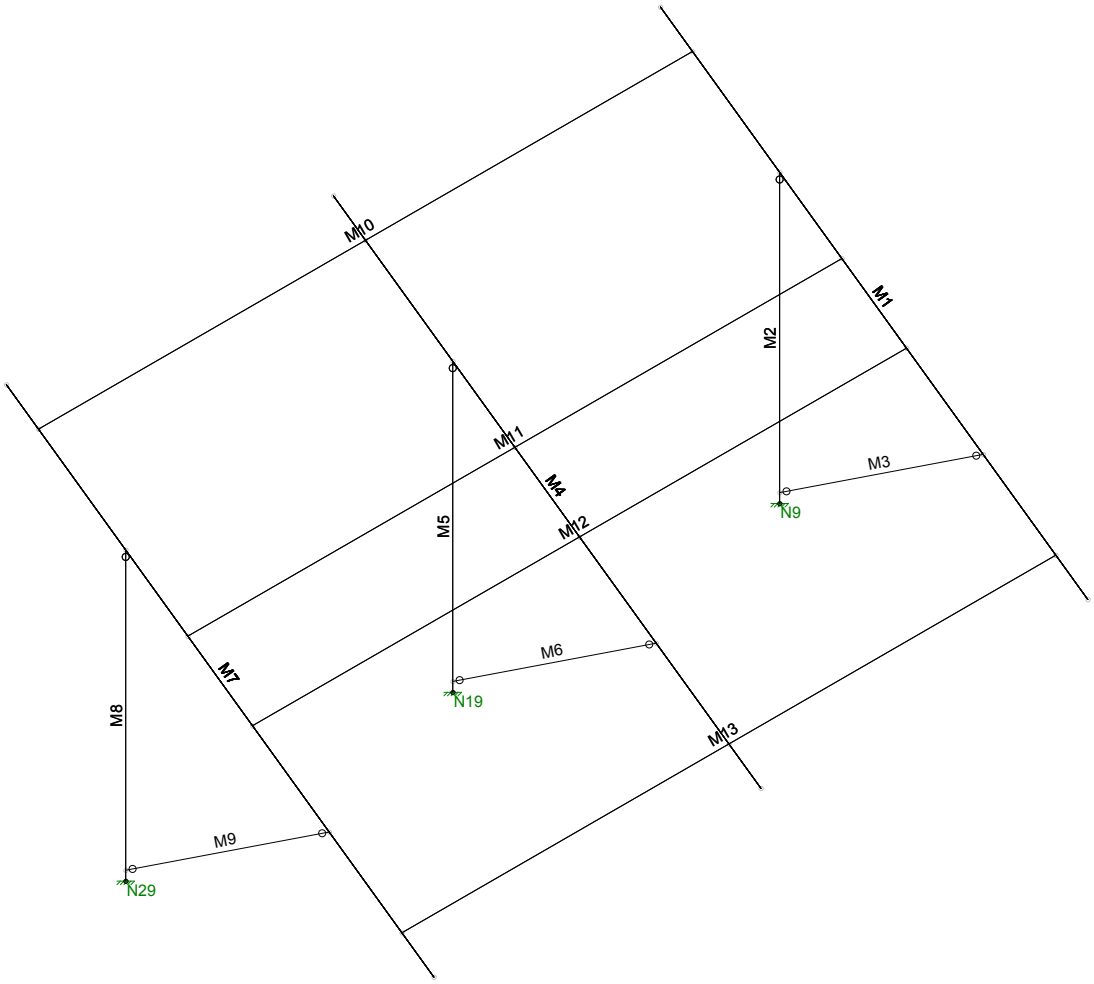

Schletter, Inc.		35° Tilt w/o Seismic Design
HCV	Standard FS Racking System	
	Representative Calculations - ASCE 7-10	

1. INTRODUCTION

1.1 Project Description

The following sections will cover the determination of forces and structural design calculations for the Schletter, Inc. FS ground mount system.

1.2 Construction

Photovoltaic modules are attached to aluminum purlins using clamp fasteners. Purlins are clamped to inclined aluminum girders, which are then connected to galvanized steel posts. Each support structure is equally spaced.

PV modules are required to meet the following specifications:

	Maximum		Minimum
Height =	1700 mm	Height =	1550 mm
Width =	1050 mm	Width =	970 mm
Dead Load =	3.00 psf	Dead Load =	1.75 psf

Modules Per Row =	2
Module Tilt =	35°
Maximum Height Above Grade =	3 ft

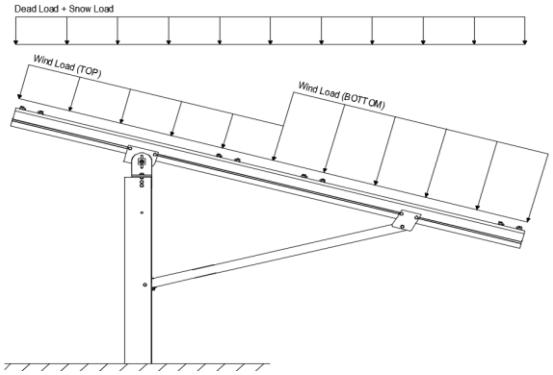

Typical loading conditions of the module dead loads, snow loads, and wind loads are shown on the left.

1.3 Technical Codes

- ASCE 7-10 - Chapter 26-31, Wind Loads
- ASCE 7-10 - Chapter 7, Snow Loads
- ASCE 7-10 - Chapter 2, Combination of Loads
- International Building Code, IBC, 2012, 2015
- Aluminum Design Manual, Eighth Edition, 2005

2. LOAD ACTIONS

2.1 Permanent Loads

g_{MAX} =	3.00 psf	*Self-weight of the PV modules.*
g_{MIN} =	1.75 psf	

2.2 Snow Loads

Ground Snow Load, P_g =	30.00 psf	
Sloped Roof Snow Load, P_s =	14.43 psf	*(ASCE 7-10, Eq. 7.4-1)*
I_s =	1.00	
C_s =	0.64	
C_e =	0.90	
C_t =	1.20	

2.3 Wind Loads

Design Wind Speed, V =	150 mph	Exposure Category = C	
Height <	15 ft	Importance Category = II	
Peak Velocity Pressure, q_z =	35.33 psf	*Including the gust factor, G=0.85. (ASCE 7-10, Eq. 27.3-1)*	

Pressure Coefficients

$Cf+_{TOP}$ =	1.2	*(Pressure)*	*Provided pressure coefficients are the result of wind tunnel testing done by Ruscheweyh Consult. Coefficients are located in test report # 1127/0510-e. Negative forces are applied away from the surface.*
$Cf+_{BOTTOM}$ =	2		
$Cf-_{TOP}$ =	-2.4	*(Suction)*	
$Cf-_{BOTTOM}$ =	-1.2		

2.4 Seismic Loads - N/A

S_S =	0.00	R =	1.25	*ASCE 7, Section 12.8.1.3: A maximum S_s of 1.5 may be used to calculate the base shear, C_s, of structures under five stories and with a period, T, of 0.5 or less. Therefore, a S_{ds} of 1.0 was used to calculate C_s.*
S_{DS} =	0.00	C_S =	0	
S_1 =	0.00	ρ =	1.3	
S_{D1} =	0.00	Ω =	1.25	
T_a =	0.00	C_d =	1.25	

2.5 Combination of Loads

ASCE 7 requires that all structures be checked by specified combinations of loads. Applicable load combinations are provided below.

Strength Design, LRFD

Component stresses are checked using the following LRFD load combinations:

1.2D + 1.6S + 0.5W
1.2D + 1.0W + 0.5S
0.9D + 1.0W [M]
1.54D + 1.3E + 0.2S [R]
0.56D + 1.3E [R]
1.54D + 1.25E + 0.2S [O]
0.56D + 1.25E [O]

(ASCE 7, Eq 2.3.2-1 through 2.3.2-7) & (ASCE 7, Section 12.4.3.2)

Allowable Stress Design, ASD

Member deflection checks and foundation designs are done according to the following ASD load combinations:

1.0D + 1.0S
1.0D + 0.6W
1.0D + 0.75L + 0.45W + 0.75S
0.6D + 0.6W [M]
1.238D + 0.875E [O]
1.1785D + 0.65625E + 0.75S [O]
0.362D + 0.875E [O]

(ASCE 7, Eq 2.4.1-1 through 2.4.1-8) & (ASCE 7, Section 12.4.3.2)

[M] *Uses the minimum allowable module dead load.*
[R] *Include redundancy factor of 1.3.*
[O] *Includes overstrength factor of 1.25. Used to check seismic drift.*

3. STRUCTURAL ANALYSIS

3.1 RISA Results

Appendix B.1 contains outputs from the structural analysis software package, RISA. These outputs are used to accurately determine resultant member and reaction forces from the loads seen throughout Section 2.

3.2 RISA Components

A member and node list has been provided below to correlate the RISA components with the design calculations in Section 4. Items of significance have been listed.

Purlins	Location
M10	Top
M11	Mid-Top
M12	Mid-Bottom
M13	Bottom

Posts	Location
M2	Outer
M5	Inner
M8	Outer

Girders	Location
M1	Outer
M4	Inner
M7	Outer

Reactions	Location
N9	Outer
N19	Inner
N29	Outer

Struts	Location
M3	Outer
M6	Inner
M9	Outer

4. MEMBER DESIGN CALCULATIONS

4.1 Purlin Design

Aluminum purlins are used to transfer loads to the support structure. Purlins are designed as continous beams with cantilevers. These are considered beams with internal hinges that can be joined with splices at 25% of the support respective span. See Appendix A.1 for detailed member calculations. Section units are in (mm).

Purlin Type =	**S1.5**	
Aluminum Type =	6105-T5	
F_{ty} =	35	ksi
L_b =	84	in
$\Phi F_{ty\ STRONG\text{-}AXIS}$ =	25.07	ksi
$\Phi F_{ty\ WEAK\text{-}AXIS}$ =	23.08	ksi
S_y =	1.33	in^3
S_x =	0.6	in^3
E =	10100	ksi
I_y =	2.16	in^4
I_x =	1.07	in^4
A =	1.25	in^2
g =	1.50	lbs/ft
M_y =	1.222	k-ft
M_z =	0.176	k-ft
$M_{y\ allowable}$ =	2.779	k-ft
$M_{z\ allowable}$ =	1.154	k-ft
Utilization =	59%	

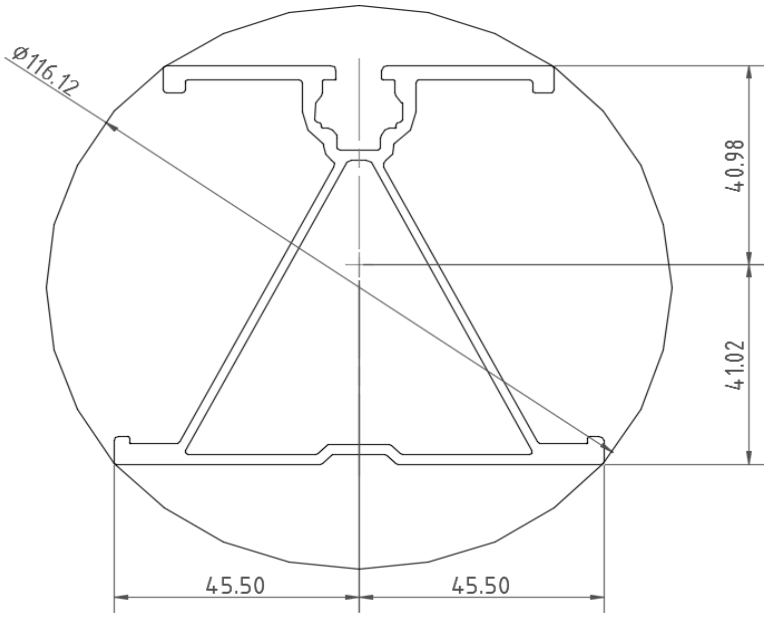

DETAIL VIEW

4.2 Girder Design

Loads from purlins are transferred to the posts using an inclined girder, which is connected to the steel post. Loads on the girder result from the support reactions of the purlins. See Appendix A.2 for detailed member calculations. Section units are in (mm).

Girder Type =	**T5**	
Aluminum Type =	6105-T5	
F_{ty} =	35	ksi
L_b =	63.82	in
$\Phi F_{ty\ AXIAL}$ =	30.80	ksi
$\Phi F_{ty\ STRONG\text{-}AXIS}$ =	30.46	ksi
$\Phi F_{ty\ WEAK\text{-}AXIS}$ =	31.56	ksi
S_y =	1.98	in^3
S_x =	1.32	in^3
E =	10100	ksi
I_y =	4.74	in^4
I_x =	1.83	in^4
A =	1.93	in^2
g =	2.32	lbs/ft
M_y =	3.953	k-ft
M_z =	0.000	k-ft
P_n =	0.045	k
$M_{y\ allowable}$ =	5.026	k-ft
$M_{z\ allowable}$ =	3.472	k-ft
$P_{n\ allowable}$ =	59.439	k
Utilization =	79%	

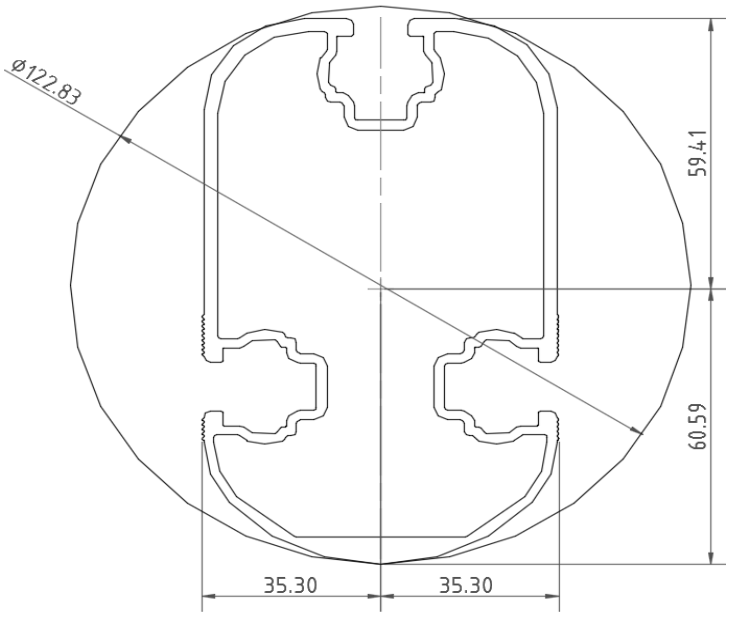

DETAIL VIEW

4.3 Strut Design

The aluminum strut connects a portion of the girder to the galvanized steel post. Girder forces are then transferred down through the strut into the post. The strut is attached with single M10 bolts at each end. See Appendix A.3 for detailed member calculations. Section units are in (mm).

Strut Type =	**55x55**	
Aluminum Type =	6105-T5	
F_{ty} =	35	ksi
L_b =	61.00	in
$\Phi F_{ty\ AXIAL}$ =	13.67	ksi
$\Phi F_{ty\ BENDING}$ =	28.22	ksi
S_y =	0.60	in^3
S_x =	0.60	in^3
E =	10100	ksi
I_y =	0.67	in^4
I_x =	0.67	in^4
A =	0.98	in^2
g =	1.18	lbs/ft
M_y =	0.004	k-ft
M_z =	0.000	k-ft
P_n =	3.795	k
$M_{y\ allowable}$ =	1.408	k-ft
$M_{z\ allowable}$ =	1.408	k-ft
$P_{n\ allowable}$ =	13.425	k
Utilization =	29%	

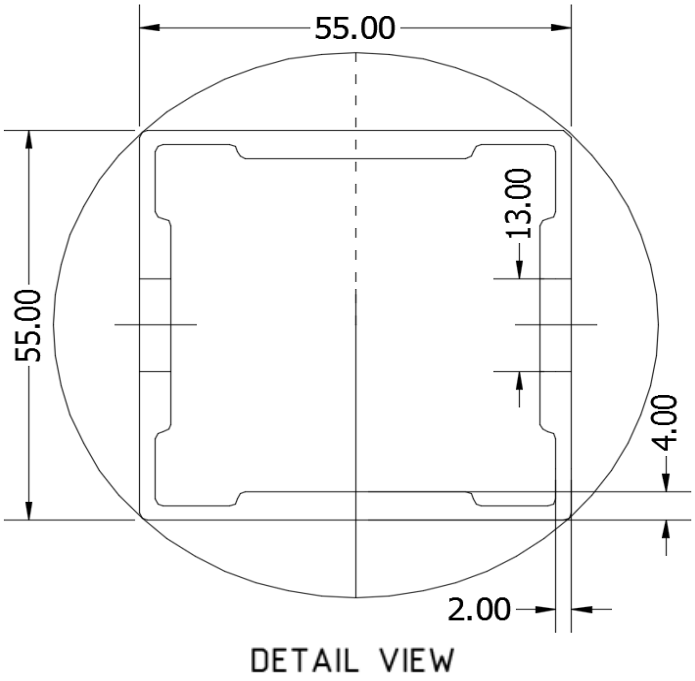

4.4 Post Design

Galvanized steel posts are a roll formed steel section, that are either ram driven into the ground or placed in a concrete foundation at a defined depth. Embedment depths will be provided on the structural drawings or through a geotechnical testing report. See Appendix A.4 for detailed member calculations. Section units are in (mm).

Post Type =	**FG8**	
Steel Type =	J2340	
F_{ty} =	60	ksi
L_b =	85.68	in
Φ =	0.90	
ΦF_{ty} =	54.00	ksi
S_y =	3.46	in^3
S_x =	1.55	in^3
E =	29000	ksi
I_y =	10.94	in^4
I_x =	4.31	in^4
A =	2.23	in^2
g =	7.59	lbs/ft
M_y =	15.460	k-ft
M_z =	0.000	k-ft
P_r =	-4.753	k
$M_{y\ allowable}$ =	19.207	k-ft
$M_{z\ allowable}$ =	14.389	k-ft
P_c =	28.060	k
Utilization =	93%	

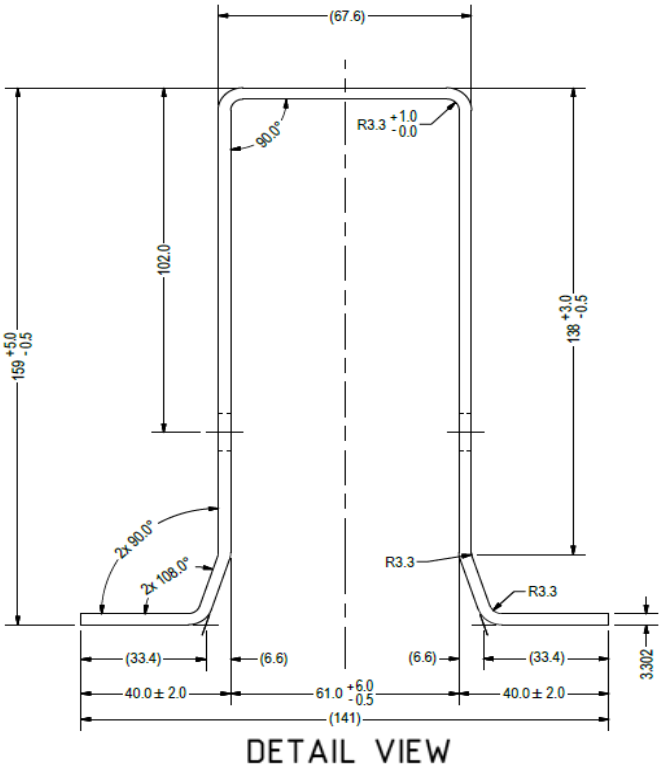

5. FOUNDATION DESIGN CALCULATIONS

5.1 Rammed Post Foundations

The following LRFD loads include a safety factor of 1.3, and are to be used in conjunction with a Schletter, Inc. Geotechnical Investigation Report. The forces below should fall within the guidelines provided in the Geotechnical Investigation Report. If a Geotechnical Investigation Report is not present, please proceed to Section 5.2 for a concrete footing design.

Maximum Tensile Load =	6.14	k
Maximum Lateral Load =	4.00	k

5.2 Design of Drilled Shaft Foundations

The galvanized steel post is to be embedded into a cylindrical drilled shaft foundation. For the purpose of design, the post is considered to be fixed to the ground. The applicable lateral force, uplift, and compression resistance checks are seen below.

5.3 Lateral Force Resistance

The equivalent lateral force is applied at the top of the post to determine the required embedment depth. A lateral soil bearing capacity for clay is assumed. Footing is unrestrained at ground level. (IBC, Eq. 18-1)

Lateral Force @ Top of Pole, P =	0.97	k
Height of Pole Above Grade, H =	7.14	ft
Diameter of Pole Footing, B =	2.00	ft
Lateral Soil Bearing Capacity, S =	0.10	ksf/ft
Isolated Pole Factor, F =	2	
First Trial Depth, D =	3.25	ft

$$S_3 = Min\ (D, 12')$$

$$S_1 = Min\left(\frac{D}{3}, 12'\right)$$

$$A = 2.34\ P/S_1 B$$

$$D = \left\{0.5A\left(1+\sqrt{1+\left(\frac{4.36\ H}{A}\right)}\right)\right\}$$

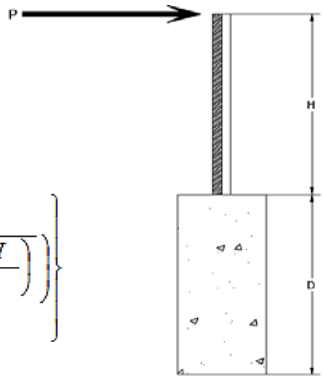

Lateral Bearing @ Bottom =	S_3
Lateral Bearing @ D/3 =	S_1
Required Depth =	D

Non-Constrained

Lateral Force @ Top of Pole, P =	0.97	k
Height of Pole Above Grade, H =	7.14	ft
Diameter of Pole Footing, B =	2.00	ft
Lateral Soil Bearing Capacity, S =	0.20	ksf/ft

1st Trial @ D_1 =	3.25	ft	
Lateral Soil Bearing @ D/3, S_1 =	0.22	ksf	
Lateral Soil Bearing @ D, S_3 =	0.65	ksf	
Constant 2.34P/(S_1B), A =	5.26		
Required Footing Depth, D =	9.54	ft	
2nd Trial @ D_2 =	6.40	ft	
Lateral Soil Bearing @ D/3, S_1 =	0.43	ksf	
Lateral Soil Bearing @ D, S_3 =	1.28	ksf	
Constant 2.34P/(S_1B), A =	2.67		
Required Footing Depth, D =	6.09	ft	
3rd Trial @ D_3 =	6.24	ft	
Lateral Soil Bearing @ D/3, S_1 =	0.42	ksf	
Lateral Soil Bearing @ D, S_3 =	1.25	ksf	
Constant 2.34P/(S_1B), A =	2.74		
Required Footing Depth, D =	6.18	ft	
4th Trial @ D_4 =	6.21	ft	
Lateral Soil Bearing @ D/3, S_1 =	0.41	ksf	
Lateral Soil Bearing @ D, S_3 =	1.24	ksf	
Constant 2.34P/(S_1B), A =	2.75		
Required Footing Depth, D =	6.20	ft	
5th Trial @ D_5 =	6.21	ft	
Lateral Soil Bearing @ D/3, S_1 =	0.41	ksf	
Lateral Soil Bearing @ D, S_3 =	1.24	ksf	
Constant 2.34P/(S_1B), A =	2.75		
Required Footing Depth, D =	6.25	ft	

A 2ft diameter x 6.25ft deep footing unrestrained at ground level is required for the racking structure.

5.4 Uplifting Force Resistance

Uplifting forces of the racking system are checked against the uplift resistance of the soil. Clay soils are assumed.

Weight of Concrete, g_{con} =	145	pcf
Uplifting Force, N =	2.82	k
Footing Diameter, B =	2.00	ft
Factor of Safety =	2.50	
Cohesion =	208.85	psf
γ_s =	120.43	pcf
α =	0.45	
Required Concrete Weight, g =	1.82	k
Required Concrete Volume, V =	12.58	ft^3
Required Footing Depth, D =	4.25	ft

Iteration	z	dz	Qs	Side
1	0.2	0.2	118.10	6.08
2	0.4	0.2	118.10	5.98
3	0.6	0.2	118.10	5.87
4	0.8	0.2	118.10	5.77
5	1	0.2	118.10	5.66
6	1.2	0.2	118.10	5.56
7	1.4	0.2	118.10	5.46
8	1.6	0.2	118.10	5.35
9	1.8	0.2	118.10	5.25
10	2	0.2	118.10	5.15
11	2.2	0.2	118.10	5.04
12	2.4	0.2	118.10	4.94
13	2.6	0.2	118.10	4.83
14	2.8	0.2	118.10	4.73
15	3	0.2	118.10	4.63
16	3.2	0.2	118.10	4.52
17	3.4	0.2	118.10	4.42
18	3.6	0.2	118.10	4.32
19	3.8	0.2	118.10	4.21
20	4	0.2	118.10	4.11
21	4.2	0.2	118.10	4.00
22	0	0.0	0.00	4.00
23	0	0.0	0.00	4.00
24	0	0.0	0.00	4.00
25	0	0.0	0.00	4.00
26	0	0.0	0.00	4.00
27	0	0.0	0.00	4.00
28	0	0.0	0.00	4.00
29	0	0.0	0.00	4.00
30	0	0.0	0.00	4.00
31	0	0.0	0.00	4.00
32	0	0.0	0.00	4.00
33	0	0.0	0.00	4.00
34	0	0.0	0.00	4.00
Max	4.2	Sum	0.99	

A 2ft diameter x 4.25ft deep footing unrestrained at ground level is required for the racking structure.



5.5 Compressive Force Resistance

Skin friction of the soil is checked against the compression force from the racking and the weight of the drilled shaft foundation. Skin friction starts at 3ft below grade. Clay soils are again assumed.

Depth Below Grade, D =	6.25	ft
Footing Diameter, B =	2.00	ft
Compressive Force, P =	3.12	k
Footing Area =	3.14	ft^2
Circumference =	6.28	ft
Skin Friction Area =	20.42	ft^2
Concrete Weight =	0.145	kcf

Bearing Pressure

Bearing Area =	3.14	ft^2
Bearing Capacity =	1.5	ksf
Resistance =	4.71	k

Weight of Concrete

Footing Volume	19.63	ft^3
Weight	2.85	k

Skin Friction Resistance

Skin Friction =	0.15	ksf
Resistance =	3.06	k
1/3 Increase for Wind =	1.33	
Total Resistance =	10.37	k
Applied Force =	5.96	k
Utilization =	58%	

A 2ft diameter footing passes at a depth of 6.25ft.



6. DESIGN OF JOINTS AND CONNECTIONS

6.1 Anchorage of Modules to Purlins and Connection of Purlins to Girders

Modules are secured to the purlins with Schletter, Inc. Rapid2+ mounting clamps. Purlins are secured to the girders with the use of 40mm mounting clamps. The reliability of calculations is uncertain due to limited standards, therefore the strength of the clamp fasteners has been evaluated by load testing.

Fastening of Modules to Purlins

Maximum Uplifting Force	=	0.799 k
Allowable Uplift	=	1.214 k
Utilization	=	66%

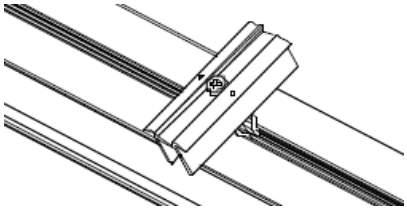

Fastening of Purlins to Girders

Maximum Uplifting Force	=	2.006 k
Allowable Uplift	=	2.180 k
Utilization	=	92%

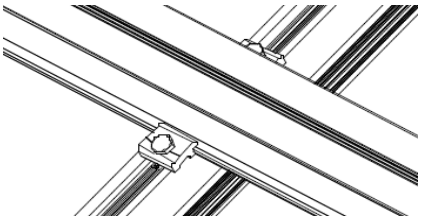

6.2 Strut Connections

The aluminum struts connect the front end of girder to a center section of the steel post. Single M10 bolts are used to attach each end of the strut to the girder and post. ASTM A193/A193M-86 equivalent stainless steel bolts are used.

Maximum Axial Load	=	3.795 k
M10 Bolt Shear Capacity	=	8.894 k
Utilization	=	43%

Bolt capacity is accounting for double shear. (ASCE 8-02, Eq. 5.3.4-1)

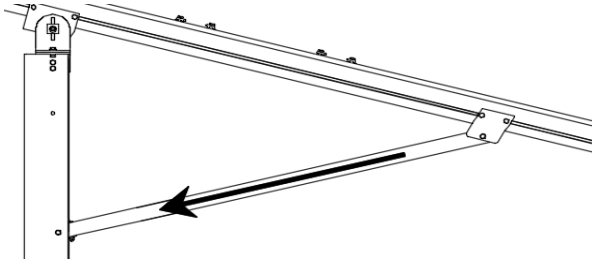

A strut under compression is shown to demonstrate the load transfer from the girder. Single M10 bolts are located at each end of the strut and are subjected to double shear.

6.3 Girder to Post Connection

In order to connect the girder to the post, custom extruded sections are assembled to create a post head piece. The reliability of calculations is uncertain due to limited standards, therefore the strength of the head piece has been evaluated by load testing.

Maximum Tensile Load	=	4.224 k
Allowable Load	=	5.649 k
Utilization	=	75%



FRONT VIEW



SIDE VIEW



7. SEISMIC DESIGN

7.1 Seismic Drift - N/A

The racking structure has been analyzed under seismic loading. The allowable story drift of the structure must fall within the limits provided by (ASCE 7, Table 12.12-1).

Mean Height, h_{sx}	=	77.78 in
Allowable Story Drift for All Other Structures, Δ	= {	$0.020h_{sx}$
		1.556 in
Max Drift, Δ_{MAX}	=	0 in
N/A		

The racking structure's reaction to seismic loads is shown to the right. The deflections have been magnified to provide a clear portrayal of potential story drift.

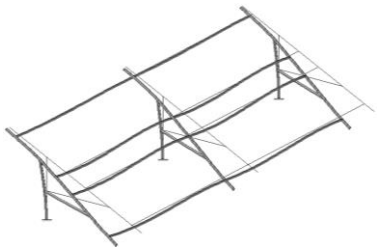

APPENDIX A

A.1 Design of Aluminum Purlins - Aluminum Design Manual, 2005 Edition

Purlin = **S1.5**

Strong Axis:		Weak Axis:	
3.4.14		**3.4.14**	
L_b =	84 in	L_b =	84
J =	0.432	J =	0.432
	232.383		147.782
$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b}Fcy}{1.6Dc}\right)^2$		$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b}Fcy}{1.6Dc}\right)^2$	
S1 =	0.51461	S1 =	0.51461
$S2 = \left(\frac{C_c}{1.6}\right)^2$		$S2 = \left(\frac{C_c}{1.6}\right)^2$	
S2 =	1701.56	S2 =	1701.56
φF_L=	φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]	φF_L=	φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]
φF_L=	28.4 ksi	φF_L=	29.4
3.4.16		**3.4.16**	
b/t =	32.195	b/t =	37.0588
$S1 = \frac{Bp - \frac{\theta_y}{\theta_b}Fcy}{1.6Dp}$		$S1 = \frac{Bp - \frac{\theta_y}{\theta_b}Fcy}{1.6Dp}$	
S1 =	12.2	S1 =	12.2
$S2 = \frac{k_1 Bp}{1.6Dp}$		$S2 = \frac{k_1 Bp}{1.6Dp}$	
S2 =	46.7	S2 =	46.7
φF_L=	φb[Bp-1.6Dp*b/t]	φF_L=	φb[Bp-1.6Dp*b/t]
φF_L=	25.1 ksi	φF_L=	23.1 ksi
3.4.16.1	Not Used	**3.4.16.1**	
Rb/t =		N/A for Weak Direction	
$S1 = \left(\frac{Bt - 1.17\frac{\theta_y}{\theta_b}Fcy}{1.6Dt}\right)^2$			
S1 =	1.1		
$S2 = C_t$			
S2 =	141.0		
φF_L=	1.17φyFcy		
φF_L=	38.9 ksi		
3.4.18		**3.4.18**	
h/t =	37.0588	h/t =	32.195
$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b}1.3Fcy}{mDbr}$		$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b}1.3Fcy}{mDbr}$	
S1 =	36.9	S1 =	36.9
m =	0.65	m =	0.65
C_0 =	40.985	C_0 =	45.5
Cc =	41.015	Cc =	45.5
$S2 = \frac{k_1 Bbr}{mDbr}$		$S2 = \frac{k_1 Bbr}{mDbr}$	
S2 =	77.2	S2 =	77.3
φF_L=	φb[Bbr-mDbr*h/t]	φF_L=	1.3φyFcy
φF_L=	43.2 ksi	φF_L=	43.2 ksi
φF_LSt=	25.1 ksi	φF_LWk=	23.1 ksi
Ix =	897074 mm^4	Iy =	446476 mm^4
	2.155 in^4		1.073 in^4
y =	41.015 mm	x =	45.5 mm
Sx =	1.335 in^3	Sy =	0.599 in^3
M_{max}St =	2.788 k-ft	M_{max}Wk =	1.152 k-ft

Compression

3.4.9

b/t = 32.195
S1 = 12.21 (See 3.4.16 above for formula)
S2 = 32.70 (See 3.4.16 above for formula)
φF_L = φc[Bp-1.6Dp*b/t]
φF_L = 25.1 ksi

b/t = 37.0588
S1 = 12.21
S2 = 32.70
φF_L = (φck2*√(BpE))/(1.6b/t)
φF_L = 21.9 ksi

3.4.10

Rb/t = 0.0

$$S1 = \left(\frac{Bt - \frac{\theta_y}{\theta_b} Fcy}{Dt}\right)^2$$

S1 = 6.87
S2 = 131.3
φF_L = φyFcy
φF_L = 33.25 ksi

φF_L = 21.94 ksi
A = 1215.13 mm^2
1.88 in^2
P_{max} = 41.32 kips

A.2 Design of Aluminum Girders - Aluminum Design Manual, 2005 Edition

Girder = **T5**

Strong Axis:

3.4.14

L_b = 63.8189 in
J = 1.98
82.1278

$$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$$

S1 = 0.51461

$$S2 = \left(\frac{C_c}{1.6}\right)^2$$

S2 = 1701.56
φF_L = φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]
φF_L = 30.5 ksi

3.4.16

b/t = 4.5

$$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$$

S1 = 12.2

$$S2 = \frac{k_1 Bp}{1.6Dp}$$

S2 = 46.7
φF_L = φyFcy
φF_L = 33.3 ksi

Weak Axis:

3.4.14

L_b = 63.8189
J = 1.98
89.1294

$$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$$

S1 = 0.51461

$$S2 = \left(\frac{C_c}{1.6}\right)^2$$

S2 = 1701.56
φF_L = φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]
φF_L = 30.3

3.4.16

b/t = 16.3333

$$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$$

S1 = 12.2

$$S2 = \frac{k_1 Bp}{1.6Dp}$$

S2 = 46.7
φF_L = φb[Bp-1.6Dp*b/t]
φF_L = 31.6 ksi

3.4.16.1 Used

Rb/t = 20.0

$$S1 = \left(\frac{Bt - 1.17\frac{\theta_y}{\theta_b}Fcy}{1.6Dt}\right)^2$$

S1 = 1.1

$$S2 = C_t$$

S2 = 141.0

φF_L= φb[Bt-Dt*√(Rb/t)]

φF_L= 30.8 ksi

3.4.16.1

N/A for Weak Direction

3.4.18

h/t = 16.3333

$$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b}1.3Fcy}{mDbr}$$

S1 = 37.9

m = 0.63

C_0 = 61.046

Cc = 58.954

$$S2 = \frac{k_1 Bbr}{mDbr}$$

S2 = 79.4

φF_L= 1.3φyFcy

φF_L= 43.2 ksi

$\varphi F_L St$= 30.5 ksi

Ix = 1970917 mm^4

4.735 in^4

y = 61.046 mm

Sx = 1.970 in^3

$M_{max}St$ = 5.001 k-ft

3.4.18

h/t = 4.5

$$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b}1.3Fcy}{mDbr}$$

S1 = 36.9

m = 0.65

C_0 = 35

Cc = 35

$$S2 = \frac{k_1 Bbr}{mDbr}$$

S2 = 77.3

φF_L= 1.3φyFcy

φF_L= 43.2 ksi

$\varphi F_L Wk$= 31.6 ksi

Iy = 763048 mm^4

1.833 in^4

x = 35 mm

Sy = 1.330 in^3

$M_{max}Wk$ = 3.499 k-ft

Compression

3.4.9

b/t = 4.5

S1 = 12.21 (See 3.4.16 above for formula)

S2 = 32.70 (See 3.4.16 above for formula)

φF_L= φyFcy

φF_L= 33.3 ksi

b/t = 16.3333

S1 = 12.21

S2 = 32.70

φF_L= φc[Bp-1.6Dp*b/t]

φF_L= 31.6 ksi

3.4.10

Rb/t = 20.0

$$S1 = \left(\frac{Bt - \frac{\theta_y}{\theta_b}Fcy}{Dt}\right)^2$$

S1 = 6.87

S2 = 131.3

φF_L= φc[Bt-Dt*√(Rb/t)]

φF_L= 30.80 ksi

φF_L= 30.80 ksi

A = 1215.13 mm^2

1.88 in^2

P_{max} = 58.01 kips

A.3 Design of Aluminum Struts - Aluminum Design Manual, 2005 Edition

Strut = **55x55**

Strong Axis:	Weak Axis:
3.4.14	**3.4.14**
L_b = 61 in	L_b = 61
J = 0.942	J = 0.942
95.1963	95.1963
$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$	$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$
S1 = 0.51461	S1 = 0.51461
$S2 = \left(\frac{C_c}{1.6}\right)^2$	$S2 = \left(\frac{C_c}{1.6}\right)^2$
S2 = 1701.56	S2 = 1701.56
φF_L= φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]	φF_L= φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]
φF_L= 30.2 ksi	φF_L= 30.2
3.4.16	**3.4.16**
b/t = 24.5	b/t = 24.5
$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$	$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$
S1 = 12.2	S1 = 12.2
$S2 = \frac{k_1 Bp}{1.6Dp}$	$S2 = \frac{k_1 Bp}{1.6Dp}$
S2 = 46.7	S2 = 46.7
φF_L= φb[Bp-1.6Dp*b/t]	φF_L= φb[Bp-1.6Dp*b/t]
φF_L= 28.2 ksi	φF_L= 28.2 ksi
3.4.16.1 Not Used	**3.4.16.1**
Rb/t = 0.0	N/A for Weak Direction
$S1 = \left(\frac{Bt - 1.17\frac{\theta_y}{\theta_b} Fcy}{1.6Dt}\right)^2$	
S1 = 1.1	
$S2 = C_t$	
S2 = 141.0	
φF_L= 1.17φyFcy	
φF_L= 38.9 ksi	
3.4.18	**3.4.18**
h/t = 24.5	h/t = 24.5
$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b} 1.3Fcy}{mDbr}$	$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b} 1.3Fcy}{mDbr}$
S1 = 36.9	S1 = 36.9
m = 0.65	m = 0.65
C_0 = 27.5	C_0 = 27.5
Cc = 27.5	Cc = 27.5
$S2 = \frac{k_1 Bbr}{mDbr}$	$S2 = \frac{k_1 Bbr}{mDbr}$
S2 = 77.3	S2 = 77.3
φF_L= 1.3φyFcy	φF_L= 1.3φyFcy
φF_L= 43.2 ksi	φF_L= 43.2 ksi
φF_LSt= 28.2 ksi	φF_LWk= 28.2 ksi
Ix = 279836 mm^4	Iy = 279836 mm^4
0.672 in^4	0.672 in^4
y = 27.5 mm	x = 27.5 mm
Sx = 0.621 in^3	Sy = 0.621 in^3
M_{max}St = 1.460 k-ft	M_{max}Wk = 1.460 k-ft

Compression

3.4.7

λ = 1.41113

r = 0.81 in

$$S1^* = \frac{Bc - Fcy}{1.6Dc^*}$$

$S1^*$ = 0.33515

$$S2^* = \frac{Cc}{\pi}\sqrt{Fcy/E}$$

$S2^*$ = 1.23671

φcc = 0.77756

$\varphi F_L = (\varphi ccFcy)/(\lambda^2)$

φF_L = 13.6667 ksi

3.4.9

b/t = 24.5

S1 = 12.21 (See 3.4.16 above for formula)

S2 = 32.70 (See 3.4.16 above for formula)

φF_L = φc[Bp-1.6Dp*b/t]

φF_L = 28.2 ksi

b/t = 24.5

S1 = 12.21

S2 = 32.70

φF_L = φc[Bp-1.6Dp*b/t]

φF_L = 28.2 ksi

3.4.10

Rb/t = 0.0

$$S1 = \left(\frac{Bt - \frac{\theta_y}{\theta_b}Fcy}{Dt}\right)^2$$

S1 = 6.87

S2 = 131.3

φF_L = φyFcy

φF_L = 33.25 ksi

φF_L = 13.67 ksi

A = 663.99 mm^2

1.03 in^2

P_{max} = 14.07 kips

A.4 Design of Galvanized Steel Posts

Post Type = **FG8**

Unbraced Length =	85.68	in	
Pr =	-4.75	k	(LRFD Factored Load)
Mr (Strong) =	15.46	k-ft	(LRFD Factored Load)
Mr (Weak) =	0.00	k-ft	(LRFD Factored Load)

Flexural Buckling:

kL/r =	123.28		
4.71√(E/Fy) =	103.55	=> kL/r	> 4.71√(E/Fy)
Fcr =	16.52	ksi	
Fe =	18.83	ksi	
Pn =	36.831	k	

Torsional/Flexural Torsional Buckling:

Fcr =	12.5831	ksi
Fey =	48.0382	ksi
Fez =	16.1601	ksi
Pn =	28.0602	k

Bending (Strong Axis):

Yielding:

Mn =	21.95	k-ft

Flange Local Buckling:

Mn =	19.207	k-ft

Pr/Pc =	0.129	<	0.2	
Utilization =	0.93	<	1.0	OK

Bending (Weak Axis):

Yielding:

Mn =	14.65	k-ft

Flange Local Buckling:

Mn =	14.39	k-ft

Pr/Pc =	0.129	<	0.2	
Utilization =	0.00	<	1.0	OK

Combined Forces

Utilization = 93%

APPENDIX B

B.1

The following pages will contain the results from RISA. Please refer back to Section 2 for load information and Section 4-5 for member and foundation design.

Basic Load Cases

	BLC Description	Category	X Gravity	Y Gravity	Z Gravity	Joint	Point	Distribut...	Area(Me...	Surface(...
1	Dead Load, Max	DL		-1				4		
2	Dead Load, Min	DL		-1				4		
3	Snow Load	SL						4		
4	Wind Load - Pressure	WL						4		
5	Wind Load - Suction	WL						4		
6	Seismic - Lateral	EL								

Member Distributed Loads (BLC 1 : Dead Load, Max)

	Member Label	Direction	Start Magnitude[lb/ft,F]	End Magnitude[lb/ft,F]	Start Location[ft,%]	End Location[ft,%]
1	M10	Y	-8.366	-8.366	0	0
2	M11	Y	-8.366	-8.366	0	0
3	M12	Y	-8.366	-8.366	0	0
4	M13	Y	-8.366	-8.366	0	0

Member Distributed Loads (BLC 2 : Dead Load, Min)

	Member Label	Direction	Start Magnitude[lb/ft,F]	End Magnitude[lb/ft,F]	Start Location[ft,%]	End Location[ft,%]
1	M10	Y	-4.45	-4.45	0	0
2	M11	Y	-4.45	-4.45	0	0
3	M12	Y	-4.45	-4.45	0	0
4	M13	Y	-4.45	-4.45	0	0

Member Distributed Loads (BLC 3 : Snow Load)

	Member Label	Direction	Start Magnitude[lb/ft,F]	End Magnitude[lb/ft,F]	Start Location[ft,%]	End Location[ft,%]
1	M10	Y	-32.97	-32.97	0	0
2	M11	Y	-32.97	-32.97	0	0
3	M12	Y	-32.97	-32.97	0	0
4	M13	Y	-32.97	-32.97	0	0

Member Distributed Loads (BLC 4 : Wind Load - Pressure)

	Member Label	Direction	Start Magnitude[lb/ft,F]	End Magnitude[lb/ft,F]	Start Location[ft,%]	End Location[ft,%]
1	M10	y	-118.221	-118.221	0	0
2	M11	y	-118.221	-118.221	0	0
3	M12	y	-197.035	-197.035	0	0
4	M13	y	-197.035	-197.035	0	0

Member Distributed Loads (BLC 5 : Wind Load - Suction)

	Member Label	Direction	Start Magnitude[lb/ft,F]	End Magnitude[lb/ft,F]	Start Location[ft,%]	End Location[ft,%]
1	M10	y	236.442	236.442	0	0
2	M11	y	236.442	236.442	0	0
3	M12	y	118.221	118.221	0	0
4	M13	y	118.221	118.221	0	0

Load Combinations

	Description	S...	P...	S...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...
1	LRFD 1.2D + 1.6S + 0.5W	Yes	Y		1	1.2	3	1.6	4	.5																
2	LRFD 1.2D + 1.0W + 0.5S	Yes	Y		1	1.2	3	.5	4	1																
3	LRFD 0.9D + 1.0W	Yes	Y		2	.9					5	1														
4	LATERAL - LRFD 1.54D + 1.3E ...	Yes	Y		1	1.54	3	.2			6	1.3														
5	LATERAL - LRFD 0.56D + 1.3E	Yes	Y		1	.56					6	1.3														
6	LATERAL - LRFD 1.54D + 1.25...	Yes	Y		1	1.54	3	.2			6	1.25														
7	LATERAL - LRFD 0.56D + 1.25E	Yes	Y		1	.56					6	1.25														

Load Combinations (Continued)

	Description	S...	P...	S...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...
8																										
9	ASD 1.0D + 1.0S	Yes	Y		1	1	3	1																		
10	ASD 1.0D + 0.6W	Yes	Y		1	1			4	.6																
11	ASD 1.0D + 0.75L + 0.45W + 0....	Yes	Y		1	1	3	.75	4	.45																
12	ASD 0.6D + 0.6W	Yes	Y		2	.6					5	.6														
13	LATERAL - ASD 1.238D + 0.875E	Yes	Y		1	1.2...					6	.875														
14	LATERAL - ASD 1.1785D + 0.65...	Yes	Y		1	1.1...	3	.75			6	.656														
15	LATERAL - ASD 0.362D + 0.875E	Yes	Y		1	.362					6	.875														

Envelope Joint Reactions

	Joint		X [lb]	LC	Y [lb]	LC	Z [lb]	LC	MX [k-ft]	LC	MY [k-ft]	LC	MZ [k-ft]	LC
1	N9	max	994.003	2	1900.68	2	129.78	2	.189	2	.008	3	5.506	3
2		min	-1312.788	3	-1463.845	3	-171.495	3	-.289	3	-.017	2	-.082	10
3	N19	max	3075.049	2	5300.299	2	0	1	0	3	0	3	9.157	3
4		min	-3070.361	3	-4693.538	3	0	3	0	15	0	15	-.393	10
5	N29	max	994.003	2	1900.68	2	171.495	3	.289	3	.017	2	5.506	3
6		min	-1312.788	3	-1463.845	3	-129.78	2	-.189	2	-.008	3	-.082	10
7	Totals:	max	5063.056	2	9101.658	2	0	1						
8		min	-5695.938	3	-7621.229	3	0	3						

Envelope Member Section Forces

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
1	M1	1	max	0	1	.006	2	0	5	0	1	0	1	0	1
2			min	0	1	0	3	0	1	0	1	0	1	0	1
3		2	max	-.299	15	-.428	15	0	5	0	1	0	15	0	4
4			min	-1.274	4	-1.818	4	0	1	0	1	0	1	0	15
5		3	max	-7.907	15	306.443	3	-3.52	15	.04	3	.117	1	.279	2
6			min	-132.432	1	-640.438	2	-62.419	1	-.151	2	.007	15	-.13	3
7		4	max	-8.206	15	305.38	3	-3.52	15	.04	3	.078	1	.677	2
8			min	-133.424	1	-641.856	2	-62.419	1	-.151	2	.005	15	-.32	3
9		5	max	-8.506	15	304.317	3	-3.52	15	.04	3	.04	1	1.075	2
10			min	-134.417	1	-643.273	2	-62.419	1	-.151	2	.002	10	-.51	3
11		6	max	137.573	3	543.172	2	-4.144	15	.032	2	.048	2	1.039	2
12			min	-529.924	2	-170.285	3	-91.624	1	-.048	3	-.016	3	-.524	3
13		7	max	136.829	3	541.755	2	-4.144	15	.032	2	.007	10	.703	2
14			min	-530.917	2	-171.348	3	-91.624	1	-.048	3	-.036	3	-.418	3
15		8	max	136.085	3	540.337	2	-4.144	15	.032	2	-.004	15	.367	2
16			min	-531.909	2	-172.412	3	-91.624	1	-.048	3	-.075	1	-.312	3
17		9	max	85.412	3	114.682	3	-5.847	15	0	15	.066	3	.167	2
18			min	-605.098	1	-65.203	2	-105.569	1	-.091	2	-.005	10	-.264	3
19		10	max	84.667	3	113.619	3	-5.847	15	0	15	.032	3	.208	2
20			min	-606.091	1	-66.62	2	-105.569	1	-.091	2	-.026	2	-.335	3
21		11	max	83.923	3	112.556	3	-5.847	15	0	15	-.002	12	.25	2
22			min	-607.083	1	-68.038	2	-105.569	1	-.091	2	-.084	1	-.405	3
23		12	max	28.789	3	787.42	3	94.886	2	.202	3	.072	1	.444	2
24			min	-744.258	1	-451.549	2	-255.86	3	-.144	2	.004	15	-.738	3
25		13	max	28.044	3	786.357	3	94.886	2	.202	3	.09	2	.725	2
26			min	-745.251	1	-452.967	2	-255.86	3	-.144	2	-.109	3	-1.226	3
27		14	max	135.041	1	434.713	2	9.867	10	.16	2	.107	3	.994	2
28			min	8.798	15	-733.342	3	-103.814	3	-.331	3	-.065	2	-1.693	3
29		15	max	134.049	1	433.296	2	9.867	10	.16	2	.043	3	.725	2
30			min	8.499	15	-734.405	3	-103.814	3	-.331	3	-.075	1	-1.237	3
31		16	max	133.056	1	431.878	2	9.867	10	.16	2	-.005	15	.457	2
32			min	8.199	15	-735.468	3	-103.814	3	-.331	3	-.1	1	-.781	3

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
33		17	max	132.064	1	430.461	2	9.867	10	.16	2	-.007	15	.189	2
34			min	7.9	15	-736.531	3	-103.814	3	-.331	3	-.125	1	-.324	3
35		18	max	1.274	4	1.819	4	0	1	0	1	0	15	0	4
36			min	.299	15	.428	15	0	5	0	1	0	1	0	15
37		19	max	0	1	.005	2	0	1	0	1	0	1	0	1
38			min	0	1	-.009	3	0	5	0	1	0	1	0	1
39	M4	1	max	0	1	.014	2	0	1	0	1	0	1	0	1
40			min	0	1	-.002	3	0	1	0	1	0	1	0	1
41		2	max	-.299	15	-.428	15	0	1	0	1	0	1	0	4
42			min	-1.274	4	-1.817	4	0	1	0	1	0	1	0	15
43		3	max	45.27	3	974.546	3	0	1	0	1	0	1	.694	2
44			min	-259.803	1	-1808.027	2	0	1	0	1	0	1	-.38	3
45		4	max	44.525	3	973.483	3	0	1	0	1	0	1	1.817	2
46			min	-260.796	1	-1809.445	2	0	1	0	1	0	1	-.985	3
47		5	max	43.781	3	972.42	3	0	1	0	1	0	1	2.94	2
48			min	-261.788	1	-1810.862	2	0	1	0	1	0	1	-1.588	3
49		6	max	755.194	3	1710.585	2	0	1	0	1	0	1	2.772	2
50			min	-1514.032	2	-807.05	3	0	1	0	1	0	1	-1.539	3
51		7	max	754.45	3	1709.167	2	0	1	0	1	0	1	1.711	2
52			min	-1515.024	2	-808.113	3	0	1	0	1	0	1	-1.038	3
53		8	max	753.705	3	1707.75	2	0	1	0	1	0	1	.65	2
54			min	-1516.017	2	-809.176	3	0	1	0	1	0	1	-.536	3
55		9	max	809.787	3	204.425	3	0	1	0	1	0	1	.029	1
56			min	-1627.461	2	-175.715	2	0	1	0	1	0	1	-.27	3
57		10	max	809.042	3	203.362	3	0	1	0	1	0	1	.123	2
58			min	-1628.454	2	-177.133	2	0	1	0	1	0	1	-.397	3
59		11	max	808.298	3	202.299	3	0	1	0	1	0	1	.233	2
60			min	-1629.446	2	-178.55	2	0	1	0	1	0	1	-.523	3
61		12	max	873.302	3	2093.596	3	0	1	0	1	0	1	.829	2
62			min	-1747.579	2	-1402.808	2	0	1	0	1	0	1	-1.408	3
63		13	max	872.558	3	2092.533	3	0	1	0	1	0	1	1.7	2
64			min	-1748.572	2	-1404.225	2	0	1	0	1	0	1	-2.707	3
65		14	max	263.517	1	1134.031	2	0	1	0	1	0	1	2.537	2
66			min	-44.741	3	-1766.202	3	0	1	0	1	0	1	-3.953	3
67		15	max	262.525	1	1132.613	2	0	1	0	1	0	1	1.834	2
68			min	-45.486	3	-1767.265	3	0	1	0	1	0	1	-2.857	3
69		16	max	261.532	1	1131.196	2	0	1	0	1	0	1	1.131	2
70			min	-46.23	3	-1768.328	3	0	1	0	1	0	1	-1.759	3
71		17	max	260.54	1	1129.778	2	0	1	0	1	0	1	.429	2
72			min	-46.975	3	-1769.391	3	0	1	0	1	0	1	-.662	3
73		18	max	1.274	4	1.82	4	0	1	0	1	0	1	0	4
74			min	.299	15	.428	15	0	1	0	1	0	1	0	15
75		19	max	0	1	.01	2	0	1	0	1	0	1	0	1
76			min	0	1	-.017	3	0	1	0	1	0	1	0	1
77	M7	1	max	0	1	.006	2	0	1	0	1	0	1	0	1
78			min	0	1	0	3	0	5	0	1	0	1	0	1
79		2	max	-.299	15	-.428	15	0	1	0	1	0	1	0	4
80			min	-1.274	4	-1.818	4	0	5	0	1	0	15	0	15
81		3	max	-7.907	15	306.443	3	62.419	1	.151	2	-.007	15	.279	2
82			min	-132.432	1	-640.438	2	3.52	15	-.04	3	-.117	1	-.13	3
83		4	max	-8.206	15	305.38	3	62.419	1	.151	2	-.005	15	.677	2
84			min	-133.424	1	-641.856	2	3.52	15	-.04	3	-.078	1	-.32	3
85		5	max	-8.506	15	304.317	3	62.419	1	.151	2	-.002	10	1.075	2
86			min	-134.417	1	-643.273	2	3.52	15	-.04	3	-.04	1	-.51	3
87		6	max	137.573	3	543.172	2	91.624	1	.048	3	.016	3	1.039	2
88			min	-529.924	2	-170.285	3	4.144	15	-.032	2	-.048	2	-.524	3
89		7	max	136.829	3	541.755	2	91.624	1	.048	3	.036	3	.703	2

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
90			min	-530.917	2	-171.348	3	4.144	15	-.032	2	-.007	10	-.418	3
91		8	max	136.085	3	540.337	2	91.624	1	.048	3	.075	1	.367	2
92			min	-531.909	2	-172.412	3	4.144	15	-.032	2	.004	15	-.312	3
93		9	max	85.412	3	114.682	3	105.569	1	.091	2	.005	10	.167	2
94			min	-605.098	1	-65.203	2	5.847	15	0	15	-.066	3	-.264	3
95		10	max	84.667	3	113.619	3	105.569	1	.091	2	.026	2	.208	2
96			min	-606.091	1	-66.62	2	5.847	15	0	15	-.032	3	-.335	3
97		11	max	83.923	3	112.556	3	105.569	1	.091	2	.084	1	.25	2
98			min	-607.083	1	-68.038	2	5.847	15	0	15	.002	12	-.405	3
99		12	max	28.789	3	787.42	3	255.86	3	.144	2	-.004	15	.444	2
100			min	-744.258	1	-451.549	2	-94.886	2	-.202	3	-.072	1	-.738	3
101		13	max	28.044	3	786.357	3	255.86	3	.144	2	.109	3	.725	2
102			min	-745.251	1	-452.967	2	-94.886	2	-.202	3	-.09	2	-1.226	3
103		14	max	135.041	1	434.713	2	103.814	3	.331	3	.065	2	.994	2
104			min	8.798	15	-733.342	3	-9.867	10	-.16	2	-.107	3	-1.693	3
105		15	max	134.049	1	433.296	2	103.814	3	.331	3	.075	1	.725	2
106			min	8.499	15	-734.405	3	-9.867	10	-.16	2	-.043	3	-1.237	3
107		16	max	133.056	1	431.878	2	103.814	3	.331	3	.1	1	.457	2
108			min	8.199	15	-735.468	3	-9.867	10	-.16	2	.005	15	-.781	3
109		17	max	132.064	1	430.461	2	103.814	3	.331	3	.125	1	.189	2
110			min	7.9	15	-736.531	3	-9.867	10	-.16	2	.007	15	-.324	3
111		18	max	1.274	4	1.819	4	0	5	0	1	0	1	0	4
112			min	.299	15	.428	15	0	1	0	1	0	15	0	15
113		19	max	0	1	.005	2	0	5	0	1	0	1	0	1
114			min	0	1	-.009	3	0	1	0	1	0	1	0	1
115	M10	1	max	103.827	3	427.29	2	-7.301	15	.014	2	.142	1	.16	2
116			min	-9.868	10	-738.585	3	-130.101	1	-.027	3	.008	15	-.331	3
117		2	max	103.827	3	317.291	2	-5.707	15	.014	2	.093	3	.173	3
118			min	-9.868	10	-558.1	3	-101.283	1	-.027	3	.002	10	-.129	2
119		3	max	103.827	3	207.293	2	-4.113	15	.014	2	.06	3	.537	3
120			min	-9.868	10	-377.614	3	-72.466	1	-.027	3	-.016	1	-.333	2
121		4	max	103.827	3	97.294	2	-2.519	15	.014	2	.029	3	.761	3
122			min	-9.868	10	-197.129	3	-43.649	1	-.027	3	-.061	1	-.452	2
123		5	max	103.827	3	-.765	15	-.029	10	.014	2	0	3	.844	3
124			min	-9.868	10	-17.284	1	-36.421	3	-.027	3	-.084	1	-.485	2
125		6	max	103.827	3	163.841	3	13.986	1	.014	2	-.005	15	.786	3
126			min	-9.868	10	-122.703	2	-34.031	3	-.027	3	-.084	1	-.432	2
127		7	max	103.827	3	344.326	3	42.803	1	.014	2	-.004	15	.589	3
128			min	-9.868	10	-232.702	2	-31.64	3	-.027	3	-.062	1	-.294	2
129		8	max	103.827	3	524.812	3	71.621	1	.014	2	.002	10	.251	3
130			min	-9.868	10	-342.701	2	-29.249	3	-.027	3	-.077	3	-.07	2
131		9	max	103.827	3	705.297	3	100.438	1	.014	2	.049	1	.239	2
132			min	-9.868	10	-452.699	2	-26.859	3	-.027	3	-.099	3	-.228	3
133		10	max	103.827	3	562.698	2	129.255	1	.008	10	.139	1	.634	2
134			min	-9.868	10	-885.782	3	-60.018	2	-.027	3	-.118	3	-.846	3
135		11	max	103.827	3	452.699	2	26.859	3	.027	3	.049	1	.239	2
136			min	-9.868	10	-705.297	3	-100.438	1	-.014	2	-.099	3	-.228	3
137		12	max	103.827	3	342.701	2	29.249	3	.027	3	.002	10	.251	3
138			min	-9.868	10	-524.812	3	-71.621	1	-.014	2	-.077	3	-.07	2
139		13	max	103.827	3	232.702	2	31.64	3	.027	3	-.004	15	.589	3
140			min	-9.868	10	-344.326	3	-42.803	1	-.014	2	-.062	1	-.294	2
141		14	max	103.827	3	122.703	2	34.031	3	.027	3	-.005	15	.786	3
142			min	-9.868	10	-163.841	3	-13.986	1	-.014	2	-.084	1	-.432	2
143		15	max	103.827	3	17.284	1	36.421	3	.027	3	0	3	.844	3
144			min	-9.868	10	.765	15	.029	10	-.014	2	-.084	1	-.485	2
145		16	max	103.827	3	197.129	3	43.649	1	.027	3	.029	3	.761	3
146			min	-9.868	10	-97.294	2	2.519	15	-.014	2	-.061	1	-.452	2

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
147		17	max	103.827	3	377.614	3	72.466	1	.027	3	.06	3	.537	3
148			min	-9.868	10	-207.293	2	4.113	15	-.014	2	-.016	1	-.333	2
149		18	max	103.827	3	558.1	3	101.283	1	.027	3	.093	3	.173	3
150			min	-9.868	10	-317.291	2	5.707	15	-.014	2	.002	10	-.129	2
151		19	max	103.827	3	738.585	3	130.101	1	.027	3	.142	1	.16	2
152			min	-9.868	10	-427.29	2	7.301	15	-.014	2	.008	15	-.331	3
153	M11	1	max	140.124	2	380.941	2	-7.683	15	0	10	.17	1	.053	2
154			min	-201.024	3	-675.637	3	-136.254	1	-.005	3	.01	15	-.289	3
155		2	max	140.124	2	270.942	2	-6.089	15	0	10	.124	3	.166	3
156			min	-201.024	3	-495.152	3	-107.437	1	-.005	3	.002	10	-.2	2
157		3	max	140.124	2	160.943	2	-4.496	15	0	10	.085	3	.481	3
158			min	-201.024	3	-314.667	3	-78.619	1	-.005	3	-.009	2	-.368	2
159		4	max	140.124	2	50.945	2	-2.902	15	0	10	.048	3	.655	3
160			min	-201.024	3	-134.182	3	-49.802	1	-.005	3	-.047	1	-.451	2
161		5	max	140.124	2	46.303	3	-.135	10	0	10	.012	3	.689	3
162			min	-201.024	3	-59.054	2	-44.371	3	-.005	3	-.074	1	-.448	2
163		6	max	140.124	2	226.788	3	8.01	2	0	10	-.004	15	.583	3
164			min	-201.024	3	-169.053	2	-41.981	3	-.005	3	-.079	1	-.359	2
165		7	max	140.124	2	407.274	3	36.65	1	0	10	-.004	15	.337	3
166			min	-201.024	3	-279.052	2	-39.59	3	-.005	3	-.062	1	-.185	2
167		8	max	140.124	2	587.759	3	65.467	1	0	10	.002	10	.075	2
168			min	-201.024	3	-389.05	2	-37.199	3	-.005	3	-.083	3	-.05	3
169		9	max	140.124	2	768.244	3	94.285	1	0	10	.04	1	.421	2
170			min	-201.024	3	-499.049	2	-34.809	3	-.005	3	-.111	3	-.578	3
171		10	max	140.124	2	128.966	14	123.102	1	0	10	.124	1	.852	2
172			min	-201.024	3	-948.729	3	-67.769	14	-.005	3	-.137	3	-1.245	3
173		11	max	140.124	2	499.049	2	34.809	3	.005	3	.04	1	.421	2
174			min	-201.024	3	-768.244	3	-94.285	1	0	10	-.111	3	-.578	3
175		12	max	140.124	2	389.05	2	37.199	3	.005	3	.002	10	.075	2
176			min	-201.024	3	-587.759	3	-65.467	1	0	10	-.083	3	-.05	3
177		13	max	140.124	2	279.052	2	39.59	3	.005	3	-.004	15	.337	3
178			min	-201.024	3	-407.274	3	-36.65	1	0	10	-.062	1	-.185	2
179		14	max	140.124	2	169.053	2	41.981	3	.005	3	-.004	15	.583	3
180			min	-201.024	3	-226.788	3	-8.01	2	0	10	-.079	1	-.359	2
181		15	max	140.124	2	59.054	2	44.371	3	.005	3	.012	3	.689	3
182			min	-201.024	3	-46.303	3	.135	10	0	10	-.074	1	-.448	2
183		16	max	140.124	2	134.182	3	49.802	1	.005	3	.048	3	.655	3
184			min	-201.024	3	-50.945	2	2.902	15	0	10	-.047	1	-.451	2
185		17	max	140.124	2	314.667	3	78.619	1	.005	3	.085	3	.481	3
186			min	-201.024	3	-160.943	2	4.496	15	0	10	-.009	2	-.368	2
187		18	max	140.124	2	495.152	3	107.437	1	.005	3	.124	3	.166	3
188			min	-201.024	3	-270.942	2	6.089	15	0	10	.002	10	-.2	2
189		19	max	140.124	2	675.637	3	136.254	1	.005	3	.17	1	.053	2
190			min	-201.024	3	-380.941	2	7.683	15	0	10	.01	15	-.289	3
191	M12	1	max	20.683	2	603.112	2	-7.739	15	0	10	.181	1	.123	2
192			min	-23.285	3	-288.149	3	-138.702	1	-.005	3	.01	15	0	15
193		2	max	20.683	2	431.813	2	-6.145	15	0	10	.109	3	.229	3
194			min	-23.285	3	-199.614	3	-109.885	1	-.005	3	.005	15	-.28	2
195		3	max	20.683	2	260.515	2	-4.551	15	0	10	.073	3	.35	3
196			min	-23.285	3	-111.078	3	-81.067	1	-.005	3	0	10	-.549	2
197		4	max	20.683	2	89.216	2	-2.957	15	0	10	.039	3	.402	3
198			min	-23.285	3	-22.543	3	-52.25	1	-.005	3	-.041	1	-.685	2
199		5	max	20.683	2	65.993	3	-1.363	15	0	10	.006	3	.385	3
200			min	-23.285	3	-82.082	2	-40.313	3	-.005	3	-.071	1	-.688	2
201		6	max	20.683	2	154.528	3	5.385	1	0	10	-.004	15	.299	3
202			min	-23.285	3	-253.381	2	-37.923	3	-.005	3	-.078	1	-.557	2
203		7	max	20.683	2	243.064	3	34.202	1	0	10	-.004	15	.145	3

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
204			min	-23.285	3	-424.679	2	-35.532	3	-.005	3	-.062	1	-.293	2
205		8	max	20.683	2	331.599	3	63.019	1	0	10	0	10	.104	2
206			min	-23.285	3	-595.978	2	-33.142	3	-.005	3	-.079	3	-.079	3
207		9	max	20.683	2	420.135	3	91.837	1	0	10	.036	1	.634	2
208			min	-23.285	3	-767.276	2	-30.751	3	-.005	3	-.104	3	-.371	3
209		10	max	20.683	2	938.575	2	65.192	11	0	15	.118	1	1.297	2
210			min	-23.285	3	-537.987	10	-120.654	1	-.005	3	-.127	3	-.732	3
211		11	max	20.683	2	767.276	2	30.751	3	.005	3	.036	1	.634	2
212			min	-23.285	3	-420.135	3	-91.837	1	0	10	-.104	3	-.371	3
213		12	max	20.683	2	595.978	2	33.142	3	.005	3	0	10	.104	2
214			min	-23.285	3	-331.599	3	-63.019	1	0	10	-.079	3	-.079	3
215		13	max	20.683	2	424.679	2	35.532	3	.005	3	-.004	15	.145	3
216			min	-23.285	3	-243.064	3	-34.202	1	0	10	-.062	1	-.293	2
217		14	max	20.683	2	253.381	2	37.923	3	.005	3	-.004	15	.299	3
218			min	-23.285	3	-154.528	3	-5.385	1	0	10	-.078	1	-.557	2
219		15	max	20.683	2	82.082	2	40.313	3	.005	3	.006	3	.385	3
220			min	-23.285	3	-65.993	3	1.363	15	0	10	-.071	1	-.688	2
221		16	max	20.683	2	22.543	3	52.25	1	.005	3	.039	3	.402	3
222			min	-23.285	3	-89.216	2	2.957	15	0	10	-.041	1	-.685	2
223		17	max	20.683	2	111.078	3	81.067	1	.005	3	.073	3	.35	3
224			min	-23.285	3	-260.515	2	4.551	15	0	10	0	10	-.549	2
225		18	max	20.683	2	199.614	3	109.885	1	.005	3	.109	3	.229	3
226			min	-23.285	3	-431.813	2	6.145	15	0	10	.005	15	-.28	2
227		19	max	20.683	2	288.149	3	138.702	1	.005	3	.181	1	.123	2
228			min	-23.285	3	-603.112	2	7.739	15	0	10	.01	15	0	15
229	M13	1	max	-3.52	15	637.956	2	-7.308	15	.007	3	.142	1	.151	2
230			min	-62.379	1	-308.537	3	-130.411	1	-.019	2	.008	15	-.04	3
231		2	max	-3.52	15	466.657	2	-5.714	15	.007	3	.089	3	.165	3
232			min	-62.379	1	-220.001	3	-101.594	1	-.019	2	.002	10	-.278	2
233		3	max	-3.52	15	295.359	2	-4.12	15	.007	3	.057	3	.302	3
234			min	-62.379	1	-131.466	3	-72.776	1	-.019	2	-.016	1	-.574	2
235		4	max	-3.52	15	124.06	2	-2.526	15	.007	3	.027	3	.37	3
236			min	-62.379	1	-42.93	3	-43.959	1	-.019	2	-.061	1	-.738	2
237		5	max	-3.52	15	45.605	3	-.269	10	.007	3	-.001	12	.369	3
238			min	-62.379	1	-47.238	2	-35.218	3	-.019	2	-.084	1	-.767	2
239		6	max	-3.52	15	134.141	3	13.675	1	.007	3	-.005	15	.299	3
240			min	-62.379	1	-218.537	2	-32.827	3	-.019	2	-.085	1	-.664	2
241		7	max	-3.52	15	222.676	3	42.493	1	.007	3	-.004	15	.16	3
242			min	-62.379	1	-389.835	2	-30.436	3	-.019	2	-.063	1	-.428	2
243		8	max	-3.52	15	311.212	3	71.31	1	.007	3	.001	10	-.002	15
244			min	-62.379	1	-561.134	2	-28.046	3	-.019	2	-.075	3	-.06	1
245		9	max	-3.52	15	399.747	3	100.127	1	.007	3	.048	1	.445	2
246			min	-62.379	1	-732.432	2	-25.655	3	-.019	2	-.096	3	-.324	3
247		10	max	-3.52	15	903.731	2	-7.038	15	0	15	.137	1	1.082	2
248			min	-62.379	1	11.651	15	-128.945	1	-.019	2	-.115	3	-.669	3
249		11	max	-3.52	15	732.432	2	25.655	3	.019	2	.048	1	.445	2
250			min	-62.379	1	-399.747	3	-100.127	1	-.007	3	-.096	3	-.324	3
251		12	max	-3.52	15	561.134	2	28.046	3	.019	2	.001	10	-.002	15
252			min	-62.379	1	-311.212	3	-71.31	1	-.007	3	-.075	3	-.06	1
253		13	max	-3.52	15	389.835	2	30.436	3	.019	2	-.004	15	.16	3
254			min	-62.379	1	-222.676	3	-42.493	1	-.007	3	-.063	1	-.428	2
255		14	max	-3.52	15	218.537	2	32.827	3	.019	2	-.005	15	.299	3
256			min	-62.379	1	-134.141	3	-13.675	1	-.007	3	-.085	1	-.664	2
257		15	max	-3.52	15	47.238	2	35.218	3	.019	2	-.001	12	.369	3
258			min	-62.379	1	-45.605	3	.269	10	-.007	3	-.084	1	-.767	2
259		16	max	-3.52	15	42.93	3	43.959	1	.019	2	.027	3	.37	3
260			min	-62.379	1	-124.06	2	2.526	15	-.007	3	-.061	1	-.738	2

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
261		17	max	-3.52	15	131.466	3	72.776	1	.019	2	.057	3	.302	3
262			min	-62.379	1	-295.359	2	4.12	15	-.007	3	-.016	1	-.574	2
263		18	max	-3.52	15	220.001	3	101.594	1	.019	2	.089	3	.165	3
264			min	-62.379	1	-466.657	2	5.714	15	-.007	3	.002	10	-.278	2
265		19	max	-3.52	15	308.537	3	130.411	1	.019	2	.142	1	.151	2
266			min	-62.379	1	-637.956	2	7.308	15	-.007	3	.008	15	-.04	3
267	M2	1	max	1900.68	2	1312.348	3	129.829	2	.008	3	.289	3	5.506	3
268			min	-1463.845	3	-994.053	2	-171.438	3	-.017	2	-.189	2	-.082	10
269		2	max	1187.477	2	882.588	3	88.745	2	0	2	.232	3	5.118	3
270			min	-1191.263	3	6.866	10	-152.142	3	0	3	-.144	2	.04	10
271		3	max	1184.371	2	882.588	3	88.745	2	0	2	.18	3	4.817	3
272			min	-1193.593	3	6.866	10	-152.142	3	0	3	-.114	2	.037	10
273		4	max	1181.265	2	882.588	3	88.745	2	0	2	.128	3	4.516	3
274			min	-1195.922	3	6.866	10	-152.142	3	0	3	-.083	2	.035	10
275		5	max	1178.159	2	882.588	3	88.745	2	0	2	.076	3	4.215	3
276			min	-1198.252	3	6.866	10	-152.142	3	0	3	-.053	2	.033	10
277		6	max	1175.053	2	882.588	3	88.745	2	0	2	.024	3	3.914	3
278			min	-1200.581	3	6.866	10	-152.142	3	0	3	-.025	1	.03	10
279		7	max	1171.947	2	882.588	3	88.745	2	0	2	.007	2	3.613	3
280			min	-1202.911	3	6.866	10	-152.142	3	0	3	-.028	3	.028	10
281		8	max	1168.841	2	882.588	3	88.745	2	0	2	.038	2	3.312	3
282			min	-1205.24	3	6.866	10	-152.142	3	0	3	-.08	3	.026	10
283		9	max	1165.735	2	882.588	3	88.745	2	0	2	.068	2	3.011	3
284			min	-1207.57	3	6.866	10	-152.142	3	0	3	-.132	3	.023	10
285		10	max	1162.629	2	882.588	3	88.745	2	0	2	.098	2	2.71	3
286			min	-1209.9	3	6.866	10	-152.142	3	0	3	-.184	3	.021	10
287		11	max	1159.523	2	882.588	3	88.745	2	0	2	.129	2	2.408	3
288			min	-1212.229	3	6.866	10	-152.142	3	0	3	-.235	3	.019	10
289		12	max	1156.417	2	882.588	3	88.745	2	0	2	.159	2	2.107	3
290			min	-1214.559	3	6.866	10	-152.142	3	0	3	-.287	3	.016	10
291		13	max	1153.31	2	882.588	3	88.745	2	0	2	.189	2	1.806	3
292			min	-1216.888	3	6.866	10	-152.142	3	0	3	-.339	3	.014	10
293		14	max	1150.204	2	882.588	3	88.745	2	0	2	.219	2	1.505	3
294			min	-1219.218	3	6.866	10	-152.142	3	0	3	-.391	3	.012	10
295		15	max	1147.098	2	882.588	3	88.745	2	0	2	.25	2	1.204	3
296			min	-1221.547	3	6.866	10	-152.142	3	0	3	-.443	3	.009	10
297		16	max	1143.992	2	882.588	3	88.745	2	0	2	.28	2	.903	3
298			min	-1223.877	3	6.866	10	-152.142	3	0	3	-.495	3	.007	10
299		17	max	1140.886	2	882.588	3	88.745	2	0	2	.31	2	.602	3
300			min	-1226.207	3	6.866	10	-152.142	3	0	3	-.547	3	.005	10
301		18	max	1137.78	2	882.588	3	88.745	2	0	2	.34	2	.301	3
302			min	-1228.536	3	6.866	10	-152.142	3	0	3	-.599	3	.002	10
303		19	max	1134.674	2	882.588	3	88.745	2	0	2	.371	2	0	1
304			min	-1230.866	3	6.866	10	-152.142	3	0	3	-.651	3	0	1
305	M5	1	max	5300.299	2	3067.859	3	0	1	0	1	0	1	9.157	3
306			min	-4693.538	3	-3075.684	2	0	1	0	1	0	1	-.393	10
307		2	max	3203.783	2	1437.782	3	0	1	0	1	0	1	8.338	3
308			min	-3656.536	3	-4.376	10	0	1	0	1	0	1	-.025	10
309		3	max	3200.677	2	1437.782	3	0	1	0	1	0	1	7.847	3
310			min	-3658.866	3	-4.376	10	0	1	0	1	0	1	-.024	10
311		4	max	3197.571	2	1437.782	3	0	1	0	1	0	1	7.357	3
312			min	-3661.195	3	-4.376	10	0	1	0	1	0	1	-.022	10
313		5	max	3194.465	2	1437.782	3	0	1	0	1	0	1	6.866	3
314			min	-3663.525	3	-4.376	10	0	1	0	1	0	1	-.021	10
315		6	max	3191.359	2	1437.782	3	0	1	0	1	0	1	6.376	3
316			min	-3665.854	3	-4.376	10	0	1	0	1	0	1	-.019	10
317		7	max	3188.253	2	1437.782	3	0	1	0	1	0	1	5.885	3

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
318			min	-3668.184	3	-4.376	10	0	1	0	1	0	1	-.018	10
319		8	max	3185.147	2	1437.782	3	0	1	0	1	0	1	5.395	3
320			min	-3670.514	3	-4.376	10	0	1	0	1	0	1	-.016	10
321		9	max	3182.041	2	1437.782	3	0	1	0	1	0	1	4.904	3
322			min	-3672.843	3	-4.376	10	0	1	0	1	0	1	-.015	10
323		10	max	3178.935	2	1437.782	3	0	1	0	1	0	1	4.414	3
324			min	-3675.173	3	-4.376	10	0	1	0	1	0	1	-.013	10
325		11	max	3175.828	2	1437.782	3	0	1	0	1	0	1	3.924	3
326			min	-3677.502	3	-4.376	10	0	1	0	1	0	1	-.012	10
327		12	max	3172.722	2	1437.782	3	0	1	0	1	0	1	3.433	3
328			min	-3679.832	3	-4.376	10	0	1	0	1	0	1	-.01	10
329		13	max	3169.616	2	1437.782	3	0	1	0	1	0	1	2.943	3
330			min	-3682.161	3	-4.376	10	0	1	0	1	0	1	-.009	10
331		14	max	3166.51	2	1437.782	3	0	1	0	1	0	1	2.452	3
332			min	-3684.491	3	-4.376	10	0	1	0	1	0	1	-.007	10
333		15	max	3163.404	2	1437.782	3	0	1	0	1	0	1	1.962	3
334			min	-3686.82	3	-4.376	10	0	1	0	1	0	1	-.006	10
335		16	max	3160.298	2	1437.782	3	0	1	0	1	0	1	1.471	3
336			min	-3689.15	3	-4.376	10	0	1	0	1	0	1	-.004	10
337		17	max	3157.192	2	1437.782	3	0	1	0	1	0	1	.981	3
338			min	-3691.48	3	-4.376	10	0	1	0	1	0	1	-.003	10
339		18	max	3154.086	2	1437.782	3	0	1	0	1	0	1	.49	3
340			min	-3693.809	3	-4.376	10	0	1	0	1	0	1	-.001	10
341		19	max	3150.98	2	1437.782	3	0	1	0	1	0	1	0	1
342			min	-3696.139	3	-4.376	10	0	1	0	1	0	1	0	1
343	M8	1	max	1900.68	2	1312.348	3	171.438	3	.017	2	.189	2	5.506	3
344			min	-1463.845	3	-994.053	2	-129.829	2	-.008	3	-.289	3	-.082	10
345		2	max	1187.477	2	882.588	3	152.142	3	0	3	.144	2	5.118	3
346			min	-1191.263	3	6.866	10	-88.745	2	0	2	-.232	3	.04	10
347		3	max	1184.371	2	882.588	3	152.142	3	0	3	.114	2	4.817	3
348			min	-1193.593	3	6.866	10	-88.745	2	0	2	-.18	3	.037	10
349		4	max	1181.265	2	882.588	3	152.142	3	0	3	.083	2	4.516	3
350			min	-1195.922	3	6.866	10	-88.745	2	0	2	-.128	3	.035	10
351		5	max	1178.159	2	882.588	3	152.142	3	0	3	.053	2	4.215	3
352			min	-1198.252	3	6.866	10	-88.745	2	0	2	-.076	3	.033	10
353		6	max	1175.053	2	882.588	3	152.142	3	0	3	.025	1	3.914	3
354			min	-1200.581	3	6.866	10	-88.745	2	0	2	-.024	3	.03	10
355		7	max	1171.947	2	882.588	3	152.142	3	0	3	.028	3	3.613	3
356			min	-1202.911	3	6.866	10	-88.745	2	0	2	-.007	2	.028	10
357		8	max	1168.841	2	882.588	3	152.142	3	0	3	.08	3	3.312	3
358			min	-1205.24	3	6.866	10	-88.745	2	0	2	-.038	2	.026	10
359		9	max	1165.735	2	882.588	3	152.142	3	0	3	.132	3	3.011	3
360			min	-1207.57	3	6.866	10	-88.745	2	0	2	-.068	2	.023	10
361		10	max	1162.629	2	882.588	3	152.142	3	0	3	.184	3	2.71	3
362			min	-1209.9	3	6.866	10	-88.745	2	0	2	-.098	2	.021	10
363		11	max	1159.523	2	882.588	3	152.142	3	0	3	.235	3	2.408	3
364			min	-1212.229	3	6.866	10	-88.745	2	0	2	-.129	2	.019	10
365		12	max	1156.417	2	882.588	3	152.142	3	0	3	.287	3	2.107	3
366			min	-1214.559	3	6.866	10	-88.745	2	0	2	-.159	2	.016	10
367		13	max	1153.31	2	882.588	3	152.142	3	0	3	.339	3	1.806	3
368			min	-1216.888	3	6.866	10	-88.745	2	0	2	-.189	2	.014	10
369		14	max	1150.204	2	882.588	3	152.142	3	0	3	.391	3	1.505	3
370			min	-1219.218	3	6.866	10	-88.745	2	0	2	-.219	2	.012	10
371		15	max	1147.098	2	882.588	3	152.142	3	0	3	.443	3	1.204	3
372			min	-1221.547	3	6.866	10	-88.745	2	0	2	-.25	2	.009	10
373		16	max	1143.992	2	882.588	3	152.142	3	0	3	.495	3	.903	3
374			min	-1223.877	3	6.866	10	-88.745	2	0	2	-.28	2	.007	10

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
375		17	max	1140.886	2	882.588	3	152.142	3	0	3	.547	3	.602	3
376			min	-1226.207	3	6.866	10	-88.745	2	0	2	-.31	2	.005	10
377		18	max	1137.78	2	882.588	3	152.142	3	0	3	.599	3	.301	3
378			min	-1228.536	3	6.866	10	-88.745	2	0	2	-.34	2	.002	10
379		19	max	1134.674	2	882.588	3	152.142	3	0	3	.651	3	0	1
380			min	-1230.866	3	6.866	10	-88.745	2	0	2	-.371	2	0	1
381	M3	1	max	1281.303	2	4.147	4	40.92	2	.003	3	.008	3	0	1
382			min	-505.184	3	.975	15	-19.451	3	-.005	2	-.018	2	0	1
383		2	max	1281.065	2	3.686	4	40.92	2	.003	3	.003	3	0	15
384			min	-505.363	3	.866	15	-19.451	3	-.005	2	-.006	2	-.001	4
385		3	max	1280.827	2	3.225	4	40.92	2	.003	3	.005	2	0	15
386			min	-505.541	3	.758	15	-19.451	3	-.005	2	-.003	3	-.002	4
387		4	max	1280.589	2	2.765	4	40.92	2	.003	3	.017	2	0	15
388			min	-505.72	3	.65	15	-19.451	3	-.005	2	-.008	3	-.003	4
389		5	max	1280.351	2	2.304	4	40.92	2	.003	3	.029	2	0	15
390			min	-505.898	3	.542	15	-19.451	3	-.005	2	-.014	3	-.004	4
391		6	max	1280.113	2	1.843	4	40.92	2	.003	3	.041	2	-.001	15
392			min	-506.077	3	.433	15	-19.451	3	-.005	2	-.02	3	-.004	4
393		7	max	1279.875	2	1.382	4	40.92	2	.003	3	.053	2	-.001	15
394			min	-506.255	3	.325	15	-19.451	3	-.005	2	-.025	3	-.005	4
395		8	max	1279.637	2	.922	4	40.92	2	.003	3	.065	2	-.001	15
396			min	-506.434	3	.217	15	-19.451	3	-.005	2	-.031	3	-.005	4
397		9	max	1279.399	2	.461	4	40.92	2	.003	3	.077	2	-.001	15
398			min	-506.612	3	.108	15	-19.451	3	-.005	2	-.037	3	-.005	4
399		10	max	1279.161	2	0	1	40.92	2	.003	3	.089	2	-.001	15
400			min	-506.791	3	0	1	-19.451	3	-.005	2	-.042	3	-.005	4
401		11	max	1278.923	2	-.108	15	40.92	2	.003	3	.101	2	-.001	15
402			min	-506.969	3	-.461	4	-19.451	3	-.005	2	-.048	3	-.005	4
403		12	max	1278.685	2	-.217	15	40.92	2	.003	3	.112	2	-.001	15
404			min	-507.148	3	-.922	4	-19.451	3	-.005	2	-.054	3	-.005	4
405		13	max	1278.447	2	-.325	15	40.92	2	.003	3	.124	2	-.001	15
406			min	-507.326	3	-1.382	4	-19.451	3	-.005	2	-.059	3	-.005	4
407		14	max	1278.209	2	-.433	15	40.92	2	.003	3	.136	2	-.001	15
408			min	-507.505	3	-1.843	4	-19.451	3	-.005	2	-.065	3	-.004	4
409		15	max	1277.971	2	-.542	15	40.92	2	.003	3	.148	2	0	15
410			min	-507.683	3	-2.304	4	-19.451	3	-.005	2	-.071	3	-.004	4
411		16	max	1277.733	2	-.65	15	40.92	2	.003	3	.16	2	0	15
412			min	-507.862	3	-2.765	4	-19.451	3	-.005	2	-.076	3	-.003	4
413		17	max	1277.495	2	-.758	15	40.92	2	.003	3	.172	2	0	15
414			min	-508.04	3	-3.225	4	-19.451	3	-.005	2	-.082	3	-.002	4
415		18	max	1277.257	2	-.866	15	40.92	2	.003	3	.184	2	0	15
416			min	-508.219	3	-3.686	4	-19.451	3	-.005	2	-.088	3	-.001	4
417		19	max	1277.019	2	-.975	15	40.92	2	.003	3	.196	2	0	1
418			min	-508.397	3	-4.147	4	-19.451	3	-.005	2	-.093	3	0	1
419	M6	1	max	3788.115	2	4.147	4	0	1	0	1	0	1	0	1
420			min	-1908.854	3	.975	15	0	1	0	1	0	1	0	1
421		2	max	3787.877	2	3.686	4	0	1	0	1	0	1	0	15
422			min	-1909.032	3	.866	15	0	1	0	1	0	1	-.001	4
423		3	max	3787.639	2	3.225	4	0	1	0	1	0	1	0	15
424			min	-1909.211	3	.758	15	0	1	0	1	0	1	-.002	4
425		4	max	3787.401	2	2.765	4	0	1	0	1	0	1	0	15
426			min	-1909.389	3	.65	15	0	1	0	1	0	1	-.003	4
427		5	max	3787.163	2	2.304	4	0	1	0	1	0	1	0	15
428			min	-1909.568	3	.542	15	0	1	0	1	0	1	-.004	4
429		6	max	3786.925	2	1.843	4	0	1	0	1	0	1	-.001	15
430			min	-1909.746	3	.433	15	0	1	0	1	0	1	-.004	4
431		7	max	3786.687	2	1.382	4	0	1	0	1	0	1	-.001	15

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
432			min	-1909.925	3	.325	15	0	1	0	1	0	1	-.005	4
433		8	max	3786.449	2	.922	4	0	1	0	1	0	1	-.001	15
434			min	-1910.103	3	.217	15	0	1	0	1	0	1	-.005	4
435		9	max	3786.211	2	.461	4	0	1	0	1	0	1	-.001	15
436			min	-1910.282	3	.108	15	0	1	0	1	0	1	-.005	4
437		10	max	3785.973	2	0	1	0	1	0	1	0	1	-.001	15
438			min	-1910.46	3	0	1	0	1	0	1	0	1	-.005	4
439		11	max	3785.735	2	-.108	15	0	1	0	1	0	1	-.001	15
440			min	-1910.639	3	-.461	4	0	1	0	1	0	1	-.005	4
441		12	max	3785.497	2	-.217	15	0	1	0	1	0	1	-.001	15
442			min	-1910.817	3	-.922	4	0	1	0	1	0	1	-.005	4
443		13	max	3785.259	2	-.325	15	0	1	0	1	0	1	-.001	15
444			min	-1910.996	3	-1.382	4	0	1	0	1	0	1	-.005	4
445		14	max	3785.021	2	-.433	15	0	1	0	1	0	1	-.001	15
446			min	-1911.174	3	-1.843	4	0	1	0	1	0	1	-.004	4
447		15	max	3784.783	2	-.542	15	0	1	0	1	0	1	0	15
448			min	-1911.353	3	-2.304	4	0	1	0	1	0	1	-.004	4
449		16	max	3784.545	2	-.65	15	0	1	0	1	0	1	0	15
450			min	-1911.531	3	-2.765	4	0	1	0	1	0	1	-.003	4
451		17	max	3784.307	2	-.758	15	0	1	0	1	0	1	0	15
452			min	-1911.71	3	-3.225	4	0	1	0	1	0	1	-.002	4
453		18	max	3784.069	2	-.866	15	0	1	0	1	0	1	0	15
454			min	-1911.888	3	-3.686	4	0	1	0	1	0	1	-.001	4
455		19	max	3783.831	2	-.975	15	0	1	0	1	0	1	0	1
456			min	-1912.067	3	-4.147	4	0	1	0	1	0	1	0	1
457	M9	1	max	1281.303	2	4.147	4	19.451	3	.005	2	.018	2	0	1
458			min	-505.184	3	.975	15	-40.92	2	-.003	3	-.008	3	0	1
459		2	max	1281.065	2	3.686	4	19.451	3	.005	2	.006	2	0	15
460			min	-505.363	3	.866	15	-40.92	2	-.003	3	-.003	3	-.001	4
461		3	max	1280.827	2	3.225	4	19.451	3	.005	2	.003	3	0	15
462			min	-505.541	3	.758	15	-40.92	2	-.003	3	-.005	2	-.002	4
463		4	max	1280.589	2	2.765	4	19.451	3	.005	2	.008	3	0	15
464			min	-505.72	3	.65	15	-40.92	2	-.003	3	-.017	2	-.003	4
465		5	max	1280.351	2	2.304	4	19.451	3	.005	2	.014	3	0	15
466			min	-505.898	3	.542	15	-40.92	2	-.003	3	-.029	2	-.004	4
467		6	max	1280.113	2	1.843	4	19.451	3	.005	2	.02	3	-.001	15
468			min	-506.077	3	.433	15	-40.92	2	-.003	3	-.041	2	-.004	4
469		7	max	1279.875	2	1.382	4	19.451	3	.005	2	.025	3	-.001	15
470			min	-506.255	3	.325	15	-40.92	2	-.003	3	-.053	2	-.005	4
471		8	max	1279.637	2	.922	4	19.451	3	.005	2	.031	3	-.001	15
472			min	-506.434	3	.217	15	-40.92	2	-.003	3	-.065	2	-.005	4
473		9	max	1279.399	2	.461	4	19.451	3	.005	2	.037	3	-.001	15
474			min	-506.612	3	.108	15	-40.92	2	-.003	3	-.077	2	-.005	4
475		10	max	1279.161	2	0	1	19.451	3	.005	2	.042	3	-.001	15
476			min	-506.791	3	0	1	-40.92	2	-.003	3	-.089	2	-.005	4
477		11	max	1278.923	2	-.108	15	19.451	3	.005	2	.048	3	-.001	15
478			min	-506.969	3	-.461	4	-40.92	2	-.003	3	-.101	2	-.005	4
479		12	max	1278.685	2	-.217	15	19.451	3	.005	2	.054	3	-.001	15
480			min	-507.148	3	-.922	4	-40.92	2	-.003	3	-.112	2	-.005	4
481		13	max	1278.447	2	-.325	15	19.451	3	.005	2	.059	3	-.001	15
482			min	-507.326	3	-1.382	4	-40.92	2	-.003	3	-.124	2	-.005	4
483		14	max	1278.209	2	-.433	15	19.451	3	.005	2	.065	3	-.001	15
484			min	-507.505	3	-1.843	4	-40.92	2	-.003	3	-.136	2	-.004	4
485		15	max	1277.971	2	-.542	15	19.451	3	.005	2	.071	3	0	15
486			min	-507.683	3	-2.304	4	-40.92	2	-.003	3	-.148	2	-.004	4
487		16	max	1277.733	2	-.65	15	19.451	3	.005	2	.076	3	0	15
488			min	-507.862	3	-2.765	4	-40.92	2	-.003	3	-.16	2	-.003	4

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
489		17	max	1277.495	2	-.758	15	19.451	3	.005	2	.082	3	0	15
490			min	-508.04	3	-3.225	4	-40.92	2	-.003	3	-.172	2	-.002	4
491		18	max	1277.257	2	-.866	15	19.451	3	.005	2	.088	3	0	15
492			min	-508.219	3	-3.686	4	-40.92	2	-.003	3	-.184	2	-.001	4
493		19	max	1277.019	2	-.975	15	19.451	3	.005	2	.093	3	0	1
494			min	-508.397	3	-4.147	4	-40.92	2	-.003	3	-.196	2	0	1

Envelope Member Section Deflections

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
1	M1	1	max	-.003	10	-.012	15	.011	1	5.097e-3	3	NC	3	NC	1
2			min	-.305	3	-.287	1	0	15	-1.309e-2	2	531.179	1	NC	1
3		2	max	-.003	10	-.01	15	.003	1	5.097e-3	3	NC	2	NC	1
4			min	-.305	3	-.229	1	0	15	-1.309e-2	2	687.974	1	NC	1
5		3	max	-.003	10	-.008	15	0	15	4.782e-3	3	NC	3	NC	1
6			min	-.305	3	-.172	1	-.004	1	-1.19e-2	2	932.643	9	NC	1
7		4	max	-.003	10	-.006	15	0	15	4.299e-3	3	NC	3	NC	2
8			min	-.305	3	-.127	3	-.007	1	-1.008e-2	2	1096.502	9	9518.642	1
9		5	max	-.003	10	-.004	15	0	15	3.815e-3	3	NC	3	NC	1
10			min	-.305	3	-.121	3	-.007	1	-8.256e-3	2	787.606	2	NC	1
11		6	max	-.003	10	.004	10	0	15	3.958e-3	3	NC	1	NC	1
12			min	-.305	3	-.107	3	-.005	1	-7.74e-3	2	650.978	2	NC	1
13		7	max	-.003	10	.021	2	0	3	4.534e-3	3	NC	5	NC	1
14			min	-.305	3	-.086	3	-.003	2	-8.128e-3	2	590.823	2	NC	1
15		8	max	-.003	10	.032	2	0	3	5.11e-3	3	NC	5	NC	1
16			min	-.305	3	-.059	3	0	2	-8.516e-3	2	562.932	2	NC	1
17		9	max	-.003	10	.038	2	0	10	5.858e-3	3	NC	5	NC	1
18			min	-.305	3	-.028	3	0	3	-8.369e-3	2	548.319	2	NC	1
19		10	max	-.003	10	.05	1	0	2	6.908e-3	3	NC	5	NC	1
20			min	-.305	3	.002	15	0	3	-7.277e-3	2	539.055	2	NC	1
21		11	max	-.003	10	.063	1	0	3	7.959e-3	3	NC	5	NC	1
22			min	-.305	3	.003	15	0	2	-6.186e-3	2	536.204	2	NC	1
23		12	max	-.003	10	.091	3	.003	3	6.784e-3	3	NC	4	NC	1
24			min	-.305	3	.004	15	-.002	2	-4.685e-3	2	540.589	2	NC	1
25		13	max	-.003	10	.146	3	.007	3	4.349e-3	3	NC	4	NC	1
26			min	-.305	3	.005	15	-.003	2	-2.952e-3	2	486.644	3	NC	1
27		14	max	-.002	10	.217	3	.007	3	2.056e-3	3	NC	4	NC	1
28			min	-.305	3	0	10	-.001	2	-1.3e-3	2	386.095	3	NC	1
29		15	max	-.002	10	.312	3	.005	1	6.042e-3	3	NC	4	NC	1
30			min	-.305	3	-.019	10	0	15	-3.229e-3	2	303.399	3	NC	1
31		16	max	-.002	10	.424	3	.006	1	1.003e-2	3	NC	4	NC	1
32			min	-.305	3	-.058	2	0	15	-5.159e-3	2	242.147	3	NC	1
33		17	max	-.002	10	.546	3	.004	1	1.401e-2	3	NC	4	NC	1
34			min	-.306	3	-.105	2	0	15	-7.088e-3	2	198.252	3	NC	1
35		18	max	-.002	10	.673	3	0	15	1.661e-2	3	NC	4	NC	1
36			min	-.306	3	-.156	2	-.003	1	-8.346e-3	2	166.94	3	NC	1
37		19	max	-.002	10	.8	3	0	15	1.661e-2	3	NC	1	NC	1
38			min	-.306	3	-.206	2	-.011	1	-8.346e-3	2	144.189	3	NC	1
39	M4	1	max	-.001	10	-.02	15	0	1	0	1	NC	3	NC	1
40			min	-.494	3	-.639	2	0	1	0	1	373.427	1	NC	1
41		2	max	-.001	10	-.016	15	0	1	0	1	NC	2	NC	1
42			min	-.494	3	-.488	2	0	1	0	1	565.839	1	NC	1
43		3	max	-.001	10	-.013	15	0	1	0	1	9163.075	11	NC	1
44			min	-.494	3	-.336	2	0	1	0	1	817.756	9	NC	1
45		4	max	-.001	10	-.009	15	0	1	0	1	NC	1	NC	1
46			min	-.494	3	-.213	1	0	1	0	1	452.512	2	NC	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
47		5	max	-.001	10	-.006	15	0	1	0	1	NC	15	NC	1
48			min	-.494	3	-.181	3	0	1	0	1	323.963	2	NC	1
49		6	max	-.001	10	.006	10	0	1	0	1	NC	5	NC	1
50			min	-.495	3	-.172	3	0	1	0	1	273.816	2	NC	1
51		7	max	0	10	.036	2	0	1	0	1	NC	5	NC	1
52			min	-.495	3	-.14	3	0	1	0	1	254.909	2	NC	1
53		8	max	0	10	.049	2	0	1	0	1	NC	5	NC	1
54			min	-.495	3	-.095	3	0	1	0	1	248.927	2	NC	1
55		9	max	0	10	.053	2	0	1	0	1	NC	4	NC	1
56			min	-.495	3	-.042	3	0	1	0	1	246.999	2	NC	1
57		10	max	0	10	.072	1	0	1	0	1	NC	4	NC	1
58			min	-.496	3	.003	15	0	1	0	1	244.951	2	NC	1
59		11	max	0	10	.092	1	0	1	0	1	NC	4	NC	1
60			min	-.496	3	.005	15	0	1	0	1	243.689	2	NC	1
61		12	max	0	10	.144	3	0	1	0	1	NC	5	NC	1
62			min	-.496	3	.006	15	0	1	0	1	243.712	2	NC	1
63		13	max	.001	10	.232	3	0	1	0	1	NC	5	NC	1
64			min	-.497	3	.007	15	0	1	0	1	248.758	2	NC	1
65		14	max	.001	10	.357	3	0	1	0	1	NC	5	NC	1
66			min	-.497	3	-.004	10	0	1	0	1	265.898	2	NC	1
67		15	max	.001	10	.535	3	0	1	0	1	NC	5	NC	1
68			min	-.497	3	-.054	2	0	1	0	1	218.637	3	NC	1
69		16	max	.001	10	.753	3	0	1	0	1	NC	5	NC	1
70			min	-.497	3	-.149	2	0	1	0	1	161.325	3	NC	1
71		17	max	.001	10	.995	3	0	1	0	1	NC	5	NC	1
72			min	-.497	3	-.259	2	0	1	0	1	124.921	3	NC	1
73		18	max	.001	10	1.246	3	0	1	0	1	NC	4	NC	1
74			min	-.497	3	-.374	2	0	1	0	1	101.252	3	NC	1
75		19	max	.001	10	1.496	3	0	1	0	1	NC	1	NC	1
76			min	-.497	3	-.489	2	0	1	0	1	85.158	3	NC	1
77	M7	1	max	-.003	10	-.012	15	0	15	1.309e-2	2	NC	3	NC	1
78			min	-.305	3	-.287	1	-.011	1	-5.097e-3	3	531.179	1	NC	1
79		2	max	-.003	10	-.01	15	0	15	1.309e-2	2	NC	2	NC	1
80			min	-.305	3	-.229	1	-.003	1	-5.097e-3	3	687.974	1	NC	1
81		3	max	-.003	10	-.008	15	.004	1	1.19e-2	2	NC	3	NC	1
82			min	-.305	3	-.172	1	0	15	-4.782e-3	3	932.643	9	NC	1
83		4	max	-.003	10	-.006	15	.007	1	1.008e-2	2	NC	3	NC	2
84			min	-.305	3	-.127	3	0	15	-4.299e-3	3	1096.502	9	9518.642	1
85		5	max	-.003	10	-.004	15	.007	1	8.256e-3	2	NC	3	NC	1
86			min	-.305	3	-.121	3	0	15	-3.815e-3	3	787.606	2	NC	1
87		6	max	-.003	10	.004	10	.005	1	7.74e-3	2	NC	1	NC	1
88			min	-.305	3	-.107	3	0	15	-3.958e-3	3	650.978	2	NC	1
89		7	max	-.003	10	.021	2	.003	2	8.128e-3	2	NC	5	NC	1
90			min	-.305	3	-.086	3	0	3	-4.534e-3	3	590.823	2	NC	1
91		8	max	-.003	10	.032	2	0	2	8.516e-3	2	NC	5	NC	1
92			min	-.305	3	-.059	3	0	3	-5.11e-3	3	562.932	2	NC	1
93		9	max	-.003	10	.038	2	0	3	8.369e-3	2	NC	5	NC	1
94			min	-.305	3	-.028	3	0	10	-5.858e-3	3	548.319	2	NC	1
95		10	max	-.003	10	.05	1	0	3	7.277e-3	2	NC	5	NC	1
96			min	-.305	3	.002	15	0	2	-6.908e-3	3	539.055	2	NC	1
97		11	max	-.003	10	.063	1	0	2	6.186e-3	2	NC	5	NC	1
98			min	-.305	3	.003	15	0	3	-7.959e-3	3	536.204	2	NC	1
99		12	max	-.003	10	.091	3	.002	2	4.685e-3	2	NC	4	NC	1
100			min	-.305	3	.004	15	-.003	3	-6.784e-3	3	540.589	2	NC	1
101		13	max	-.003	10	.146	3	.003	2	2.952e-3	2	NC	4	NC	1
102			min	-.305	3	.005	15	-.007	3	-4.349e-3	3	486.644	3	NC	1
103		14	max	-.002	10	.217	3	.001	2	1.3e-3	2	NC	4	NC	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
104			min	-.305	3	0	10	-.007	3	-2.056e-3	3	386.095	3	NC	1
105		15	max	-.002	10	.312	3	0	15	3.229e-3	2	NC	4	NC	1
106			min	-.305	3	-.019	10	-.005	1	-6.042e-3	3	303.399	3	NC	1
107		16	max	-.002	10	.424	3	0	15	5.159e-3	2	NC	4	NC	1
108			min	-.305	3	-.058	2	-.006	1	-1.003e-2	3	242.147	3	NC	1
109		17	max	-.002	10	.546	3	0	15	7.088e-3	2	NC	4	NC	1
110			min	-.306	3	-.105	2	-.004	1	-1.401e-2	3	198.252	3	NC	1
111		18	max	-.002	10	.673	3	.003	1	8.346e-3	2	NC	4	NC	1
112			min	-.306	3	-.156	2	0	15	-1.661e-2	3	166.94	3	NC	1
113		19	max	-.002	10	.8	3	.011	1	8.346e-3	2	NC	1	NC	1
114			min	-.306	3	-.206	2	0	15	-1.661e-2	3	144.189	3	NC	1
115	M10	1	max	0	3	.629	3	.306	3	1.701e-2	3	NC	1	NC	1
116			min	0	10	-.138	2	.002	10	-6.757e-3	2	NC	1	NC	1
117		2	max	0	3	.788	3	.318	3	1.886e-2	3	NC	4	NC	1
118			min	0	10	-.217	2	.004	10	-7.725e-3	2	1059.707	3	NC	1
119		3	max	0	3	.938	3	.339	3	2.07e-2	3	NC	4	NC	2
120			min	0	10	-.291	2	.006	10	-8.694e-3	2	543.133	3	4798.88	1
121		4	max	0	3	1.064	3	.367	3	2.254e-2	3	NC	5	NC	5
122			min	0	10	-.348	2	.008	10	-9.663e-3	2	386.315	3	2750.236	3
123		5	max	0	3	1.154	3	.397	3	2.438e-2	3	NC	5	NC	5
124			min	0	10	-.385	2	.008	10	-1.063e-2	2	320.311	3	1842.835	3
125		6	max	0	3	1.203	3	.427	3	2.623e-2	3	NC	5	NC	5
126			min	0	10	-.398	2	.007	10	-1.16e-2	2	292.601	3	1385.597	3
127		7	max	0	3	1.216	3	.454	3	2.807e-2	3	NC	5	NC	5
128			min	0	10	-.391	2	.005	10	-1.257e-2	2	286.378	3	1129.842	3
129		8	max	0	3	1.201	3	.477	3	2.991e-2	3	NC	4	NC	2
130			min	0	10	-.37	2	.002	10	-1.354e-2	2	294.01	3	982.235	3
131		9	max	0	3	1.174	3	.492	3	3.175e-2	3	NC	4	NC	2
132			min	0	10	-.346	2	0	10	-1.451e-2	2	308.427	3	903.231	3
133		10	max	0	1	1.159	3	.497	3	3.36e-2	3	NC	4	NC	2
134			min	0	1	-.334	2	-.001	10	-1.547e-2	2	317.296	3	877.423	3
135		11	max	0	10	1.174	3	.492	3	3.175e-2	3	NC	4	NC	2
136			min	0	3	-.346	2	0	10	-1.451e-2	2	308.427	3	903.231	3
137		12	max	0	10	1.201	3	.477	3	2.991e-2	3	NC	4	NC	2
138			min	0	3	-.37	2	.002	10	-1.354e-2	2	294.01	3	982.235	3
139		13	max	0	10	1.216	3	.454	3	2.807e-2	3	NC	5	NC	5
140			min	0	3	-.391	2	.005	10	-1.257e-2	2	286.378	3	1129.842	3
141		14	max	0	10	1.203	3	.427	3	2.623e-2	3	NC	5	NC	5
142			min	0	3	-.398	2	.007	10	-1.16e-2	2	292.601	3	1385.597	3
143		15	max	0	10	1.154	3	.397	3	2.438e-2	3	NC	5	NC	5
144			min	0	3	-.385	2	.008	10	-1.063e-2	2	320.311	3	1842.835	3
145		16	max	0	10	1.064	3	.367	3	2.254e-2	3	NC	5	NC	5
146			min	0	3	-.348	2	.008	10	-9.663e-3	2	386.315	3	2750.236	3
147		17	max	0	10	.938	3	.339	3	2.07e-2	3	NC	4	NC	2
148			min	0	3	-.291	2	.006	10	-8.694e-3	2	543.133	3	4798.88	1
149		18	max	0	10	.788	3	.318	3	1.886e-2	3	NC	4	NC	1
150			min	0	3	-.217	2	.004	10	-7.725e-3	2	1059.707	3	NC	1
151		19	max	0	10	.629	3	.306	3	1.701e-2	3	NC	1	NC	1
152			min	0	3	-.138	2	.002	10	-6.757e-3	2	NC	1	NC	1
153	M11	1	max	0	2	.068	1	.305	3	5.931e-3	3	NC	1	NC	1
154			min	-.001	3	.004	15	.003	10	-3.335e-4	10	NC	1	NC	1
155		2	max	0	2	.142	3	.311	3	6.286e-3	3	NC	4	NC	1
156			min	-.001	3	-.01	10	.005	10	-3.313e-4	10	2084.785	3	NC	1
157		3	max	0	2	.216	3	.329	3	6.64e-3	3	NC	4	NC	2
158			min	-.001	3	-.053	2	.007	10	-3.292e-4	10	1092.543	3	6052.426	1
159		4	max	0	2	.266	3	.355	3	6.995e-3	3	NC	4	NC	4
160			min	0	3	-.079	2	.008	10	-3.271e-4	10	821.76	3	3365.119	3

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
161		5	max	0	2	.286	3	.386	3	7.35e-3	3	NC	4	NC	5
162			min	0	3	-.084	2	.009	10	-3.25e-4	10	749.287	3	2081.851	3
163		6	max	0	2	.273	3	.418	3	7.705e-3	3	NC	4	NC	5
164			min	0	3	-.068	2	.008	10	-3.228e-4	10	794.509	3	1490.815	3
165		7	max	0	2	.233	3	.448	3	8.06e-3	3	NC	4	NC	5
166			min	0	3	-.035	2	.006	10	-3.207e-4	10	981.015	3	1177.603	3
167		8	max	0	2	.177	3	.473	3	8.415e-3	3	NC	1	NC	2
168			min	0	3	-.003	10	.003	10	-3.186e-4	10	1455.17	3	1002.653	3
169		9	max	0	2	.124	3	.49	3	8.77e-3	3	NC	2	NC	2
170			min	0	3	.005	15	0	10	-3.165e-4	10	2682.654	3	910.629	3
171		10	max	0	1	.1	3	.496	3	9.125e-3	3	NC	4	NC	2
172			min	0	1	.005	15	0	10	-3.143e-4	10	4410.82	3	880.692	3
173		11	max	0	3	.124	3	.49	3	8.77e-3	3	NC	2	NC	2
174			min	0	2	.005	15	0	10	-3.165e-4	10	2682.654	3	910.629	3
175		12	max	0	3	.177	3	.473	3	8.415e-3	3	NC	1	NC	2
176			min	0	2	-.003	10	.003	10	-3.186e-4	10	1455.17	3	1002.653	3
177		13	max	0	3	.233	3	.448	3	8.06e-3	3	NC	4	NC	5
178			min	0	2	-.035	2	.006	10	-3.207e-4	10	981.015	3	1177.603	3
179		14	max	0	3	.273	3	.418	3	7.705e-3	3	NC	4	NC	5
180			min	0	2	-.068	2	.008	10	-3.228e-4	10	794.509	3	1490.815	3
181		15	max	0	3	.286	3	.386	3	7.35e-3	3	NC	4	NC	5
182			min	0	2	-.084	2	.009	10	-3.25e-4	10	749.287	3	2081.851	3
183		16	max	0	3	.266	3	.355	3	6.995e-3	3	NC	4	NC	4
184			min	0	2	-.079	2	.008	10	-3.271e-4	10	821.76	3	3365.119	3
185		17	max	.001	3	.216	3	.329	3	6.64e-3	3	NC	4	NC	2
186			min	0	2	-.053	2	.007	10	-3.292e-4	10	1092.543	3	6052.426	1
187		18	max	.001	3	.142	3	.311	3	6.286e-3	3	NC	4	NC	1
188			min	0	2	-.01	10	.005	10	-3.313e-4	10	2084.785	3	NC	1
189		19	max	.001	3	.068	1	.305	3	5.931e-3	3	NC	1	NC	1
190			min	0	2	.004	15	.003	10	-3.335e-4	10	NC	1	NC	1
191	M12	1	max	0	2	.036	2	.305	3	4.237e-3	3	NC	1	NC	1
192			min	0	3	-.039	3	.003	10	1.532e-4	15	NC	1	NC	1
193		2	max	0	2	.009	3	.314	3	4.557e-3	3	NC	4	NC	1
194			min	0	3	-.045	2	.004	10	1.593e-4	15	2075.875	2	NC	1
195		3	max	0	2	.047	3	.334	3	4.877e-3	3	NC	4	NC	2
196			min	0	3	-.113	2	.005	10	1.653e-4	15	1127.718	2	5899.752	3
197		4	max	0	2	.068	3	.36	3	5.197e-3	3	NC	4	NC	2
198			min	0	3	-.155	2	.006	10	1.713e-4	15	878.633	2	3054.441	3
199		5	max	0	2	.07	3	.391	3	5.518e-3	3	NC	4	NC	5
200			min	0	3	-.165	2	.007	10	1.603e-4	10	835.41	2	1970.233	3
201		6	max	0	2	.053	3	.421	3	5.838e-3	3	NC	4	NC	5
202			min	0	3	-.142	2	.007	10	1.347e-4	10	941.077	2	1446.238	3
203		7	max	0	2	.023	3	.45	3	6.158e-3	3	NC	4	NC	5
204			min	0	3	-.094	2	.005	10	1.09e-4	10	1295.014	2	1160.621	3
205		8	max	0	2	0	4	.474	3	6.478e-3	3	NC	4	NC	2
206			min	0	3	-.031	2	.003	10	8.342e-5	10	2493.112	2	998.373	3
207		9	max	0	2	.026	2	.489	3	6.799e-3	3	NC	1	NC	2
208			min	0	3	-.047	3	.001	10	5.779e-5	10	NC	1	912.258	3
209		10	max	0	1	.052	2	.495	3	7.119e-3	3	NC	1	NC	2
210			min	0	1	-.061	3	0	10	3.216e-5	10	7645.488	3	884.177	3
211		11	max	0	3	.026	2	.489	3	6.799e-3	3	NC	1	NC	2
212			min	0	2	-.047	3	.001	10	5.779e-5	10	NC	1	912.258	3
213		12	max	0	3	0	4	.474	3	6.478e-3	3	NC	4	NC	2
214			min	0	2	-.031	2	.003	10	8.342e-5	10	2493.112	2	998.373	3
215		13	max	0	3	.023	3	.45	3	6.158e-3	3	NC	4	NC	5
216			min	0	2	-.094	2	.005	10	1.09e-4	10	1295.014	2	1160.621	3
217		14	max	0	3	.053	3	.421	3	5.838e-3	3	NC	4	NC	5

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
218			min	0	2	-.142	2	.007	10	1.347e-4	10	941.077	2	1446.238	3
219		15	max	0	3	.07	3	.391	3	5.518e-3	3	NC	4	NC	5
220			min	0	2	-.165	2	.007	10	1.603e-4	10	835.41	2	1970.233	3
221		16	max	0	3	.068	3	.36	3	5.197e-3	3	NC	4	NC	2
222			min	0	2	-.155	2	.006	10	1.713e-4	15	878.633	2	3054.441	3
223		17	max	0	3	.047	3	.334	3	4.877e-3	3	NC	4	NC	2
224			min	0	2	-.113	2	.005	10	1.653e-4	15	1127.718	2	5899.752	3
225		18	max	0	3	.009	3	.314	3	4.557e-3	3	NC	4	NC	1
226			min	0	2	-.045	2	.004	10	1.593e-4	15	2075.875	2	NC	1
227		19	max	0	3	.036	2	.305	3	4.237e-3	3	NC	1	NC	1
228			min	0	2	-.039	3	.003	10	1.532e-4	15	NC	1	NC	1
229	M13	1	max	0	15	-.009	15	.305	3	8.577e-3	2	NC	1	NC	1
230			min	0	1	-.209	1	.003	10	5.368e-5	3	NC	1	NC	1
231		2	max	0	15	-.011	15	.318	3	9.88e-3	2	NC	4	NC	1
232			min	0	1	-.311	2	.005	10	-4.208e-4	3	1378.803	2	NC	1
233		3	max	0	15	-.013	15	.34	3	1.118e-2	2	NC	5	NC	2
234			min	0	1	-.42	2	.008	10	-8.952e-4	3	727.681	2	4704.769	1
235		4	max	0	15	-.014	12	.367	3	1.249e-2	2	NC	5	NC	5
236			min	0	1	-.502	2	.009	10	-1.37e-3	3	536.997	2	2735.211	3
237		5	max	0	15	-.01	12	.396	3	1.379e-2	2	NC	5	NC	5
238			min	0	1	-.549	2	.01	10	-1.844e-3	3	466.724	2	1844.873	3
239		6	max	0	15	-.016	15	.426	3	1.509e-2	2	NC	5	NC	5
240			min	0	1	-.56	2	.009	10	-2.319e-3	3	453.133	2	1393.188	3
241		7	max	0	15	-.016	15	.453	3	1.639e-2	2	NC	5	NC	5
242			min	0	1	-.539	2	.007	10	-2.793e-3	3	479.724	2	1139.449	3
243		8	max	0	15	-.016	15	.474	3	1.77e-2	2	NC	5	NC	2
244			min	0	1	-.499	2	.005	10	-3.268e-3	3	542.531	2	992.622	3
245		9	max	0	15	-.015	15	.489	3	1.9e-2	2	NC	5	NC	2
246			min	0	1	-.456	2	.003	10	-3.742e-3	3	629.493	2	913.937	3
247		10	max	0	1	-.015	15	.494	3	2.03e-2	2	NC	3	NC	2
248			min	0	1	-.435	2	.001	10	-4.216e-3	3	682.885	2	888.232	3
249		11	max	0	1	-.015	15	.489	3	1.9e-2	2	NC	5	NC	2
250			min	0	15	-.456	2	.003	10	-3.742e-3	3	629.493	2	913.937	3
251		12	max	0	1	-.016	15	.474	3	1.77e-2	2	NC	5	NC	2
252			min	0	15	-.499	2	.005	10	-3.268e-3	3	542.531	2	992.622	3
253		13	max	0	1	-.016	15	.453	3	1.639e-2	2	NC	5	NC	5
254			min	0	15	-.539	2	.007	10	-2.793e-3	3	479.724	2	1139.449	3
255		14	max	0	1	-.016	15	.426	3	1.509e-2	2	NC	5	NC	5
256			min	0	15	-.56	2	.009	10	-2.319e-3	3	453.133	2	1393.188	3
257		15	max	0	1	-.01	12	.396	3	1.379e-2	2	NC	5	NC	5
258			min	0	15	-.549	2	.01	10	-1.844e-3	3	466.724	2	1844.873	3
259		16	max	0	1	-.014	12	.367	3	1.249e-2	2	NC	5	NC	5
260			min	0	15	-.502	2	.009	10	-1.37e-3	3	536.997	2	2735.211	3
261		17	max	0	1	-.013	15	.34	3	1.118e-2	2	NC	5	NC	2
262			min	0	15	-.42	2	.008	10	-8.952e-4	3	727.681	2	4704.769	1
263		18	max	0	1	-.011	15	.318	3	9.88e-3	2	NC	4	NC	1
264			min	0	15	-.311	2	.005	10	-4.208e-4	3	1378.803	2	NC	1
265		19	max	0	1	-.009	15	.305	3	8.577e-3	2	NC	1	NC	1
266			min	0	15	-.209	1	.003	10	5.368e-5	3	NC	1	NC	1
267	M2	1	max	0	1	0	1	0	1	0	1	NC	1	NC	1
268			min	0	1	0	1	0	1	0	1	NC	1	NC	1
269		2	max	0	3	0	10	0	3	3.292e-3	2	NC	1	NC	1
270			min	0	2	-.002	3	0	2	-1.61e-3	3	NC	1	NC	1
271		3	max	0	3	0	10	0	3	3.028e-3	2	NC	1	NC	1
272			min	0	2	-.007	3	0	2	-1.423e-3	3	NC	1	NC	1
273		4	max	0	3	0	10	.002	3	2.764e-3	2	NC	1	NC	1
274			min	0	2	-.015	3	-.001	2	-1.235e-3	3	4869.061	3	NC	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
275		5	max	0	3	0	10	.003	3	2.499e-3	2	NC	2	NC	1
276			min	0	2	-.026	3	-.002	2	-1.047e-3	3	2819.113	3	NC	1
277		6	max	0	3	0	10	.004	3	2.235e-3	2	NC	2	NC	1
278			min	0	2	-.04	3	-.003	2	-8.598e-4	3	1850.883	3	NC	1
279		7	max	0	3	0	10	.005	3	1.97e-3	2	NC	2	NC	1
280			min	0	2	-.056	3	-.003	2	-6.722e-4	3	1316.689	3	9663.645	3
281		8	max	0	3	0	10	.007	3	1.706e-3	2	NC	2	NC	1
282			min	0	2	-.074	3	-.004	2	-4.846e-4	3	990.22	3	7987.255	3
283		9	max	0	3	0	10	.008	3	1.441e-3	2	NC	5	NC	1
284			min	0	2	-.095	3	-.005	2	-2.97e-4	3	775.941	3	6888.345	3
285		10	max	0	3	0	10	.009	3	1.177e-3	2	NC	5	NC	1
286			min	0	2	-.117	3	-.006	2	-1.094e-4	3	627.55	3	6162.487	3
287		11	max	0	3	0	10	.009	3	9.122e-4	2	NC	5	NC	1
288			min	0	2	-.142	3	-.006	2	1.833e-6	15	520.421	3	5702.279	3
289		12	max	0	3	0	10	.009	3	6.477e-4	2	NC	5	NC	1
290			min	0	2	-.167	3	-.006	2	-3.546e-5	9	440.482	3	5454.569	3
291		13	max	0	3	-.001	10	.009	3	4.534e-4	3	NC	10	NC	1
292			min	0	2	-.194	3	-.006	2	-9.29e-5	9	379.207	3	5404.381	3
293		14	max	.001	3	-.001	10	.008	3	6.409e-4	3	NC	10	NC	1
294			min	0	2	-.222	3	-.006	2	-1.503e-4	9	331.178	3	5577.28	3
295		15	max	.001	3	-.002	10	.007	3	8.285e-4	3	NC	10	NC	1
296			min	-.001	2	-.252	3	-.006	2	-3.176e-4	1	292.834	3	6059.74	3
297		16	max	.001	3	-.002	10	.005	3	1.016e-3	3	NC	10	NC	1
298			min	-.001	2	-.282	3	-.005	1	-5.175e-4	1	261.737	3	7087.912	3
299		17	max	.001	3	-.002	10	.002	3	1.204e-3	3	NC	10	NC	1
300			min	-.001	2	-.312	3	-.004	1	-7.174e-4	1	236.177	3	9402.498	3
301		18	max	.001	3	-.002	10	0	15	1.391e-3	3	NC	10	NC	1
302			min	-.001	2	-.343	3	-.003	1	-9.392e-4	2	214.926	3	NC	1
303		19	max	.001	3	-.002	10	.002	2	1.579e-3	3	NC	10	NC	1
304			min	-.001	2	-.374	3	-.007	3	-1.204e-3	2	197.082	3	NC	1
305	M5	1	max	0	1	0	1	0	1	0	1	NC	1	NC	1
306			min	0	1	0	1	0	1	0	1	NC	1	NC	1
307		2	max	0	3	0	10	0	1	0	1	NC	1	NC	1
308			min	0	2	-.003	3	0	1	0	1	NC	1	NC	1
309		3	max	0	3	0	10	0	1	0	1	NC	1	NC	1
310			min	0	2	-.012	3	0	1	0	1	6386.555	3	NC	1
311		4	max	0	3	0	10	0	1	0	1	NC	1	NC	1
312			min	0	2	-.025	3	0	1	0	1	2966.154	3	NC	1
313		5	max	0	3	0	10	0	1	0	1	NC	2	NC	1
314			min	0	2	-.043	3	0	1	0	1	1721.463	3	NC	1
315		6	max	.001	3	0	10	0	1	0	1	NC	2	NC	1
316			min	-.001	2	-.065	3	0	1	0	1	1131.648	3	NC	1
317		7	max	.001	3	0	10	0	1	0	1	NC	2	NC	1
318			min	-.001	2	-.091	3	0	1	0	1	805.653	3	NC	1
319		8	max	.002	3	.001	10	0	1	0	1	NC	2	NC	1
320			min	-.001	2	-.122	3	0	1	0	1	606.203	3	NC	1
321		9	max	.002	3	.001	10	0	1	0	1	NC	5	NC	1
322			min	-.002	2	-.155	3	0	1	0	1	475.194	3	NC	1
323		10	max	.002	3	.001	10	0	1	0	1	NC	5	NC	1
324			min	-.002	2	-.192	3	0	1	0	1	384.42	3	NC	1
325		11	max	.002	3	.002	10	0	1	0	1	NC	10	NC	1
326			min	-.002	2	-.231	3	0	1	0	1	318.861	3	NC	1
327		12	max	.003	3	.002	10	0	1	0	1	NC	10	NC	1
328			min	-.002	2	-.273	3	0	1	0	1	269.926	3	NC	1
329		13	max	.003	3	.002	10	0	1	0	1	NC	10	NC	1
330			min	-.002	2	-.317	3	0	1	0	1	232.407	3	NC	1
331		14	max	.003	3	.002	10	0	1	0	1	NC	10	NC	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
332			min	-.003	2	-.363	3	0	1	0	1	202.992	3	NC	1
333		15	max	.003	3	.002	10	0	1	0	1	NC	10	NC	1
334			min	-.003	2	-.41	3	0	1	0	1	179.505	3	NC	1
335		16	max	.004	3	.003	10	0	1	0	1	NC	10	NC	1
336			min	-.003	2	-.459	3	0	1	0	1	160.455	3	NC	1
337		17	max	.004	3	.003	10	0	1	0	1	NC	10	NC	1
338			min	-.003	2	-.509	3	0	1	0	1	144.794	3	NC	1
339		18	max	.004	3	.003	10	0	1	0	1	NC	10	NC	1
340			min	-.003	2	-.559	3	0	1	0	1	131.772	3	NC	1
341		19	max	.004	3	.003	10	0	1	0	1	NC	10	NC	1
342			min	-.004	2	-.61	3	0	1	0	1	120.838	3	NC	1
343	M8	1	max	0	1	0	1	0	1	0	1	NC	1	NC	1
344			min	0	1	0	1	0	1	0	1	NC	1	NC	1
345		2	max	0	3	0	10	0	2	1.61e-3	3	NC	1	NC	1
346			min	0	2	-.002	3	0	3	-3.292e-3	2	NC	1	NC	1
347		3	max	0	3	0	10	0	2	1.423e-3	3	NC	1	NC	1
348			min	0	2	-.007	3	0	3	-3.028e-3	2	NC	1	NC	1
349		4	max	0	3	0	10	.001	2	1.235e-3	3	NC	1	NC	1
350			min	0	2	-.015	3	-.002	3	-2.764e-3	2	4869.061	3	NC	1
351		5	max	0	3	0	10	.002	2	1.047e-3	3	NC	2	NC	1
352			min	0	2	-.026	3	-.003	3	-2.499e-3	2	2819.113	3	NC	1
353		6	max	0	3	0	10	.003	2	8.598e-4	3	NC	2	NC	1
354			min	0	2	-.04	3	-.004	3	-2.235e-3	2	1850.883	3	NC	1
355		7	max	0	3	0	10	.003	2	6.722e-4	3	NC	2	NC	1
356			min	0	2	-.056	3	-.005	3	-1.97e-3	2	1316.689	3	9663.645	3
357		8	max	0	3	0	10	.004	2	4.846e-4	3	NC	2	NC	1
358			min	0	2	-.074	3	-.007	3	-1.706e-3	2	990.22	3	7987.255	3
359		9	max	0	3	0	10	.005	2	2.97e-4	3	NC	5	NC	1
360			min	0	2	-.095	3	-.008	3	-1.441e-3	2	775.941	3	6888.345	3
361		10	max	0	3	0	10	.006	2	1.094e-4	3	NC	5	NC	1
362			min	0	2	-.117	3	-.009	3	-1.177e-3	2	627.55	3	6162.487	3
363		11	max	0	3	0	10	.006	2	-1.833e-6	15	NC	5	NC	1
364			min	0	2	-.142	3	-.009	3	-9.122e-4	2	520.421	3	5702.279	3
365		12	max	0	3	0	10	.006	2	3.546e-5	9	NC	5	NC	1
366			min	0	2	-.167	3	-.009	3	-6.477e-4	2	440.482	3	5454.569	3
367		13	max	0	3	-.001	10	.006	2	9.29e-5	9	NC	10	NC	1
368			min	0	2	-.194	3	-.009	3	-4.534e-4	3	379.207	3	5404.381	3
369		14	max	.001	3	-.001	10	.006	2	1.503e-4	9	NC	10	NC	1
370			min	0	2	-.222	3	-.008	3	-6.409e-4	3	331.178	3	5577.28	3
371		15	max	.001	3	-.002	10	.006	2	3.176e-4	1	NC	10	NC	1
372			min	-.001	2	-.252	3	-.007	3	-8.285e-4	3	292.834	3	6059.74	3
373		16	max	.001	3	-.002	10	.005	1	5.175e-4	1	NC	10	NC	1
374			min	-.001	2	-.282	3	-.005	3	-1.016e-3	3	261.737	3	7087.912	3
375		17	max	.001	3	-.002	10	.004	1	7.174e-4	1	NC	10	NC	1
376			min	-.001	2	-.312	3	-.002	3	-1.204e-3	3	236.177	3	9402.498	3
377		18	max	.001	3	-.002	10	.003	1	9.392e-4	2	NC	10	NC	1
378			min	-.001	2	-.343	3	0	15	-1.391e-3	3	214.926	3	NC	1
379		19	max	.001	3	-.002	10	.007	3	1.204e-3	2	NC	10	NC	1
380			min	-.001	2	-.374	3	-.002	2	-1.579e-3	3	197.082	3	NC	1
381	M3	1	max	0	3	0	10	0	3	1.845e-3	2	NC	1	NC	1
382			min	0	2	0	3	0	2	-8.794e-4	3	NC	1	NC	1
383		2	max	0	3	0	15	.005	3	1.898e-3	2	NC	1	NC	3
384			min	0	2	-.019	3	-.01	2	-9.197e-4	3	NC	1	6036.735	2
385		3	max	0	3	-.001	15	.01	3	1.951e-3	2	NC	1	NC	4
386			min	0	2	-.037	3	-.02	2	-9.601e-4	3	NC	1	2998.452	2
387		4	max	.001	3	-.002	15	.015	3	2.003e-3	2	NC	1	NC	4
388			min	-.001	2	-.056	3	-.031	2	-1.e-3	3	NC	1	2002.033	2

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
389		5	max	.001	3	-.003	15	.02	3	2.056e-3	2	NC	1	NC	4
390			min	-.002	2	-.074	3	-.04	2	-1.041e-3	3	NC	1	1516.194	2
391		6	max	.001	3	-.003	15	.025	3	2.109e-3	2	NC	1	NC	4
392			min	-.002	2	-.093	3	-.05	2	-1.081e-3	3	NC	1	1235.177	2
393		7	max	.002	3	-.004	15	.029	3	2.162e-3	2	NC	1	NC	4
394			min	-.003	2	-.111	3	-.058	2	-1.122e-3	3	NC	1	1057.542	2
395		8	max	.002	3	-.004	15	.033	3	2.215e-3	2	NC	1	NC	4
396			min	-.003	2	-.129	3	-.065	2	-1.162e-3	3	NC	1	940.341	2
397		9	max	.002	3	-.005	15	.036	3	2.267e-3	2	NC	1	NC	5
398			min	-.004	2	-.148	3	-.071	2	-1.202e-3	3	NC	1	862.739	2
399		10	max	.002	3	-.005	10	.038	3	2.32e-3	2	NC	1	NC	5
400			min	-.004	2	-.166	3	-.075	2	-1.243e-3	3	NC	1	814.008	2
401		11	max	.002	3	-.006	10	.039	3	2.373e-3	2	NC	1	NC	5
402			min	-.004	2	-.184	3	-.077	2	-1.283e-3	3	NC	1	788.927	2
403		12	max	.003	3	-.006	10	.04	3	2.426e-3	2	NC	1	NC	5
404			min	-.005	2	-.202	3	-.077	2	-1.323e-3	3	NC	1	786.039	2
405		13	max	.003	3	-.006	10	.039	3	2.479e-3	2	NC	1	NC	5
406			min	-.005	2	-.22	3	-.075	2	-1.364e-3	3	NC	1	807.499	2
407		14	max	.003	3	-.006	10	.037	3	2.531e-3	2	NC	1	NC	5
408			min	-.006	2	-.238	3	-.07	2	-1.404e-3	3	NC	1	860.55	2
409		15	max	.003	3	-.006	10	.033	3	2.584e-3	2	NC	1	NC	4
410			min	-.006	2	-.255	3	-.062	2	-1.444e-3	3	NC	1	962.367	2
411		16	max	.003	3	-.006	10	.028	3	2.637e-3	2	NC	1	NC	4
412			min	-.007	2	-.273	3	-.051	2	-1.485e-3	3	NC	1	1155.408	2
413		17	max	.003	3	-.006	10	.021	3	2.69e-3	2	NC	1	NC	4
414			min	-.007	2	-.291	3	-.036	2	-1.525e-3	3	NC	1	1569.484	2
415		18	max	.004	3	-.006	10	.013	3	2.743e-3	2	NC	1	NC	4
416			min	-.007	2	-.309	3	-.018	2	-1.565e-3	3	NC	1	2857.066	2
417		19	max	.004	3	-.005	10	.006	1	2.795e-3	2	NC	1	NC	1
418			min	-.008	2	-.326	3	0	15	-1.606e-3	3	NC	1	NC	1
419	M6	1	max	.001	3	0	10	0	1	0	1	NC	1	NC	1
420			min	0	2	0	3	0	1	0	1	NC	1	NC	1
421		2	max	.002	3	0	10	0	1	0	1	NC	1	NC	1
422			min	-.002	2	-.03	3	0	1	0	1	NC	1	NC	1
423		3	max	.002	3	-.002	10	0	1	0	1	NC	1	NC	1
424			min	-.003	2	-.06	3	0	1	0	1	NC	1	NC	1
425		4	max	.003	3	-.002	10	0	1	0	1	NC	1	NC	1
426			min	-.004	2	-.089	3	0	1	0	1	NC	1	NC	1
427		5	max	.004	3	-.003	10	0	1	0	1	NC	1	NC	1
428			min	-.005	2	-.119	3	0	1	0	1	NC	1	NC	1
429		6	max	.004	3	-.004	10	0	1	0	1	NC	1	NC	1
430			min	-.007	2	-.148	3	0	1	0	1	NC	1	NC	1
431		7	max	.005	3	-.004	10	0	1	0	1	NC	1	NC	1
432			min	-.008	2	-.178	3	0	1	0	1	NC	1	NC	1
433		8	max	.006	3	-.005	10	0	1	0	1	NC	1	NC	1
434			min	-.009	2	-.207	3	0	1	0	1	NC	1	NC	1
435		9	max	.006	3	-.006	10	0	1	0	1	NC	1	NC	1
436			min	-.011	2	-.236	3	0	1	0	1	NC	1	NC	1
437		10	max	.007	3	-.006	10	0	1	0	1	NC	1	NC	1
438			min	-.012	2	-.266	3	0	1	0	1	NC	1	NC	1
439		11	max	.008	3	-.006	10	0	1	0	1	NC	1	NC	1
440			min	-.013	2	-.295	3	0	1	0	1	NC	1	NC	1
441		12	max	.008	3	-.007	10	0	1	0	1	NC	1	NC	1
442			min	-.014	2	-.324	3	0	1	0	1	NC	1	NC	1
443		13	max	.009	3	-.007	10	0	1	0	1	NC	1	NC	1
444			min	-.016	2	-.353	3	0	1	0	1	NC	1	NC	1
445		14	max	.009	3	-.007	10	0	1	0	1	NC	1	NC	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
446			min	-.017	2	-.382	3	0	1	0	1	NC	1	NC	1
447		15	max	.01	3	-.007	10	0	1	0	1	NC	1	NC	1
448			min	-.018	2	-.411	3	0	1	0	1	NC	1	NC	1
449		16	max	.011	3	-.007	10	0	1	0	1	NC	1	NC	1
450			min	-.019	2	-.44	3	0	1	0	1	NC	1	NC	1
451		17	max	.011	3	-.007	10	0	1	0	1	NC	1	NC	1
452			min	-.021	2	-.469	3	0	1	0	1	NC	1	NC	1
453		18	max	.012	3	-.007	10	0	1	0	1	NC	1	NC	1
454			min	-.022	2	-.497	3	0	1	0	1	NC	1	NC	1
455		19	max	.013	3	-.007	10	0	1	0	1	NC	1	NC	1
456			min	-.023	2	-.526	3	0	1	0	1	NC	1	NC	1
457	M9	1	max	0	3	0	10	0	2	8.794e-4	3	NC	1	NC	1
458			min	0	2	0	3	0	3	-1.845e-3	2	NC	1	NC	1
459		2	max	0	3	0	15	.01	2	9.197e-4	3	NC	1	NC	3
460			min	0	2	-.019	3	-.005	3	-1.898e-3	2	NC	1	6036.735	2
461		3	max	0	3	-.001	15	.02	2	9.601e-4	3	NC	1	NC	4
462			min	0	2	-.037	3	-.01	3	-1.951e-3	2	NC	1	2998.452	2
463		4	max	.001	3	-.002	15	.031	2	1.e-3	3	NC	1	NC	4
464			min	-.001	2	-.056	3	-.015	3	-2.003e-3	2	NC	1	2002.033	2
465		5	max	.001	3	-.003	15	.04	2	1.041e-3	3	NC	1	NC	4
466			min	-.002	2	-.074	3	-.02	3	-2.056e-3	2	NC	1	1516.194	2
467		6	max	.001	3	-.003	15	.05	2	1.081e-3	3	NC	1	NC	4
468			min	-.002	2	-.093	3	-.025	3	-2.109e-3	2	NC	1	1235.177	2
469		7	max	.002	3	-.004	15	.058	2	1.122e-3	3	NC	1	NC	4
470			min	-.003	2	-.111	3	-.029	3	-2.162e-3	2	NC	1	1057.542	2
471		8	max	.002	3	-.004	15	.065	2	1.162e-3	3	NC	1	NC	4
472			min	-.003	2	-.129	3	-.033	3	-2.215e-3	2	NC	1	940.341	2
473		9	max	.002	3	-.005	15	.071	2	1.202e-3	3	NC	1	NC	5
474			min	-.004	2	-.148	3	-.036	3	-2.267e-3	2	NC	1	862.739	2
475		10	max	.002	3	-.005	10	.075	2	1.243e-3	3	NC	1	NC	5
476			min	-.004	2	-.166	3	-.038	3	-2.32e-3	2	NC	1	814.008	2
477		11	max	.002	3	-.006	10	.077	2	1.283e-3	3	NC	1	NC	5
478			min	-.004	2	-.184	3	-.039	3	-2.373e-3	2	NC	1	788.927	2
479		12	max	.003	3	-.006	10	.077	2	1.323e-3	3	NC	1	NC	5
480			min	-.005	2	-.202	3	-.04	3	-2.426e-3	2	NC	1	786.039	2
481		13	max	.003	3	-.006	10	.075	2	1.364e-3	3	NC	1	NC	5
482			min	-.005	2	-.22	3	-.039	3	-2.479e-3	2	NC	1	807.499	2
483		14	max	.003	3	-.006	10	.07	2	1.404e-3	3	NC	1	NC	5
484			min	-.006	2	-.238	3	-.037	3	-2.531e-3	2	NC	1	860.55	2
485		15	max	.003	3	-.006	10	.062	2	1.444e-3	3	NC	1	NC	4
486			min	-.006	2	-.255	3	-.033	3	-2.584e-3	2	NC	1	962.367	2
487		16	max	.003	3	-.006	10	.051	2	1.485e-3	3	NC	1	NC	4
488			min	-.007	2	-.273	3	-.028	3	-2.637e-3	2	NC	1	1155.408	2
489		17	max	.003	3	-.006	10	.036	2	1.525e-3	3	NC	1	NC	4
490			min	-.007	2	-.291	3	-.021	3	-2.69e-3	2	NC	1	1569.484	2
491		18	max	.004	3	-.006	10	.018	2	1.565e-3	3	NC	1	NC	4
492			min	-.007	2	-.309	3	-.013	3	-2.743e-3	2	NC	1	2857.066	2
493		19	max	.004	3	-.005	10	0	15	1.606e-3	3	NC	1	NC	1
494			min	-.008	2	-.326	3	-.006	1	-2.795e-3	2	NC	1	NC	1