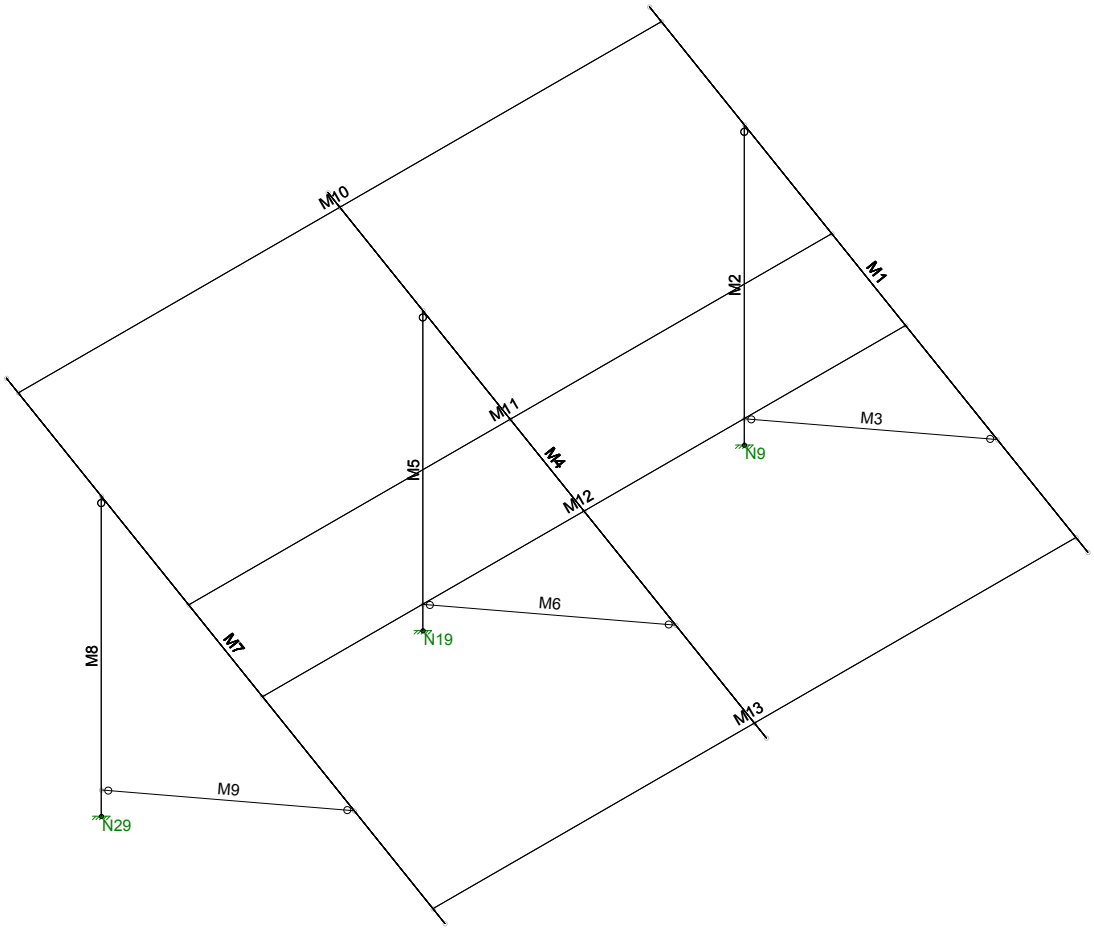

Schletter, Inc.		30° Tilt w/ Seismic Design
HCV	Standard FS Racking System	
	Representative Calculations - ASCE 7-10	

1. INTRODUCTION

1.1 Project Description

The following sections will cover the determination of forces and structural design calculations for the Schletter, Inc. FS ground mount system.

1.2 Construction

Photovoltaic modules are attached to aluminum purlins using clamp fasteners. Purlins are clamped to inclined aluminum girders, which are then connected to galvanized steel posts. Each support structure is equally spaced.

PV modules are required to meet the following specifications:

	Maximum		Minimum
Height =	2000 mm	Height =	1900 mm
Width =	1050 mm	Width =	970 mm
Dead Load =	3.00 psf	Dead Load =	1.75 psf

Modules Per Row =	2
Module Tilt =	30°
Maximum Height Above Grade =	3 ft

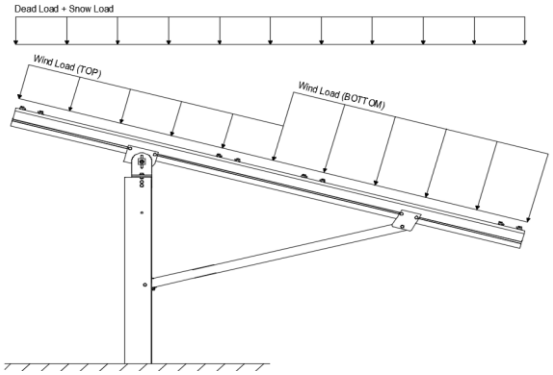

Typical loading conditions of the module dead loads, snow loads, and wind loads are shown on the left.

1.3 Technical Codes

- ASCE 7-10 - Chapter 26-31, Wind Loads
- ASCE 7-10 - Chapter 7, Snow Loads
- ASCE 7-10 - Chapter 2, Combination of Loads
- International Building Code, IBC, 2012, 2015
- Aluminum Design Manual, Eighth Edition, 2005

2. LOAD ACTIONS

2.1 Permanent Loads

g_{MAX} =	3.00	psf	*Self-weight of the PV modules.*
g_{MIN} =	1.75	psf	

2.2 Snow Loads

Ground Snow Load, P_g =	30.00	psf	
Sloped Roof Snow Load, P_s =	16.49	psf	*(ASCE 7-10, Eq. 7.4-1)*
I_s =	1.00		
C_s =	0.73		
C_e =	0.90		
C_t =	1.20		

2.3 Wind Loads

Design Wind Speed, V =	115	mph	Exposure Category = C
Height <	15	ft	Importance Category = II
Peak Velocity Pressure, q_z =	20.76	psf	*Including the gust factor, G=0.85. (ASCE 7-10, Eq. 27.3-1)*

Pressure Coefficients

$Cf+_{TOP}$ =	1.15	*(Pressure)*	*Provided pressure coefficients are the result of wind tunnel testing done by Ruscheweyh Consult. Coefficients are located in test report # 1127/0510-e. Negative forces are applied away from the surface.*
$Cf+_{BOTTOM}$ =	1.85		
$Cf-_{TOP}$ =	-2.3	*(Suction)*	
$Cf-_{BOTTOM}$ =	-1.1		

2.4 Seismic Loads

S_S =	2.50	R =	1.25	*ASCE 7, Section 12.8.1.3: A maximum S_s of 1.5 may be used to calculate the base shear, C_s, of structures under five stories and with a period, T, of 0.5 or less. Therefore, a S_{ds} of 1.0 was used to calculate C_s.*
S_{DS} =	1.67	C_S =	0.8	
S_1 =	1.00	ρ =	1.3	
S_{D1} =	1.00	Ω =	1.25	
T_a =	0.08	C_d =	1.25	

2.5 Combination of Loads

ASCE 7 requires that all structures be checked by specified combinations of loads. Applicable load combinations are provided below.

Strength Design, LRFD

Component stresses are checked using the following LRFD load combinations:

1.2D + 1.6S + 0.5W		
1.2D + 1.0W + 0.5S		
0.9D + 1.0W	M	
1.54D + 1.3E + 0.2S	R	*(ASCE 7, Eq 2.3.2-1 through 2.3.2-7) & (ASCE 7, Section 12.4.3.2)*
0.56D + 1.3E	R	
1.54D + 1.25E + 0.2S	O	
0.56D + 1.25E	O	

Allowable Stress Design, ASD

Member deflection checks and foundation designs are done according to the following ASD load combinations:

1.0D + 1.0S		
1.0D + 0.6W		
1.0D + 0.75L + 0.45W + 0.75S		
0.6D + 0.6W	M	*(ASCE 7, Eq 2.4.1-1 through 2.4.1-8) & (ASCE 7, Section 12.4.3.2)*
1.238D + 0.875E	O	
1.1785D + 0.65625E + 0.75S	O	
0.362D + 0.875E	O	

M *Uses the minimum allowable module dead load.*

R *Include redundancy factor of 1.3.*

O *Includes overstrength factor of 1.25. Used to check seismic drift.*

3. STRUCTURAL ANALYSIS

3.1 RISA Results

Appendix B.1 contains outputs from the structural analysis software package, RISA. These outputs are used to accurately determine resultant member and reaction forces from the loads seen throughout Section 2.

3.2 RISA Components

A member and node list has been provided below to correlate the RISA components with the design calculations in Section 4. Items of significance have been listed.

Purlins	Location
M10	Top
M11	Mid-Top
M12	Mid-Bottom
M13	Bottom

Posts	Location
M2	Outer
M5	Inner
M8	Outer

Girders	Location
M1	Outer
M4	Inner
M7	Outer

Reactions	Location
N9	Outer
N19	Inner
N29	Outer

Struts	Location
M3	Outer
M6	Inner
M9	Outer

4. MEMBER DESIGN CALCULATIONS

4.1 Purlin Design

Aluminum purlins are used to transfer loads to the support structure. Purlins are designed as continous beams with cantilevers. These are considered beams with internal hinges that can be joined with splices at 25% of the support respective span. See Appendix A.1 for detailed member calculations. Section units are in (mm).

Purlin Type =	**S1.5**	
Aluminum Type =	6105-T5	
F_{ty} =	35	ksi
L_b =	132	in
$\Phi F_{ty\ STRONG\text{-}AXIS}$ =	25.07	ksi
$\Phi F_{ty\ WEAK\text{-}AXIS}$ =	23.08	ksi
S_y =	1.33	in^3
S_x =	0.6	in^3
E =	10100	ksi
I_y =	2.16	in^4
I_x =	1.07	in^4
A =	1.25	in^2
g =	1.50	lbs/ft
M_y =	1.962	k-ft
M_z =	0.300	k-ft
$M_{y\ allowable}$ =	2.779	k-ft
$M_{z\ allowable}$ =	1.154	k-ft
Utilization =	97%	

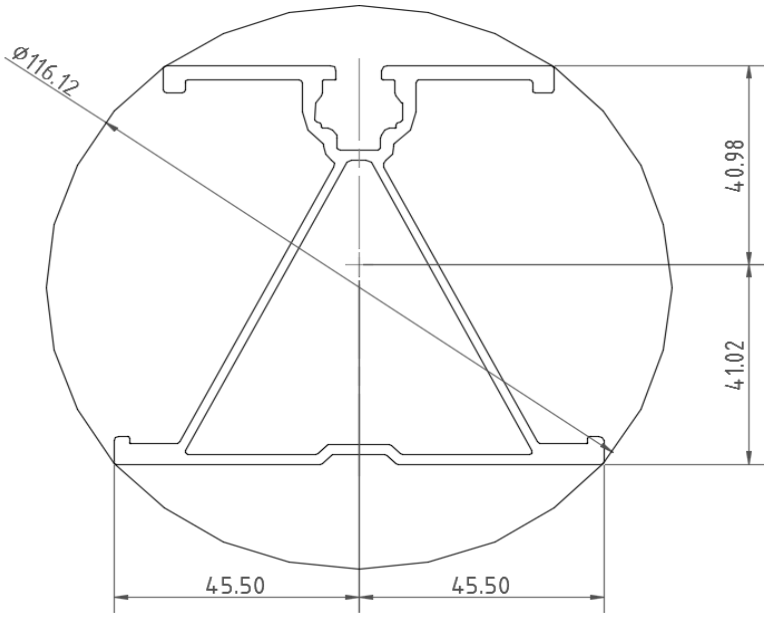

DETAIL VIEW

4.2 Girder Design

Loads from purlins are transferred to the posts using an inclined girder, which is connected to the steel post. Loads on the girder result from the support reactions of the purlins. See Appendix A.2 for detailed member calculations. Section units are in (mm).

Girder Type =	**T5**	
Aluminum Type =	6105-T5	
F_{ty} =	35	ksi
L_b =	81.77	in
$\Phi F_{ty\ AXIAL}$ =	30.80	ksi
$\Phi F_{ty\ STRONG\text{-}AXIS}$ =	30.06	ksi
$\Phi F_{ty\ WEAK\text{-}AXIS}$ =	31.56	ksi
S_y =	1.98	in^3
S_x =	1.32	in^3
E =	10100	ksi
I_y =	4.74	in^4
I_x =	1.83	in^4
A =	1.93	in^2
g =	2.32	lbs/ft
M_y =	4.112	k-ft
M_z =	0.000	k-ft
P_n =	1.356	k
$M_{y\ allowable}$ =	4.960	k-ft
$M_{z\ allowable}$ =	3.472	k-ft
$P_{n\ allowable}$ =	59.439	k
Utilization =	85%	

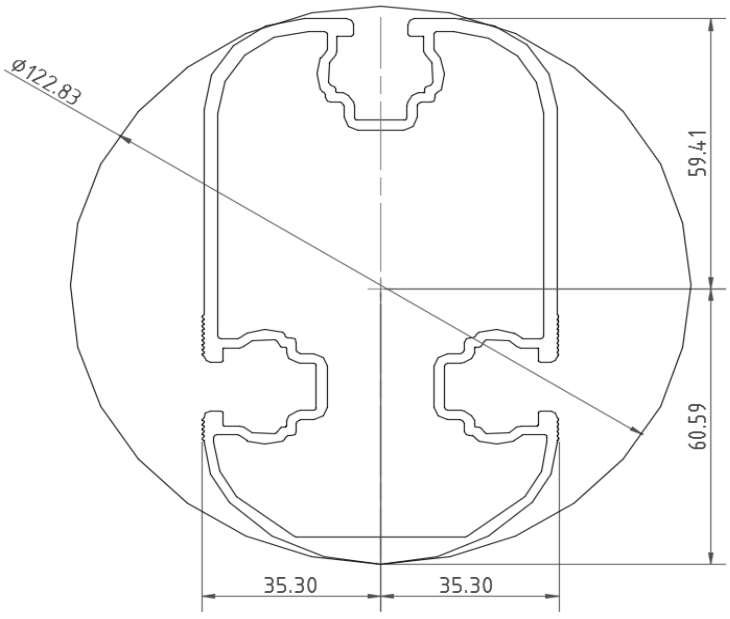

DETAIL VIEW

4.3 Strut Design

The aluminum strut connects a portion of the girder to the galvanized steel post. Girder forces are then transferred down through the strut into the post. The strut is attached with single M10 bolts at each end. See Appendix A.3 for detailed member calculations. Section units are in (mm).

Strut Type =	**55x55**	
Aluminum Type =	6105-T5	
F_{ty} =	35	ksi
L_b =	74.80	in
$\Phi F_{ty\ AXIAL}$ =	9.61	ksi
$\Phi F_{ty\ BENDING}$ =	28.22	ksi
S_y =	0.60	in^3
S_x =	0.60	in^3
E =	10100	ksi
I_y =	0.67	in^4
I_x =	0.67	in^4
A =	0.98	in^2
g =	1.18	lbs/ft
M_y =	0.007	k-ft
M_z =	0.000	k-ft
P_n =	5.077	k
$M_{y\ allowable}$ =	1.408	k-ft
$M_{z\ allowable}$ =	1.408	k-ft
$P_{n\ allowable}$ =	9.441	k
Utilization =	54%	

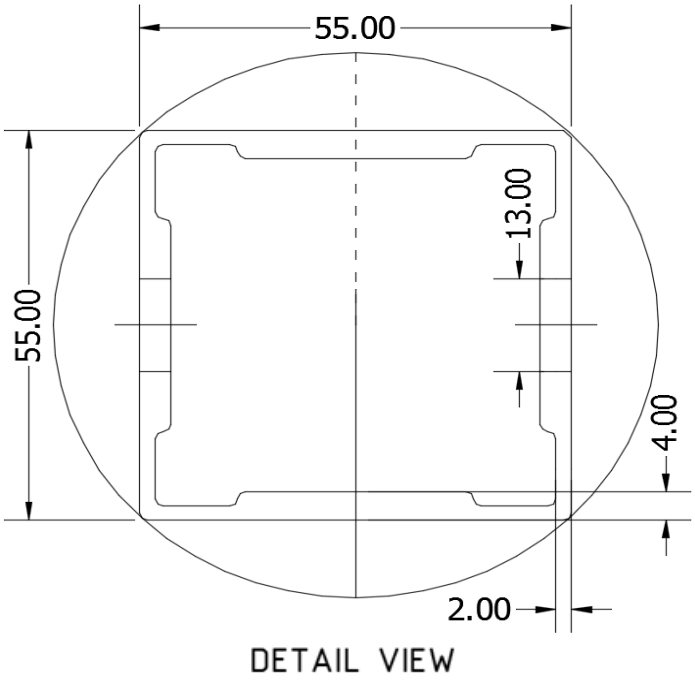

4.4 Post Design

Galvanized steel posts are a roll formed steel section, that are either ram driven into the ground or placed in a concrete foundation at a defined depth. Embedment depths will be provided on the structural drawings or through a geotechnical testing report. See Appendix A.4 for detailed member calculations. Section units are in (mm).

Post Type =	**FG8**	
Steel Type =	J2340	
F_{ty} =	60	ksi
L_b =	89.60	in
Φ =	0.90	
ΦF_{ty} =	54.00	ksi
S_y =	3.46	in^3
S_x =	1.55	in^3
E =	29000	ksi
I_y =	10.94	in^4
I_x =	4.31	in^4
A =	2.23	in^2
g =	7.59	lbs/ft
M_y =	13.478	k-ft
M_z =	0.000	k-ft
P_r =	6.814	k
$M_{y\ allowable}$ =	19.207	k-ft
$M_{z\ allowable}$ =	14.389	k-ft
P_c =	25.874	k
Utilization =	99%	

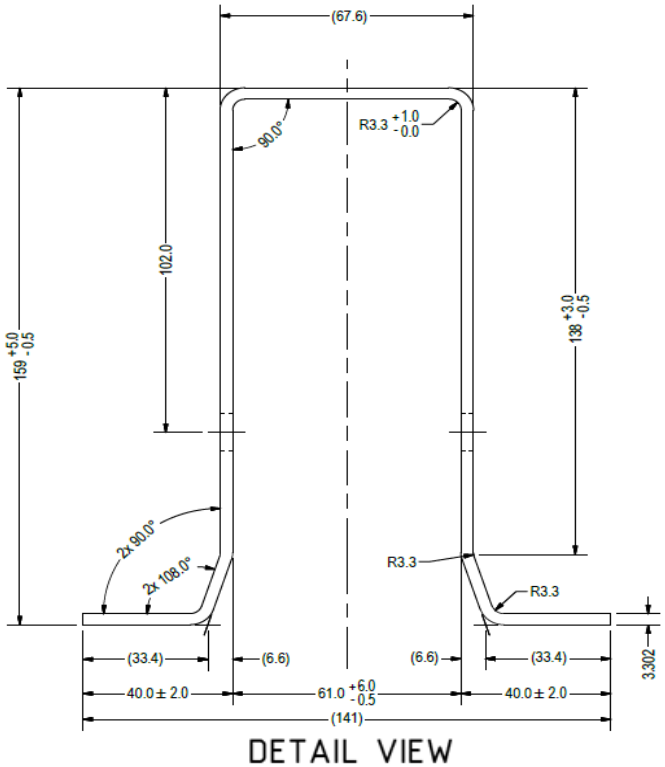

5. FOUNDATION DESIGN CALCULATIONS

5.1 Rammed Post Foundations

The following LRFD loads include a safety factor of 1.3, and are to be used in conjunction with a Schletter, Inc. Geotechnical Investigation Report. The forces below should fall within the guidelines provided in the Geotechnical Investigation Report. If a Geotechnical Investigation Report is not present, please proceed to Section 5.2 for a concrete footing design.

Maximum Tensile Load =	6.37	k
Maximum Lateral Load =	3.88	k

5.2 Design of Drilled Shaft Foundations

The galvanized steel post is to be embedded into a cylindrical drilled shaft foundation. For the purpose of design, the post is considered to be fixed to the ground. The applicable lateral force, uplift, and compression resistance checks are seen below.

5.3 Lateral Force Resistance

The equivalent lateral force is applied at the top of the post to determine the required embedment depth. A lateral soil bearing capacity for clay is assumed. Footing is unrestrained at ground level. (IBC, Eq. 18-1)

Lateral Force @ Top of Pole, P =	1.19	k
Height of Pole Above Grade, H =	6.47	ft
Diameter of Pole Footing, B =	2.00	ft
Lateral Soil Bearing Capacity, S =	0.10	ksf/ft
Isolated Pole Factor, F =	2	
First Trial Depth, D =	3.25	ft

Lateral Bearing @ Bottom =	S_3
Lateral Bearing @ D/3 =	S_1
Required Depth =	D

$$S_3 = Min\ (D, 12')$$

$$S_1 = Min\left(\frac{D}{3}, 12'\right)$$

$$A = 2.34\ P/S_1 B$$

$$D = \left\{0.5A\left(1+\sqrt{1+\left(\frac{4.36\ H}{A}\right)}\right)\right\}$$

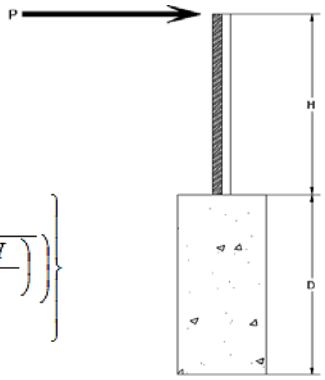

Non-Constrained

Lateral Force @ Top of Pole, P =	1.19	k
Height of Pole Above Grade, H =	6.47	ft
Diameter of Pole Footing, B =	2.00	ft
Lateral Soil Bearing Capacity, S =	0.20	ksf/ft

1st Trial @ D_1 =	3.25	ft
Lateral Soil Bearing @ D/3, S_1 =	0.22	ksf
Lateral Soil Bearing @ D, S_3 =	0.65	ksf
Constant 2.34P/(S_1B), A =	6.44	
Required Footing Depth, D =	10.69	ft

2nd Trial @ D_2 =	6.97	ft
Lateral Soil Bearing @ D/3, S_1 =	0.46	ksf
Lateral Soil Bearing @ D, S_3 =	1.39	ksf
Constant 2.34P/(S_1B), A =	3.00	
Required Footing Depth, D =	6.34	ft

3rd Trial @ D_3 =	6.66	ft
Lateral Soil Bearing @ D/3, S_1 =	0.44	ksf
Lateral Soil Bearing @ D, S_3 =	1.33	ksf
Constant 2.34P/(S_1B), A =	3.15	
Required Footing Depth, D =	6.54	ft

4th Trial @ D_4 =	6.60	ft
Lateral Soil Bearing @ D/3, S_1 =	0.44	ksf
Lateral Soil Bearing @ D, S_3 =	1.32	ksf
Constant 2.34P/(S_1B), A =	3.17	
Required Footing Depth, D =	6.58	ft

5th Trial @ D_5 =	6.59	ft
Lateral Soil Bearing @ D/3, S_1 =	0.44	ksf
Lateral Soil Bearing @ D, S_3 =	1.32	ksf
Constant 2.34P/(S_1B), A =	3.18	
Required Footing Depth, D =	6.75	ft

A 2ft diameter x 6.75ft deep footing unrestrained at ground level is required for the racking structure.

5.4 Uplifting Force Resistance

Uplifting forces of the racking system are checked against the uplift resistance of the soil. Clay soils are assumed.

Weight of Concrete, g_{con} =	145	pcf
Uplifting Force, N =	2.91	k
Footing Diameter, B =	2.00	ft
Factor of Safety =	2.50	
Cohesion =	208.85	psf
γ_s =	120.43	pcf
α =	0.45	
Required Concrete Weight, g =	1.87	k
Required Concrete Volume, V =	12.92	ft^3
Required Footing Depth, D =	4.25	ft

Iteration	z	dz	Qs	Side
1	0.2	0.2	118.10	6.29
2	0.4	0.2	118.10	6.19
3	0.6	0.2	118.10	6.08
4	0.8	0.2	118.10	5.98
5	1	0.2	118.10	5.88
6	1.2	0.2	118.10	5.77
7	1.4	0.2	118.10	5.67
8	1.6	0.2	118.10	5.56
9	1.8	0.2	118.10	5.46
10	2	0.2	118.10	5.36
11	2.2	0.2	118.10	5.25
12	2.4	0.2	118.10	5.15
13	2.6	0.2	118.10	5.05
14	2.8	0.2	118.10	4.94
15	3	0.2	118.10	4.84
16	3.2	0.2	118.10	4.73
17	3.4	0.2	118.10	4.63
18	3.6	0.2	118.10	4.53
19	3.8	0.2	118.10	4.42
20	4	0.2	118.10	4.32
21	4.2	0.2	118.10	4.22
22	4.4	0.2	118.10	4.11
23	0	0.0	0.00	4.11
24	0	0.0	0.00	4.11
25	0	0.0	0.00	4.11
26	0	0.0	0.00	4.11
27	0	0.0	0.00	4.11
28	0	0.0	0.00	4.11
29	0	0.0	0.00	4.11
30	0	0.0	0.00	4.11
31	0	0.0	0.00	4.11
32	0	0.0	0.00	4.11
33	0	0.0	0.00	4.11
34	0	0.0	0.00	4.11
Max	4.4	Sum	1.04	

A 2ft diameter x 4.25ft deep footing unrestrained at ground level is required for the racking structure.



5.5 Compressive Force Resistance

Skin friction of the soil is checked against the compression force from the racking and the weight of the drilled shaft foundation. Skin friction starts at 3ft below grade. Clay soils are again assumed.

Depth Below Grade, D =	6.75	ft
Footing Diameter, B =	2.00	ft
Compressive Force, P =	4.49	k
Footing Area =	3.14	ft^2
Circumference =	6.28	ft
Skin Friction Area =	23.56	ft^2
Concrete Weight =	0.145	kcf

Bearing Pressure

Bearing Area =	3.14	ft^2
Bearing Capacity =	1.5	ksf
Resistance =	4.71	k

Weight of Concrete

Footing Volume	21.21	ft^3
Weight	3.07	k

Skin Friction Resistance

Skin Friction =	0.15	ksf
Resistance =	3.53	k
1/3 Increase for Wind =	1.33	
Total Resistance =	11.00	k
Applied Force =	7.56	k
Utilization =	69%	

A 2ft diameter footing passes at a depth of 6.75ft.



6. DESIGN OF JOINTS AND CONNECTIONS

6.1 Anchorage of Modules to Purlins and Connection of Purlins to Girders

Modules are secured to the purlins with Schletter, Inc. Rapid2+ mounting clamps. Purlins are secured to the girders with the use of 40mm mounting clamps. The reliability of calculations is uncertain due to limited standards, therefore the strength of the clamp fasteners has been evaluated by load testing.

Fastening of Modules to Purlins

Maximum Uplifting Force	=	0.522 k
Allowable Uplift	=	1.214 k
Utilization	=	43%

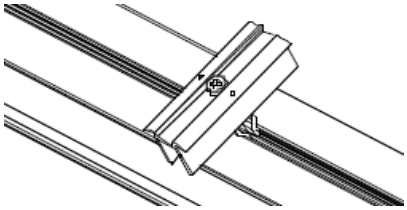

Fastening of Purlins to Girders

Maximum Uplifting Force	=	2.031 k
Allowable Uplift	=	2.180 k
Utilization	=	93%

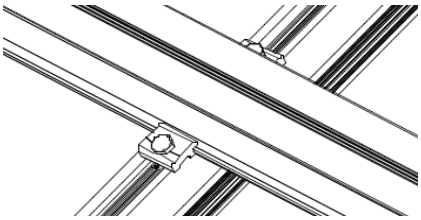

6.2 Strut Connections

The aluminum struts connect the front end of girder to a center section of the steel post. Single M10 bolts are used to attach each end of the strut to the girder and post. ASTM A193/A193M-86 equivalent stainless steel bolts are used.

Maximum Axial Load	=	5.077 k
M10 Bolt Shear Capacity	=	8.894 k
Utilization	=	57%

Bolt capacity is accounting for double shear. (ASCE 8-02, Eq. 5.3.4-1)

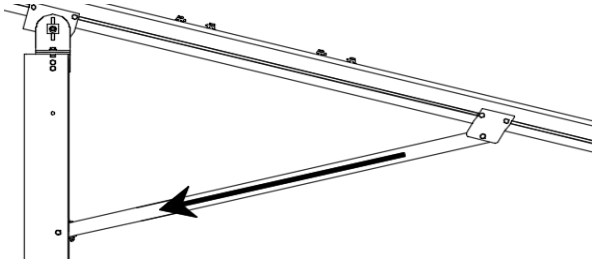

A strut under compression is shown to demonstrate the load transfer from the girder. Single M10 bolts are located at each end of the strut and are subjected to double shear.

6.3 Girder to Post Connection

In order to connect the girder to the post, custom extruded sections are assembled to create a post head piece. The reliability of calculations is uncertain due to limited standards, therefore the strength of the head piece has been evaluated by load testing.

Maximum Tensile Load	=	4.210 k
Allowable Load	=	5.649 k
Utilization	=	75%



FRONT VIEW



SIDE VIEW



7. SEISMIC DESIGN

7.1 Seismic Drift

The racking structure has been analyzed under seismic loading. The allowable story drift of the structure must fall within the limits provided by (ASCE 7, Table 12.12-1).

Mean Height, h_{sx}	=	79.13 in
Allowable Story Drift for All Other Structures, Δ	= {	$0.020h_{sx}$
		1.583 in
Max Drift, Δ_{MAX}	=	1.328 in

1.328 ≤ 1.583, OK.

The racking structure's reaction to seismic loads is shown to the right. The deflections have been magnified to provide a clear portrayal of potential story drift.

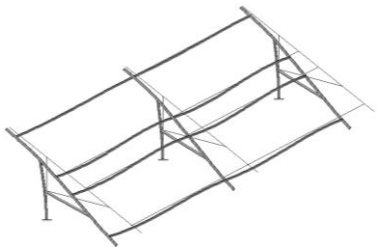

APPENDIX A

A.1 Design of Aluminum Purlins - Aluminum Design Manual, 2005 Edition

Purlin = **S1.5**

Strong Axis:		Weak Axis:	
3.4.14		**3.4.14**	
L_b =	132 in	L_b =	132
J =	0.432	J =	0.432
	365.174		232.229
$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$		$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$	
S1 =	0.51461	S1 =	0.51461
$S2 = \left(\frac{C_c}{1.6}\right)^2$		$S2 = \left(\frac{C_c}{1.6}\right)^2$	
S2 =	1701.56	S2 =	1701.56
φF_L=	φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]	φF_L=	φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]
φF_L=	27.1 ksi	φF_L=	28.4
3.4.16		**3.4.16**	
b/t =	32.195	b/t =	37.0588
$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$		$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$	
S1 =	12.2	S1 =	12.2
$S2 = \frac{k_1 Bp}{1.6Dp}$		$S2 = \frac{k_1 Bp}{1.6Dp}$	
S2 =	46.7	S2 =	46.7
φF_L=	φb[Bp-1.6Dp*b/t]	φF_L=	φb[Bp-1.6Dp*b/t]
φF_L=	25.1 ksi	φF_L=	23.1 ksi
3.4.16.1	Not Used	**3.4.16.1**	
Rb/t =		N/A for Weak Direction	
$S1 = \left(\frac{Bt - 1.17\frac{\theta_y}{\theta_b} Fcy}{1.6Dt}\right)^2$			
S1 =	1.1		
$S2 = C_t$			
S2 =	141.0		
φF_L=	1.17φyFcy		
φF_L=	38.9 ksi		
3.4.18		**3.4.18**	
h/t =	37.0588	h/t =	32.195
$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b} 1.3Fcy}{mDbr}$		$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b} 1.3Fcy}{mDbr}$	
S1 =	36.9	S1 =	36.9
m =	0.65	m =	0.65
C_0 =	40.985	C_0 =	45.5
Cc =	41.015	Cc =	45.5
$S2 = \frac{k_1 Bbr}{mDbr}$		$S2 = \frac{k_1 Bbr}{mDbr}$	
S2 =	77.2	S2 =	77.3
φF_L=	φb[Bbr-mDbr*h/t]	φF_L=	1.3φyFcy
φF_L=	43.2 ksi	φF_L=	43.2 ksi
φF_LSt=	25.1 ksi	φF_LWk=	23.1 ksi
Ix =	897074 mm^4	Iy =	446476 mm^4
	2.155 in^4		1.073 in^4
y =	41.015 mm	x =	45.5 mm
Sx =	1.335 in^3	Sy =	0.599 in^3
M_{max}St =	2.788 k-ft	M_{max}Wk =	1.152 k-ft

Compression

3.4.9

b/t = 32.195
S1 = 12.21 (See 3.4.16 above for formula)
S2 = 32.70 (See 3.4.16 above for formula)
φF_L = φc[Bp-1.6Dp*b/t]
φF_L = 25.1 ksi

b/t = 37.0588
S1 = 12.21
S2 = 32.70
φF_L = (φck2*√(BpE))/(1.6b/t)
φF_L = 21.9 ksi

3.4.10

Rb/t = 0.0

$$S1 = \left(\frac{Bt - \frac{\theta_y}{\theta_b} Fcy}{Dt}\right)^2$$

S1 = 6.87
S2 = 131.3
φF_L = φyFcy
φF_L = 33.25 ksi

φF_L = 21.94 ksi
A = 1215.13 mm^2
1.88 in^2
P_{max} = 41.32 kips

A.2 Design of Aluminum Girders - Aluminum Design Manual, 2005 Edition

Girder = **T5**

Strong Axis:

3.4.14

L_b = 81.7717 in
J = 1.98
105.231

$$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$$

S1 = 0.51461

$$S2 = \left(\frac{C_c}{1.6}\right)^2$$

S2 = 1701.56
φF_L = φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]
φF_L = 30.1 ksi

3.4.16

b/t = 4.5

$$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$$

S1 = 12.2

$$S2 = \frac{k_1 Bp}{1.6Dp}$$

S2 = 46.7
φF_L = φyFcy
φF_L = 33.3 ksi

Weak Axis:

3.4.14

L_b = 81.7717
J = 1.98
114.202

$$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$$

S1 = 0.51461

$$S2 = \left(\frac{C_c}{1.6}\right)^2$$

S2 = 1701.56
φF_L = φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]
φF_L = 29.9

3.4.16

b/t = 16.3333

$$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$$

S1 = 12.2

$$S2 = \frac{k_1 Bp}{1.6Dp}$$

S2 = 46.7
φF_L = φb[Bp-1.6Dp*b/t]
φF_L = 31.6 ksi

3.4.16.1 Used

Rb/t = 20.0

$$S1 = \left(\frac{Bt - 1.17\frac{\theta_y}{\theta_b}Fcy}{1.6Dt}\right)^2$$

S1 = 1.1

$$S2 = C_t$$

S2 = 141.0

φF_L = φb[Bt-Dt*√(Rb/t)]

φF_L = 30.8 ksi

3.4.16.1

N/A for Weak Direction

3.4.18

h/t = 16.3333

$$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b}1.3Fcy}{mDbr}$$

S1 = 37.9

m = 0.63

C_0 = 61.046

Cc = 58.954

$$S2 = \frac{k_1 Bbr}{mDbr}$$

S2 = 79.4

φF_L = 1.3φyFcy

φF_L = 43.2 ksi

$\varphi F_L St$ = 30.1 ksi

Ix = 1970917 mm^4

4.735 in^4

y = 61.046 mm

Sx = 1.970 in^3

$M_{max}St$ = 4.935 k-ft

3.4.18

h/t = 4.5

$$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b}1.3Fcy}{mDbr}$$

S1 = 36.9

m = 0.65

C_0 = 35

Cc = 35

$$S2 = \frac{k_1 Bbr}{mDbr}$$

S2 = 77.3

φF_L = 1.3φyFcy

φF_L = 43.2 ksi

$\varphi F_L Wk$ = 31.6 ksi

Iy = 763048 mm^4

1.833 in^4

x = 35 mm

Sy = 1.330 in^3

$M_{max}Wk$ = 3.499 k-ft

Compression

3.4.9

b/t = 4.5

S1 = 12.21 (See 3.4.16 above for formula)

S2 = 32.70 (See 3.4.16 above for formula)

φF_L = φyFcy

φF_L = 33.3 ksi

b/t = 16.3333

S1 = 12.21

S2 = 32.70

φF_L = φc[Bp-1.6Dp*b/t]

φF_L = 31.6 ksi

3.4.10

Rb/t = 20.0

$$S1 = \left(\frac{Bt - \frac{\theta_y}{\theta_b}Fcy}{Dt}\right)^2$$

S1 = 6.87

S2 = 131.3

φF_L = φc[Bt-Dt*√(Rb/t)]

φF_L = 30.80 ksi

φF_L = 30.80 ksi

A = 1215.13 mm^2

1.88 in^2

P_{max} = 58.01 kips

A.3 Design of Aluminum Struts - Aluminum Design Manual, 2005 Edition

Strut = **55x55**

Strong Axis:

3.4.14

L_b = 74.8031 in

J = 0.942

116.737

$$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$$

S1 = 0.51461

$$S2 = \left(\frac{C_c}{1.6}\right)^2$$

S2 = 1701.56

φF_L= φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]

φF_L= 29.9 ksi

3.4.16

b/t = 24.5

$$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$$

S1 = 12.2

$$S2 = \frac{k_1 Bp}{1.6Dp}$$

S2 = 46.7

φF_L= φb[Bp-1.6Dp*b/t]

φF_L= 28.2 ksi

3.4.16.1 Not Used

Rb/t = 0.0

$$S1 = \left(\frac{Bt - 1.17\frac{\theta_y}{\theta_b} Fcy}{1.6Dt}\right)^2$$

S1 = 1.1

$$S2 = C_t$$

S2 = 141.0

φF_L= 1.17φyFcy

φF_L= 38.9 ksi

3.4.18

h/t = 24.5

$$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b} 1.3Fcy}{mDbr}$$

S1 = 36.9

m = 0.65

C_0 = 27.5

Cc = 27.5

$$S2 = \frac{k_1 Bbr}{mDbr}$$

S2 = 77.3

φF_L= 1.3φyFcy

φF_L= 43.2 ksi

φF_LSt= 28.2 ksi

Ix = 279836 mm^4

0.672 in^4

y = 27.5 mm

Sx = 0.621 in^3

M_{max}St = 1.460 k-ft

Weak Axis:

3.4.14

L_b = 74.8031

J = 0.942

116.737

$$S1 = \left(\frac{Bc - \frac{\theta_y}{\theta_b} Fcy}{1.6Dc}\right)^2$$

S1 = 0.51461

$$S2 = \left(\frac{C_c}{1.6}\right)^2$$

S2 = 1701.56

φF_L= φb[Bc-1.6Dc*√((LbSc)/(Cb*√(IyJ)/2))]

φF_L= 29.9

3.4.16

b/t = 24.5

$$S1 = \frac{Bp - \frac{\theta_y}{\theta_b} Fcy}{1.6Dp}$$

S1 = 12.2

$$S2 = \frac{k_1 Bp}{1.6Dp}$$

S2 = 46.7

φF_L= φb[Bp-1.6Dp*b/t]

φF_L= 28.2 ksi

3.4.16.1

N/A for Weak Direction

3.4.18

h/t = 24.5

$$S1 = \frac{Bbr - \frac{\theta_y}{\theta_b} 1.3Fcy}{mDbr}$$

S1 = 36.9

m = 0.65

C_0 = 27.5

Cc = 27.5

$$S2 = \frac{k_1 Bbr}{mDbr}$$

S2 = 77.3

φF_L= 1.3φyFcy

φF_L= 43.2 ksi

φF_LWk= 28.2 ksi

Iy = 279836 mm^4

0.672 in^4

x = 27.5 mm

Sy = 0.621 in^3

M_{max}Wk = 1.460 k-ft

Compression

3.4.7

λ = 1.73045

r = 0.81 in

$$S1^* = \frac{Bc - Fcy}{1.6Dc^*}$$

$S1^*$ = 0.33515

$$S2^* = \frac{Cc}{\pi}\sqrt{Fcy/E}$$

$S2^*$ = 1.23671

φcc = 0.82226

$\varphi F_L = (\varphi ccFcy)/(\lambda^2)$

φF_L = 9.61085 ksi

3.4.9

b/t = 24.5

S1 = 12.21 (See 3.4.16 above for formula)

S2 = 32.70 (See 3.4.16 above for formula)

$\varphi F_L = \varphi c[Bp-1.6Dp*b/t]$

φF_L = 28.2 ksi

b/t = 24.5

S1 = 12.21

S2 = 32.70

$\varphi F_L = \varphi c[Bp-1.6Dp*b/t]$

φF_L = 28.2 ksi

3.4.10

Rb/t = 0.0

$$S1 = \left(\frac{Bt - \frac{\theta_y}{\theta_b}Fcy}{Dt}\right)^2$$

S1 = 6.87

S2 = 131.3

$\varphi F_L = \varphi yFcy$

φF_L = 33.25 ksi

φF_L = 9.61 ksi

A = 663.99 mm^2

1.03 in^2

P_{max} = 9.89 kips

A.4 Design of Galvanized Steel Posts

Post Type = **FG8**

Unbraced Length =	89.60	in	
Pr =	6.81	k	(LRFD Factored Load)
Mr (Strong) =	13.48	k-ft	(LRFD Factored Load)
Mr (Weak) =	0.00	k-ft	(LRFD Factored Load)

Flexural Buckling:

kL/r =	128.92			
4.71√(E/Fy) =	103.55	=>	kL/r	> 4.71√(E/Fy)
Fcr =	15.10	ksi		
Fe =	17.22	ksi		
Pn =	33.677	k		

Torsional/Flexural Torsional Buckling:

Fcr =	11.6026	ksi
Fey =	43.9243	ksi
Fez =	14.9387	ksi
Pn =	25.8738	k

Bending (Strong Axis):

Yielding:

Mn =	21.95	k-ft

Flange Local Buckling:

Mn =	19.207	k-ft

Pr/Pc =	0.2926	≥	0.2	
Utilization =	0.99	<	1.0	OK

Bending (Weak Axis):

Yielding:

Mn =	14.65	k-ft

Flange Local Buckling:

Mn =	14.39	k-ft

Pr/Pc =	0.293	≥	0.2	
Utilization =	0.00	<	1.0	OK

Combined Forces

Utilization = 99%

APPENDIX B

B.1

The following pages will contain the results from RISA. Please refer back to Section 2 for load information and Section 4-5 for member and foundation design.

Basic Load Cases

	BLC Description	Category	X Gravity	Y Gravity	Z Gravity	Joint	Point	Distribut...	Area(Me...	Surface(...
1	Dead Load, Max	DL		-1				4		
2	Dead Load, Min	DL		-1				4		
3	Snow Load	SL						4		
4	Wind Load - Pressure	WL						4		
5	Wind Load - Suction	WL						4		
6	Seismic - Lateral	EL			.8			8		

Member Distributed Loads (BLC 1 : Dead Load, Max)

	Member Label	Direction	Start Magnitude[lb/ft,F]	End Magnitude[lb/ft,F]	Start Location[ft,%]	End Location[ft,%]
1	M10	Y	-9.843	-9.843	0	0
2	M11	Y	-9.843	-9.843	0	0
3	M12	Y	-9.843	-9.843	0	0
4	M13	Y	-9.843	-9.843	0	0

Member Distributed Loads (BLC 2 : Dead Load, Min)

	Member Label	Direction	Start Magnitude[lb/ft,F]	End Magnitude[lb/ft,F]	Start Location[ft,%]	End Location[ft,%]
1	M10	Y	-5.454	-5.454	0	0
2	M11	Y	-5.454	-5.454	0	0
3	M12	Y	-5.454	-5.454	0	0
4	M13	Y	-5.454	-5.454	0	0

Member Distributed Loads (BLC 3 : Snow Load)

	Member Label	Direction	Start Magnitude[lb/ft,F]	End Magnitude[lb/ft,F]	Start Location[ft,%]	End Location[ft,%]
1	M10	Y	-46.866	-46.866	0	0
2	M11	Y	-46.866	-46.866	0	0
3	M12	Y	-46.866	-46.866	0	0
4	M13	Y	-46.866	-46.866	0	0

Member Distributed Loads (BLC 4 : Wind Load - Pressure)

	Member Label	Direction	Start Magnitude[lb/ft,F]	End Magnitude[lb/ft,F]	Start Location[ft,%]	End Location[ft,%]
1	M10	y	-78.344	-78.344	0	0
2	M11	y	-78.344	-78.344	0	0
3	M12	y	-126.031	-126.031	0	0
4	M13	y	-126.031	-126.031	0	0

Member Distributed Loads (BLC 5 : Wind Load - Suction)

	Member Label	Direction	Start Magnitude[lb/ft,F]	End Magnitude[lb/ft,F]	Start Location[ft,%]	End Location[ft,%]
1	M10	y	156.688	156.688	0	0
2	M11	y	156.688	156.688	0	0
3	M12	y	74.938	74.938	0	0
4	M13	y	74.938	74.938	0	0

Member Distributed Loads (BLC 6 : Seismic - Lateral)

	Member Label	Direction	Start Magnitude[lb/ft,F]	End Magnitude[lb/ft,F]	Start Location[ft,%]	End Location[ft,%]
1	M10	Z	7.874	7.874	0	0
2	M11	Z	7.874	7.874	0	0
3	M12	Z	7.874	7.874	0	0
4	M13	Z	7.874	7.874	0	0
5	M10	Z	0	0	0	0
6	M11	Z	0	0	0	0
7	M12	Z	0	0	0	0
8	M13	Z	0	0	0	0

Load Combinations

	Description	S...	P...	S...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...	B...	Fa...
1	LRFD 1.2D + 1.6S + 0.5W	Yes	Y		1	1.2	3	1.6	4	.5														
2	LRFD 1.2D + 1.0W + 0.5S	Yes	Y		1	1.2	3	.5	4	1														
3	LRFD 0.9D + 1.0W	Yes	Y		2	.9					5	1												
4	LATERAL - LRFD 1.54D + 1.3E ...	Yes	Y		1	1.54	3	.2			6	1.3												
5	LATERAL - LRFD 0.56D + 1.3E	Yes	Y		1	.56					6	1.3												
6	LATERAL - LRFD 1.54D + 1.25...	Yes	Y		1	1.54	3	.2			6	1.25												
7	LATERAL - LRFD 0.56D + 1.25E	Yes	Y		1	.56					6	1.25												
8																								
9	ASD 1.0D + 1.0S	Yes	Y		1	1	3	1																
10	ASD 1.0D + 0.6W	Yes	Y		1	1			4	.6														
11	ASD 1.0D + 0.75L + 0.45W + 0....	Yes	Y		1	1	3	.75	4	.45														
12	ASD 0.6D + 0.6W	Yes	Y		2	.6					5	.6												
13	LATERAL - ASD 1.238D + 0.875E	Yes	Y		1	1.2...					6	.875												
14	LATERAL - ASD 1.1785D + 0.65...	Yes	Y		1	1.1...	3	.75			6	.656												
15	LATERAL - ASD 0.362D + 0.875E	Yes	Y		1	.362					6	.875												

Envelope Joint Reactions

	Joint		X [lb]	LC	Y [lb]	LC	Z [lb]	LC	MX [k-ft]	LC	MY [k-ft]	LC	MZ [k-ft]	LC
1	N9	max	769.357	2	2579.297	1	219.704	1	.365	1	.027	5	7.21	1
2		min	-1069.425	3	-1578.986	3	-416.894	5	-2.077	5	-.017	2	.886	15
3	N19	max	2957.535	2	6836.292	1	0	3	0	1	.029	4	13.256	1
4		min	-2956.921	3	-4889.026	3	-448.365	5	-2.181	4	0	3	.53	15
5	N29	max	769.357	2	2579.297	1	228.533	3	.352	3	.03	4	7.21	1
6		min	-1069.425	3	-1578.986	3	-471.307	4	-2.208	4	-.007	3	-.361	5
7	Totals:	max	4496.25	2	11994.887	1	0	11						
8		min	-5095.772	3	-8046.998	3	-1301.937	5						

Envelope Member Section Forces

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
1	M1	1	max	0	1	.004	1	.001	4	0	1	0	1	0	1
2			min	0	1	0	3	0	1	0	1	0	1	0	1
3		2	max	-16.014	12	293.747	3	-10.052	12	.057	3	.422	1	.261	2
4			min	-257.745	1	-712.861	2	-194.705	1	-.269	2	.038	12	-.104	3
5		3	max	-16.472	12	292.559	3	-10.052	12	.057	3	.294	1	.729	2
6			min	-258.66	1	-714.445	2	-194.705	1	-.269	2	.032	12	-.296	3
7		4	max	-16.929	12	291.371	3	-10.052	12	.057	3	.166	1	1.199	2
8			min	-259.575	1	-716.029	2	-194.705	1	-.269	2	.018	10	-.488	3
9		5	max	388.657	3	678.481	2	10.419	3	.065	2	.217	1	1.413	2
10			min	-1206.438	1	-268.097	3	-250.907	1	-.084	3	-.048	3	-.576	3
11		6	max	387.971	3	676.897	2	10.419	3	.065	2	.07	2	.968	2
12			min	-1207.353	1	-269.285	3	-250.907	1	-.084	3	-.049	5	-.4	3
13		7	max	387.285	3	675.312	2	10.419	3	.065	2	-.011	10	.524	2
14			min	-1208.268	1	-270.474	3	-250.907	1	-.084	3	-.123	4	-.223	3
15		8	max	386.599	3	673.728	2	10.419	3	.065	2	-.018	12	.082	2
16			min	-1209.182	1	-271.662	3	-250.907	1	-.084	3	-.276	1	-.045	3
17		9	max	361.681	3	4.801	3	27.768	3	.024	5	.129	1	.043	3
18			min	-1480.072	1	-21.016	2	-301.301	1	-.205	2	.007	10	-.12	2
19		10	max	360.995	3	3.613	3	27.768	3	.024	5	.071	3	.04	3
20			min	-1480.986	1	-22.601	2	-301.301	1	-.205	2	-.068	2	-.106	2
21		11	max	360.309	3	2.424	3	27.768	3	.024	5	.089	3	.038	3
22			min	-1481.901	1	-24.185	2	-301.301	1	-.205	2	-.266	1	-.091	2
23		12	max	330.894	3	691.502	3	82.989	2	.344	3	.191	1	.092	1
24			min	-1747.402	1	-515.724	1	-258.287	4	-.331	2	.018	10	-.182	3

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
25		13	max	330.208	3	690.314	3	82.989	2	.344	3	.192	1	.431	1
26			min	-1748.317	1	-517.308	1	-259.872	4	-.331	2	-.089	5	-.635	3
27		14	max	329.521	3	689.125	3	82.989	2	.344	3	.194	1	.771	1
28			min	-1749.232	1	-518.893	1	-261.458	4	-.331	2	-.252	5	-1.088	3
29		15	max	328.835	3	687.937	3	82.989	2	.344	3	.234	2	1.112	1
30			min	-1750.147	1	-520.477	1	-263.043	4	-.331	2	-.416	5	-1.54	3
31		16	max	260.021	1	512.791	1	88.485	5	.265	1	.039	3	.846	1
32			min	15.749	12	-701.239	3	-159.648	1	-.489	3	-.267	4	-1.176	3
33		17	max	259.106	1	511.207	1	86.9	5	.265	1	.003	3	.51	1
34			min	15.291	12	-702.427	3	-159.648	1	-.489	3	-.342	1	-.715	3
35		18	max	258.191	1	509.622	1	85.314	5	.265	1	-.022	12	.175	1
36			min	14.834	12	-703.616	3	-159.648	1	-.489	3	-.447	1	-.254	3
37		19	max	0	1	0	2	0	1	0	1	0	1	0	1
38			min	0	1	-.002	3	0	5	0	1	0	1	0	1
39	M4	1	max	0	1	.009	1	.001	4	0	1	0	1	0	1
40			min	0	1	-.001	3	0	1	0	1	0	1	0	1
41		2	max	-15.27	12	938.102	3	0	1	.061	4	.342	4	.64	2
42			min	-461.878	1	-2048.391	2	-129.137	5	0	1	0	1	-.303	3
43		3	max	-15.727	12	936.914	3	0	1	.061	4	.258	4	1.985	2
44			min	-462.792	1	-2049.975	2	-130.723	5	0	1	0	1	-.918	3
45		4	max	-16.185	12	935.725	3	0	1	.061	4	.172	4	3.331	2
46			min	-463.707	1	-2051.56	2	-132.308	5	0	1	0	1	-1.533	3
47		5	max	1394.881	3	2009.036	2	0	1	0	1	.013	4	3.931	2
48			min	-3271.31	2	-953.948	3	-117.354	4	-.046	4	0	1	-1.799	3
49		6	max	1394.195	3	2007.451	2	0	1	0	1	0	1	2.613	2
50			min	-3272.225	2	-955.136	3	-118.94	4	-.046	4	-.065	5	-1.173	3
51		7	max	1393.509	3	2005.867	2	0	1	0	1	0	1	1.296	2
52			min	-3273.14	2	-956.325	3	-120.525	4	-.046	4	-.143	4	-.546	3
53		8	max	1392.823	3	2004.282	2	0	1	0	1	0	1	.082	3
54			min	-3274.054	2	-957.513	3	-122.111	4	-.046	4	-.222	4	-.049	1
55		9	max	1371.711	3	14.807	3	0	1	.019	4	.163	5	.376	3
56			min	-3629.261	1	-93.933	2	-267.932	4	0	1	0	1	-.636	2
57		10	max	1371.025	3	13.618	3	0	1	.019	4	0	1	.367	3
58			min	-3630.176	1	-95.517	2	-269.518	4	0	1	-.013	4	-.574	2
59		11	max	1370.339	3	12.43	3	0	1	.019	4	0	1	.358	3
60			min	-3631.09	1	-97.101	2	-271.103	4	0	1	-.191	4	-.51	2
61		12	max	1358.222	3	1953.878	3	0	1	.196	4	.13	5	.068	1
62			min	-4077.456	1	-1644.06	1	-289.128	5	0	1	0	1	-.269	3
63		13	max	1357.535	3	1952.69	3	0	1	.196	4	0	1	1.147	1
64			min	-4078.371	1	-1645.644	1	-290.714	5	0	1	-.062	4	-1.551	3
65		14	max	1356.849	3	1951.502	3	0	1	.196	4	0	1	2.227	1
66			min	-4079.285	1	-1647.228	1	-292.299	5	0	1	-.253	4	-2.832	3
67		15	max	1356.163	3	1950.313	3	0	1	.196	4	0	1	3.309	1
68			min	-4080.2	1	-1648.813	1	-293.885	5	0	1	-.445	4	-4.112	3
69		16	max	462.815	1	1537.354	1	73.836	5	0	1	0	1	2.519	1
70			min	18.546	12	-1915.891	3	0	1	-.197	4	-.199	5	-3.121	3
71		17	max	461.9	1	1535.77	1	72.251	5	0	1	0	1	1.511	1
72			min	18.088	12	-1917.08	3	0	1	-.197	4	-.151	5	-1.864	3
73		18	max	460.986	1	1534.185	1	70.665	5	0	1	0	1	.504	1
74			min	17.631	12	-1918.268	3	0	1	-.197	4	-.104	4	-.605	3
75		19	max	0	1	.001	2	0	1	0	1	0	1	0	1
76			min	0	1	-.005	3	0	4	0	1	0	1	0	1
77	M7	1	max	0	1	.004	1	.002	4	0	1	0	1	0	1
78			min	0	1	0	3	0	12	0	1	0	1	0	1
79		2	max	18.206	5	293.747	3	194.705	1	.269	2	.16	5	.261	2
80			min	-257.745	1	-712.861	2	-54.815	5	-.057	3	-.422	1	-.104	3
81		3	max	17.779	5	292.559	3	194.705	1	.269	2	.123	5	.729	2

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
82			min	-258.66	1	-714.445	2	-56.4	5	-.057	3	-.294	1	-.296	3
83		4	max	17.352	5	291.371	3	194.705	1	.269	2	.086	5	1.199	2
84			min	-259.575	1	-716.029	2	-57.986	5	-.057	3	-.166	1	-.488	3
85		5	max	388.657	3	678.481	2	250.907	1	.084	3	.048	3	1.413	2
86			min	-1206.438	1	-268.097	3	-39.092	5	-.065	2	-.217	1	-.576	3
87		6	max	387.971	3	676.897	2	250.907	1	.084	3	.041	3	.968	2
88			min	-1207.353	1	-269.285	3	-40.677	5	-.065	2	-.07	2	-.4	3
89		7	max	387.285	3	675.312	2	250.907	1	.084	3	.112	1	.524	2
90			min	-1208.268	1	-270.474	3	-42.263	5	-.065	2	-.079	5	-.223	3
91		8	max	386.599	3	673.728	2	250.907	1	.084	3	.276	1	.082	2
92			min	-1209.182	1	-271.662	3	-43.848	5	-.065	2	-.108	5	-.045	3
93		9	max	361.681	3	4.801	3	301.301	1	.205	2	.067	5	.043	3
94			min	-1480.072	1	-21.016	2	-97.682	5	.022	15	-.129	1	-.12	2
95		10	max	360.995	3	3.613	3	301.301	1	.205	2	.068	2	.04	3
96			min	-1480.986	1	-22.601	2	-99.268	5	.022	15	-.071	3	-.106	2
97		11	max	360.309	3	2.424	3	301.301	1	.205	2	.266	1	.038	3
98			min	-1481.901	1	-24.185	2	-100.853	5	.022	15	-.089	3	-.091	2
99		12	max	330.894	3	691.502	3	257.303	3	.331	2	.045	5	.092	1
100			min	-1747.402	1	-515.724	1	-239.679	5	-.344	3	-.191	1	-.182	3
101		13	max	330.208	3	690.314	3	257.303	3	.331	2	.054	3	.431	1
102			min	-1748.317	1	-517.308	1	-241.265	5	-.344	3	-.192	1	-.635	3
103		14	max	329.521	3	689.125	3	257.303	3	.331	2	.223	3	.771	1
104			min	-1749.232	1	-518.893	1	-242.85	5	-.344	3	-.305	4	-1.088	3
105		15	max	328.835	3	687.937	3	257.303	3	.331	2	.391	3	1.112	1
106			min	-1750.147	1	-520.477	1	-244.436	5	-.344	3	-.458	4	-1.54	3
107		16	max	260.021	1	512.791	1	159.648	1	.489	3	.238	1	.846	1
108			min	7.455	15	-701.239	3	23.567	10	-.265	1	-.189	5	-1.176	3
109		17	max	259.106	1	511.207	1	159.648	1	.489	3	.342	1	.51	1
110			min	7.18	15	-702.427	3	23.567	10	-.265	1	-.116	5	-.715	3
111		18	max	258.191	1	509.622	1	159.648	1	.489	3	.447	1	.175	1
112			min	6.904	15	-703.616	3	23.567	10	-.265	1	-.044	5	-.254	3
113		19	max	0	1	0	2	0	12	0	1	0	1	0	1
114			min	0	1	-.002	3	0	1	0	1	0	1	0	1
115	M10	1	max	159.705	1	508.395	1	-6.639	15	.006	2	.501	1	.265	1
116			min	23.561	10	-704.736	3	-257.865	1	-.018	3	-.008	5	-.489	3
117		2	max	159.705	1	366.734	1	-4.129	15	.006	2	.218	1	.259	3
118			min	23.561	10	-519.858	3	-203.719	1	-.018	3	-.019	5	-.269	1
119		3	max	159.705	1	225.074	1	-1.618	15	.006	2	.03	2	.782	3
120			min	23.561	10	-334.979	3	-149.573	1	-.018	3	-.029	4	-.631	1
121		4	max	159.705	1	83.414	1	1.073	5	.006	2	-.006	12	1.078	3
122			min	23.561	10	-150.1	3	-95.427	1	-.018	3	-.147	1	-.82	1
123		5	max	159.705	1	34.778	3	4.956	5	.006	2	-.013	12	1.149	3
124			min	23.561	10	-58.246	1	-41.282	1	-.018	3	-.231	1	-.835	1
125		6	max	159.705	1	219.657	3	14.562	14	.006	2	-.009	15	.993	3
126			min	22.827	15	-199.906	1	-4.824	10	-.018	3	-.248	1	-.677	1
127		7	max	159.705	1	404.536	3	67.01	1	.006	2	0	15	.612	3
128			min	13.12	15	-341.566	1	.909	12	-.018	3	-.199	1	-.346	1
129		8	max	159.705	1	589.414	3	121.156	1	.006	2	.018	5	.158	1
130			min	3.412	15	-483.226	1	3.46	12	-.018	3	-.084	1	-.034	5
131		9	max	159.705	1	774.293	3	175.302	1	.006	2	.097	1	.835	1
132			min	-8.731	5	-624.886	1	6.012	12	-.018	3	-.016	10	-.829	3
133		10	max	159.705	1	959.172	3	22.913	10	.018	3	.344	1	1.685	1
134			min	23.561	10	-373.327	10	-229.447	1	-.002	14	-.001	3	-1.888	3
135		11	max	159.705	1	624.886	1	-3.446	15	.018	3	.097	1	.835	1
136			min	20.938	15	-774.293	3	-175.302	1	-.006	2	-.022	5	-.829	3
137		12	max	159.705	1	483.226	1	-.935	15	.018	3	-.014	12	.158	1
138			min	11.23	15	-589.414	3	-121.156	1	-.006	2	-.084	1	.003	12

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
139		13	max	159.705	1	341.566	1	2.142	5	.018	3	-.017	12	.612	3
140			min	1.523	15	-404.536	3	-67.01	1	-.006	2	-.199	1	-.346	1
141		14	max	159.705	1	199.906	1	6.026	5	.018	3	-.014	15	.993	3
142			min	-11.678	5	-219.657	3	-12.872	9	-.006	2	-.248	1	-.677	1
143		15	max	159.705	1	58.246	1	41.282	1	.018	3	-.007	15	1.149	3
144			min	-26.101	5	-34.778	3	4.194	12	-.006	2	-.231	1	-.835	1
145		16	max	159.705	1	150.1	3	95.427	1	.018	3	.003	5	1.078	3
146			min	-40.524	5	-83.414	1	6.745	12	-.006	2	-.147	1	-.82	1
147		17	max	159.705	1	334.979	3	149.573	1	.018	3	.03	2	.782	3
148			min	-54.947	5	-225.074	1	9.297	12	-.006	2	-.011	9	-.631	1
149		18	max	159.705	1	519.858	3	203.719	1	.018	3	.218	1	.259	3
150			min	-69.37	5	-366.734	1	11.848	12	-.006	2	.017	12	-.269	1
151		19	max	159.705	1	704.736	3	257.865	1	.018	3	.501	1	.265	1
152			min	-83.792	5	-508.395	1	14.4	12	-.006	2	.033	12	-.489	3
153	M11	1	max	303.296	1	500.375	1	27.48	5	0	12	.558	1	.176	4
154			min	-284.874	3	-690.689	3	-265.711	1	-.01	1	-.219	5	-.487	3
155		2	max	303.296	1	358.715	1	31.363	5	0	12	.266	1	.244	3
156			min	-284.874	3	-505.81	3	-211.565	1	-.01	1	-.183	5	-.368	2
157		3	max	303.296	1	217.055	1	35.246	5	0	12	.041	2	.749	3
158			min	-284.874	3	-320.932	3	-157.419	1	-.01	1	-.143	5	-.703	1
159		4	max	303.296	1	75.395	1	39.129	5	0	12	.015	3	1.029	3
160			min	-284.874	3	-136.053	3	-103.273	1	-.01	1	-.127	4	-.882	1
161		5	max	303.296	1	48.826	3	43.013	5	0	12	-.003	12	1.082	3
162			min	-284.874	3	-68.182	2	-49.127	1	-.01	1	-.212	1	-.887	1
163		6	max	303.296	1	233.704	3	49.762	4	0	12	.008	5	.909	3
164			min	-284.874	3	-207.925	1	-9.273	3	-.01	1	-.239	1	-.72	1
165		7	max	303.296	1	418.583	3	66.169	4	0	12	.068	5	.511	3
166			min	-284.874	3	-349.585	1	-5.446	3	-.01	1	-.2	1	-.379	1
167		8	max	303.296	1	603.462	3	113.31	1	0	12	.132	5	.135	1
168			min	-284.874	3	-491.245	1	-1.619	3	-.01	1	-.094	1	-.114	3
169		9	max	303.296	1	788.34	3	167.456	1	0	12	.227	4	.822	1
170			min	-284.874	3	-632.906	1	2.059	12	-.01	1	-.03	3	-.964	3
171		10	max	303.296	1	973.219	3	221.601	1	.01	1	.358	4	1.682	1
172			min	-284.874	3	-774.566	1	-4.61	12	-.004	14	-.025	3	-2.041	3
173		11	max	303.296	1	632.906	1	33.586	5	.01	1	.077	1	.822	1
174			min	-284.874	3	-788.34	3	-167.456	1	0	5	-.186	5	-.964	3
175		12	max	303.296	1	491.245	1	37.469	5	.01	1	-.019	12	.135	1
176			min	-284.874	3	-603.462	3	-113.31	1	0	5	-.16	4	-.114	3
177		13	max	303.296	1	349.585	1	41.353	5	.01	1	-.017	12	.511	3
178			min	-284.874	3	-418.583	3	-59.164	1	0	5	-.2	1	-.379	1
179		14	max	303.296	1	207.925	1	45.236	5	.01	1	-.011	12	.909	3
180			min	-284.874	3	-233.704	3	-7.341	9	0	5	-.239	1	-.72	1
181		15	max	303.296	1	68.182	2	59.271	4	.01	1	.016	5	1.082	3
182			min	-284.874	3	-48.826	3	8.147	12	0	5	-.212	1	-.887	1
183		16	max	303.296	1	136.053	3	103.273	1	.01	1	.079	5	1.029	3
184			min	-284.874	3	-75.395	1	10.699	12	0	5	-.119	1	-.882	1
185		17	max	303.296	1	320.932	3	157.419	1	.01	1	.152	4	.749	3
186			min	-284.874	3	-217.055	1	13.25	12	0	5	.016	9	-.703	1
187		18	max	303.296	1	505.81	3	211.565	1	.01	1	.275	4	.244	3
188			min	-284.874	3	-358.715	1	15.802	12	0	5	.041	12	-.368	2
189		19	max	303.296	1	690.689	3	265.711	1	.01	1	.558	1	.174	1
190			min	-284.874	3	-500.375	1	18.353	12	0	5	.062	12	-.487	3
191	M12	1	max	52.035	5	692.572	2	28.065	5	0	15	.587	1	.27	2
192			min	-48.919	1	-277.777	3	-269.792	1	-.007	1	-.221	5	.036	12
193		2	max	37.612	5	499.318	2	31.949	5	0	15	.291	1	.347	3
194			min	-48.919	1	-192.815	3	-215.647	1	-.007	1	-.184	5	-.458	2
195		3	max	23.189	5	306.064	2	35.832	5	0	15	.061	2	.531	3

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
196			min	-48.919	1	-107.853	3	-161.501	1	-.007	1	-.143	5	-.95	2
197		4	max	17.407	3	112.81	2	39.715	5	0	15	0	10	.611	3
198			min	-48.919	1	-22.891	3	-107.355	1	-.007	1	-.125	4	-1.206	2
199		5	max	17.407	3	62.071	3	43.598	5	0	15	-.009	12	.587	3
200			min	-48.919	1	-80.444	2	-53.209	1	-.007	1	-.202	1	-1.226	2
201		6	max	17.407	3	147.033	3	49.879	4	0	15	.01	5	.459	3
202			min	-48.919	1	-273.698	2	-10.851	2	-.007	1	-.234	1	-1.01	2
203		7	max	17.407	3	231.995	3	66.286	4	0	15	.07	5	.227	3
204			min	-50.795	14	-466.952	2	-1.288	3	-.007	1	-.2	1	-.557	2
205		8	max	17.407	3	316.957	3	109.228	1	0	15	.135	5	.132	2
206			min	-64.075	4	-660.205	2	1.991	12	-.007	1	-.099	1	-.108	3
207		9	max	17.407	3	401.919	3	163.374	1	0	15	.23	4	1.057	2
208			min	-78.497	4	-853.459	2	4.542	12	-.007	1	-.022	10	-.547	3
209		10	max	17.407	3	-17.754	15	217.52	1	.003	3	.361	4	2.218	2
210			min	-92.92	4	-1046.713	2	-10.194	3	-.007	1	-.009	3	-1.09	3
211		11	max	52.6	5	853.459	2	34.559	5	.007	1	.067	1	1.057	2
212			min	-48.919	1	-401.919	3	-163.374	1	0	5	-.191	5	-.547	3
213		12	max	38.177	5	660.205	2	38.442	5	.007	1	-.016	12	.132	2
214			min	-48.919	1	-316.957	3	-109.228	1	0	5	-.165	4	-.108	3
215		13	max	23.754	5	466.952	2	42.325	5	.007	1	-.016	12	.227	3
216			min	-48.919	1	-231.995	3	-55.082	1	0	5	-.2	1	-.557	2
217		14	max	17.407	3	273.698	2	46.208	5	.007	1	-.014	12	.459	3
218			min	-48.919	1	-147.033	3	-5.643	9	0	5	-.234	1	-1.01	2
219		15	max	17.407	3	80.444	2	60.973	4	.007	1	.016	5	.587	3
220			min	-48.919	1	-62.071	3	5.664	12	0	5	-.202	1	-1.226	2
221		16	max	17.407	3	22.891	3	107.355	1	.007	1	.08	5	.611	3
222			min	-48.919	1	-112.81	2	8.215	12	0	5	-.104	1	-1.206	2
223		17	max	17.407	3	107.853	3	161.501	1	.007	1	.157	4	.531	3
224			min	-50.647	14	-306.064	2	10.767	12	0	5	.011	12	-.95	2
225		18	max	17.407	3	192.815	3	215.647	1	.007	1	.291	1	.347	3
226			min	-63.633	4	-499.318	2	13.318	12	0	5	.026	12	-.458	2
227		19	max	17.407	3	277.777	3	269.792	1	.007	1	.587	1	.27	2
228			min	-78.056	4	-692.572	2	15.87	12	0	5	.044	12	-.059	5
229	M13	1	max	53.097	5	712.249	2	18.64	5	.005	3	.487	1	.269	2
230			min	-194.379	1	-294.957	3	-256.101	1	-.023	2	-.178	5	-.057	3
231		2	max	38.674	5	518.995	2	22.524	5	.005	3	.207	1	.251	3
232			min	-194.379	1	-209.995	3	-201.956	1	-.023	2	-.153	5	-.483	2
233		3	max	24.252	5	325.741	2	26.407	5	.005	3	.021	2	.456	3
234			min	-194.379	1	-125.033	3	-147.81	1	-.023	2	-.129	4	-.999	2
235		4	max	9.829	5	132.487	2	30.29	5	.005	3	-.001	3	.557	3
236			min	-194.379	1	-40.071	3	-93.664	1	-.023	2	-.155	1	-1.279	2
237		5	max	-2.695	15	44.891	3	34.173	5	.005	3	-.01	12	.554	3
238			min	-194.379	1	-60.767	2	-39.518	1	-.023	2	-.236	1	-1.323	2
239		6	max	-10.052	12	129.853	3	43.074	4	.005	3	-.003	15	.447	3
240			min	-194.379	1	-254.02	2	-4.694	3	-.023	2	-.251	1	-1.131	2
241		7	max	-10.052	12	214.815	3	68.773	1	.005	3	.044	5	.236	3
242			min	-194.379	1	-447.274	2	-.867	3	-.023	2	-.2	1	-.702	2
243		8	max	-10.052	12	299.777	3	122.919	1	.005	3	.098	5	-.01	15
244			min	-194.379	1	-640.528	2	2.31	12	-.023	2	-.083	1	-.078	3
245		9	max	-10.052	12	384.739	3	177.065	1	.005	3	.187	4	.864	2
246			min	-194.379	1	-833.782	2	4.862	12	-.023	2	-.018	3	-.496	3
247		10	max	-10.052	12	-17.468	15	231.211	1	.023	2	.35	1	2.001	2
248			min	-194.379	1	-1027.036	2	-10.614	3	-.008	14	-.008	3	-1.019	3
249		11	max	36.667	5	833.782	2	23.396	5	.023	2	.1	1	.864	2
250			min	-194.379	1	-384.739	3	-177.065	1	-.005	3	-.138	5	-.496	3
251		12	max	22.244	5	640.528	2	27.279	5	.023	2	-.015	12	.006	5
252			min	-194.379	1	-299.777	3	-122.919	1	-.005	3	-.121	4	-.078	3

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
253		13	max	7.822	5	447.274	2	31.162	5	.023	2	-.016	12	.236	3
254			min	-194.379	1	-214.815	3	-68.773	1	-.005	3	-.2	1	-.702	2
255		14	max	-4.021	15	254.02	2	35.045	5	.023	2	-.015	12	.447	3
256			min	-194.379	1	-129.853	3	-14.628	1	-.005	3	-.251	1	-1.131	2
257		15	max	-10.052	12	60.767	2	46.796	4	.023	2	.015	5	.554	3
258			min	-194.379	1	-44.891	3	5.344	12	-.005	3	-.236	1	-1.323	2
259		16	max	-10.052	12	40.071	3	93.664	1	.023	2	.065	5	.557	3
260			min	-194.379	1	-132.487	2	7.896	12	-.005	3	-.155	1	-1.279	2
261		17	max	-10.052	12	125.033	3	147.81	1	.023	2	.119	5	.456	3
262			min	-194.379	1	-325.741	2	10.447	12	-.005	3	-.015	9	-.999	2
263		18	max	-10.052	12	209.995	3	201.956	1	.023	2	.222	4	.251	3
264			min	-194.379	1	-518.995	2	12.999	12	-.005	3	.024	12	-.483	2
265		19	max	-10.052	12	294.957	3	256.101	1	.023	2	.487	1	.269	2
266			min	-194.379	1	-712.249	2	15.55	12	-.005	3	.042	12	-.057	3
267	M2	1	max	2579.297	1	1068.805	3	219.983	1	.027	5	2.077	5	7.21	1
268			min	-1578.986	3	-768.063	2	-417.01	5	-.017	2	-.365	1	.886	15
269		2	max	2576.026	1	1068.805	3	219.983	1	.027	5	1.928	5	7.288	1
270			min	-1581.439	3	-768.063	2	-414.174	5	-.017	2	-.286	1	.847	15
271		3	max	1966.246	1	1233.458	1	162.026	1	.002	2	1.772	5	7.09	1
272			min	-1315.836	3	139.514	15	-387.966	5	-.001	3	-.248	1	.802	15
273		4	max	1962.974	1	1233.458	1	162.026	1	.002	2	1.633	5	6.647	1
274			min	-1318.29	3	139.514	15	-385.131	5	-.001	3	-.19	1	.752	15
275		5	max	1959.703	1	1233.458	1	162.026	1	.002	2	1.497	4	6.204	1
276			min	-1320.744	3	139.514	15	-382.296	5	-.001	3	-.132	1	.702	15
277		6	max	1956.431	1	1233.458	1	162.026	1	.002	2	1.367	4	5.761	1
278			min	-1323.197	3	139.514	15	-379.46	5	-.001	3	-.073	1	.652	15
279		7	max	1953.16	1	1233.458	1	162.026	1	.002	2	1.238	4	5.318	1
280			min	-1325.651	3	139.514	15	-376.625	5	-.001	3	-.084	3	.601	15
281		8	max	1949.889	1	1233.458	1	162.026	1	.002	2	1.11	4	4.875	1
282			min	-1328.104	3	139.514	15	-373.79	5	-.001	3	-.157	3	.551	15
283		9	max	1946.617	1	1233.458	1	162.026	1	.002	2	.983	4	4.431	1
284			min	-1330.558	3	139.514	15	-370.955	5	-.001	3	-.23	3	.501	15
285		10	max	1943.346	1	1233.458	1	162.026	1	.002	2	.857	4	3.988	1
286			min	-1333.012	3	139.514	15	-368.119	5	-.001	3	-.303	3	.451	15
287		11	max	1940.074	1	1233.458	1	162.026	1	.002	2	.731	4	3.545	1
288			min	-1335.465	3	139.514	15	-365.284	5	-.001	3	-.376	3	.401	15
289		12	max	1936.803	1	1233.458	1	162.026	1	.002	2	.607	4	3.102	1
290			min	-1337.919	3	139.514	15	-362.449	5	-.001	3	-.449	3	.351	15
291		13	max	1933.531	1	1233.458	1	162.026	1	.002	2	.484	4	2.659	1
292			min	-1340.372	3	139.514	15	-359.614	5	-.001	3	-.522	3	.301	15
293		14	max	1930.26	1	1233.458	1	162.026	1	.002	2	.407	2	2.216	1
294			min	-1342.826	3	139.514	15	-356.778	5	-.001	3	-.596	3	.251	15
295		15	max	1926.988	1	1233.458	1	162.026	1	.002	2	.463	2	1.773	1
296			min	-1345.279	3	139.514	15	-353.943	5	-.001	3	-.669	3	.2	15
297		16	max	1923.717	1	1233.458	1	162.026	1	.002	2	.519	2	1.329	1
298			min	-1347.733	3	139.514	15	-351.108	5	-.001	3	-.742	3	.15	15
299		17	max	1920.446	1	1233.458	1	162.026	1	.002	2	.574	2	.886	1
300			min	-1350.187	3	139.514	15	-348.273	5	-.001	3	-.815	3	.1	15
301		18	max	1917.174	1	1233.458	1	162.026	1	.002	2	.63	2	.443	1
302			min	-1352.64	3	139.514	15	-345.437	5	-.001	3	-.888	3	.05	15
303		19	max	1913.903	1	1233.458	1	162.026	1	.002	2	.686	2	0	1
304			min	-1355.094	3	139.514	15	-342.602	5	-.001	3	-.961	3	0	1
305	M5	1	max	6836.292	1	2953.065	3	0	1	.029	4	2.181	4	13.256	1
306			min	-4889.026	3	-2950.767	2	-448.601	5	0	1	0	1	.53	15
307		2	max	6833.021	1	2953.065	3	0	1	.029	4	2.022	4	13.902	1
308			min	-4891.48	3	-2950.767	2	-445.766	5	0	1	0	1	.537	15
309		3	max	5139.765	1	2392.267	1	0	1	0	1	1.858	4	13.752	1

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
310			min	-3979.705	3	91.02	15	-424.582	4	-.001	4	0	1	.523	15
311		4	max	5136.493	1	2392.267	1	0	1	0	1	1.706	4	12.892	1
312			min	-3982.158	3	91.02	15	-421.747	4	-.001	4	0	1	.491	15
313		5	max	5133.222	1	2392.267	1	0	1	0	1	1.555	4	12.033	1
314			min	-3984.612	3	91.02	15	-418.912	4	-.001	4	0	1	.458	15
315		6	max	5129.95	1	2392.267	1	0	1	0	1	1.405	4	11.173	1
316			min	-3987.066	3	91.02	15	-416.076	4	-.001	4	0	1	.425	15
317		7	max	5126.679	1	2392.267	1	0	1	0	1	1.256	4	10.314	1
318			min	-3989.519	3	91.02	15	-413.241	4	-.001	4	0	1	.392	15
319		8	max	5123.407	1	2392.267	1	0	1	0	1	1.108	4	9.454	1
320			min	-3991.973	3	91.02	15	-410.406	4	-.001	4	0	1	.36	15
321		9	max	5120.136	1	2392.267	1	0	1	0	1	.961	4	8.595	1
322			min	-3994.426	3	91.02	15	-407.571	4	-.001	4	0	1	.327	15
323		10	max	5116.865	1	2392.267	1	0	1	0	1	.815	4	7.735	1
324			min	-3996.88	3	91.02	15	-404.735	4	-.001	4	0	1	.294	15
325		11	max	5113.593	1	2392.267	1	0	1	0	1	.67	4	6.876	1
326			min	-3999.333	3	91.02	15	-401.9	4	-.001	4	0	1	.262	15
327		12	max	5110.322	1	2392.267	1	0	1	0	1	.526	4	6.016	1
328			min	-4001.787	3	91.02	15	-399.065	4	-.001	4	0	1	.229	15
329		13	max	5107.05	1	2392.267	1	0	1	0	1	.383	4	5.157	1
330			min	-4004.241	3	91.02	15	-396.23	4	-.001	4	0	1	.196	15
331		14	max	5103.779	1	2392.267	1	0	1	0	1	.241	4	4.297	1
332			min	-4006.694	3	91.02	15	-393.394	4	-.001	4	0	1	.164	15
333		15	max	5100.507	1	2392.267	1	0	1	0	1	.1	4	3.438	1
334			min	-4009.148	3	91.02	15	-390.559	4	-.001	4	0	1	.131	15
335		16	max	5097.236	1	2392.267	1	0	1	0	1	0	1	2.578	1
336			min	-4011.601	3	91.02	15	-387.724	4	-.001	4	-.04	5	.098	15
337		17	max	5093.964	1	2392.267	1	0	1	0	1	0	1	1.719	1
338			min	-4014.055	3	91.02	15	-384.889	4	-.001	4	-.178	4	.065	15
339		18	max	5090.693	1	2392.267	1	0	1	0	1	0	1	.859	1
340			min	-4016.509	3	91.02	15	-382.053	4	-.001	4	-.316	4	.033	15
341		19	max	5087.422	1	2392.267	1	0	1	0	1	0	1	0	1
342			min	-4018.962	3	91.02	15	-379.218	4	-.001	4	-.453	4	0	1
343	M8	1	max	2579.297	1	1068.805	3	228.368	3	.03	4	2.208	4	7.21	1
344			min	-1578.986	3	-768.063	2	-471.72	4	-.007	3	-.352	3	-.361	5
345		2	max	2576.026	1	1068.805	3	228.368	3	.03	4	2.039	4	7.288	1
346			min	-1581.439	3	-768.063	2	-468.885	4	-.007	3	-.27	3	-.313	5
347		3	max	1966.246	1	1233.458	1	203.445	3	.001	3	1.871	4	7.09	1
348			min	-1315.836	3	-48.976	5	-434.283	4	-.002	2	-.209	3	-.282	5
349		4	max	1962.974	1	1233.458	1	203.445	3	.001	3	1.716	4	6.647	1
350			min	-1318.29	3	-48.976	5	-431.447	4	-.002	2	-.135	3	-.264	5
351		5	max	1959.703	1	1233.458	1	203.445	3	.001	3	1.561	4	6.204	1
352			min	-1320.744	3	-48.976	5	-428.612	4	-.002	2	-.062	3	-.246	5
353		6	max	1956.431	1	1233.458	1	203.445	3	.001	3	1.408	4	5.761	1
354			min	-1323.197	3	-48.976	5	-425.777	4	-.002	2	.007	12	-.229	5
355		7	max	1953.16	1	1233.458	1	203.445	3	.001	3	1.255	4	5.318	1
356			min	-1325.651	3	-48.976	5	-422.942	4	-.002	2	-.018	2	-.211	5
357		8	max	1949.889	1	1233.458	1	203.445	3	.001	3	1.104	4	4.875	1
358			min	-1328.104	3	-48.976	5	-420.106	4	-.002	2	-.073	2	-.194	5
359		9	max	1946.617	1	1233.458	1	203.445	3	.001	3	.953	4	4.431	1
360			min	-1330.558	3	-48.976	5	-417.271	4	-.002	2	-.129	2	-.176	5
361		10	max	1943.346	1	1233.458	1	203.445	3	.001	3	.809	5	3.988	1
362			min	-1333.012	3	-48.976	5	-414.436	4	-.002	2	-.185	2	-.158	5
363		11	max	1940.074	1	1233.458	1	203.445	3	.001	3	.672	5	3.545	1
364			min	-1335.465	3	-48.976	5	-411.601	4	-.002	2	-.24	2	-.141	5
365		12	max	1936.803	1	1233.458	1	203.445	3	.001	3	.535	5	3.102	1
366			min	-1337.919	3	-48.976	5	-408.765	4	-.002	2	-.296	2	-.123	5

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
367		13	max	1933.531	1	1233.458	1	203.445	3	.001	3	.522	3	2.659	1
368			min	-1340.372	3	-48.976	5	-405.93	4	-.002	2	-.352	2	-.106	5
369		14	max	1930.26	1	1233.458	1	203.445	3	.001	3	.596	3	2.216	1
370			min	-1342.826	3	-48.976	5	-403.095	4	-.002	2	-.407	2	-.088	5
371		15	max	1926.988	1	1233.458	1	203.445	3	.001	3	.669	3	1.773	1
372			min	-1345.279	3	-48.976	5	-400.26	4	-.002	2	-.463	2	-.07	5
373		16	max	1923.717	1	1233.458	1	203.445	3	.001	3	.742	3	1.329	1
374			min	-1347.733	3	-48.976	5	-397.424	4	-.002	2	-.519	2	-.053	5
375		17	max	1920.446	1	1233.458	1	203.445	3	.001	3	.815	3	.886	1
376			min	-1350.187	3	-48.976	5	-394.589	4	-.002	2	-.574	2	-.035	5
377		18	max	1917.174	1	1233.458	1	203.445	3	.001	3	.888	3	.443	1
378			min	-1352.64	3	-48.976	5	-391.754	4	-.002	2	-.63	2	-.018	5
379		19	max	1913.903	1	1233.458	1	203.445	3	.001	3	.961	3	0	1
380			min	-1355.094	3	-48.976	5	-388.919	4	-.002	2	-.686	2	0	1
381	M3	1	max	1749.838	2	5.617	6	61.25	2	.018	3	.03	5	0	1
382			min	-692.35	3	1.32	15	-25.561	3	-.039	2	-.004	1	0	1
383		2	max	1749.629	2	4.993	6	61.25	2	.018	3	.024	4	0	15
384			min	-692.507	3	1.174	15	-25.561	3	-.039	2	-.008	3	-.002	6
385		3	max	1749.421	2	4.369	6	61.25	2	.018	3	.039	2	0	15
386			min	-692.663	3	1.027	15	-25.561	3	-.039	2	-.017	3	-.004	6
387		4	max	1749.212	2	3.745	6	61.25	2	.018	3	.061	2	-.001	15
388			min	-692.82	3	.88	15	-25.561	3	-.039	2	-.026	3	-.005	6
389		5	max	1749.003	2	3.121	6	61.25	2	.018	3	.083	2	-.001	15
390			min	-692.976	3	.734	15	-25.561	3	-.039	2	-.035	3	-.006	6
391		6	max	1748.795	2	2.497	6	61.25	2	.018	3	.105	2	-.002	15
392			min	-693.133	3	.587	15	-25.561	3	-.039	2	-.044	3	-.007	6
393		7	max	1748.586	2	1.872	6	61.25	2	.018	3	.127	2	-.002	15
394			min	-693.289	3	.44	15	-25.561	3	-.039	2	-.053	3	-.008	6
395		8	max	1748.378	2	1.248	6	61.25	2	.018	3	.149	2	-.002	15
396			min	-693.445	3	.293	15	-25.561	3	-.039	2	-.062	3	-.009	6
397		9	max	1748.169	2	.624	6	61.25	2	.018	3	.171	2	-.002	15
398			min	-693.602	3	.147	15	-25.561	3	-.039	2	-.071	3	-.009	6
399		10	max	1747.96	2	0	1	61.25	2	.018	3	.192	2	-.002	15
400			min	-693.758	3	0	1	-25.561	3	-.039	2	-.081	3	-.009	6
401		11	max	1747.752	2	-.147	15	61.25	2	.018	3	.214	2	-.002	15
402			min	-693.915	3	-.624	4	-25.561	3	-.039	2	-.09	3	-.009	6
403		12	max	1747.543	2	-.293	15	61.25	2	.018	3	.236	2	-.002	15
404			min	-694.071	3	-1.248	4	-25.561	3	-.039	2	-.099	3	-.009	6
405		13	max	1747.335	2	-.44	15	61.25	2	.018	3	.258	2	-.002	15
406			min	-694.228	3	-1.872	4	-25.561	3	-.039	2	-.108	3	-.008	6
407		14	max	1747.126	2	-.587	15	61.25	2	.018	3	.28	2	-.002	15
408			min	-694.384	3	-2.497	4	-25.561	3	-.039	2	-.117	3	-.007	6
409		15	max	1746.917	2	-.734	15	61.25	2	.018	3	.302	2	-.001	15
410			min	-694.541	3	-3.121	4	-25.561	3	-.039	2	-.126	3	-.006	6
411		16	max	1746.709	2	-.88	15	61.25	2	.018	3	.324	2	-.001	15
412			min	-694.697	3	-3.745	4	-25.561	3	-.039	2	-.135	3	-.005	6
413		17	max	1746.5	2	-1.027	15	61.25	2	.018	3	.345	2	0	15
414			min	-694.854	3	-4.369	4	-25.561	3	-.039	2	-.144	3	-.004	6
415		18	max	1746.292	2	-1.174	15	61.25	2	.018	3	.367	2	0	15
416			min	-695.01	3	-4.993	4	-25.561	3	-.039	2	-.154	3	-.002	6
417		19	max	1746.083	2	-1.32	15	61.25	2	.018	3	.389	2	0	1
418			min	-695.166	3	-5.617	4	-25.561	3	-.039	2	-.163	3	0	1
419	M6	1	max	5077.325	2	5.617	4	0	1	.004	5	.031	4	0	1
420			min	-2354.919	3	1.32	15	-29.18	4	0	1	0	1	0	1
421		2	max	5077.116	2	4.993	4	0	1	.004	5	.02	4	0	15
422			min	-2355.075	3	1.174	15	-28.722	4	0	1	0	1	-.002	4
423		3	max	5076.908	2	4.369	4	0	1	.004	5	.01	4	0	15

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
424			min	-2355.232	3	1.027	15	-28.263	4	0	1	0	1	-.004	4
425		4	max	5076.699	2	3.745	4	0	1	.004	5	0	4	-.001	15
426			min	-2355.388	3	.88	15	-27.804	4	0	1	0	1	-.005	4
427		5	max	5076.49	2	3.121	4	0	1	.004	5	0	1	-.001	15
428			min	-2355.545	3	.734	15	-27.346	4	0	1	-.01	4	-.006	4
429		6	max	5076.282	2	2.497	4	0	1	.004	5	0	1	-.002	15
430			min	-2355.701	3	.587	15	-26.887	4	0	1	-.019	4	-.007	4
431		7	max	5076.073	2	1.872	4	0	1	.004	5	0	1	-.002	15
432			min	-2355.858	3	.44	15	-26.429	4	0	1	-.029	4	-.008	4
433		8	max	5075.865	2	1.248	4	0	1	.004	5	0	1	-.002	15
434			min	-2356.014	3	.293	15	-25.97	4	0	1	-.038	4	-.009	4
435		9	max	5075.656	2	.624	4	0	1	.004	5	0	1	-.002	15
436			min	-2356.17	3	.147	15	-25.511	4	0	1	-.047	4	-.009	4
437		10	max	5075.447	2	0	1	0	1	.004	5	0	1	-.002	15
438			min	-2356.327	3	0	1	-25.053	4	0	1	-.056	4	-.009	4
439		11	max	5075.239	2	-.147	15	0	1	.004	5	0	1	-.002	15
440			min	-2356.483	3	-.624	6	-24.594	4	0	1	-.065	4	-.009	4
441		12	max	5075.03	2	-.293	15	0	1	.004	5	0	1	-.002	15
442			min	-2356.64	3	-1.248	6	-24.135	4	0	1	-.074	4	-.009	4
443		13	max	5074.822	2	-.44	15	0	1	.004	5	0	1	-.002	15
444			min	-2356.796	3	-1.872	6	-23.677	4	0	1	-.083	4	-.008	4
445		14	max	5074.613	2	-.587	15	0	1	.004	5	0	1	-.002	15
446			min	-2356.953	3	-2.497	6	-23.218	4	0	1	-.091	4	-.007	4
447		15	max	5074.404	2	-.734	15	0	1	.004	5	0	1	-.001	15
448			min	-2357.109	3	-3.121	6	-22.759	4	0	1	-.099	4	-.006	4
449		16	max	5074.196	2	-.88	15	0	1	.004	5	0	1	-.001	15
450			min	-2357.266	3	-3.745	6	-22.301	4	0	1	-.107	4	-.005	4
451		17	max	5073.987	2	-1.027	15	0	1	.004	5	0	1	0	15
452			min	-2357.422	3	-4.369	6	-21.842	4	0	1	-.115	4	-.004	4
453		18	max	5073.779	2	-1.174	15	0	1	.004	5	0	1	0	15
454			min	-2357.579	3	-4.993	6	-21.383	4	0	1	-.123	4	-.002	4
455		19	max	5073.57	2	-1.32	15	0	1	.004	5	0	1	0	1
456			min	-2357.735	3	-5.617	6	-20.925	4	0	1	-.13	4	0	1
457	M9	1	max	1749.838	2	5.617	4	25.561	3	.039	2	.032	4	0	1
458			min	-692.35	3	1.32	15	-61.25	2	-.018	3	-.001	3	0	1
459		2	max	1749.629	2	4.993	4	25.561	3	.039	2	.02	5	0	15
460			min	-692.507	3	1.174	15	-61.25	2	-.018	3	-.018	2	-.002	4
461		3	max	1749.421	2	4.369	4	25.561	3	.039	2	.017	3	0	15
462			min	-692.663	3	1.027	15	-61.25	2	-.018	3	-.039	2	-.004	4
463		4	max	1749.212	2	3.745	4	25.561	3	.039	2	.026	3	-.001	15
464			min	-692.82	3	.88	15	-61.25	2	-.018	3	-.061	2	-.005	4
465		5	max	1749.003	2	3.121	4	25.561	3	.039	2	.035	3	-.001	15
466			min	-692.976	3	.734	15	-61.25	2	-.018	3	-.083	2	-.006	4
467		6	max	1748.795	2	2.497	4	25.561	3	.039	2	.044	3	-.002	15
468			min	-693.133	3	.587	15	-61.25	2	-.018	3	-.105	2	-.007	4
469		7	max	1748.586	2	1.872	4	25.561	3	.039	2	.053	3	-.002	15
470			min	-693.289	3	.44	15	-61.25	2	-.018	3	-.127	2	-.008	4
471		8	max	1748.378	2	1.248	4	25.561	3	.039	2	.062	3	-.002	15
472			min	-693.445	3	.293	15	-61.25	2	-.018	3	-.149	2	-.009	4
473		9	max	1748.169	2	.624	4	25.561	3	.039	2	.071	3	-.002	15
474			min	-693.602	3	.147	15	-61.25	2	-.018	3	-.171	2	-.009	4
475		10	max	1747.96	2	0	1	25.561	3	.039	2	.081	3	-.002	15
476			min	-693.758	3	0	1	-61.25	2	-.018	3	-.192	2	-.009	4
477		11	max	1747.752	2	-.147	15	25.561	3	.039	2	.09	3	-.002	15
478			min	-693.915	3	-.624	6	-61.25	2	-.018	3	-.214	2	-.009	4
479		12	max	1747.543	2	-.293	15	25.561	3	.039	2	.099	3	-.002	15
480			min	-694.071	3	-1.248	6	-61.25	2	-.018	3	-.236	2	-.009	4

Envelope Member Section Forces (Continued)

	Member	Sec		Axial[lb]	LC	y Shear[lb]	LC	z Shear[lb]	LC	Torque[k-ft]	LC	y-y Mome...	LC	z-z Mome...	LC
481		13	max	1747.335	2	-.44	15	25.561	3	.039	2	.108	3	-.002	15
482			min	-694.228	3	-1.872	6	-61.25	2	-.018	3	-.258	2	-.008	4
483		14	max	1747.126	2	-.587	15	25.561	3	.039	2	.117	3	-.002	15
484			min	-694.384	3	-2.497	6	-61.25	2	-.018	3	-.28	2	-.007	4
485		15	max	1746.917	2	-.734	15	25.561	3	.039	2	.126	3	-.001	15
486			min	-694.541	3	-3.121	6	-61.25	2	-.018	3	-.302	2	-.006	4
487		16	max	1746.709	2	-.88	15	25.561	3	.039	2	.135	3	-.001	15
488			min	-694.697	3	-3.745	6	-61.25	2	-.018	3	-.324	2	-.005	4
489		17	max	1746.5	2	-1.027	15	25.561	3	.039	2	.144	3	0	15
490			min	-694.854	3	-4.369	6	-61.25	2	-.018	3	-.345	2	-.004	4
491		18	max	1746.292	2	-1.174	15	25.561	3	.039	2	.154	3	0	15
492			min	-695.01	3	-4.993	6	-61.25	2	-.018	3	-.367	2	-.002	4
493		19	max	1746.083	2	-1.32	15	25.561	3	.039	2	.163	3	0	1
494			min	-695.166	3	-5.617	6	-61.25	2	-.018	3	-.389	2	0	1

Envelope Member Section Deflections

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
1	M1	1	max	-.06	15	-.064	12	.018	1	1.185e-2	3	NC	3	NC	1
2			min	-.529	1	-.874	1	-1.16	4	-3.341e-2	2	114.265	1	164.137	5
3		2	max	-.06	15	-.067	15	0	12	1.148e-2	3	NC	3	NC	3
4			min	-.529	1	-.738	1	-1.119	4	-3.166e-2	2	128.347	1	172.569	4
5		3	max	-.06	15	-.059	15	-.001	12	1.075e-2	3	NC	12	NC	3
6			min	-.529	1	-.605	1	-1.068	4	-2.823e-2	2	145.88	1	184.02	4
7		4	max	-.06	15	-.05	15	0	12	1.002e-2	3	9263.906	12	NC	3
8			min	-.529	1	-.482	1	-1.008	4	-2.481e-2	2	166.956	1	199.659	4
9		5	max	-.06	15	-.042	15	.001	3	9.786e-3	3	NC	12	NC	3
10			min	-.529	1	-.376	1	-.942	4	-2.257e-2	2	190.721	1	220.218	4
11		6	max	-.06	15	-.034	15	.003	3	1.085e-2	3	NC	12	NC	3
12			min	-.528	1	-.29	1	-.873	4	-2.34e-2	2	215.722	1	246.238	4
13		7	max	-.06	15	-.027	15	.003	3	1.191e-2	3	NC	3	NC	1
14			min	-.528	1	-.217	1	-.807	4	-2.424e-2	2	242.586	1	278.261	4
15		8	max	-.06	15	-.019	15	.001	3	1.298e-2	3	8652.143	12	NC	1
16			min	-.527	1	-.152	1	-.746	4	-2.507e-2	2	273.213	1	315.454	5
17		9	max	-.06	15	-.012	15	0	2	1.443e-2	3	4827.769	12	NC	1
18			min	-.527	1	-.087	1	-.69	4	-2.413e-2	2	312.004	1	359.814	5
19		10	max	-.06	15	-.004	10	.002	1	1.625e-2	3	3383.408	12	NC	1
20			min	-.526	1	-.037	3	-.632	4	-2.152e-2	2	365.334	1	421.23	5
21		11	max	-.06	15	.047	1	0	1	1.807e-2	3	2622.022	12	NC	1
22			min	-.526	1	-.017	3	-.575	4	-1.892e-2	2	442.69	1	507.586	5
23		12	max	-.06	15	.116	1	.007	3	1.689e-2	3	3621.6	10	NC	1
24			min	-.525	1	.002	12	-.521	4	-1.553e-2	2	564.932	1	631.454	5
25		13	max	-.06	15	.184	1	.017	3	1.251e-2	3	8073.612	10	NC	1
26			min	-.524	1	.015	12	-.465	4	-1.133e-2	1	775.133	1	841.916	5
27		14	max	-.06	15	.245	1	.026	3	8.134e-3	3	NC	10	NC	1
28			min	-.523	1	.026	15	-.411	4	-8.737e-3	4	922.313	3	1223.757	5
29		15	max	-.06	15	.295	1	.025	3	3.758e-3	3	NC	2	NC	1
30			min	-.523	1	.033	15	-.366	4	-1.002e-2	4	702.637	3	1931.009	5
31		16	max	-.06	15	.327	1	.017	3	8.868e-3	3	NC	11	NC	2
32			min	-.523	1	.041	15	-.335	4	-8.996e-3	4	518.732	3	3200.376	5
33		17	max	-.06	15	.347	1	.02	1	1.509e-2	3	NC	11	NC	2
34			min	-.523	1	.049	15	-.314	4	-8.961e-3	1	390.362	3	4501.361	1
35		18	max	-.06	15	.365	3	.01	1	2.131e-2	3	NC	1	NC	2
36			min	-.523	1	.056	15	-.302	4	-1.234e-2	1	305.463	3	6029.775	1
37		19	max	-.06	15	.469	3	-.002	10	2.449e-2	3	NC	1	NC	1
38			min	-.523	1	.063	15	-.298	4	-1.406e-2	1	249.281	3	NC	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
39	M4	1	max	-.039	15	-.05	12	0	1	4.246e-4	4	NC	3	NC	1
40			min	-1.024	1	-1.828	1	-1.159	4	0	1	59.343	1	163.822	4
41		2	max	-.039	15	-.053	15	0	1	3.351e-5	5	4573.549	12	NC	1
42			min	-1.024	1	-1.525	1	-1.121	4	0	1	67.967	1	171.487	4
43		3	max	-.039	15	-.044	15	0	1	0	1	2387.727	12	NC	1
44			min	-1.024	1	-1.23	1	-1.07	4	-7.404e-4	4	79.167	1	182.656	4
45		4	max	-.039	15	-.035	15	0	1	0	1	2349.956	15	NC	1
46			min	-1.024	1	-.962	1	-1.009	4	-1.512e-3	4	93.122	1	198.204	4
47		5	max	-.039	15	-.028	15	0	1	0	1	2673.378	15	NC	1
48			min	-1.023	1	-.74	1	-.942	4	-1.903e-3	4	109.067	1	218.912	4
49		6	max	-.039	15	-.022	15	0	1	0	1	3008.961	15	NC	1
50			min	-1.022	1	-.571	1	-.873	4	-1.318e-3	4	125.381	1	245.015	4
51		7	max	-.039	15	-.017	15	0	1	0	1	3367.731	15	NC	1
52			min	-1.021	1	-.436	1	-.806	4	-7.319e-4	4	142.256	1	276.785	4
53		8	max	-.039	15	-.012	15	0	1	0	1	5779.342	12	NC	1
54			min	-1.02	1	-.319	1	-.745	4	-1.462e-4	4	161.179	1	313.984	4
55		9	max	-.039	15	-.008	15	0	1	1.706e-5	5	NC	3	NC	1
56			min	-1.018	1	-.201	1	-.691	4	0	1	186.249	1	357.084	4
57		10	max	-.039	15	-.003	15	0	1	0	1	5915.122	12	NC	1
58			min	-1.017	1	-.073	1	-.632	4	-2.201e-4	4	223.95	1	418.929	4
59		11	max	-.039	15	.063	1	0	1	0	1	6241.409	15	NC	1
60			min	-1.015	1	-.013	3	-.574	4	-4.564e-4	4	285.432	1	505.714	4
61		12	max	-.039	15	.207	1	0	1	0	1	8196.59	15	NC	1
62			min	-1.014	1	.008	15	-.522	4	-1.788e-3	4	402.146	1	623.054	4
63		13	max	-.039	15	.351	1	0	1	0	1	NC	10	NC	1
64			min	-1.012	1	.013	15	-.466	4	-4.283e-3	4	678.422	1	822.911	4
65		14	max	-.039	15	.477	1	0	1	0	1	NC	5	NC	1
66			min	-1.01	1	.018	15	-.414	4	-6.778e-3	4	894.939	3	1186.317	4
67		15	max	-.039	15	.568	1	0	1	0	1	NC	1	NC	1
68			min	-1.009	1	.022	15	-.371	4	-9.273e-3	4	558.434	3	1843.914	4
69		16	max	-.039	15	.609	1	0	1	0	1	NC	4	NC	1
70			min	-1.009	1	.024	15	-.342	4	-7.296e-3	4	344.123	3	2972.287	4
71		17	max	-.039	15	.611	1	0	1	0	1	NC	4	NC	1
72			min	-1.009	1	.025	15	-.321	4	-4.794e-3	4	229.105	3	5347.445	4
73		18	max	-.039	15	.786	3	0	1	0	1	NC	4	NC	1
74			min	-1.009	1	.025	15	-.305	4	-2.292e-3	4	165.916	3	NC	1
75		19	max	-.039	15	1.03	3	0	1	0	1	NC	1	NC	1
76			min	-1.009	1	.025	15	-.294	4	-1.016e-3	4	129.006	3	NC	1
77	M7	1	max	.021	5	.012	5	-.001	12	3.341e-2	2	NC	3	NC	1
78			min	-.529	1	-.874	1	-1.17	4	-1.185e-2	3	114.265	1	160.931	4
79		2	max	.021	5	.014	5	.012	1	3.166e-2	2	NC	3	NC	3
80			min	-.529	1	-.738	1	-1.112	4	-1.148e-2	3	128.347	1	172.111	4
81		3	max	.021	5	.015	5	.028	1	2.823e-2	2	NC	5	NC	3
82			min	-.529	1	-.605	1	-1.053	4	-1.075e-2	3	145.88	1	185.546	4
83		4	max	.021	5	.015	5	.032	1	2.481e-2	2	NC	5	NC	3
84			min	-.529	1	-.482	1	-.991	4	-1.002e-2	3	166.956	1	201.937	4
85		5	max	.021	5	.014	5	.029	1	2.257e-2	2	NC	5	NC	3
86			min	-.529	1	-.376	1	-.927	4	-9.786e-3	3	190.721	1	222.119	4
87		6	max	.021	5	.013	5	.019	1	2.34e-2	2	NC	5	NC	3
88			min	-.528	1	-.29	1	-.865	4	-1.085e-2	3	215.722	1	246.186	4
89		7	max	.021	5	.01	5	.007	1	2.424e-2	2	NC	3	NC	1
90			min	-.528	1	-.217	1	-.805	4	-1.191e-2	3	242.586	1	274.865	4
91		8	max	.021	5	.008	5	0	2	2.507e-2	2	NC	5	NC	1
92			min	-.527	1	-.152	1	-.747	4	-1.298e-2	3	273.213	1	309.636	4
93		9	max	.021	5	.005	5	.001	3	2.413e-2	2	NC	5	NC	1
94			min	-.527	1	-.087	1	-.69	4	-1.443e-2	3	312.004	1	353.113	4
95		10	max	.021	5	.003	5	.002	3	2.152e-2	2	NC	5	NC	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
96			min	-.526	1	-.037	3	-.633	4	-1.625e-2	3	365.334	1	411.924	4
97		11	max	.021	5	.047	1	0	10	1.892e-2	2	NC	5	NC	1
98			min	-.526	1	-.017	3	-.575	4	-1.807e-2	3	442.69	1	495.027	4
99		12	max	.021	5	.116	1	.008	1	1.553e-2	2	NC	7	NC	1
100			min	-.525	1	-.002	5	-.518	4	-1.689e-2	3	564.932	1	619.98	4
101		13	max	.021	5	.184	1	.012	2	1.133e-2	1	NC	4	NC	1
102			min	-.524	1	-.005	5	-.46	4	-1.251e-2	3	775.133	1	826.664	4
103		14	max	.021	5	.245	1	.013	2	7.163e-3	1	NC	4	NC	1
104			min	-.523	1	-.008	5	-.409	4	-8.134e-3	3	922.313	3	1177.237	4
105		15	max	.021	5	.295	1	.007	2	2.996e-3	1	NC	2	NC	1
106			min	-.523	1	-.012	5	-.371	4	-9.148e-3	5	702.637	3	1737.651	4
107		16	max	.021	5	.327	1	0	10	5.583e-3	1	NC	4	NC	2
108			min	-.523	1	-.018	5	-.345	4	-8.868e-3	3	518.732	3	2516.088	4
109		17	max	.021	5	.347	1	-.002	10	8.961e-3	1	NC	4	NC	2
110			min	-.523	1	-.025	5	-.326	4	-1.509e-2	3	390.362	3	3844.545	4
111		18	max	.021	5	.365	3	-.001	10	1.234e-2	1	NC	1	NC	2
112			min	-.523	1	-.032	5	-.308	4	-2.131e-2	3	305.463	3	6029.775	1
113		19	max	.021	5	.469	3	.015	1	1.406e-2	1	NC	1	NC	1
114			min	-.523	1	-.04	5	-.289	4	-2.449e-2	3	249.281	3	NC	1
115	M10	1	max	.002	1	.418	3	.523	1	1.326e-2	3	NC	1	NC	1
116			min	-.299	4	-.036	5	-.021	5	-1.209e-3	2	NC	1	NC	1
117		2	max	.001	1	.79	3	.623	1	1.522e-2	3	NC	4	NC	3
118			min	-.299	4	-.027	10	0	15	-1.803e-3	2	709.993	3	2642.445	1
119		3	max	.001	1	1.133	3	.776	1	1.719e-2	3	NC	5	NC	15
120			min	-.299	4	-.186	2	.013	15	-2.397e-3	2	369.155	3	1042.8	1
121		4	max	.001	1	1.386	3	.931	1	1.916e-2	3	NC	5	NC	15
122			min	-.299	4	-.297	2	.022	15	-2.992e-3	2	272.725	3	646.511	1
123		5	max	0	1	1.513	3	1.053	1	2.112e-2	3	NC	5	NC	15
124			min	-.299	4	-.318	2	.027	15	-3.586e-3	2	241.035	3	498.311	1
125		6	max	0	1	1.507	3	1.121	1	2.309e-2	3	NC	5	NC	15
126			min	-.299	4	-.245	2	.028	15	-4.181e-3	2	242.512	3	441.77	1
127		7	max	0	1	1.384	3	1.131	1	2.505e-2	3	NC	5	NC	15
128			min	-.299	4	-.096	2	.028	15	-4.775e-3	2	273.173	3	434.477	1
129		8	max	0	1	1.192	3	1.095	1	2.702e-2	3	NC	4	NC	5
130			min	-.299	4	.01	15	.027	15	-5.37e-3	2	341.112	3	461.932	1
131		9	max	0	1	1.001	3	1.04	1	2.899e-2	3	NC	5	NC	5
132			min	-.299	4	.016	15	.03	15	-5.964e-3	2	452.7	3	510.995	1
133		10	max	0	1	.911	3	1.009	1	3.095e-2	3	NC	5	NC	5
134			min	-.299	4	.025	15	.039	15	-6.559e-3	2	535.609	3	543.03	1
135		11	max	0	10	1.001	3	1.04	1	2.899e-2	3	NC	5	NC	15
136			min	-.299	4	.029	15	.051	15	-5.964e-3	2	452.7	3	510.995	1
137		12	max	0	10	1.192	3	1.095	1	2.702e-2	3	NC	4	9194.854	15
138			min	-.299	4	.011	10	.059	15	-5.37e-3	2	341.112	3	461.932	1
139		13	max	0	10	1.384	3	1.131	1	2.505e-2	3	NC	5	9108.012	15
140			min	-.299	4	-.096	2	.064	15	-4.775e-3	2	273.173	3	434.477	1
141		14	max	0	10	1.507	3	1.121	1	2.309e-2	3	8797.502	15	NC	15
142			min	-.3	4	-.245	2	.064	15	-4.181e-3	2	242.512	3	441.77	1
143		15	max	0	10	1.513	3	1.053	1	2.112e-2	3	6581.732	15	NC	15
144			min	-.3	4	-.318	2	.061	15	-3.586e-3	2	241.035	3	498.311	1
145		16	max	0	10	1.386	3	.931	1	1.916e-2	3	6001.177	15	NC	5
146			min	-.3	4	-.297	2	.057	15	-2.992e-3	2	272.725	3	646.511	1
147		17	max	0	10	1.133	3	.776	1	1.719e-2	3	6682.757	15	NC	5
148			min	-.3	4	-.186	2	.053	15	-2.397e-3	2	369.155	3	1042.8	1
149		18	max	0	10	.79	3	.623	1	1.522e-2	3	NC	15	NC	3
150			min	-.3	4	-.027	10	.053	15	-1.803e-3	2	709.993	3	2642.445	1
151		19	max	0	10	.418	3	.523	1	1.326e-2	3	NC	1	NC	1
152			min	-.3	4	.06	15	.06	15	-1.209e-3	2	NC	1	NC	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
153	M11	1	max	.003	1	.082	1	.525	1	8.781e-3	1	NC	1	NC	1
154			min	-.546	4	-.007	3	-.021	5	-2.955e-4	5	NC	1	NC	1
155		2	max	.003	1	.284	3	.601	1	9.832e-3	1	NC	4	NC	3
156			min	-.546	4	-.193	2	.036	15	-1.447e-4	5	905.098	3	3034.323	4
157		3	max	.002	1	.549	3	.742	1	1.088e-2	1	NC	5	NC	3
158			min	-.546	4	-.405	2	.059	15	-1.38e-5	15	474.273	3	1216.357	1
159		4	max	.002	1	.728	3	.894	1	1.193e-2	1	NC	5	NC	12
160			min	-.546	4	-.536	2	.058	15	8.616e-5	15	359.189	3	715.638	1
161		5	max	.002	1	.786	3	1.019	1	1.298e-2	1	NC	5	6497.889	15
162			min	-.546	4	-.567	2	.042	15	1.861e-4	15	332.653	3	534.624	1
163		6	max	.001	1	.719	3	1.095	1	1.403e-2	1	NC	5	NC	5
164			min	-.546	4	-.497	2	.019	15	2.861e-4	15	363.529	3	463.508	1
165		7	max	.001	1	.546	3	1.115	1	1.509e-2	1	NC	5	NC	5
166			min	-.547	4	-.347	2	-.003	15	3.86e-4	15	477.189	3	447.631	1
167		8	max	0	1	.315	3	1.089	1	1.614e-2	1	NC	5	NC	13
168			min	-.547	4	-.155	2	-.018	5	4.86e-4	15	820.005	3	468.287	1
169		9	max	0	1	.099	3	1.042	1	1.719e-2	1	NC	4	NC	13
170			min	-.547	4	0	15	-.004	15	5.86e-4	15	2481.602	3	511.006	1
171		10	max	0	1	.136	1	1.014	1	1.824e-2	1	NC	3	NC	5
172			min	-.547	4	0	3	.039	15	6.859e-4	15	4853.688	1	539.596	1
173		11	max	0	3	.099	3	1.042	1	1.719e-2	1	NC	4	4566.068	15
174			min	-.547	4	.005	10	.084	15	7.167e-4	15	2481.602	3	511.006	1
175		12	max	0	3	.315	3	1.089	1	1.614e-2	1	NC	5	3804.279	15
176			min	-.547	4	-.155	2	.1	15	7.474e-4	15	820.005	3	468.287	1
177		13	max	0	3	.546	3	1.115	1	1.509e-2	1	NC	15	4533.278	15
178			min	-.547	4	-.347	2	.093	15	7.781e-4	15	477.189	3	447.631	1
179		14	max	.001	3	.719	3	1.095	1	1.403e-2	1	8460.826	15	8222.27	15
180			min	-.547	4	-.497	2	.071	15	8.089e-4	15	363.529	3	463.508	1
181		15	max	.002	3	.786	3	1.019	1	1.298e-2	1	6624.115	15	NC	5
182			min	-.547	4	-.567	2	.043	15	8.396e-4	15	332.653	3	534.624	1
183		16	max	.002	3	.728	3	.894	1	1.193e-2	1	6190.925	15	NC	12
184			min	-.547	4	-.536	2	.017	15	8.704e-4	15	359.189	3	715.638	1
185		17	max	.002	3	.549	3	.742	1	1.088e-2	1	7008.112	15	NC	3
186			min	-.547	4	-.405	2	.004	15	9.011e-4	15	474.273	3	1216.357	1
187		18	max	.003	3	.284	3	.601	1	9.832e-3	1	NC	15	NC	3
188			min	-.547	4	-.193	2	.015	15	9.319e-4	15	905.098	3	3465.88	1
189		19	max	.003	3	.082	1	.525	1	8.781e-3	1	NC	1	NC	1
190			min	-.547	4	-.007	3	.06	15	9.626e-4	15	NC	1	NC	1
191	M12	1	max	0	3	.006	5	.527	1	8.214e-3	1	NC	1	NC	1
192			min	-.719	4	-.121	1	-.021	5	-3.395e-4	5	NC	1	NC	1
193		2	max	0	3	.12	3	.591	1	8.977e-3	1	NC	5	NC	3
194			min	-.719	4	-.463	1	.036	15	-1.998e-4	5	706.764	2	3115.735	4
195		3	max	0	3	.268	3	.726	1	9.74e-3	1	NC	5	NC	12
196			min	-.719	4	-.773	2	.058	15	-6.017e-5	5	379.805	2	1328.969	1
197		4	max	0	3	.354	3	.876	1	1.05e-2	1	NC	5	6981.405	12
198			min	-.719	4	-.984	2	.057	15	3.597e-5	15	291.282	2	756.565	1
199		5	max	0	3	.368	3	1.003	1	1.127e-2	1	NC	5	6833.265	15
200			min	-.719	4	-1.055	2	.04	15	1.288e-4	15	270.237	2	554.87	1
201		6	max	0	3	.314	3	1.083	1	1.203e-2	1	NC	5	NC	5
202			min	-.719	4	-.982	2	.016	15	2.215e-4	15	291.876	2	474.988	1
203		7	max	0	3	.206	3	1.108	1	1.279e-2	1	NC	5	NC	5
204			min	-.719	4	-.793	2	-.006	5	3.143e-4	15	369.377	2	454.088	1
205		8	max	0	3	.073	3	1.088	1	1.355e-2	1	NC	5	NC	13
206			min	-.719	4	-.567	1	-.022	5	4.071e-4	15	572.364	2	470.851	1
207		9	max	0	3	-.01	15	1.045	1	1.432e-2	1	NC	3	NC	13
208			min	-.719	4	-.359	1	-.005	5	4.999e-4	15	1109.678	1	510.022	1
209		10	max	0	1	-.01	15	1.019	1	1.508e-2	1	NC	5	NC	5

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
210			min	-.719	4	-.264	1	.039	15	5.927e-4	15	1852.448	1	536.716	1
211		11	max	0	1	-.015	15	1.045	1	1.432e-2	1	NC	3	4457.709	15
212			min	-.719	4	-.359	1	.086	15	6.316e-4	15	1109.678	1	510.022	1
213		12	max	0	1	.073	3	1.088	1	1.355e-2	1	NC	5	3699.468	15
214			min	-.719	4	-.567	1	.102	15	6.705e-4	15	572.364	2	470.851	1
215		13	max	0	1	.206	3	1.108	1	1.279e-2	1	NC	15	4386.778	15
216			min	-.719	4	-.793	2	.095	15	7.094e-4	15	369.377	2	454.088	1
217		14	max	0	1	.314	3	1.083	1	1.203e-2	1	7696.235	15	7848.871	15
218			min	-.719	4	-.982	2	.073	15	7.484e-4	15	291.876	2	474.988	1
219		15	max	0	1	.368	3	1.003	1	1.127e-2	1	6827.725	15	NC	5
220			min	-.719	4	-1.055	2	.044	15	7.873e-4	15	270.237	2	554.87	1
221		16	max	0	1	.354	3	.876	1	1.05e-2	1	6959.04	15	NC	13
222			min	-.719	4	-.984	2	.017	15	8.262e-4	15	291.282	2	756.565	1
223		17	max	0	1	.268	3	.726	1	9.74e-3	1	8439.97	15	NC	6
224			min	-.719	4	-.773	2	.004	15	8.651e-4	15	379.805	2	1328.969	1
225		18	max	0	1	.12	3	.591	1	8.977e-3	1	NC	15	NC	3
226			min	-.719	4	-.463	1	.014	15	9.041e-4	15	706.764	2	4122.697	1
227		19	max	0	1	-.016	15	.527	1	8.214e-3	1	NC	1	NC	1
228			min	-.719	4	-.121	1	.06	15	9.43e-4	15	NC	1	NC	1
229	M13	1	max	0	12	.013	5	.529	1	1.726e-2	1	NC	1	NC	1
230			min	-1.142	4	-.807	1	-.021	5	-1.513e-3	3	NC	1	NC	1
231		2	max	0	12	.065	3	.636	1	1.961e-2	1	NC	5	NC	3
232			min	-1.142	4	-1.262	1	.033	15	-2.1e-3	3	539.342	2	2460.946	1
233		3	max	0	12	.207	3	.794	1	2.196e-2	1	NC	5	NC	12
234			min	-1.142	4	-1.669	1	.057	15	-2.686e-3	3	285.702	2	995.808	1
235		4	max	0	12	.295	3	.952	1	2.431e-2	1	NC	15	6771.371	12
236			min	-1.142	4	-1.973	1	.061	15	-3.273e-3	3	212.48	2	624.712	1
237		5	max	0	12	.319	3	1.074	1	2.666e-2	1	NC	15	5349.653	15
238			min	-1.142	4	-2.145	1	.051	15	-3.859e-3	3	187.025	2	484.78	1
239		6	max	0	12	.278	3	1.141	1	2.901e-2	1	9176.411	15	9561.924	15
240			min	-1.142	4	-2.178	1	.033	15	-4.446e-3	3	185.111	2	431.605	1
241		7	max	0	12	.185	3	1.149	1	3.136e-2	1	8707.418	15	NC	5
242			min	-1.141	4	-2.091	1	.015	15	-5.033e-3	3	201.673	2	425.631	1
243		8	max	0	12	.065	3	1.112	1	3.371e-2	1	8871.554	15	NC	5
244			min	-1.141	4	-1.93	1	.004	15	-5.619e-3	3	235.149	1	453.243	1
245		9	max	0	12	-.036	12	1.055	1	3.606e-2	1	9414.251	15	NC	5
246			min	-1.141	4	-1.762	1	.009	15	-6.206e-3	3	276.581	1	501.697	1
247		10	max	0	1	-.058	15	1.024	1	3.84e-2	1	NC	3	NC	5
248			min	-1.141	4	-1.68	1	.039	15	-6.792e-3	3	302.31	1	533.164	1
249		11	max	0	1	-.036	12	1.055	1	3.606e-2	1	8971.787	15	5784.759	15
250			min	-1.141	4	-1.762	1	.072	15	-6.206e-3	3	276.581	1	501.697	1
251		12	max	0	1	.065	3	1.112	1	3.371e-2	1	7383.243	15	5020	15
252			min	-1.141	4	-1.93	1	.083	15	-5.619e-3	3	235.149	1	453.243	1
253		13	max	0	1	.185	3	1.149	1	3.136e-2	1	6192.493	15	6205.506	15
254			min	-1.141	4	-2.091	1	.078	15	-5.033e-3	3	201.673	2	425.631	1
255		14	max	0	1	.278	3	1.141	1	2.901e-2	1	5550.552	15	NC	15
256			min	-1.141	4	-2.178	1	.06	15	-4.446e-3	3	185.111	2	431.605	1
257		15	max	.001	1	.319	3	1.074	1	2.666e-2	1	5422.202	15	NC	5
258			min	-1.141	4	-2.145	1	.039	15	-3.859e-3	3	187.025	2	484.78	1
259		16	max	.001	1	.295	3	.952	1	2.431e-2	1	5895.469	15	NC	13
260			min	-1.141	4	-1.973	1	.019	15	-3.273e-3	3	212.48	2	624.712	1
261		17	max	.002	1	.207	3	.794	1	2.196e-2	1	7492.036	15	NC	4
262			min	-1.141	4	-1.669	1	.011	15	-2.686e-3	3	285.702	2	995.808	1
263		18	max	.002	1	.065	3	.636	1	1.961e-2	1	NC	15	NC	3
264			min	-1.141	4	-1.262	1	.021	15	-2.1e-3	3	539.342	2	2460.946	1
265		19	max	.002	1	-.067	12	.529	1	1.726e-2	1	NC	1	NC	1
266			min	-1.141	4	-.807	1	.06	15	-1.513e-3	3	NC	1	NC	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
267	M2	1	max	0	1	0	1	0	1	0	1	NC	1	NC	1
268			min	0	1	0	1	0	1	0	1	NC	1	NC	1
269		2	max	0	3	0	15	.002	5	6.142e-3	2	NC	1	NC	1
270			min	0	1	-.003	1	0	1	-9.579e-3	5	NC	1	NC	1
271		3	max	0	3	-.001	15	.007	5	8.665e-3	2	NC	2	NC	1
272			min	0	1	-.01	1	-.001	1	-1.391e-2	5	7557.756	1	NC	1
273		4	max	0	3	-.003	15	.016	5	7.964e-3	2	NC	5	NC	1
274			min	0	1	-.023	1	-.002	1	-1.357e-2	5	3355.6	1	4949.432	5
275		5	max	0	3	-.005	15	.027	5	7.264e-3	2	NC	5	NC	1
276			min	0	1	-.041	1	-.004	1	-1.323e-2	5	1909.264	1	2867.289	5
277		6	max	0	3	-.007	15	.041	5	6.563e-3	2	NC	15	NC	1
278			min	0	1	-.063	1	-.006	1	-1.289e-2	5	1241.076	1	1887.204	5
279		7	max	0	3	-.01	15	.058	5	5.863e-3	2	7576.977	15	NC	1
280			min	0	1	-.088	1	-.008	1	-1.255e-2	5	877.203	1	1347.203	5
281		8	max	0	3	-.014	15	.076	5	5.162e-3	2	5691.938	15	NC	9
282			min	0	1	-.118	1	-.01	1	-1.221e-2	5	656.923	1	1017.601	5
283		9	max	0	3	-.017	15	.097	5	4.462e-3	2	4456.046	15	NC	9
284			min	-.001	1	-.151	1	-.012	1	-1.187e-2	5	513.114	1	801.112	5
285		10	max	0	3	-.022	15	.119	5	3.761e-3	2	3601.625	15	NC	9
286			min	-.001	1	-.187	1	-.014	1	-1.153e-2	5	414.01	1	651.201	5
287		11	max	0	3	-.026	15	.143	5	3.061e-3	2	2984.978	15	NC	9
288			min	-.001	1	-.226	1	-.015	1	-1.118e-2	5	342.66	1	542.88	5
289		12	max	.001	3	-.031	15	.168	5	2.36e-3	2	2525.396	15	NC	9
290			min	-.001	1	-.268	1	-.016	1	-1.084e-2	5	289.587	1	462.068	5
291		13	max	.001	3	-.036	15	.194	4	1.66e-3	2	2173.266	15	NC	9
292			min	-.002	1	-.312	1	-.017	1	-1.055e-2	4	248.988	1	399.717	4
293		14	max	.001	3	-.041	15	.221	4	9.595e-4	2	1897.487	15	NC	3
294			min	-.002	1	-.357	1	-.017	1	-1.03e-2	4	217.233	1	350.698	4
295		15	max	.001	3	-.046	15	.249	4	1.098e-3	3	1677.399	15	NC	3
296			min	-.002	1	-.404	1	-.016	1	-1.005e-2	4	191.919	1	311.577	4
297		16	max	.001	3	-.052	15	.277	4	1.492e-3	3	1498.965	15	NC	3
298			min	-.002	1	-.453	1	-.015	1	-9.8e-3	4	171.415	1	279.872	4
299		17	max	.001	3	-.057	15	.306	4	1.887e-3	3	1352.353	15	NC	9
300			min	-.002	1	-.502	1	-.012	1	-9.551e-3	4	154.582	1	253.844	4
301		18	max	.002	3	-.063	15	.334	4	2.281e-3	3	1230.484	15	NC	1
302			min	-.002	1	-.552	1	-.015	3	-9.302e-3	4	140.6	1	232.243	4
303		19	max	.002	3	-.069	15	.362	4	2.676e-3	3	1128.188	15	NC	1
304			min	-.002	1	-.602	1	-.024	3	-9.052e-3	4	128.871	1	214.15	4
305	M5	1	max	0	1	0	1	0	1	0	1	NC	1	NC	1
306			min	0	1	0	1	0	1	0	1	NC	1	NC	1
307		2	max	0	3	0	15	.002	4	0	1	NC	1	NC	1
308			min	0	1	-.004	1	0	1	-1.019e-2	4	NC	1	NC	1
309		3	max	0	3	0	15	.008	4	0	1	NC	4	NC	1
310			min	0	1	-.019	1	0	1	-1.478e-2	4	4085.26	1	NC	1
311		4	max	0	3	-.002	15	.016	4	0	1	NC	5	NC	1
312			min	-.001	1	-.044	1	0	1	-1.438e-2	4	1781.587	1	4717.102	4
313		5	max	.001	3	-.003	15	.028	4	0	1	NC	5	NC	1
314			min	-.002	1	-.077	1	0	1	-1.398e-2	4	1005.739	1	2734.377	4
315		6	max	.001	3	-.005	15	.043	4	0	1	NC	5	NC	1
316			min	-.002	1	-.119	1	0	1	-1.358e-2	4	650.889	1	1801.167	4
317		7	max	.002	3	-.007	15	.06	4	0	1	NC	15	NC	1
318			min	-.002	1	-.169	1	0	1	-1.318e-2	4	458.767	1	1286.996	4
319		8	max	.002	3	-.009	15	.08	4	0	1	8908.731	15	NC	1
320			min	-.003	1	-.226	1	0	1	-1.278e-2	4	342.9	1	973.151	4
321		9	max	.002	3	-.011	15	.101	4	0	1	6957.929	15	NC	1
322			min	-.003	1	-.29	1	0	1	-1.238e-2	4	267.458	1	767.009	4
323		10	max	.002	3	-.014	15	.124	4	0	1	5613.704	15	NC	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
324			min	-.003	1	-.36	1	0	1	-1.198e-2	4	215.571	1	624.265	4
325		11	max	.003	3	-.017	15	.149	4	0	1	4646.02	15	NC	1
326			min	-.004	1	-.435	1	0	1	-1.158e-2	4	178.27	1	521.135	4
327		12	max	.003	3	-.02	15	.175	4	0	1	3926.27	15	NC	1
328			min	-.004	1	-.515	1	0	1	-1.117e-2	4	150.559	1	444.209	4
329		13	max	.003	3	-.023	15	.201	4	0	1	3375.707	15	NC	1
330			min	-.004	1	-.6	1	0	1	-1.077e-2	4	129.38	1	385.261	4
331		14	max	.004	3	-.026	15	.229	4	0	1	2945.108	15	NC	1
332			min	-.005	1	-.688	1	0	1	-1.037e-2	4	112.829	1	339.112	4
333		15	max	.004	3	-.03	15	.257	4	0	1	2601.86	15	NC	1
334			min	-.005	1	-.779	1	0	1	-9.972e-3	4	99.644	1	302.328	4
335		16	max	.004	3	-.033	15	.285	4	0	1	2323.848	15	NC	1
336			min	-.005	1	-.872	1	0	1	-9.571e-3	4	88.971	1	272.572	4
337		17	max	.004	3	-.037	15	.313	4	0	1	2095.613	15	NC	1
338			min	-.006	1	-.967	1	0	1	-9.17e-3	4	80.213	1	248.203	4
339		18	max	.005	3	-.041	15	.34	4	0	1	1906.035	15	NC	1
340			min	-.006	1	-1.064	1	0	1	-8.769e-3	4	72.941	1	228.047	4
341		19	max	.005	3	-.044	15	.367	4	0	1	1747.012	15	NC	1
342			min	-.006	1	-1.161	1	0	1	-8.368e-3	4	66.843	1	211.241	4
343	M8	1	max	0	1	0	1	0	1	0	1	NC	1	NC	1
344			min	0	1	0	1	0	1	0	1	NC	1	NC	1
345		2	max	0	3	0	5	.002	4	2.613e-3	3	NC	1	NC	1
346			min	0	1	-.003	1	0	3	-1.087e-2	4	NC	1	NC	1
347		3	max	0	3	0	5	.008	4	3.635e-3	3	NC	2	NC	1
348			min	0	1	-.01	1	-.001	3	-1.573e-2	4	7557.756	1	NC	1
349		4	max	0	3	.001	5	.017	4	3.241e-3	3	NC	4	NC	1
350			min	0	1	-.023	1	-.002	3	-1.523e-2	4	3355.6	1	4671.275	4
351		5	max	0	3	.002	5	.029	4	2.847e-3	3	NC	4	NC	1
352			min	0	1	-.041	1	-.004	3	-1.472e-2	4	1909.264	1	2709.702	4
353		6	max	0	3	.003	5	.043	4	2.452e-3	3	NC	5	NC	1
354			min	0	1	-.063	1	-.005	3	-1.422e-2	4	1241.076	1	1785.941	4
355		7	max	0	3	.004	5	.061	4	2.058e-3	3	NC	5	NC	1
356			min	0	1	-.088	1	-.007	3	-1.372e-2	4	877.203	1	1276.793	4
357		8	max	0	3	.005	5	.08	4	1.663e-3	3	NC	5	NC	9
358			min	0	1	-.118	1	-.008	3	-1.322e-2	4	656.923	1	965.934	4
359		9	max	0	3	.006	5	.102	4	1.269e-3	3	NC	5	NC	9
360			min	-.001	1	-.151	1	-.009	3	-1.272e-2	4	513.114	1	761.718	4
361		10	max	0	3	.008	5	.125	4	8.744e-4	3	NC	7	NC	9
362			min	-.001	1	-.187	1	-.01	3	-1.221e-2	4	414.01	1	620.288	4
363		11	max	0	3	.009	5	.15	4	4.8e-4	3	NC	15	NC	9
364			min	-.001	1	-.226	1	-.01	3	-1.171e-2	4	342.66	1	518.102	4
365		12	max	.001	3	.011	5	.176	4	8.552e-5	3	9808.441	15	NC	9
366			min	-.001	1	-.268	1	-.01	3	-1.121e-2	4	289.587	1	441.879	4
367		13	max	.001	3	.013	5	.202	4	-1.741e-4	9	8454.239	15	NC	9
368			min	-.002	1	-.312	1	-.008	3	-1.071e-2	4	248.988	1	383.474	4
369		14	max	.001	3	.015	5	.23	4	1.003e-4	9	7391.157	15	NC	3
370			min	-.002	1	-.357	1	-.006	3	-1.02e-2	4	217.233	1	337.757	4
371		15	max	.001	3	.017	5	.258	4	3.747e-4	9	6541.064	15	NC	3
372			min	-.002	1	-.404	1	-.003	3	-9.738e-3	5	191.919	1	301.326	4
373		16	max	.001	3	.019	5	.285	4	9.998e-4	1	5850.681	15	NC	3
374			min	-.002	1	-.453	1	.001	12	-9.337e-3	5	171.415	1	271.866	4
375		17	max	.001	3	.021	5	.313	4	1.681e-3	1	5282.581	15	NC	9
376			min	-.002	1	-.502	1	0	10	-8.936e-3	5	154.582	1	247.753	4
377		18	max	.002	3	.023	5	.341	4	2.362e-3	1	4809.737	15	NC	1
378			min	-.002	1	-.552	1	-.001	10	-8.535e-3	5	140.6	1	227.824	4
379		19	max	.002	3	.025	5	.367	4	3.044e-3	1	4412.378	15	NC	1
380			min	-.002	1	-.602	1	-.005	2	-8.134e-3	5	128.871	1	211.223	4

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
381	M3	1	max	.005	1	0	15	.004	5	3.417e-3	2	NC	1	NC	1
382			min	0	15	-.002	1	0	1	-4.454e-3	5	NC	1	NC	1
383		2	max	.004	1	-.005	15	.062	5	3.974e-3	2	NC	1	NC	4
384			min	0	15	-.041	1	-.036	2	-4.453e-3	5	NC	1	2085.729	2
385		3	max	.004	1	-.009	15	.121	5	4.53e-3	2	NC	1	NC	4
386			min	0	10	-.079	1	-.072	2	-4.452e-3	5	NC	1	1050.981	2
387		4	max	.003	3	-.014	15	.18	5	5.086e-3	2	NC	1	NC	4
388			min	0	10	-.117	1	-.106	2	-4.451e-3	5	NC	1	710.761	2
389		5	max	.003	3	-.018	15	.239	5	5.643e-3	2	NC	1	NC	6
390			min	0	10	-.155	1	-.138	2	-4.45e-3	5	NC	1	544.481	2
391		6	max	.004	3	-.023	15	.298	5	6.199e-3	2	NC	1	7633.903	6
392			min	0	10	-.192	1	-.167	2	-4.449e-3	5	NC	1	448.166	2
393		7	max	.004	3	-.027	15	.357	5	6.756e-3	2	NC	1	5937.677	6
394			min	-.001	2	-.23	1	-.193	2	-4.448e-3	5	8990.605	6	387.317	2
395		8	max	.004	3	-.031	15	.415	5	7.312e-3	2	NC	1	4887.096	6
396			min	-.002	2	-.267	1	-.215	2	-4.447e-3	5	8301.976	6	347.335	2
397		9	max	.005	3	-.036	15	.472	5	7.868e-3	2	NC	1	4208.48	6
398			min	-.003	2	-.305	1	-.232	2	-4.446e-3	5	7931.316	6	321.158	2
399		10	max	.005	3	-.04	15	.528	5	8.425e-3	2	NC	1	3766.837	6
400			min	-.003	2	-.342	1	-.243	2	-4.445e-3	5	7814.056	6	305.186	2
401		11	max	.005	3	-.044	15	.583	5	8.981e-3	2	NC	1	3492.377	6
402			min	-.004	2	-.378	1	-.248	2	-4.444e-3	5	7931.316	6	297.731	2
403		12	max	.005	3	-.048	15	.636	5	9.538e-3	2	NC	1	3351.08	6
404			min	-.005	2	-.415	1	-.247	2	-4.443e-3	5	8301.976	6	293.736	14
405		13	max	.006	3	-.052	15	.687	5	1.009e-2	2	NC	1	3333.703	6
406			min	-.006	2	-.451	1	-.237	2	-4.442e-3	5	8990.605	6	264.072	14
407		14	max	.006	3	-.056	15	.736	5	1.065e-2	2	NC	1	3489.58	13
408			min	-.006	2	-.487	1	-.219	2	-4.696e-3	3	NC	1	238.912	14
409		15	max	.006	3	-.06	15	.783	5	1.121e-2	2	NC	1	3843.375	13
410			min	-.007	2	-.523	1	-.193	2	-4.953e-3	3	NC	1	217.304	14
411		16	max	.007	3	-.063	15	.828	5	1.176e-2	2	NC	1	4553.885	13
412			min	-.008	2	-.559	1	-.156	2	-5.21e-3	3	NC	1	198.545	14
413		17	max	.007	3	-.067	15	.87	5	1.232e-2	2	NC	1	6115.933	13
414			min	-.008	2	-.594	1	-.109	2	-5.467e-3	3	NC	1	182.112	14
415		18	max	.007	3	-.071	15	.915	4	1.288e-2	2	NC	1	NC	6
416			min	-.009	2	-.63	1	-.051	2	-5.724e-3	3	NC	1	167.601	14
417		19	max	.007	3	-.075	15	.96	4	1.343e-2	2	NC	1	NC	1
418			min	-.01	2	-.665	1	0	3	-5.981e-3	3	NC	1	154.701	14
419	M6	1	max	.009	1	0	15	.004	4	0	1	NC	1	NC	1
420			min	0	15	-.005	1	0	1	-4.756e-3	4	NC	1	NC	1
421		2	max	.007	1	-.003	15	.066	4	0	1	NC	1	NC	1
422			min	0	15	-.078	1	0	1	-4.812e-3	4	NC	1	9138.848	4
423		3	max	.007	3	-.006	15	.128	4	0	1	NC	1	NC	1
424			min	0	10	-.151	1	0	1	-4.868e-3	4	NC	1	4397.713	4
425		4	max	.008	3	-.01	15	.191	4	0	1	NC	1	NC	1
426			min	0	10	-.224	1	0	1	-4.924e-3	4	NC	1	2860.167	4
427		5	max	.009	3	-.013	15	.253	4	0	1	NC	1	NC	1
428			min	-.003	2	-.297	1	0	1	-4.98e-3	4	NC	1	2118.937	4
429		6	max	.01	3	-.016	15	.315	4	0	1	NC	1	NC	1
430			min	-.005	2	-.369	1	0	1	-5.036e-3	4	NC	1	1694.429	4
431		7	max	.011	3	-.019	15	.377	4	0	1	NC	1	NC	1
432			min	-.007	2	-.442	1	0	1	-5.091e-3	4	8990.605	4	1428.029	4
433		8	max	.012	3	-.021	15	.438	4	0	1	NC	1	NC	1
434			min	-.009	2	-.514	1	0	1	-5.147e-3	4	8301.976	4	1252.778	4
435		9	max	.013	3	-.024	15	.497	4	0	1	NC	1	NC	1
436			min	-.011	2	-.586	1	0	1	-5.203e-3	4	7931.316	4	1136.21	4
437		10	max	.014	3	-.027	15	.555	4	0	1	NC	1	NC	1

Envelope Member Section Deflections (Continued)

	Member	Sec		x [in]	LC	y [in]	LC	z [in]	LC	x Rotate [r...	LC	(n) L/y Ratio	LC	(n) L/z Ratio	LC
438			min	-.013	2	-.658	1	0	1	-5.259e-3	4	7814.056	4	1061.475	4
439		11	max	.014	3	-.03	15	.611	4	0	1	NC	1	NC	1
440			min	-.015	2	-.73	1	0	1	-5.315e-3	4	7931.316	4	1020.064	4
441		12	max	.015	3	-.032	15	.665	4	0	1	NC	1	NC	1
442			min	-.017	2	-.801	1	0	1	-5.371e-3	4	8301.976	4	1008.947	4
443		13	max	.016	3	-.035	15	.717	4	0	1	NC	1	NC	1
444			min	-.019	2	-.872	1	0	1	-5.427e-3	4	8990.605	4	1030.039	4
445		14	max	.017	3	-.037	15	.766	4	0	1	NC	1	NC	1
446			min	-.021	2	-.943	1	0	1	-5.483e-3	4	NC	1	1091.874	4
447		15	max	.018	3	-.04	15	.812	4	0	1	NC	1	NC	1
448			min	-.024	2	-1.014	1	0	1	-5.539e-3	4	NC	1	1215.547	4
449		16	max	.019	3	-.042	15	.854	4	0	1	NC	1	NC	1
450			min	-.026	2	-1.085	1	0	1	-5.595e-3	4	NC	1	1453.819	4
451		17	max	.02	3	-.045	15	.894	4	0	1	NC	1	NC	1
452			min	-.028	2	-1.155	1	0	1	-5.65e-3	4	NC	1	1968.57	4
453		18	max	.021	3	-.047	15	.929	4	0	1	NC	1	NC	1
454			min	-.03	2	-1.226	1	0	1	-5.706e-3	4	NC	1	3574.206	4
455		19	max	.022	3	-.049	15	.961	4	0	1	NC	1	NC	1
456			min	-.032	2	-1.296	1	0	1	-5.762e-3	4	NC	1	NC	1
457	M9	1	max	.005	1	0	5	.004	4	1.352e-3	3	NC	1	NC	1
458			min	0	5	-.002	1	0	3	-5.139e-3	4	NC	1	NC	1
459		2	max	.004	1	0	5	.07	4	1.609e-3	3	NC	1	NC	15
460			min	0	5	-.041	1	-.016	3	-5.239e-3	4	NC	1	2085.729	2
461		3	max	.004	1	.002	5	.136	4	1.866e-3	3	NC	1	6486.731	15
462			min	0	5	-.079	1	-.031	3	-5.34e-3	4	NC	1	1050.981	2
463		4	max	.003	3	.003	5	.202	4	2.124e-3	3	NC	1	4220.053	15
464			min	0	5	-.117	1	-.046	3	-5.441e-3	4	NC	1	710.761	2
465		5	max	.003	3	.003	5	.268	4	2.381e-3	3	NC	1	3127.16	15
466			min	0	5	-.155	1	-.06	3	-5.643e-3	2	NC	1	544.481	2
467		6	max	.004	3	.004	5	.334	4	2.638e-3	3	NC	1	2501.174	15
468			min	0	10	-.192	1	-.072	3	-6.199e-3	2	NC	1	448.166	2
469		7	max	.004	3	.006	5	.398	4	2.895e-3	3	NC	1	2108.301	15
470			min	-.001	2	-.23	1	-.084	3	-6.756e-3	2	8990.605	4	387.317	2
471		8	max	.004	3	.007	5	.461	4	3.152e-3	3	NC	1	1849.839	15
472			min	-.002	2	-.267	1	-.093	3	-7.312e-3	2	8301.976	4	347.335	2
473		9	max	.005	3	.008	5	.522	4	3.41e-3	3	NC	1	1677.929	15
474			min	-.003	2	-.305	1	-.101	3	-7.868e-3	2	7931.316	4	321.158	2
475		10	max	.005	3	.009	5	.581	4	3.667e-3	3	NC	1	1567.737	15
476			min	-.003	2	-.342	1	-.106	3	-8.425e-3	2	7814.056	4	305.186	2
477		11	max	.005	3	.011	5	.637	4	3.924e-3	3	NC	1	1506.72	15
478			min	-.004	2	-.378	1	-.108	3	-8.981e-3	2	7184.233	5	297.731	2
479		12	max	.005	3	.012	5	.69	4	4.181e-3	3	NC	1	1490.425	15
480			min	-.005	2	-.415	1	-.108	3	-9.538e-3	2	6259.981	5	298.446	2
481		13	max	.006	3	.014	5	.739	4	4.438e-3	3	NC	1	1521.697	15
482			min	-.006	2	-.451	1	-.104	3	-1.009e-2	2	5506.487	5	308.322	2
483		14	max	.006	3	.016	5	.785	4	4.696e-3	3	NC	1	1613.153	15
484			min	-.006	2	-.487	1	-.097	3	-1.065e-2	2	4885.534	5	330.298	2
485		15	max	.006	3	.018	5	.827	4	4.953e-3	3	NC	1	1795.975	15
486			min	-.007	2	-.523	1	-.087	3	-1.121e-2	2	4369.264	5	371.179	2
487		16	max	.007	3	.02	5	.864	4	5.21e-3	3	NC	1	2148.133	15
488			min	-.008	2	-.559	1	-.072	3	-1.176e-2	2	3936.892	5	447.663	2
489		17	max	.007	3	.022	5	.896	4	5.467e-3	3	NC	1	2908.852	15
490			min	-.008	2	-.594	1	-.052	3	-1.232e-2	2	3572.619	5	610.688	2
491		18	max	.007	3	.024	5	.923	4	5.724e-3	3	NC	1	5281.63	15
492			min	-.009	2	-.63	1	-.028	3	-1.288e-2	2	3264.264	5	1116.131	2
493		19	max	.007	3	.026	5	.945	4	5.981e-3	3	NC	1	NC	1
494			min	-.01	2	-.665	1	-.03	1	-1.343e-2	2	3002.323	5	NC	1