Product
Folder

Order
Now

Technical
Documents

Tools &
Software

Support &
Community

TEXAS INSTRUMENTS

TMUX6136

SCDS397 – NOVEMBER 2018

TMUX6136 ±16.5-V, Low Capacitance, Low-Leakage-Current, Precision, Dual SPDT Switch

1 Features

- Wide Supply Range: ±5 V to ±16.5 V (dual) or 10 V to 16.5 V (single)
- Latch-Up Performance Meets 100 mA per JESD78 Class II Level A on all Pins
- Low On-Capacitance: 5.5 pF
- Low Input Leakage: 0.5 pA
- Low Charge Injection: –0.4 pC
- Rail-to-Rail Operation
- Low On-Resistance: 120 Ω
- Fast Transition Time: 66 ns
- Break-Before-Make Switching Action
- SELx Pin Connectable to V_{DD} With Integrated Pull-down
- Logic Levels: 2 V to V_{DD}
- Low Supply Current: 17 µA
- Human Body Model (HBM) ESD Protection: ± 2kV on All Pins
- Industry-Standard TSSOP Package

2 Applications

- Factory Automation and Industrial Process Controls
- Programmable Logic Controllers (PLC)
- Analog Input Modules
- ATE Test Equipment
- Digital Multimeters
- Battery Monitoring Systems

3 Description

The TMUX6136 is a complementary metal-oxide semiconductor (CMOS) analog switch containing two independently selectable SPDT switches.The devices work well with dual supplies (±5 V to ±16.5 V), a single supply (10 V to 16.5 V), or asymmetric supplies. The digital select pin (SELx) has transistor-transistor logic (TTL) compatible thresholds, ensuring TTL/ CMOS logic compatibility.

The TMUX6136 switches one of two inputs (Sx) to a common output (D), depending on the status of the SELx pins. Each switch conducts equally well in both directions in the ON position and supports input signal range up to the supplies. In the OFF condition, signal levels up to the supplies are blocked. All switches exhibit break-before-make (BBM) switching action.
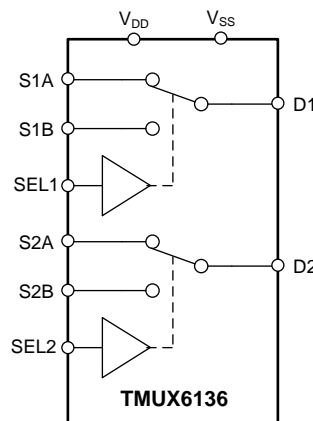
The TMUX6136 is part of Texas Instruments Precision Switches and Multiplexers family. The device has very low leakage current and charge injection, allowing them to be used in high-precision measurement applications. The devic also provides excellent isolation by blocking signal levels up to the supplies when the switches are in the OFF position. Low supply current of 17 µA enables usage in portable applications.

Device Information[1]

PART NUMBER	PACKAGE	BODY SIZE (NOM)
TMUX6136	TSSOP (16)	5.00 mm x 4.40 mm

(1) For all available packages, see the package option addendum at the end of the data sheet.

Simplified Schematic

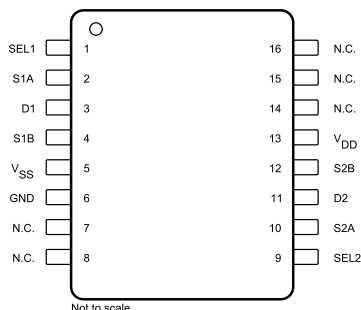Copyright © 2018, Texas Instruments Incorporated

Table of Contents

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

DATE	REVISION	NOTES
November 2018	*	Initial release.

5 Pin Configuration and Functions

PW Package
16-Pin TSSOP
Top View

```
        SEL1  ⎸  1        16  ⎸  N.C.
        S1A   ⎸  2        15  ⎸  N.C.
        D1    ⎸  3        14  ⎸  N.C.
        S1B   ⎸  4        13  ⎸  V_DD
        V_SS  ⎸  5        12  ⎸  S2B
        GND   ⎸  6        11  ⎸  D2
        N.C.  ⎸  7        10  ⎸  S2A
        N.C.  ⎸  8         9  ⎸  SEL2
```

Not to scale

Pin Functions

PIN		TYPE	DESCRIPTION
NAME	NO.		
SEL1	1	I	Select line 0
S1A	2	I/O	Source pin 1A. Can be an input or output.
D1	3	I/O	Drain pin D1. Can be an input or output.
S1B	4	I/O	Source pin 1B. Can be an input or output.
V_{SS}	5	P	Negative power supply. This pin is the most negative power-supply potential. In single-supply applications, this pin can be connected to ground. For reliable operation, connect a decoupling capacitor ranging from 0.1 µF to 10 µF between V_{SS} and GND.
GND	6		Ground (0 V) reference
N.C.	7, 8, 14, 15, 16	No Connect	No internal connection
SEL2	9	I	Select line 1
S2A	10	I/O	Source pin 2A. Can be an input or output.
D2	11	I/O	Drain pin D2. Can be an input or output.
S2B	12	I/O	Source pin 2B. Can be an input or output.
V_{DD}	13	P	Positive power supply. This pin is the most positive power-supply potential. For reliable operation, connect a decoupling capacitor ranging from 0.1 µF to 10 µF between V_{DD} and GND.

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)[1]

		MIN	MAX	UNIT
V_{DD} to V_{SS}			36	V
V_{DD} to GND	Supply voltage	−0.3	18	V
V_{SS} to GND		−18	0.3	V
V_{DIG}	Digital input pin (SEL1, SEL2) voltage	GND −0.3	V_{DD}+0.3	V
I_{DIG}	Digital input pin (SEL1, SEL2) current	−30	30	mA
V_{ANA_IN}	Analog input pin (Sx) voltage	V_{SS}−0.3	V_{DD}+0.3	V
I_{ANA_IN}	Analog input pin (Sx) current	−30	30	mA
V_{ANA_OUT}	Analog output pin (D) voltage	V_{SS}−0.3	V_{DD}+0.3	V
I_{ANA_OUT}	Analog output pin (D) current	−30	30	mA
T_A	Ambient temperature	−55	140	°C
T_J	Junction temperature		150	°C
T_{stg}	Storage temperature	−65	150	°C

(1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Condition*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins[1]	±2000	V
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins[2]	±500	

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Thermal Information

	THERMAL METRIC[1]	TMUX6136 PW (TSSOP) 16 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	111.0	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	41.7	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	57.2	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	4.1	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	56.6	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	N/A	°C/W

(1) For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

6.4 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V_{DD} to V_{SS} (1)	Power supply voltage differential	10		33	V
V_{DD} to GND	Positive power supply voltage (singlle supply, V_{SS} = 0 V)	10		16.5	V

(1) V_{DD} and V_{SS} can be any value as long as 10 V ≤ ($V_{DD} - V_{SS}$) ≤ 33 V.

Recommended Operating Conditions (continued)

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V_{DD} to GND	Positive power supply voltage (dual supply)	5		16.5	V
V_{SS} to GND	Negative power supply voltage (dual supply)	−16.5		−5	V
V_S [1]	Source pins voltage	V_{SS}		V_{DD}	V
V_D	Drain pin voltage	V_{SS}		V_{DD}	V
V_{DIG}	Digital input pin (SEL1, SEL2) voltage	0		V_{DD}	V
I_{CH}	Channel current (T_A = 25°C)	−25		25	mA
T_A	Ambient temperature	−40		125	°C

6.5 Electrical Characteristics (Dual Supplies: ±15 V)

at T_A = 25°C, V_{DD} = 15 V, and V_{SS} = -15 V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	TEST CONDITIONS	MIN	TYP	MAX	UNIT
ANALOG SWITCH							
V_A	Analog signal range		T_A = −40°C to +125°C	V_{SS}		V_{DD}	V
R_{ON}	On-resistance	V_S = 0 V, I_S = 1 mA			120	135	Ω
		V_S = ±10 V, I_S = 1 mA			140	160	Ω
			T_A = −40°C to +85°C			210	Ω
			T_A = −40°C to +125°C			245	Ω
ΔR_{ON}	On-resistance mismatch between channels	V_S = ±10 V, I_S = 1 mA			2.5	6	Ω
			T_A = −40°C to +85°C			9	Ω
			T_A = −40°C to +125°C			11	Ω
R_{ON_FLAT}	On-resistance flatness	V_S = −10 V, 0 V, +10 V, I_S = 1 mA			23	33	Ω
			T_A = −40°C to +85°C			35	Ω
			T_A = −40°C to +125°C			37	Ω
R_{ON_DRIFT}	On-resistance drift	V_S = 0 V			0.42		%/°C
$I_{S(OFF)}$	Source off leakage current[1]	Switch state is off, V_S = +10 V / −10 V, V_D = −10 V/ + 10 V		−0.05	0.005	0.05	nA
		Switch state is off, V_S = +10 V / −10 V, V_D = −10 V/ + 10 V	T_A = −40°C to +85°C	-0.17		0.1	nA
		Switch state is off, V_S = +10 V / −10 V, V_D = −10 V/ + 10 V	T_A = −40°C to +125°C	−1		0.25	nA
$I_{D(ON)}$	Drain on leakage current	Switch state is on, V_S = +10 V / −10 V, V_D = −10 V/ +10 V		−0.06	0.008	0.06	nA
			T_A = −40°C to +85°C	−0.25		0.15	nA
			T_A = −40°C to +125°C	−1.6		0.4	nA
DIGITAL INPUT (EN, Ax pins)							
V_{IH}	Logic voltage high			2			V
V_{IL}	Logic voltage low					0.8	V
$R_{PD(EN)}$	Pull-down resistance on EN pin				6		MΩ
POWER SUPPLY							
I_{DD}	V_{DD} supply current	V_A = 0 V or 3.3 V, V_S = 0 V			17	21	µA
			T_A = −40°C to +85°C			22	µA
			T_A = −40°C to +125°C			23	µA

(1) When V_S is positive, V_D is negative, and vice versa.

Electrical Characteristics (Dual Supplies: ±15 V) (continued)

at T_A = 25°C, V_{DD} = 15 V, and V_{SS} = -15 V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	TEST CONDITIONS	MIN	TYP	MAX	UNIT
I_{SS}	V_{SS} supply current	V_A = 0 V or 3.3 V, V_S = 0 V			8	10	µA
			T_A = −40°C to +85°C			11	µA
			T_A = −40°C to +125°C			12	µA

6.6 Switching Characteristics (Dual Supplies: ±15 V)

at T_A = 25°C, V_{DD} = 15 V, and V_{SS} = -15 V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{TRAN}	Transition time	V_S = 10 V, R_L = 300 Ω , C_L = 35 pF		66	78	ns
		V_S = 10 V, R_L = 300 Ω , C_L = 35 pF, T_A = −40°C to +85°C			107	ns
		V_S = 10 V, R_L = 300 Ω , C_L = 35 pF, T_A = −40°C to +125°C			117	ns
tBBM	Break-before-make time delay	V_S = 10 V, R_L = 300 Ω , C_L = 35 pF, T_A = −40°C to +125°C	20	40		ns
Q_J	Charge injection	V_S = 0 V, R_S = 0 Ω , C_L = 1 nF		−0.4		pC
O_{ISO}	Off-isolation	R_L = 50 Ω , C_L = 5 pF, f = 1 MHz		−85		dB
X_{TALK}	Channel-to-channel crosstalk	R_L = 50 Ω , C_L = 5 pF, f = 1 MHz (Inter-channel: S1x & S2x)		−105		dB
		R_L = 50 Ω , C_L = 5 pF, f = 1 MHz (Intra-channel: SxA & SxB)		−92		dB
I_L	Insertion loss	R_L = 50 Ω , C_L = 5 pF, f = 1 MHz		−7		dB
ACPSRR	AC Power Supply Rejection Ratio	R_L = 10 kΩ , C_L = 5 pF, V_{PP}= 0.62 V on V_{DD}, f= 1 MHz		−59		dB
		R_L = 10 kΩ , C_L = 5 pF, V_{PP}= 0.62 V on V_{SS}, f= 1 MHz		−59		dB
BW	-3dB Bandwidth	R_L = 50 Ω , C_L = 5 pF		670		MHz
THD	Total harmonic distortion + noise	R_L = 10k Ω , C_L = 5 pF, f= 20Hz to 20kHz		0.08		%
C_{IN}	Digital input capacitance	V_{IN} = 0 V or V_{DD}		1.5		pF
$C_{S(OFF)}$	Source off-capacitance	V_S = 0 V, f = 1 MHz		2.4	3.3	pF
$C_{S(ON)}$, $C_{D(ON)}$	Source and drain on-capacitance	V_S = 0 V, f = 1 MHz		5.5	7.5	pF

6.7 Electrical Characteristics (Single Supply: 12 V)

at T_A = 25°C, V_{DD} = 12 V, and V_{SS} = 0 V (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
ANALOG SWITCH							
V_A	Analog signal range			V_{SS}		V_{DD}	V
R_{ON}	On-resistance	V_S = 10 V, I_S = 1 mA			235	345	Ω
			T_A = −40°C to +85°C			400	Ω
			T_A = −40°C to +125°C			440	Ω
ΔR_{ON}	On-resistance mismatch between channels	V_S = 10 V, I_S = 1 mA			4	12	Ω
			T_A = −40°C to +85°C			19	Ω
			T_A = −40°C to +125°C			23	Ω
R_{ON_DRIFT}	On-resistance drift	V_S = 0 V			0.47		%/°C
$I_{S(OFF)}$	Source off leakage current[1]	Switch state is off, V_S = 10 V/ 1 V, V_D = 1 V/ 10 V		−0.03	0.005	0.03	nA
			T_A = −40°C to +85°C	−0.1		0.07	nA
			T_A = −40°C to +125°C	−0.8		0.2	nA
$I_{D(ON)}$	Drain on leakage current	Switch state is on, V_S = floating, V_D = 1 V/ 10 V		−0.04	0.01	0.04	nA
			T_A = −40°C to +85°C	−0.16		0.09	nA
			T_A = −40°C to +125°C	−1.2		0.3	nA
DIGITAL INPUT (EN, Ax pins)							
V_{IH}	Logic voltage high			2			V
V_{IL}	Logic voltage low					0.8	V
$R_{PD(EN)}$	Pull-down resistance on EN pin				6		MΩ
POWER SUPPLY							
I_{DD}	V_{DD} supply current	V_A = 0 V or 3.3 V, V_S = 0 V			13	16	µA
			T_A = −40°C to +85°C			17	µA
			T_A = −40°C to +125°C			18	µA

(1)   When V_S is positive, V_D is negative, and vice versa.

6.8 Switching Characteristics (Single Supply: 12 V)

at T_A = 25°C, V_{DD} = 12 V, and V_{SS} = 0 V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{TRAN}	Transition time	V_S = 8 V, R_L = 300 Ω , C_L = 35 pF		72	84	ns
		V_S = 8 V, R_L = 300 Ω , C_L = 35 pF, T_A = −40°C to +85°C			117	ns
		V_S = 8 V, R_L = 300 Ω , C_L = 35 pF, T_A = −40°C to +125°C			128	ns
t_{BBM}	Break-before-make time delay	V_S = 8 V, R_L = 300 Ω , C_L = 35 pF, T_A = −40°C to +125°C	20	40		ns
Q_J	Charge injection	V_S = 6 V, R_S = 0 Ω , C_L = 1 nF		−0.7		pC
O_{ISO}	Off-isolation	R_L = 50 Ω , C_L = 5 pF, f = 1 MHz		-85		dB
X_{TALK}	Channel-to-channel crosstalk	R_L = 50 Ω , C_L = 5 pF, f = 1 MHz (Inter-channel: S1x & S2x)		−110		dB
		R_L = 50 Ω , C_L = 5 pF, f = 1 MHz (Inra-channel: SxA & SxB)		−95		dB
I_L	Insertion loss	R_L = 50 Ω , C_L = 5 pF, f = 1 MHz		−13		dB
ACPSRR	AC Power Supply Rejection Ratio	R_L= 10 kΩ , C_L = 5 pF, V_{PP}= 0.62 V, f= 1 MHz		−58		dB
BW	-3dB Bandwidth	R_L = 50 Ω , C_L = 5 pF		650		MHz
C_{IN}	Digital input capacitance	V_{IN} = 0 V or V_{DD}		1.7		pF
$C_{S(OFF)}$	Source off-capacitance	V_S = 6 V, f = 1 MHz		2.6	3.7	pF

Switching Characteristics (Single Supply: 12 V) (continued)

at T_A = 25°C, V_{DD} = 12 V, and V_{SS} = 0 V (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$C_{S(ON)}$, $C_{D(ON)}$	Source and drain on-capacitance	V_S = 6 V, f = 1 MHz		6.3	8.5	pF

Product Folder Links: *TMUX6136*

6.9 Typical Characteristics

at T_A = 25°C, V_{DD} = 15 V, and V_{SS} = −15 V (unless otherwise noted)

Dual Supply Operation (T_A = 25°C)
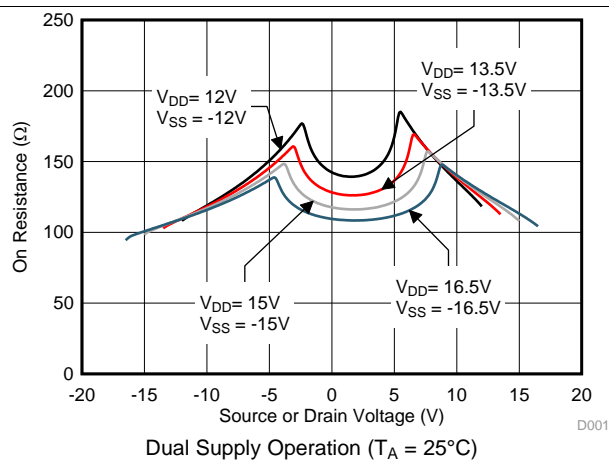
Figure 1. On-Resistance vs Source or Drain Voltage

Single Supply Operation (T_A = 25°C)
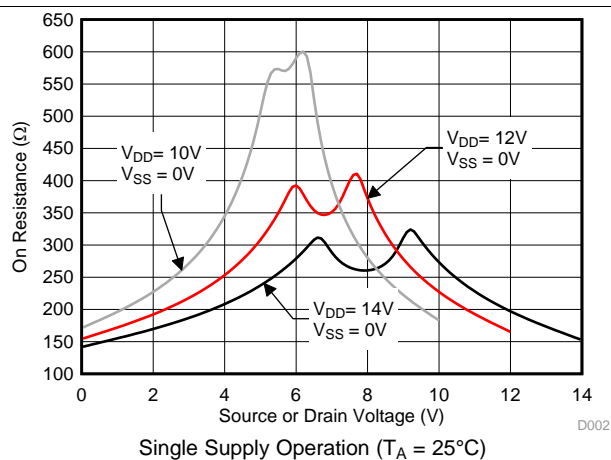
Figure 2. On-Resistance vs Source or Drain Voltage

V_{DD} = 15 V, V_{SS} = −15 V
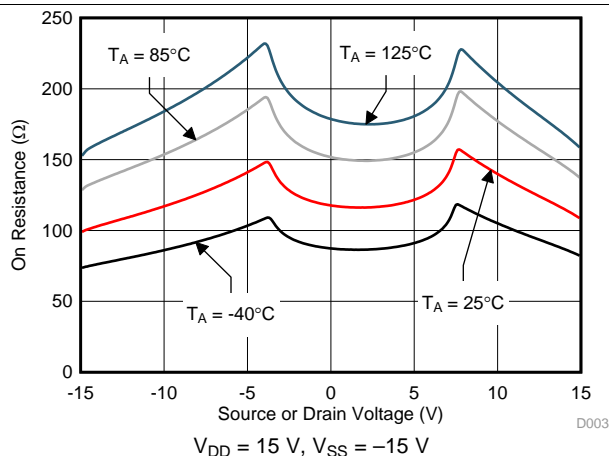
Figure 3. On-Resistance vs Source or Drain Voltage

V_{DD} = 12 V, V_{SS} = 0 V
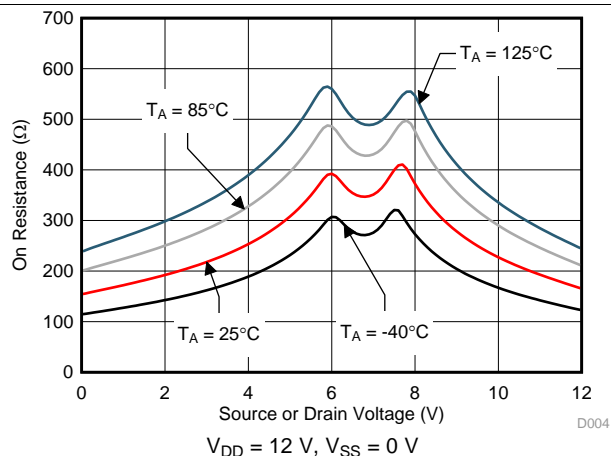
Figure 4. On-Resistance vs Source or Drain Voltage

V_{DD} = 15 V, V_{SS} = −15 V
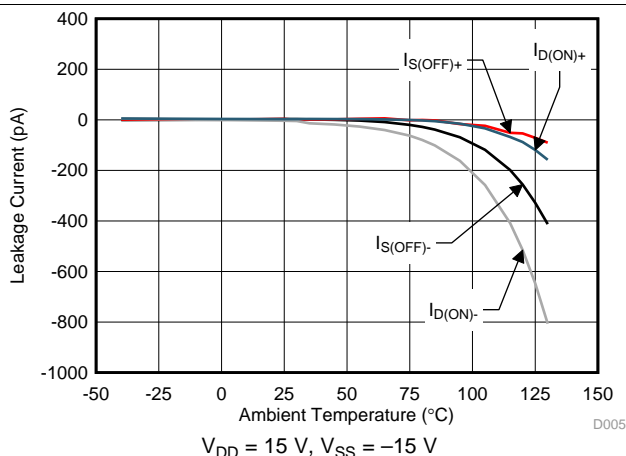
Figure 5. Leakage Current vs Temperature

V_{DD} = 12 V, V_{SS} = 0 V
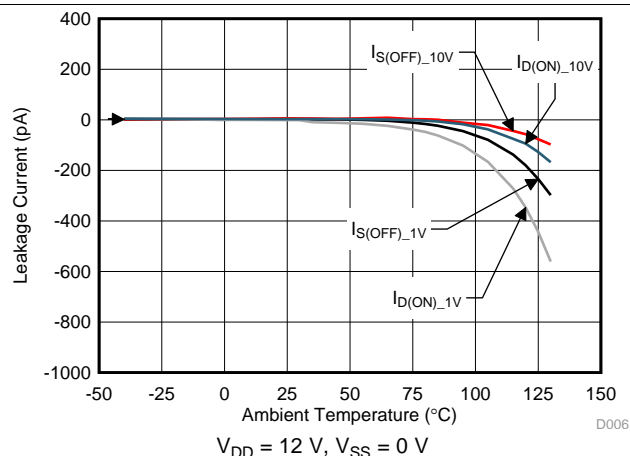
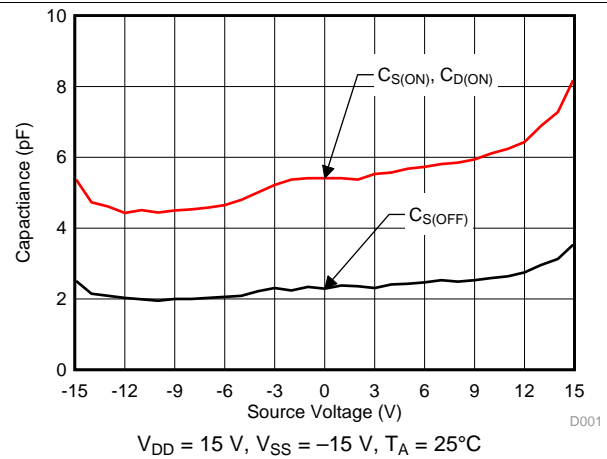**Figure 6. Leakage Current vs Temperature**

Typical Characteristics (continued)
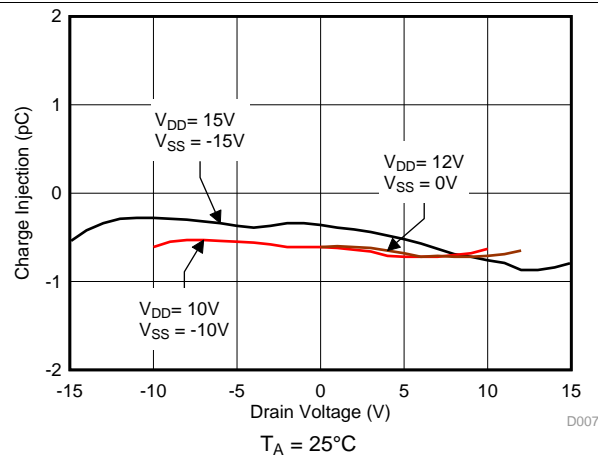
Figure 7. Charge Injection vs Source Voltage
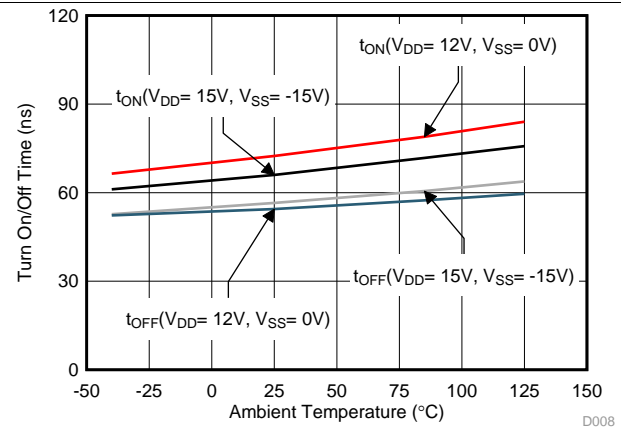
Figure 8. Transition Times vs Temperature
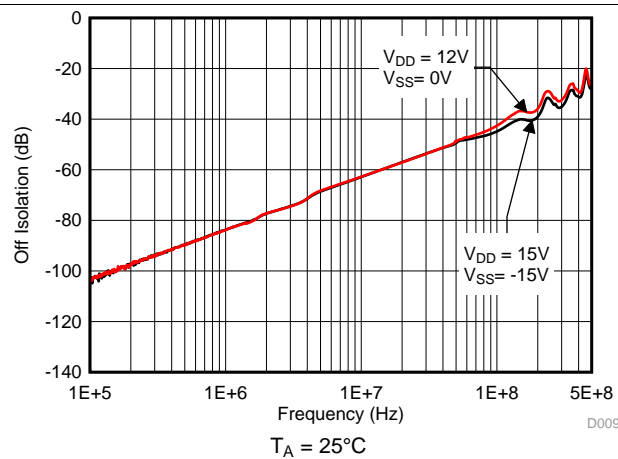
Figure 9. Off Isolation vs Frequency
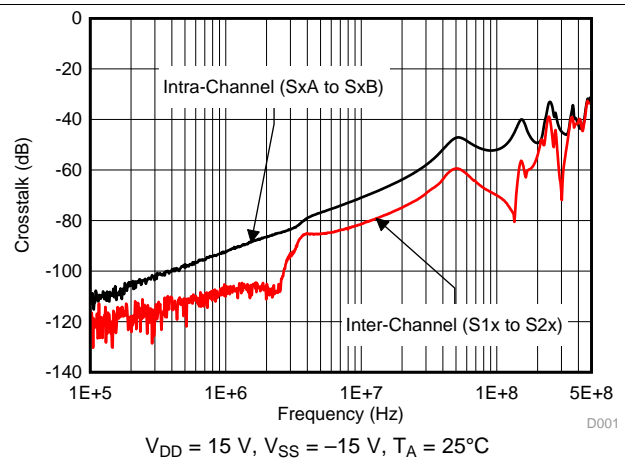
Figure 10. Crosstalk vs Frequency
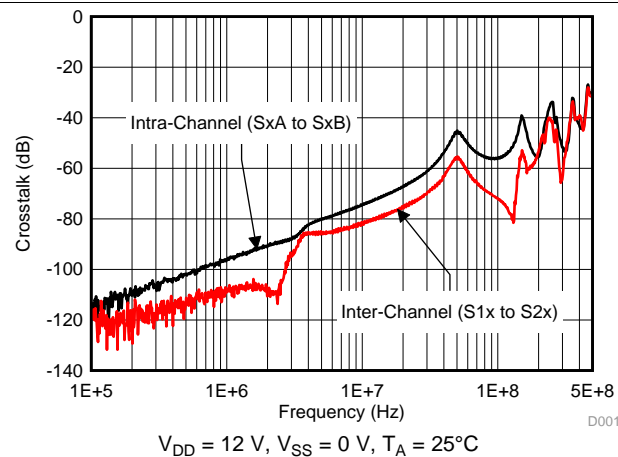
Figure 11. Crosstalk vs Frequency
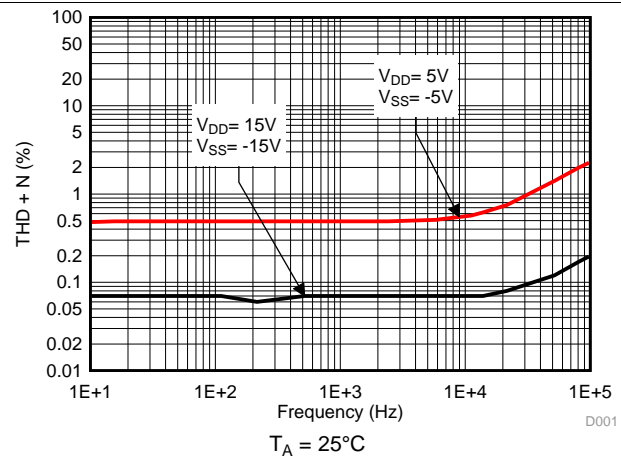
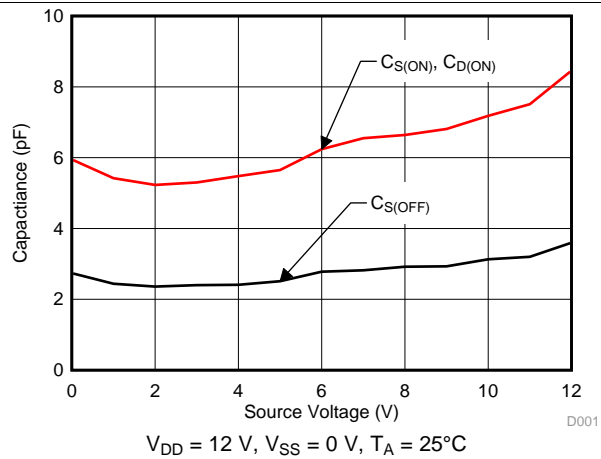**Figure 12. THD+N vs Frequency**

Product Folder Links: *TMUX6136*
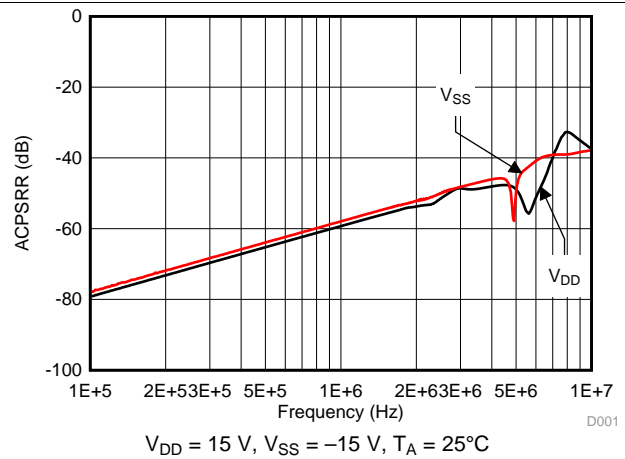
Typical Characteristics (continued)

$V_{DD} = 15$ V, $V_{SS} = -15$ V, $T_A = 25°C$
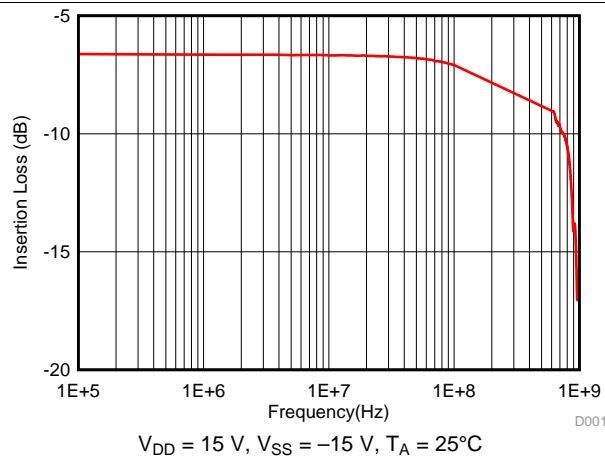
Figure 13. On Response vs Frequency

$V_{DD} = 15$ V, $V_{SS} = -15$ V, $T_A = 25°C$

Figure 14. Capacitance vs Source Voltage

$V_{DD} = 12$ V, $V_{SS} = 0$ V, $T_A = 25°C$

Figure 15. Capacitance vs Source Voltage


$V_{DD} = 15$ V, $V_{SS} = -15$ V, $T_A = 25°C$

Figure 16. ACPSRR vs Frequency

7 Detailed Description

7.1 Overview

7.1.1 On-Resistance

The on-resistance of the TMUX6136 is the ohmic resistance across the source (Sx) and drain (D) pins of the device. The on-resistance varies with input voltage and supply voltage. The symbol R_{ON} is used to denote on-resistance. The measurement setup used to measure R_{ON} is shown in Figure 17. Voltage (V) and current (I_{CH}) are measured using this setup, and R_{ON} is computed as shown in Equation 1:
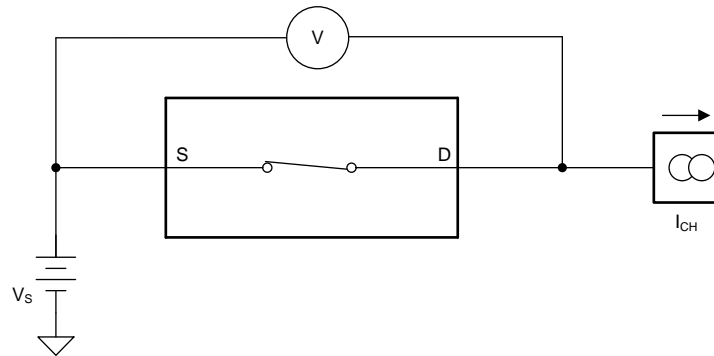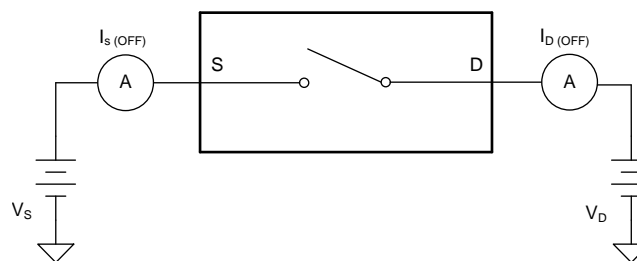

Figure 17. On-Resistance Measurement Setup

$$R_{ON} = V / I_{CH} \tag{1}$$

7.1.2 Off-Leakage Current

Source off-leakage current is defined as the leakage current that flows into or out of the source pin when the switch is in the off state. This current is denoted by the symbol $I_{S(OFF)}$. Drain off-leakage measurement is not characterization since the drain pin is always connected to one of the two source pins.

The setup used to measure both off-leakage currents is shown in Figure 18

Figure 18. Off-Leakage Measurement Setup

Product Folder Links: *TMUX6136*

Overview (continued)

7.1.3 On-Leakage Current

On-leakage current is defined as the leakage current that flows into or out of the drain pin when the switch is in the on state. The source pin is left floating during the measurement. Figure 19 shows the circuit used for measuring the on-leakage current, denoted by $I_{D(ON)}$.
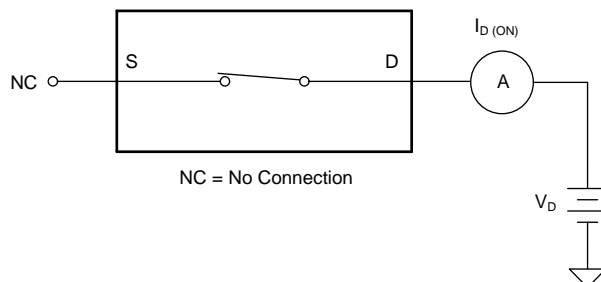
Figure 19. On-Leakage Measurement Setup

7.1.4 Transition Time

Transition time is defined as the time taken by the output of the TMUX6136 to rise or fall to 90% of the transition after the digital address signal has fallen or risen to 50% of the transition. Figure 20 shows the setup used to measure transition time, denoted by the symbol t_{TRAN}.
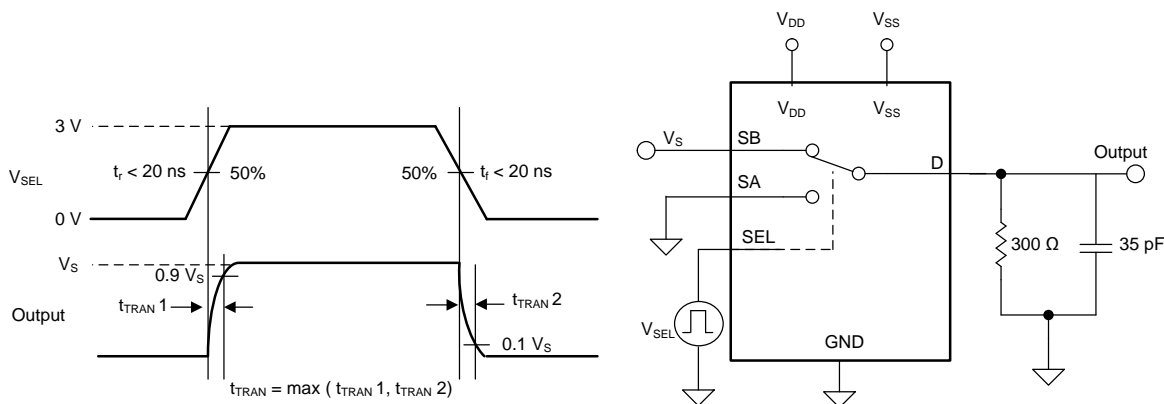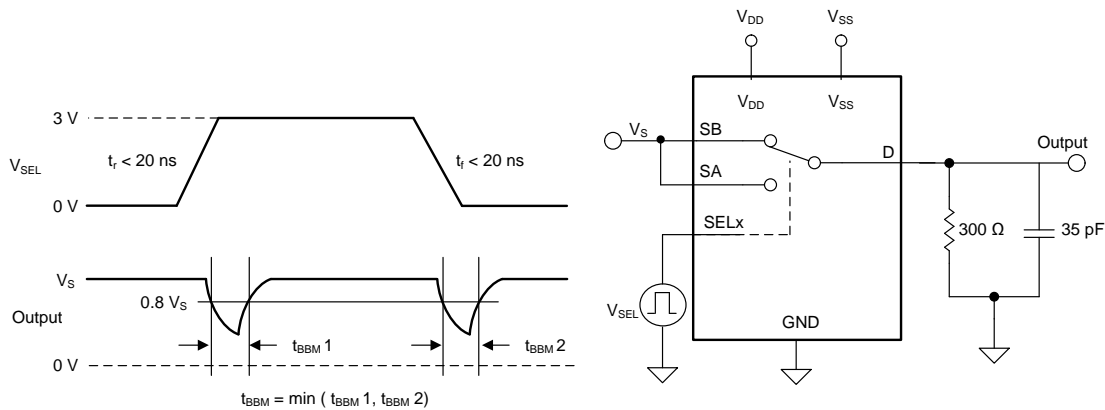

Figure 20. Transition-Time Measurement Setup

Product Folder Links: *TMUX6136*

Overview (continued)

7.1.5 Break-Before-Make Delay

Break-before-make delay is a safety feature that prevents two inputs from connecting when the TMUX6136 is switching. The TMUX6136 output first breaks from the on-state switch before making the connection with the next on-state switch. The time delay between the *break* and the *make* is known as break-before-make delay. Figure 21 shows the setup used to measure break-before-make delay, denoted by the symbol t_{BBM}.

Figure 21. Break-Before-Make Delay Measurement Setup

7.1.6 Charge Injection

The TMUX6136 have a simple transmission-gate topology. Any mismatch in capacitance between the NMOS and PMOS transistors results in a charge injected into the drain or source during the falling or rising edge of the gate signal. The amount of charge injected into the source of the device is known as charge injection, and is denoted by the symbol Q_{INJ}. Figure 22 shows the setup used to measure charge injection from drain (D) to source (Sx).
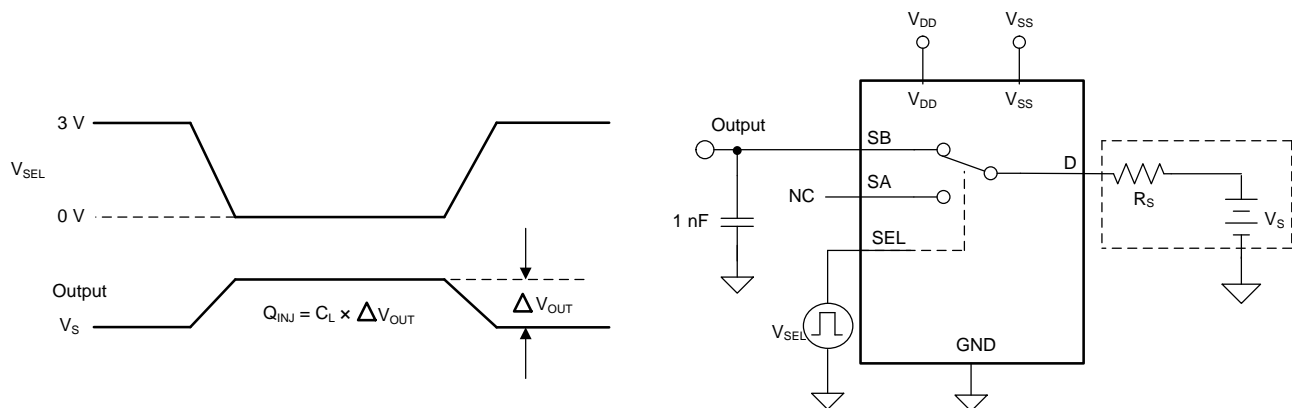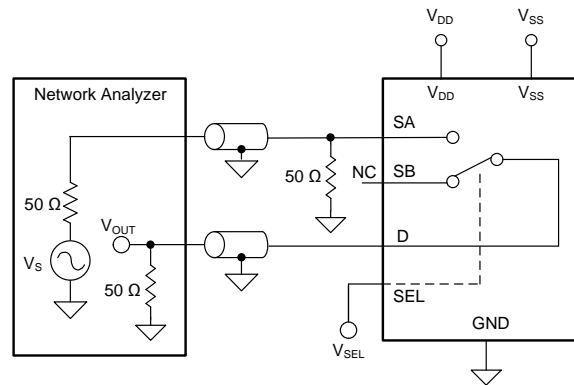

Figure 22. Charge-Injection Measurement Setup

7.1.7 Off Isolation

Off isolation is defined as the voltage at the drain pin (D) of the TMUX6136 when a 1-V_{RMS} signal is applied to the source pin (Sx) of an off-channel. Figure 23 shows the setup used to measure off isolation. Use Equation 2 to compute off isolation.

Product Folder Links: *TMUX6136*

Overview (continued)


Figure 23. Off Isolation Measurement Setup

$$\text{Off Isolation} = 20 \cdot \text{Log}\left(\frac{V_{OUT}}{V_S} \right)$$

(2)

7.1.8 Channel-to-Channel Crosstalk

There are two types of crosstalk that can be defined for the TMUX6136:

1. Intra-channel crosstalk: the voltage at the source pin (Sx) of an off-switch input, when a 1-VRMS signal is applied at the source pin of an on-switch input in the same channel, as shown in Figure 24

2. Inter-channel crosstalk: the voltage at the source pin (Sx) of an on-switch input, when a 1-VRMS signal is applied at the source pin of an on-switch input in a different channel, as shown in Figure 25
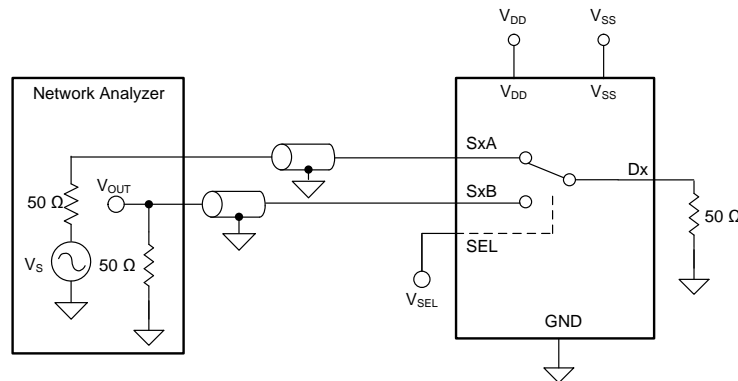
Figure 24. Intra-channel Crosstalk Measurement Setup

Product Folder Links: *TMUX6136*

Overview (continued)
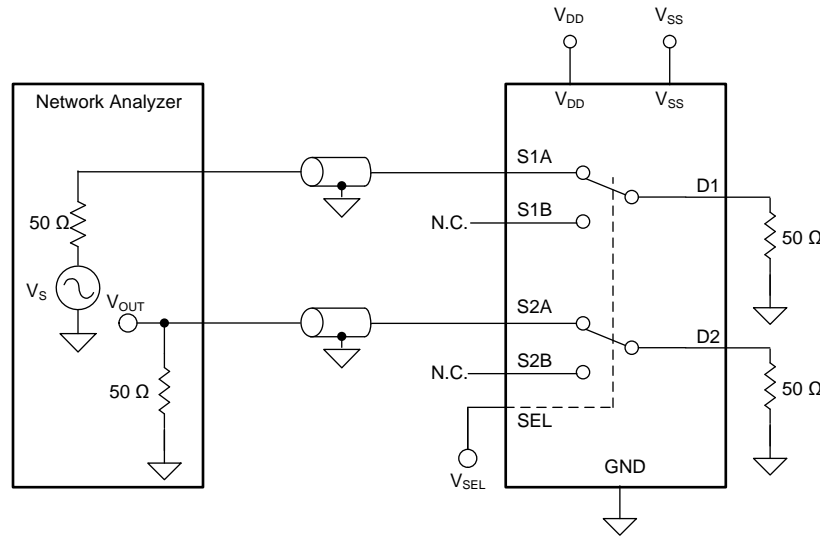
Figure 25. Inter-channel Crosstalk Measurement Setup

$$\text{Channel-to-Channel Crosstalk} = 20 \cdot \text{Log}\left(\frac{V_{OUT}}{V_S}\right)$$

(3)

7.1.9 Bandwidth

Bandwidth is defined as the range of frequencies that are attenuated by < 3 dB when the input is applied to the source pin (Sx) of an on-channel, and the output is measured at the drain pin (D) of the TMUX6136. Figure 26 shows the setup used to measure bandwidth of the mux. Use Equation 4 to compute the attenuation.
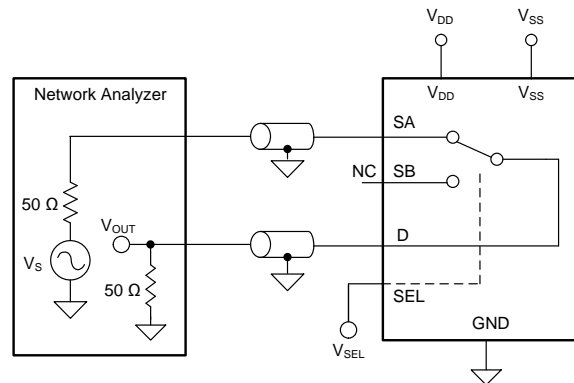
Figure 26. Bandwidth Measurement Setup

$$\text{Attenuation} = 20 \cdot \text{Log}\left(\frac{V_2}{V_1}\right)$$

(4)

7.1.10 THD + Noise

The total harmonic distortion (THD) of a signal is a measurement of the harmonic distortion, and is defined as the ratio of the sum of the powers of all harmonic components to the power of the fundamental frequency at the mux output. The on-resistance of the TMUX6136 varies with the amplitude of the input signal and results in distortion when the drain pin is connected to a low-impedance load. Total harmonic distortion plus noise is denoted as THD+N.
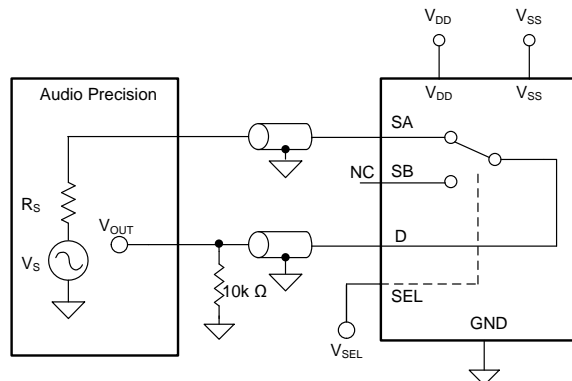
Overview (continued)

Figure 27. THD+N Measurement Setup

7.1.11 AC Power Supply Rejection Ratio (AC PSRR)

AC PSRR measures the ability of a device to prevent noise and spurious signals that appear on the supply voltage pin from coupling to the output of the switch. The DC voltage on the device supply is modulated by a sine wave of 620 mV$_{PP}$. The ratio of the amplitude of signal on the output to the amplitude of the modulated signal is the AC PSRR.

$$V_{BIAS} = 0 \text{ V}$$
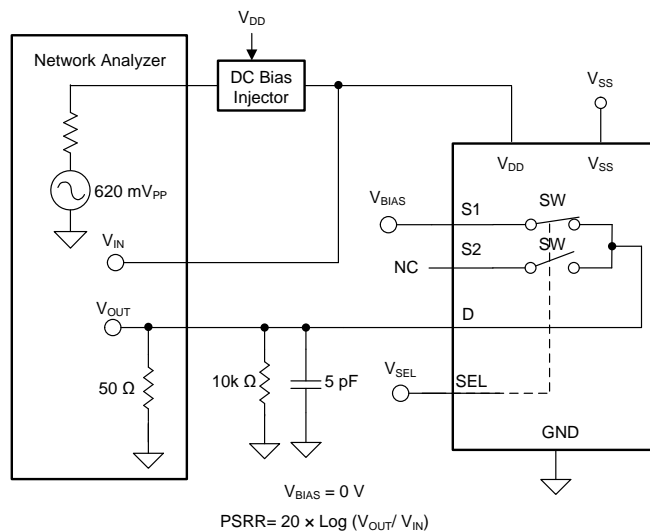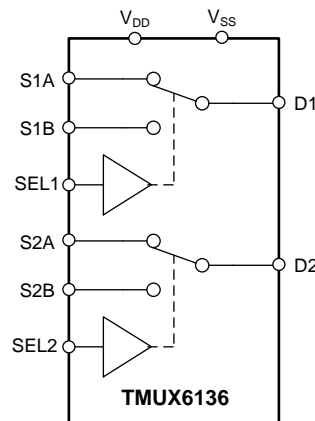
$$PSRR = 20 \times Log \ (V_{OUT} / V_{IN})$$

Figure 28. AC PSRR Measurement Setup

The *Functional Block Diagram* section provides a top-level block diagram of the TMUX6136. The TMUX6136 is a 4-channel, single-ended, analog multiplexer. Each channel is turned on or turned off based on the state of the address lines and enable pin.

7.2 Functional Block Diagram

Copyright © 2018, Texas Instruments Incorporated

7.3 Feature Description

7.3.1 Ultralow Leakage Current

The TMUX6136 provide extremely low on- and off-leakage currents. The TMUX6136 is capable of switching signals from high source-impedance inputs into a high input-impedance op amp with minimal offset error because of the ultralow leakage currents. Figure 29 shows typical leakage currents of the TMUX6136 versus temperature.
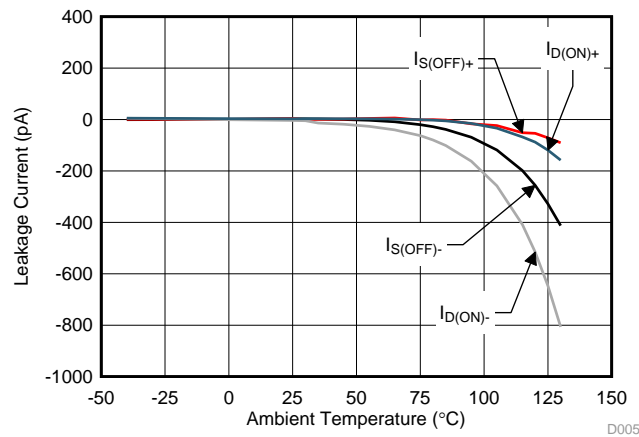
Figure 29. Leakage Current vs Temperature

7.3.2 Ultralow Charge Injection

The TMUX6136 is implemented with simple transmission gate topology, as shown in Figure 30. Any mismatch in the stray capacitance associated with the NMOS and PMOS causes an output level change whenever the switch is opened or closed.

Feature Description (continued)

Figure 30. Transmission Gate Topology
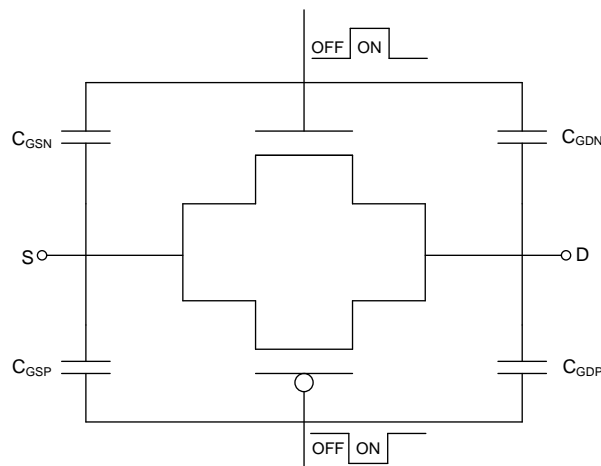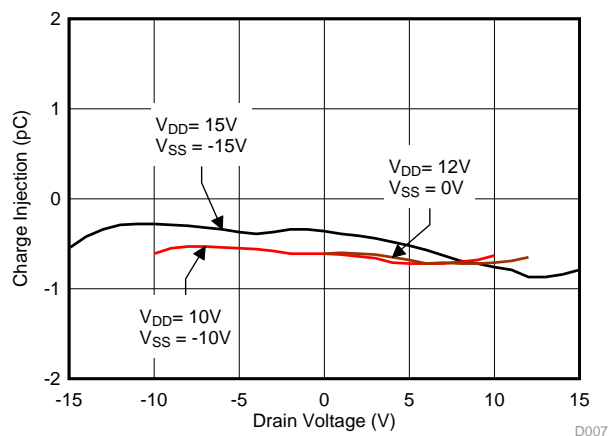
The TMUX6136 utilizes special charge-injection cancellation circuitry that reduces the drain (D)-to-source (Sx) charge injection to as low as –0.4 pC at $V_S = 0$ V, as shown in Figure 31.

Figure 31. Charge Injection vs Drain Voltage

7.3.3 Bidirectional and Rail-to-Rail Operation

The TMUX6136 conducts equally well from source (Sx) to drain (D) or from drain (D) to source (Sx). Each TMUX6136 channel has very similar characteristics in both directions. The valid analog signal for TMUX6136 ranges from V_{SS} to V_{DD}. The input signal to the TMUX6136 swings from V_{SS} to V_{DD} without any significant degradation in performance.

7.4 Device Functional Modes

7.4.1 Truth Table

Table 1. TMUX6136 Truth Table

SELx	Switch A (S1A to D1 or S2A to D2)	Switch B (S1B to D1 or S2B to D2)
0	OFF	ON
1	ON	OFF

8 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information

The TMUX6136 offers outstanding input/output leakage currents and ultralow charge injection. The device operate up to 33 V (V_{DD} to V_{SS} dual supply) or 16.5 V (V_{DD} single supply), and offer true rail-to-rail input and output. The on-capacitance of the TMUX6136 is low. These features makes the TMUX6136 a precision, robust, high-performance analog multiplexer for high-voltage, industrial applications.

8.2 Typical Application

One example to take advantage of TMUX6136's precision performance is the implementation of parametric measurement unit (PMU) in the semiconductor automatic test equipment (ATE) application. The PMU is frequently used to characterize and measure the digital pin's DC characteristics of a device under test (DUT). Among all the PMU's capabilities, force voltage, measure current (FVMC), and force current, measure voltage (FCMV) are the two most typical configurations in DC characterizations.

Figure 32. FVMC Measurement in PMU

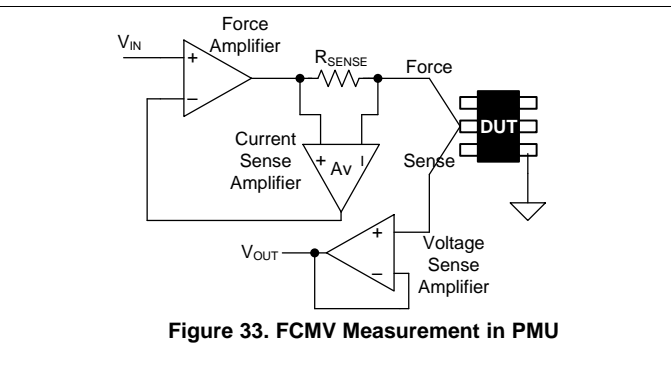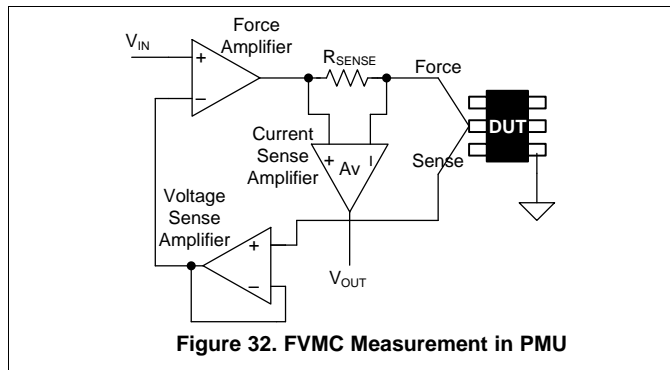

Figure 33. FCMV Measurement in PMU

Figure 32 shows a simplified diagram of the PMU in FVMC configuration. The control loop consists of the force amplifier with the voltage sense amplifier (unity gain in this example) making up the feedback path. Current flowing through the DUT is measured by sensing the current flowing through a sense resistor (R_{SENSE}) in series with the DUT. The current sense amplifier with a gain of Av generates a voltage (V_{OUT}) at its output and the voltage can then be measured by an ADC. The voltage produced at the DUT pin stays at the input voltage level (IN) as long as the force amplifier doesn't rail out (ie. I_{DUT} × R_{SENSE} x Av stays within the input voltage range of the force amplifier). Depending on level of the DUT current to be measured, different gain settings need to be configured for the current sense amplifier.

Figure 33 shows a simplified diagram of the PMU in FCMV mode. The voltage V_{IN} is now converted to a current through the following relationship:

Force Current = V_{IN} / (R_{SENSE} x Av)   (5)

The control loop consists of the force amplifier with the current sense amplifier making up the feedback path. The voltage at the DUT is sensed across the voltage sense amplifier (unity gain in this example) and presented at the output for sample.

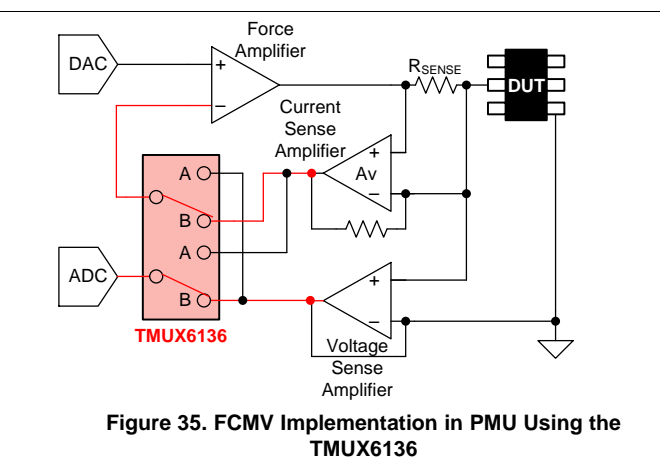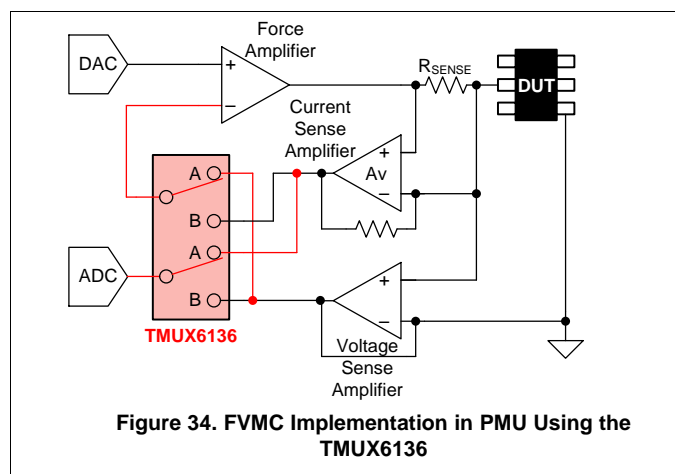Product Folder Links: *TMUX6136*

Typical Application (continued)

8.2.1 Design Requirements

The goal of this design example is to simplify the FVMC and FCMV functions of a PMU design using a SPDT switch. The FVMC configuration is useful to test a device being used as a power supply, or in continuity or leakage testing. In this configuration, the input voltage is directly applied to the DUT pin, and the current into/ out of the DUT pin is converted to a voltage by a sense resistor and measured by an analog to digital converter (ADC). In the FCMV mode, an input current is forced to the DUT and the produced voltage on the DUT pin is directly measured. In this example, the PMU design is required to meet the following specifications:

- Force voltage range: –15 volts to +15 volts
- Force current range: ±5 µA to ±50 mA
- Measure voltage range: –15 volts to +15 volts
- Measure current range: ±5 µA to ±50 mA

In additional to the voltage and current requirements, fast throughput is also a key requirements in ATE because it relates directly to the cost of manufacturing the DUT.

8.2.2 Detailed Design Procedure

Figure 34. FVMC Implementation in PMU Using the TMUX6136

Figure 35. FCMV Implementation in PMU Using the TMUX6136

The FVMC and FCMV modes implementations can be combined with the use of a dual SPDT switch such as the TMUX6136. Figure 34 and Figure 35 shows simplified diagrams of such implementations. In the FVMC mode, the switch is toggled to position A and this allows the voltage sense amplifier to become part of the feedback loop and the voltage output of the current sense amplifier to be sampled by the ADC. In the FCMV mode, the switch is toggled to position B, and this allows the current sense amplifier to become part of the feedback loop and the voltage output of the voltage sense amplifier to be sampled by the ADC.

Typical Application (continued)

8.2.3 Application Curve

The fast transition time of the TMUX6136 and low input/ output parasitic capacitance help minimize the settling time, making the TMUX6136 an excellent candidate to implement the FVMC and FCMV functions of the PMU. Figure 36 shows the plot for the transition time vs. temperature for the TMUX6136.
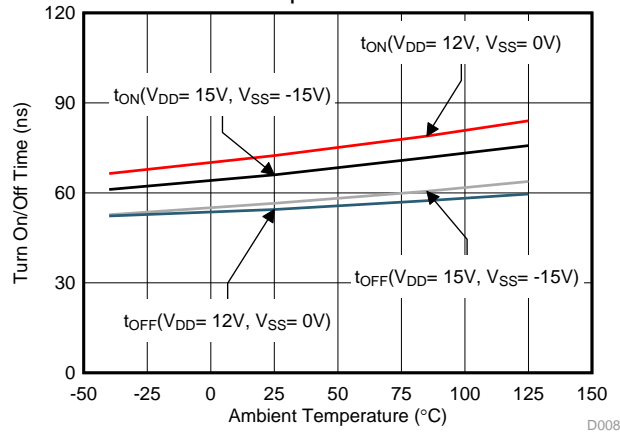
Figure 36. Transition Time VS Temperature for TMUX6136

9 Power Supply Recommendations

The TMUX6136 operates across a wide supply range of ±5 V to ±16.5 V (10 V to 16.5 V in single-supply mode). The device also perform well with unsymmetric supplies such as V_{DD} = 12 V and V_{SS}= –5 V. For reliable operation, use a supply decoupling capacitor ranging between 0.1 µF to 10 µF at both the V_{DD} and V_{SS} pins to ground.
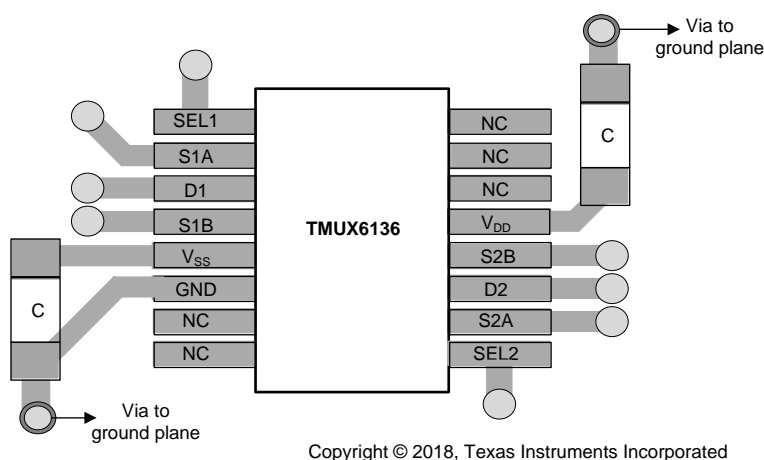
10 Layout

10.1 Layout Guidelines

Figure 37 illustrates an example of a PCB layout with the TMUX6136.

Some key considerations are:

1. Decouple the V_{DD} and V_{SS} pins with a 0.1-μF capacitor, placed as close to the pin as possible. Make sure that the capacitor voltage rating is sufficient for the V_{DD} and V_{SS} supplies.
2. Keep the input lines as short as possible.
3. Use a solid ground plane to help distribute heat and reduce electromagnetic interference (EMI) noise pickup.
4. Do not run sensitive analog traces in parallel with digital traces. Avoid crossing digital and analog traces if possible, and only make perpendicular crossings when necessary.

10.2 Layout Example

Copyright © 2018, Texas Instruments Incorporated

Figure 37. TMUX6136 Layout Example

11 Device and Documentation Support

11.1 Documentation Support

11.1.1 Related Documentation

- *ADS8664 12-Bit, 500-kSPS, 4- and 8-Channel, Single-Supply, SAR ADCs with Bipolar Input Ranges* (SBAS492)
- *OPA192 36-V, Precision, Rail-to-Rail Input/Output, Low Offset Voltage, Low Input Bias Current Op Amp with e-Trim™* (SBOS620)

11.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

11.3 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community.* Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

11.4 Trademarks

E2E is a trademark of Texas Instruments.

11.5 Electrostatic Discharge Caution

This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

11.6 Glossary

SLYZ022 — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TMUX6136PWR	ACTIVE	TSSOP	PW	16	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 125	MUX6136	Samples

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".
RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.
Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.
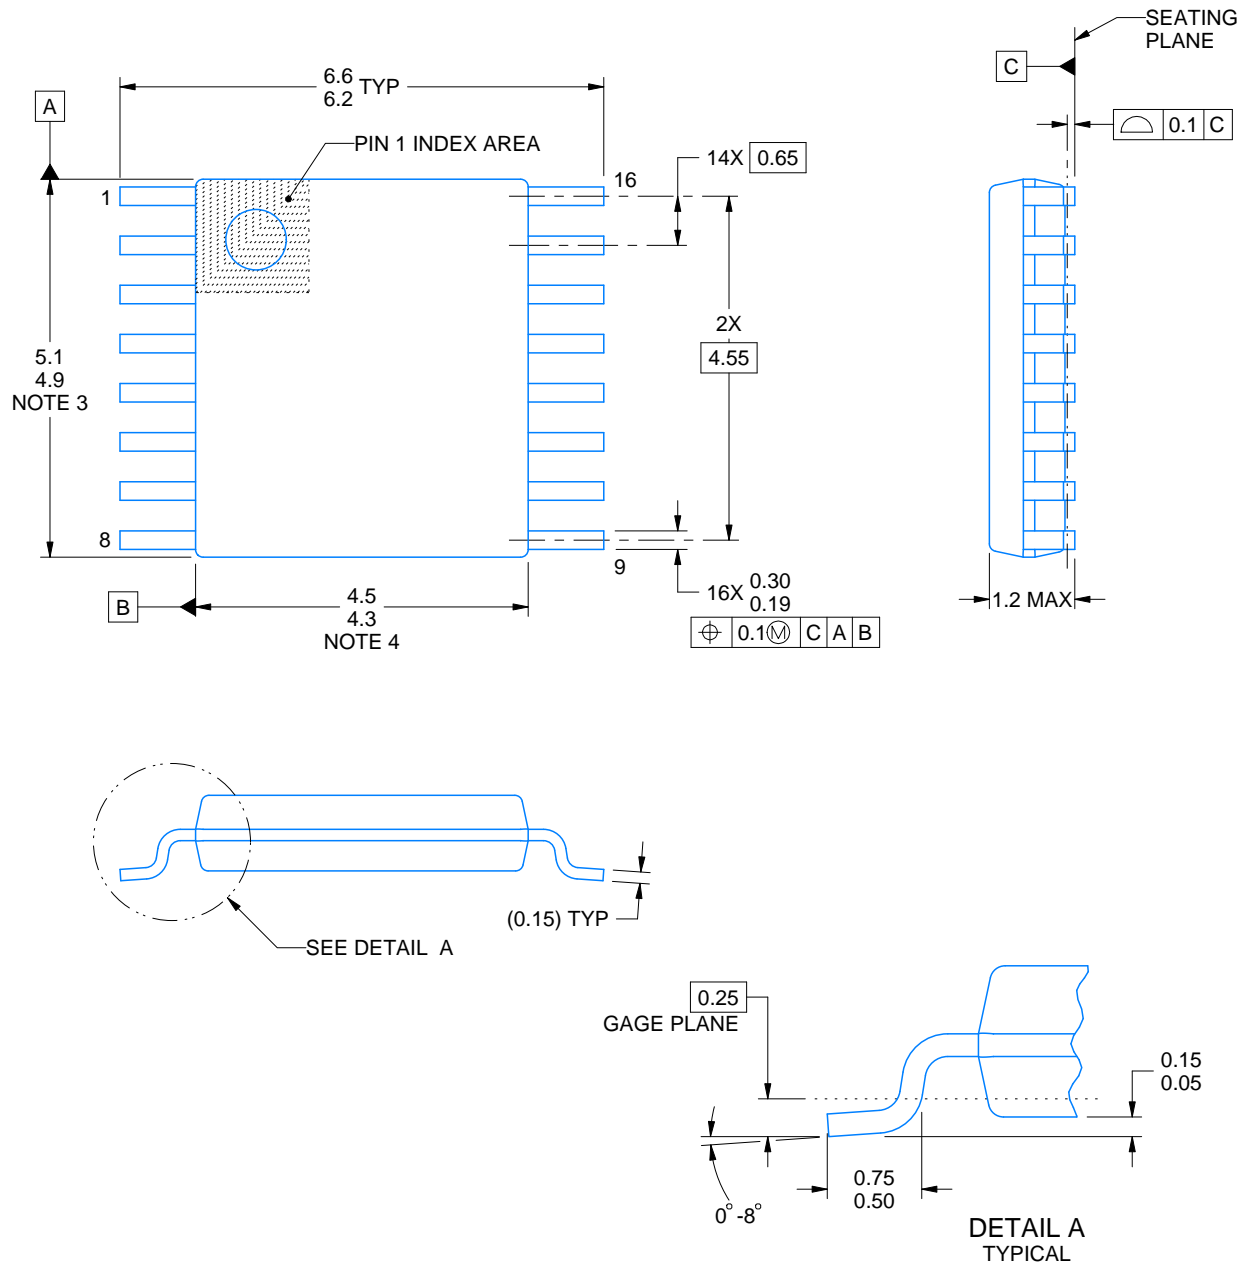
TAPE AND REEL INFORMATION

REEL DIMENSIONS

TAPE DIMENSIONS

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TMUX6136PWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TMUX6136PWR	TSSOP	PW	16	2000	367.0	367.0	35.0

6.6
6.2 TYP

A

PIN 1 INDEX AREA

1

16

14X 0.65

2X

4.55

5.1
4.9
NOTE 3

8

9

B

4.5
4.3
NOTE 4

16X 0.30
0.19

⊕ 0.1Ⓜ C A B

SEATING
PLANE

C

◁ 0.1 C

1.2 MAX

SEE DETAIL A

(0.15) TYP

0.25

GAGE PLANE

0.15
0.05

0°-8°

0.75
0.50

DETAIL A
TYPICAL

4220204/A 02/2017

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

16X (1.5)

SYMM

1

16X (0.45)

(R0.05) TYP

16

SYMM

14X (0.65)

8

9

(5.8)

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X

SOLDER MASK
OPENING

METAL

EXPOSED METAL

0.05 MAX
ALL AROUND

NON-SOLDER MASK
DEFINED
(PREFERRED)

METAL UNDER
SOLDER MASK

SOLDER MASK
OPENING

EXPOSED METAL

0.05 MIN
ALL AROUND

SOLDER MASK
DEFINED
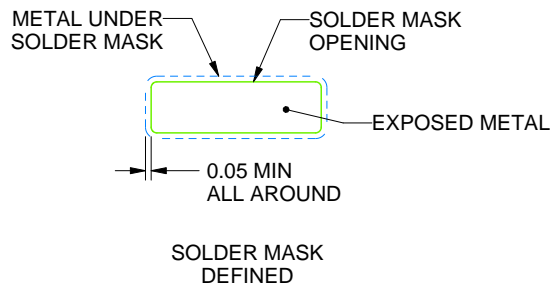
SOLDER MASK DETAILS

4220204/A   02/2017

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220204/A   02/2017

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.