

PRODUCT DATASHEET (1/1)

CIRCULAR PUSH-PULL CONNECTOR Y-CIRC P

Part Number	YCP-TPB12ACX-08MSEEX-065X	Order Number:	80-02094
Name	Straight cable plug with standard back nut		


Connector Details

Connector Type Digit	PB
Series	T (IP68)
Housing Surface	Chrome
Insulator Material	PEEK (UL)
Housing Material	Brass
O-Ring Material	----
Potting Material	----
Positioning Plate Mat.	----
RoHS	2011/65/EU (2015/863/EU)
Size	Size 12
Housing Variant	Standard
Insulator Variant	Standard



This picture is a schematic representation of the assembled connector and can change depending

Coding: A (1 key at 0°)




Parameters

IP Grade (to contact)	IP68 *)	(According IEC 60529)
IP Grade (to housing)	IP50	(According IEC 60529)
Mating Cycles	5000	(According DIN EN 60512-9-1)
Max. operating temperature	+120°C	(According MIL-STD 810F, Method 501.4; 74 hours)
Min. operating temperature	-20°C	(According MIL-STD 810F, Method 502.4; 16 hours)
Short Term Max. Temp	+200°C	(According J-STD-002D/ J-STD-020D)
Vibration	20 g [10 Hz - 2000 Hz]	(According DIN EN 60512-6-4)
Shock Resistance	50 g [6 ms]	(According DIN EN 60512-6-3)
Salt Spray Corrosion	>144 h	(According DIN EN 60512-11-6)
Shielding (10 MHz)	>75dB	
Shielding (1 GHz)	>55dB	

*) IP68 achievement with round cables and correct assembled cable exit

Dimensions [mm]


D1= 11.5 L1= ~42.5 W1= 10.0
L2= ~31.5 W2= 10.0

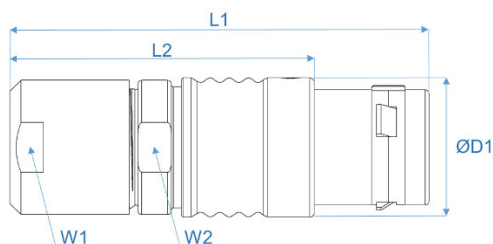

Contact

Pin Count	8 Pins
Contact Diameter	0.7 mm
Terminal Cross Section	Max AWG 22 / 0.34 mm²
Current Rating [A]	5.0 (for ambient temp. + temp. rise < max. operating temp.) Max current rating depends in most cases on the conductor or PCB dimensions; Caution: Do not disconnect under load.
Contact Type	Male: Solder Contacts
Contact Material and Surface	CuZn38Pb2; min 0.75µm Au
Grounding Material and Surface	----; ----
Test Voltage [kV rms] Contact-Contact	0.61
Test Voltage [kV rms] Contact-Shell	0.96
Contact Resistance	<6.5mΩ

Pin Layout (Terminal View)



Cable Exit

Collet type	065
Cable diameter range:	>6.0 to 6.5 mm
Material Cable Sealing	FKM, black

Dimensions [mm]

D1= 6.5
D2= >6.0
D3= 7.1

