



(a) During the pulse

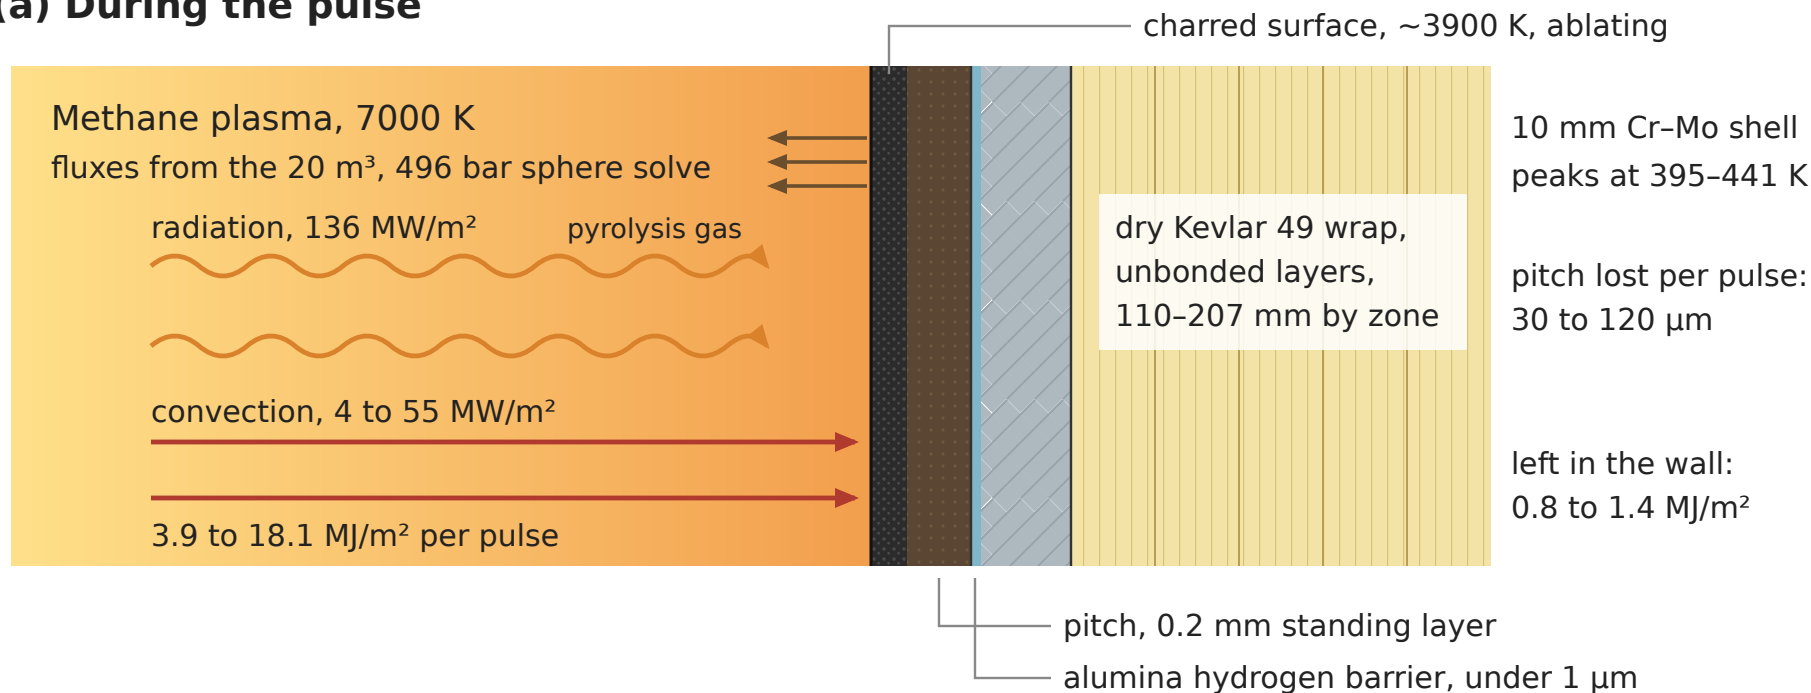


(b) Between pulses: quench, then recoat

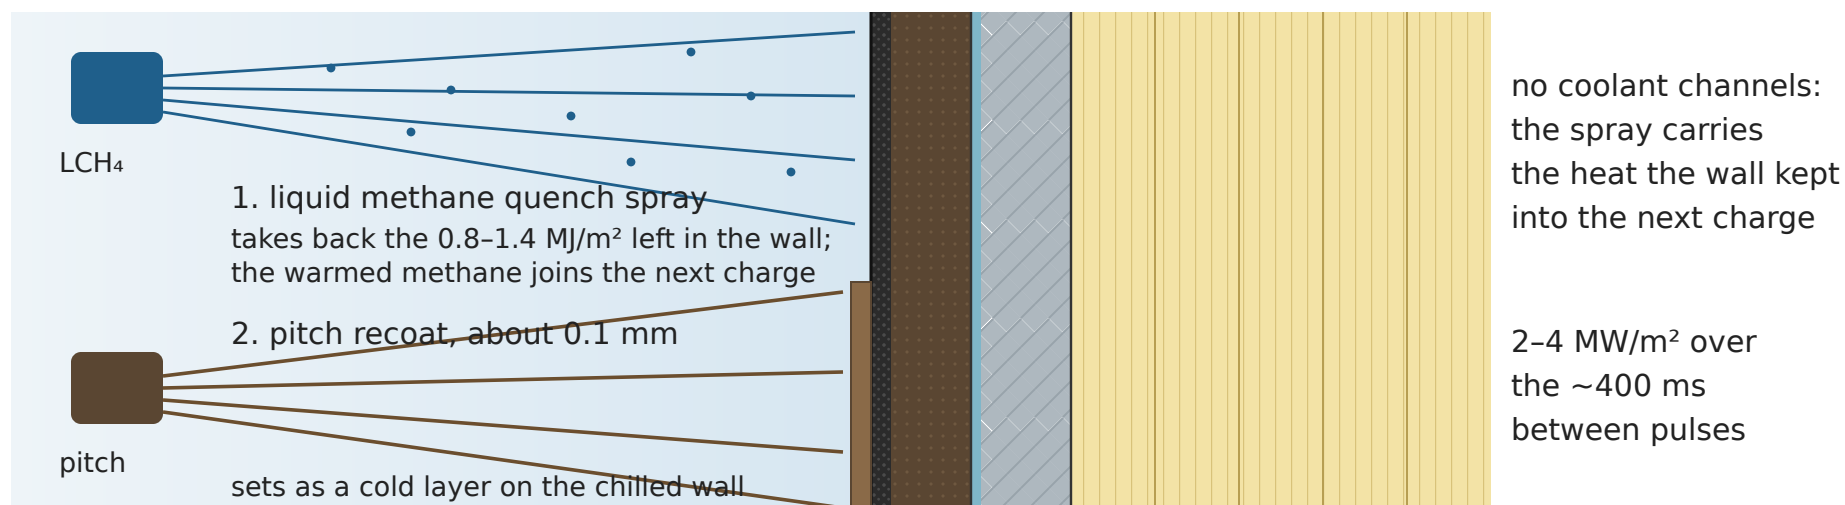

Layer thicknesses are not to scale. Pitch is exaggerated about 100 times against the shell, and the alumina far more.

(c) One 500 ms cycle at 2 Hz

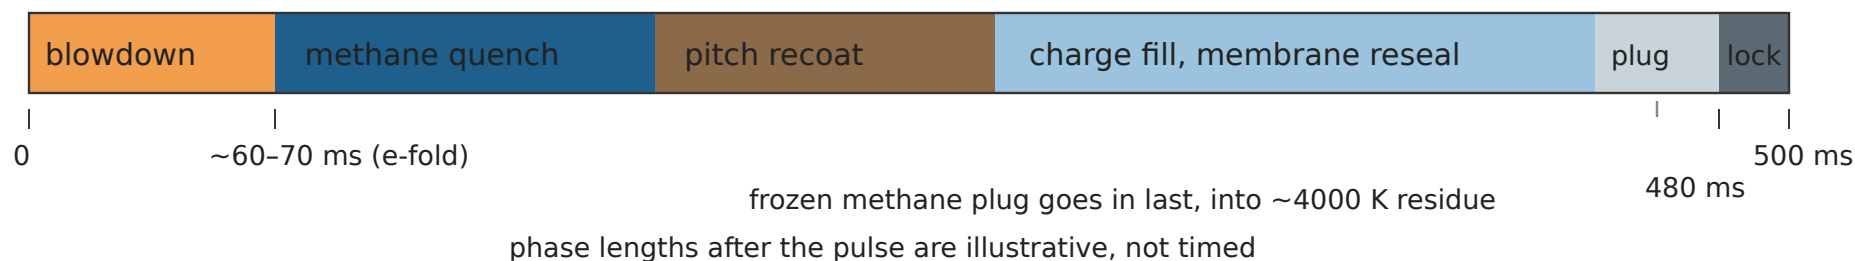

(d) Mass per pulse, 5 kg rod

