



(a) During the pulse, 25 to 53 ms

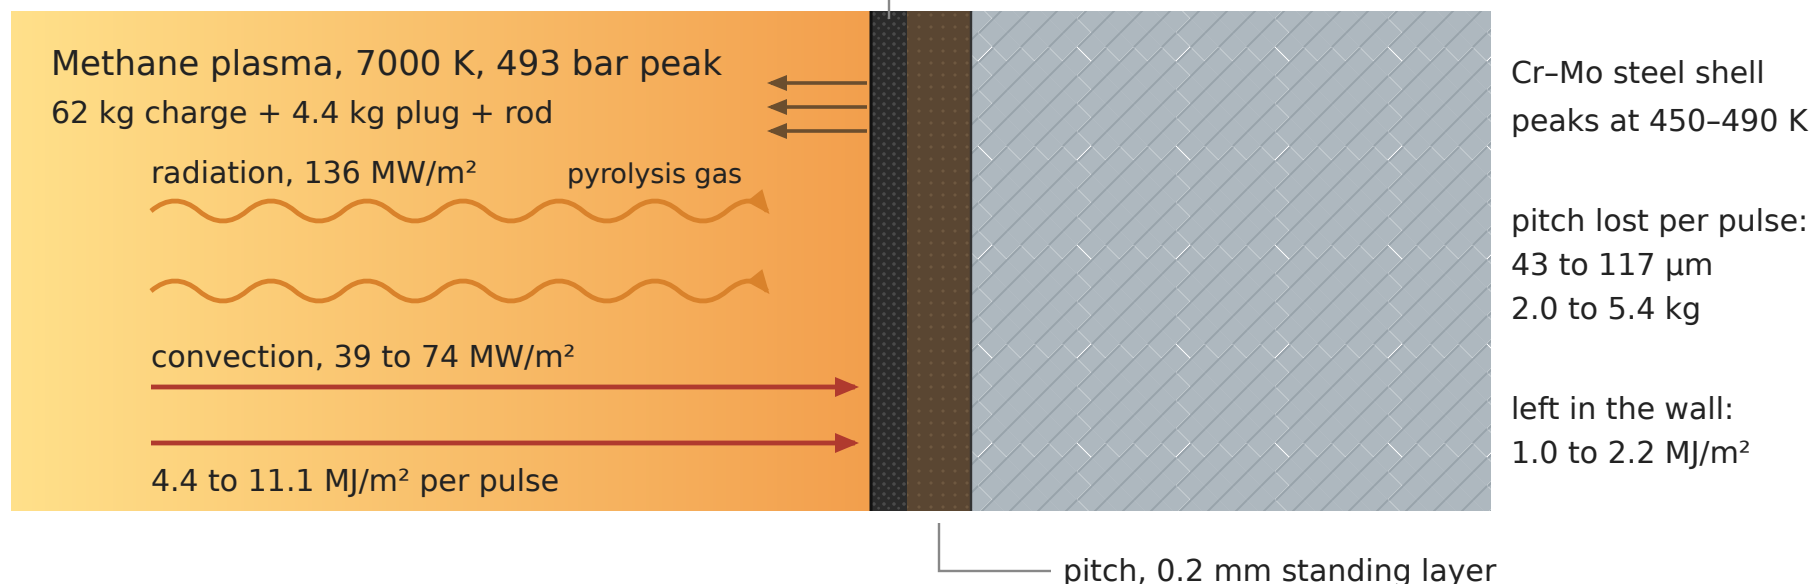


(b) Between pulses: quench, then recoat

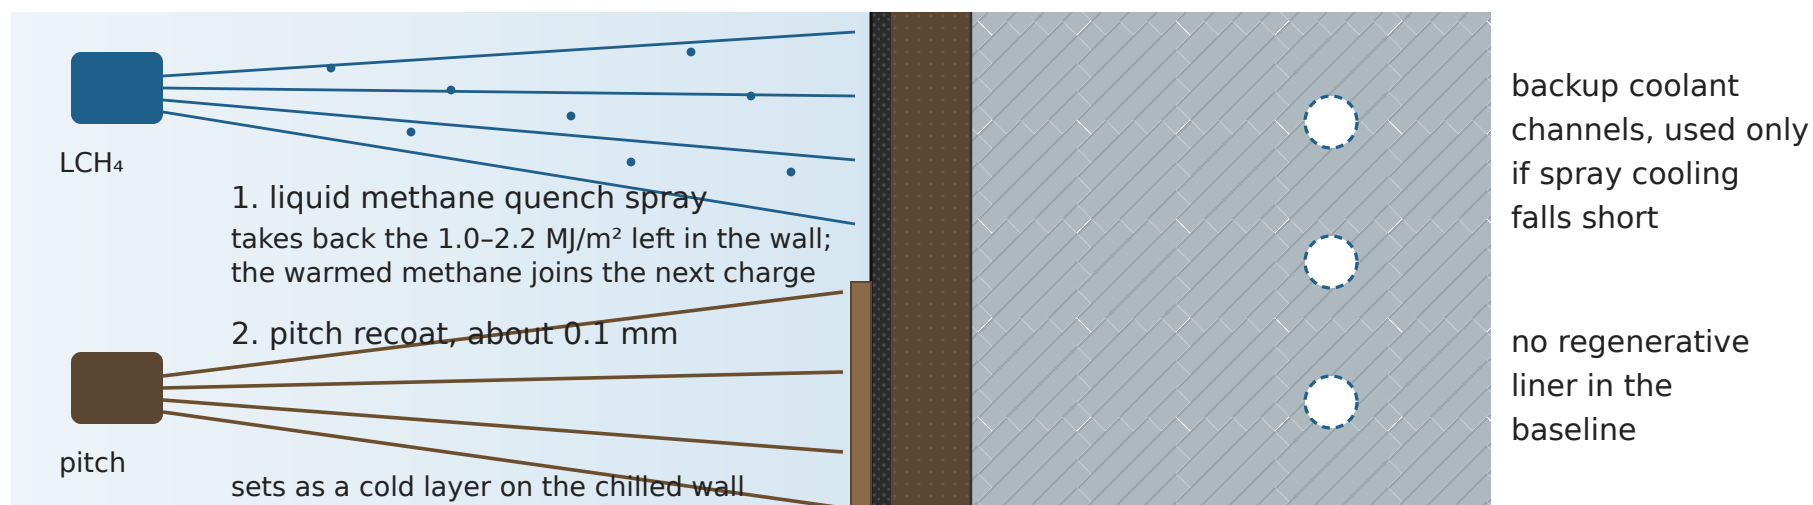

Layer thicknesses are not to scale. Pitch is exaggerated about 100 times against the steel.

(c) One 250 ms cycle at 4 Hz

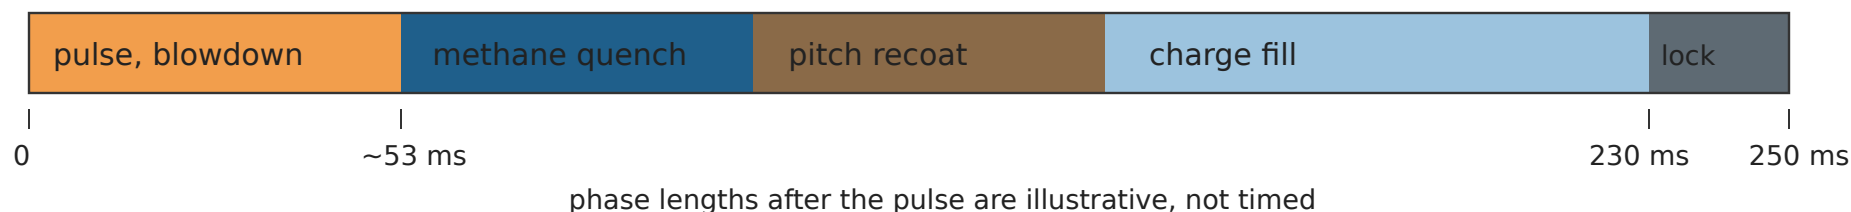

(d) Mass per pulse, 2.5 kg rod

