


1. Edit with sudo nano the “/etc/network/interfaces” file and rewrite it as followings to give your Kali machine an IP address.

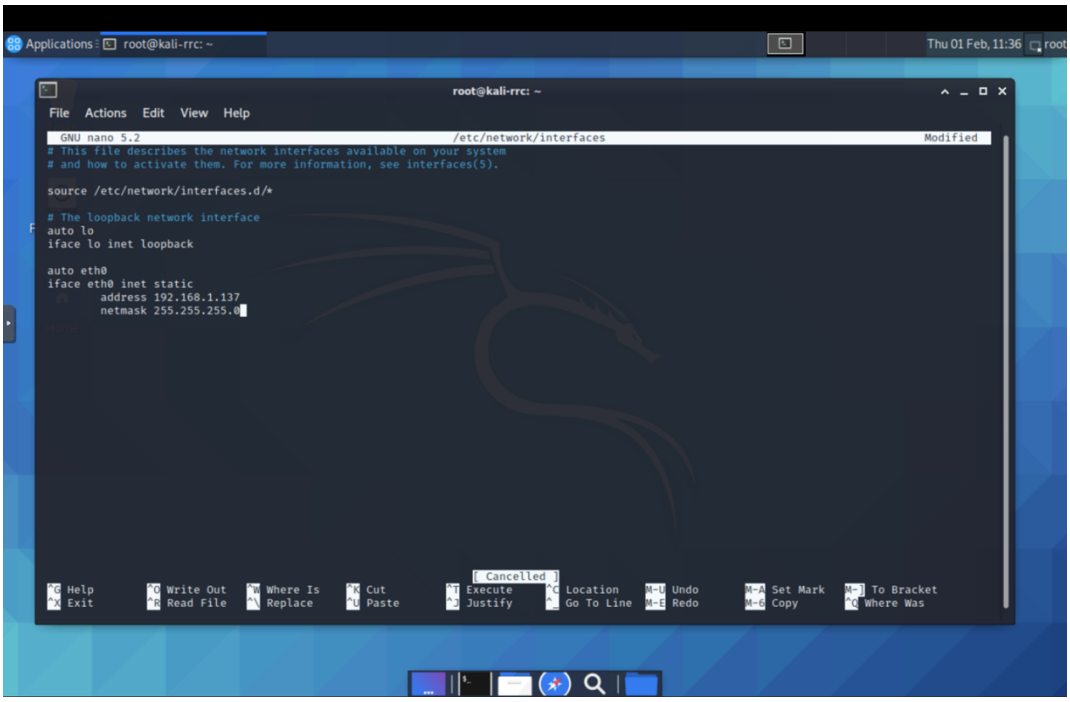


2. Restart the service by using the “systemctl” command as follow

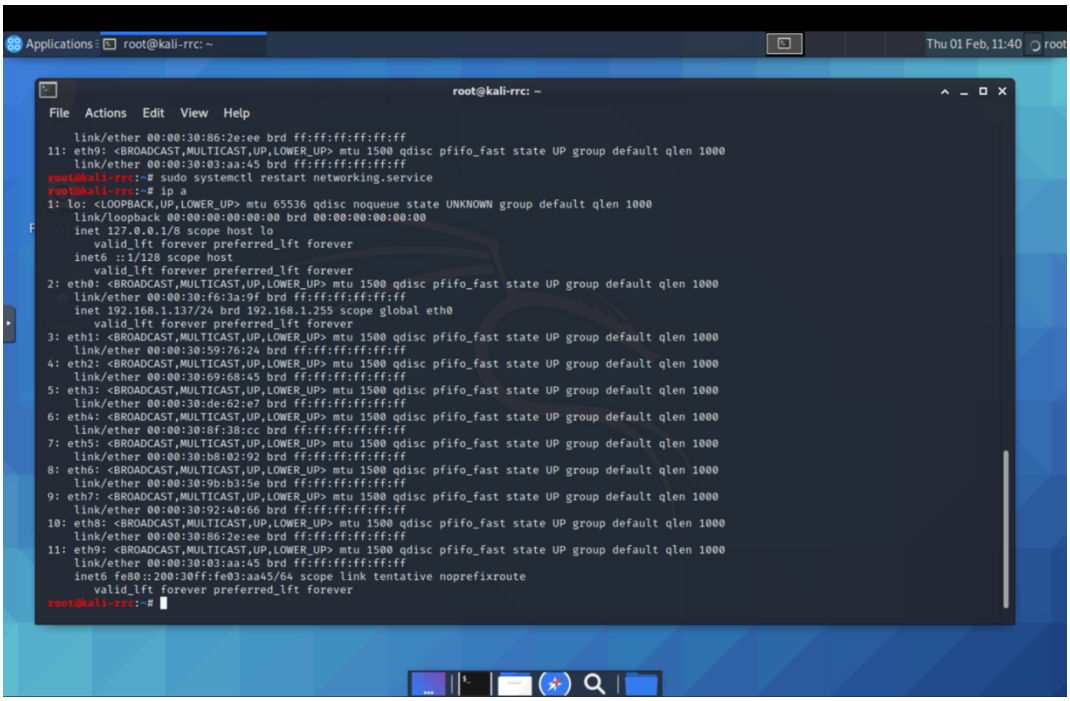


3. You can try pinging your other machines.

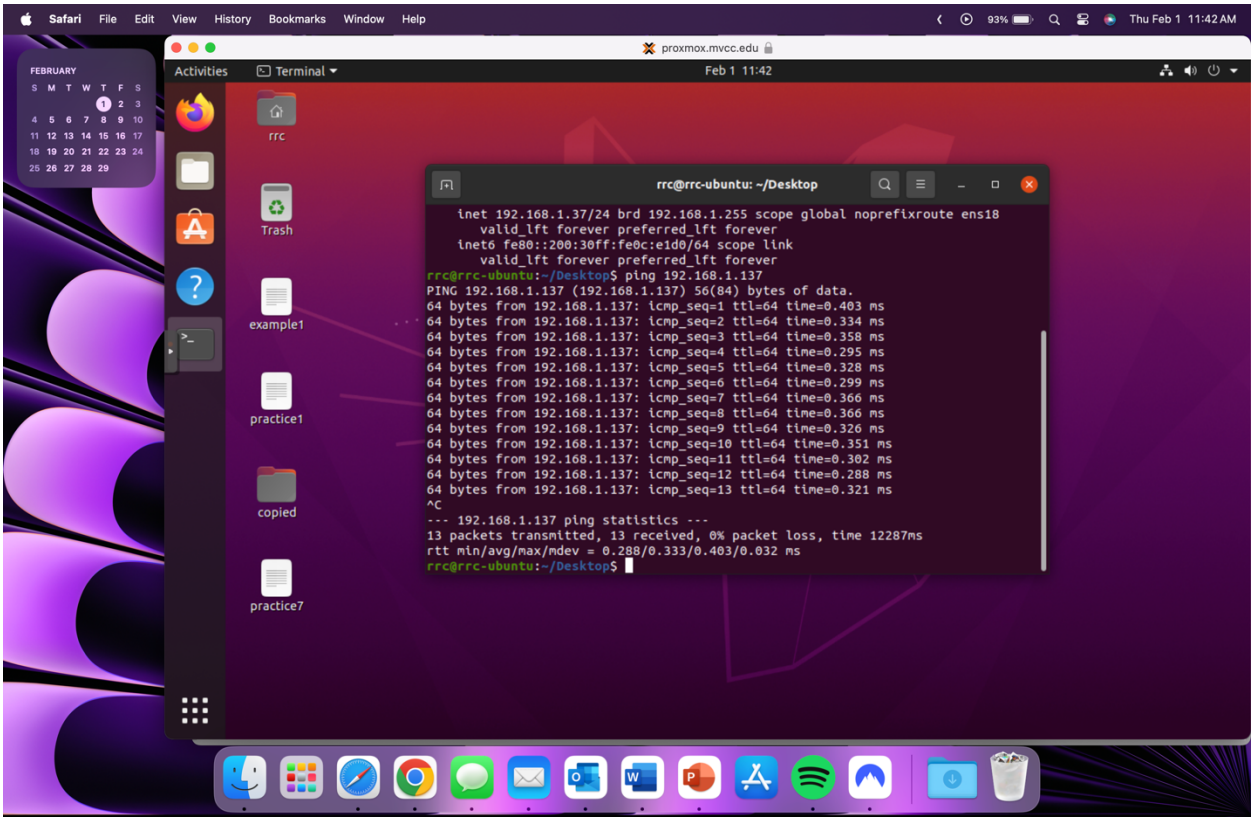


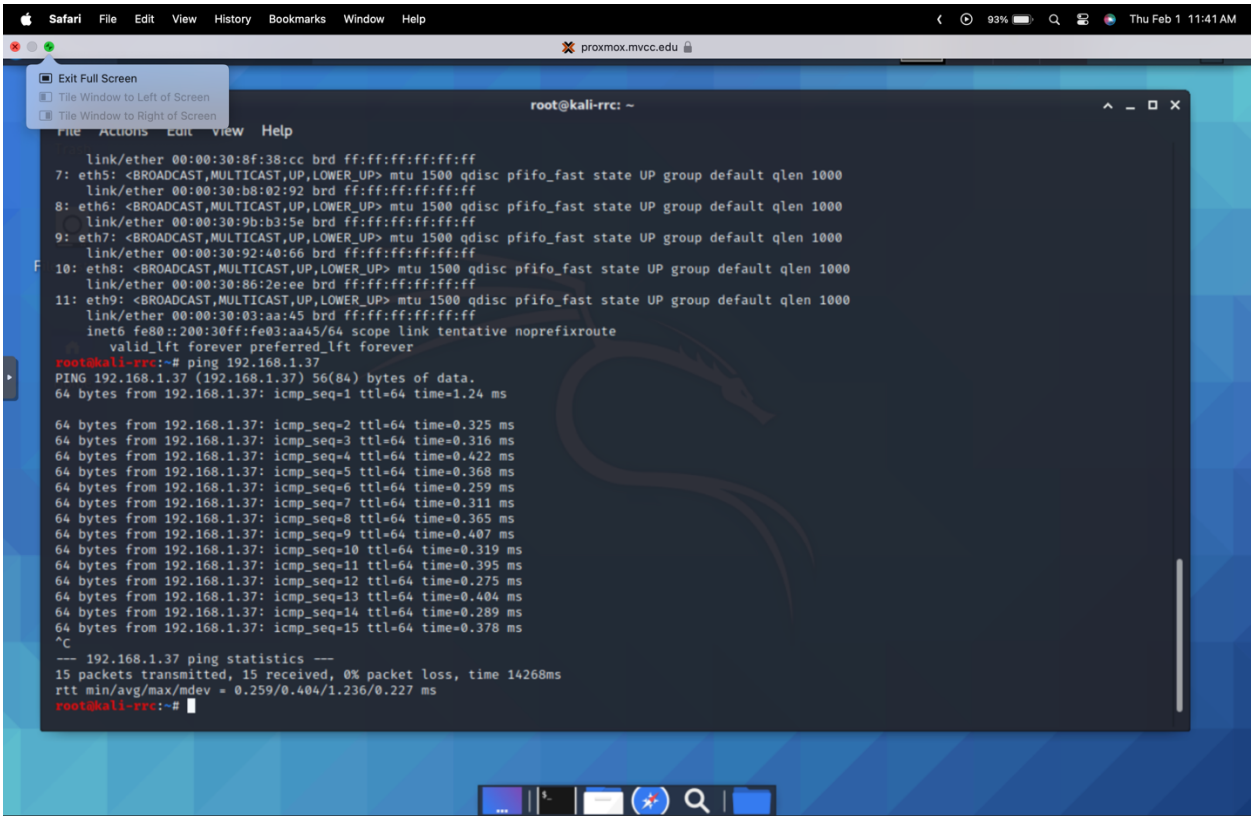


4. You can use vi to edit set the IP address in the following file path.

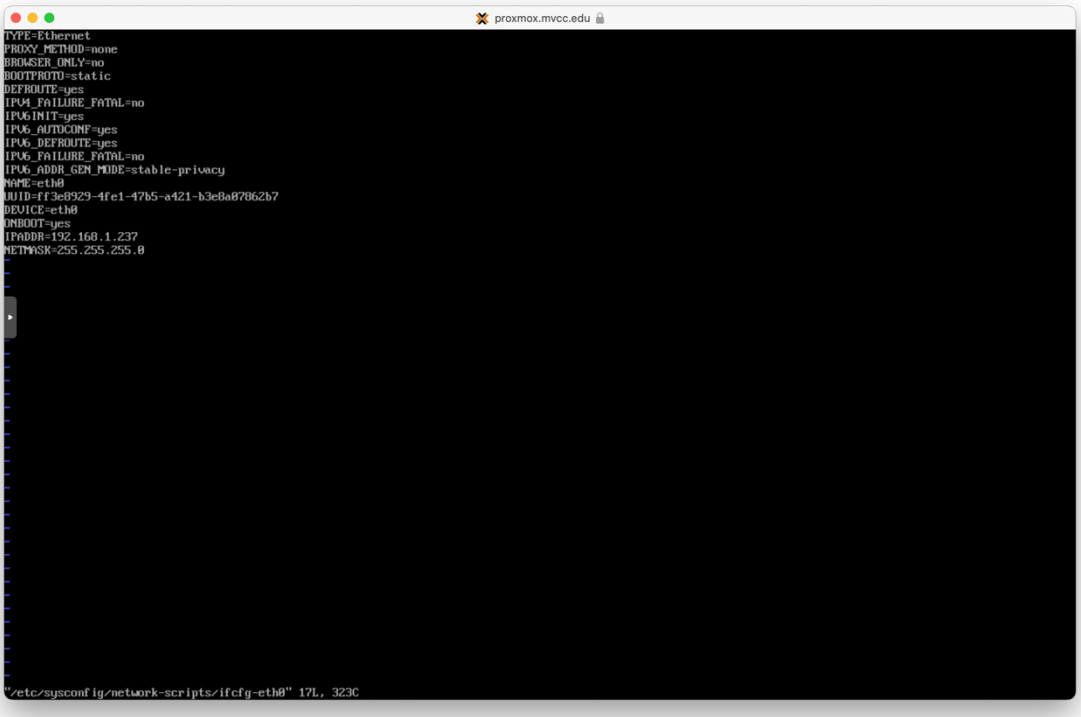



5. Restart the service using “systemctl” command.

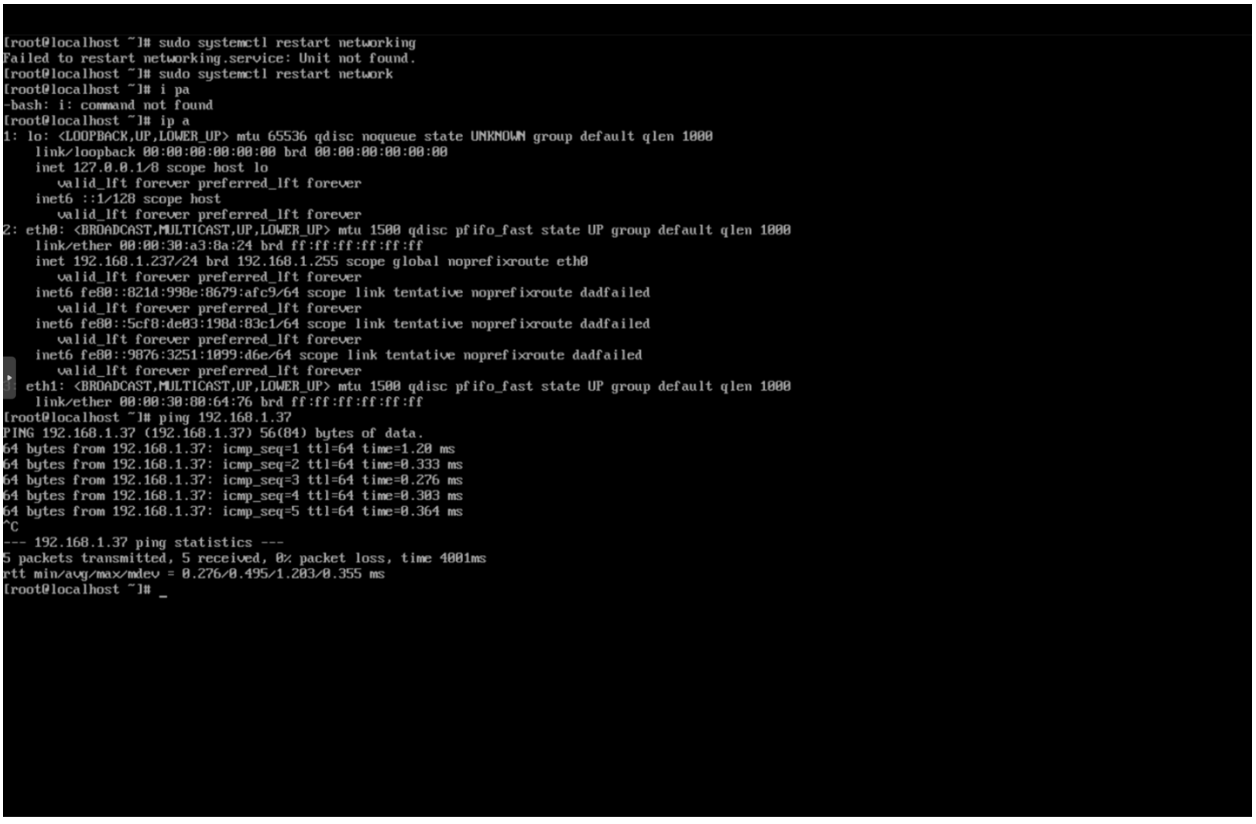


6. You can try pinging to other devices back and forth

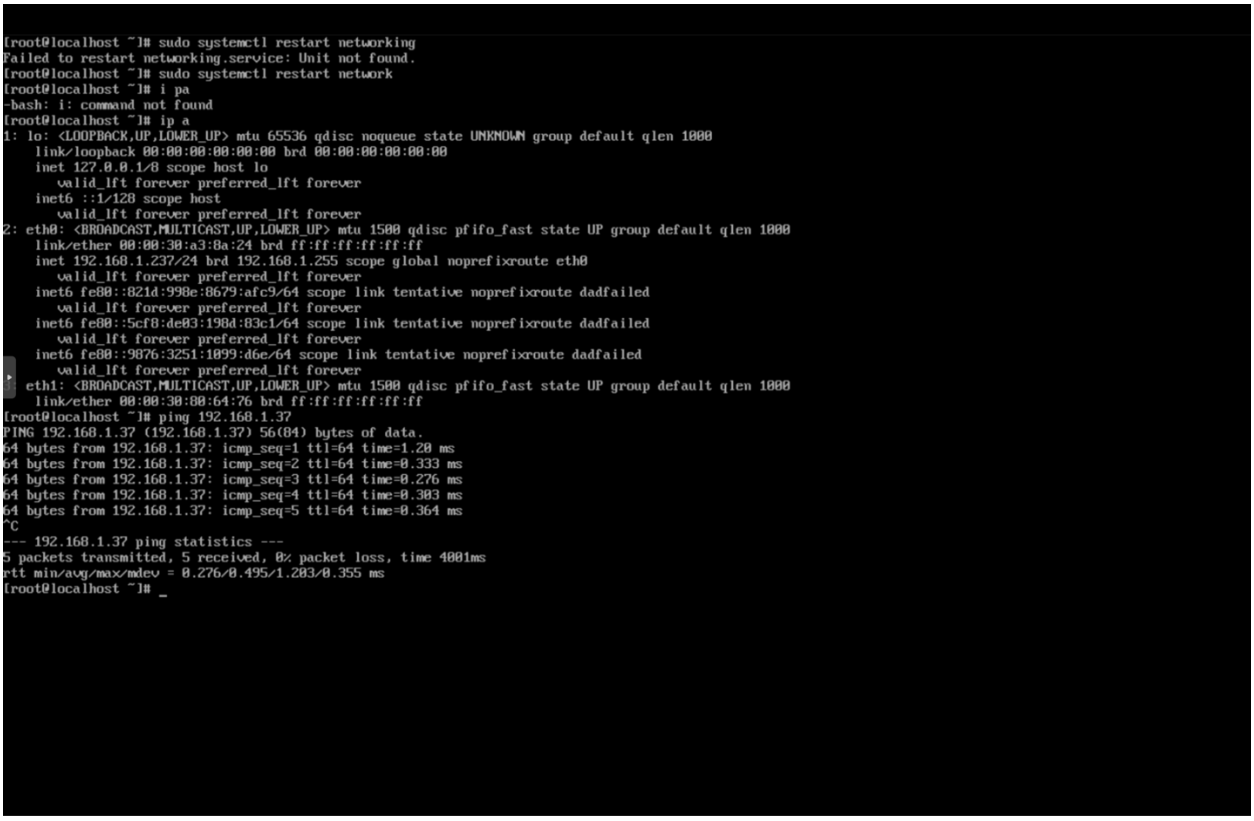


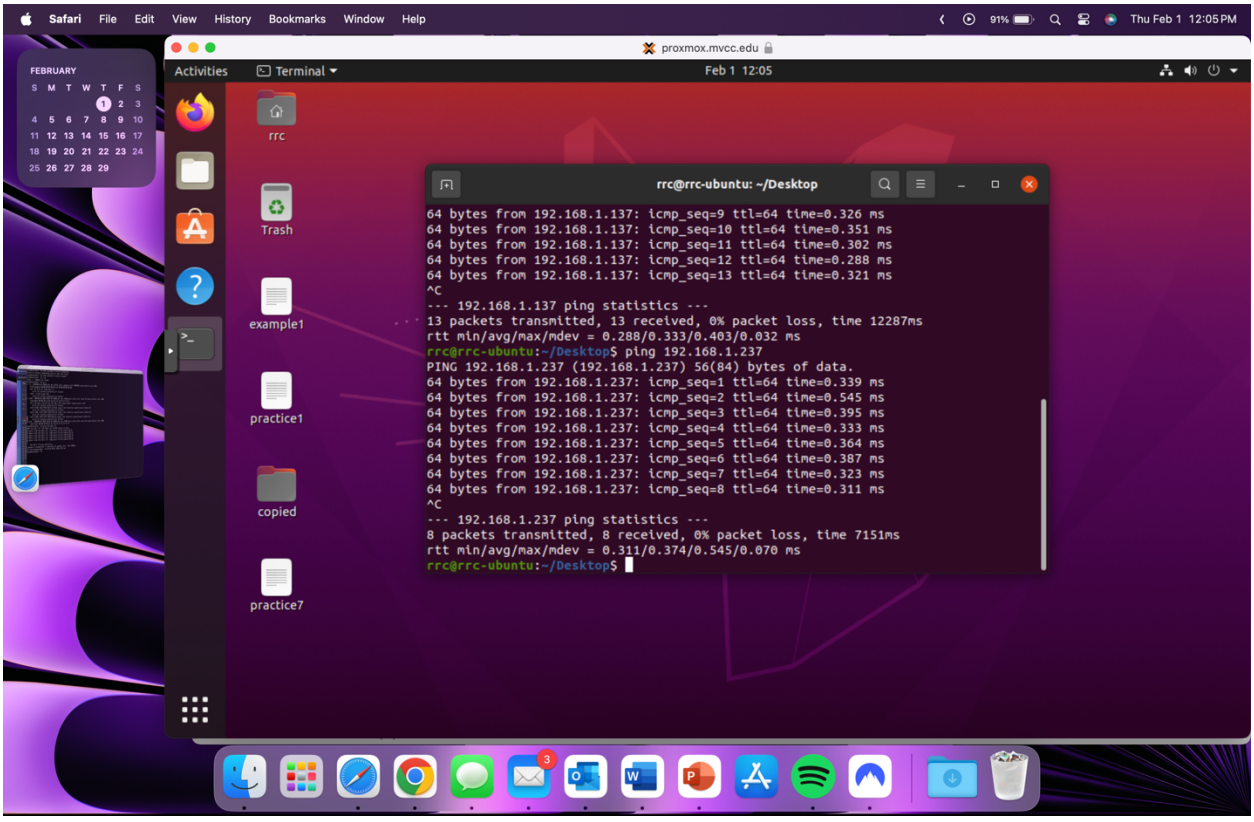


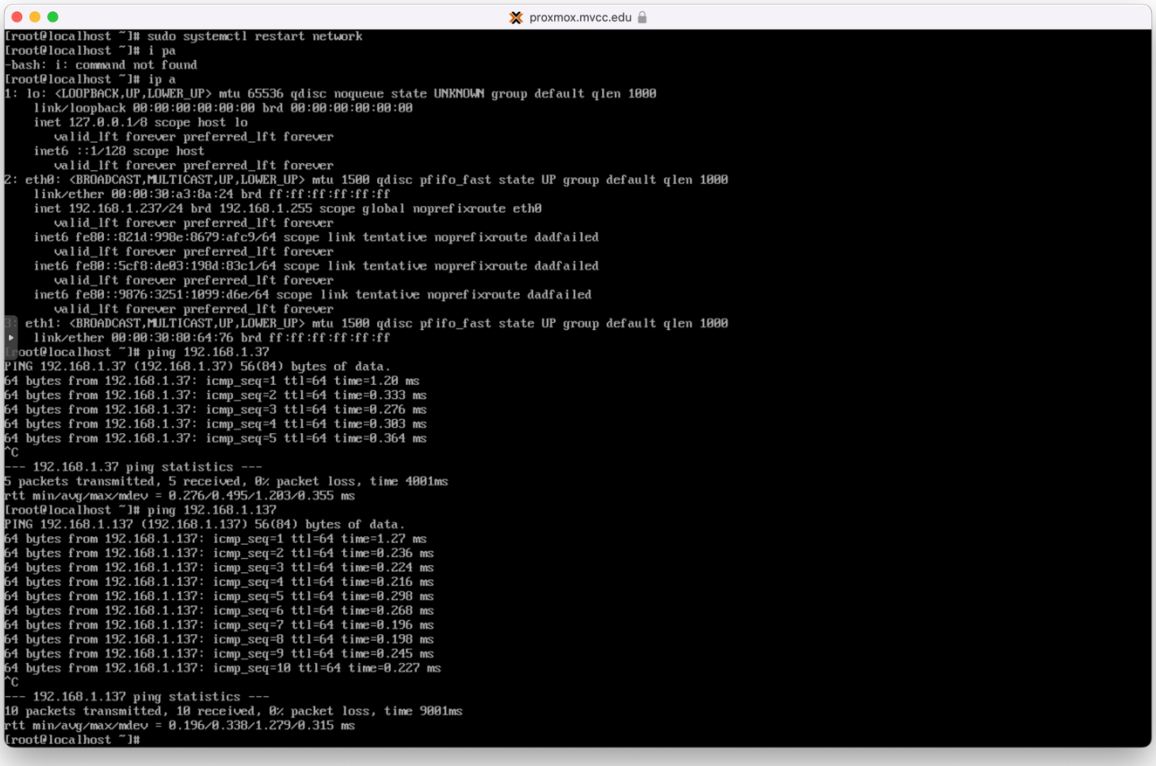
proxmox.mvcc.edu
[root@localhost ~]# sudo systemctl restart network
[root@localhost ~]# i pa
-bash: i: command not found
[root@localhost ~]# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
inet 127.0.0.1/8 scope host lo
valid_lft forever preferred_lft forever
inet6 ::1/128 scope host
valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
link/ether 00:00:30:a3:8a:24 brd ff:ff:ff:ff:ff:ff
inet 192.168.1.237/24 brd 192.168.1.255 scope global noprefixroute eth0
valid_lft forever preferred_lft forever
inet6 fe80::821d:998e:8679:afc9/64 scope link tentative noprefixroute dadfailed
valid_lft forever preferred_lft forever
inet6 fe80::5cf8:de03:198d:83c1/64 scope link tentative noprefixroute dadfailed
valid_lft forever preferred_lft forever
inet6 fe80::9876:3251:1099:d6e/64 scope link tentative noprefixroute dadfailed
valid_lft forever preferred_lft forever
3: eth1: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
link/ether 00:00:30:80:64:76 brd ff:ff:ff:ff:ff:ff
[root@localhost ~]# ping 192.168.1.37
PING 192.168.1.37 (192.168.1.37) 56(84) bytes of data.
64 bytes from 192.168.1.37: icmp_seq=1 ttl=64 time=1.20 ms
64 bytes from 192.168.1.37: icmp_seq=2 ttl=64 time=0.333 ms
64 bytes from 192.168.1.37: icmp_seq=3 ttl=64 time=0.276 ms
64 bytes from 192.168.1.37: icmp_seq=4 ttl=64 time=0.303 ms
64 bytes from 192.168.1.37: icmp_seq=5 ttl=64 time=0.364 ms
^C
--- 192.168.1.37 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4001ms
rtt min/avg/max/mdev = 0.276/0.495/1.203/0.355 ms
[root@localhost ~]# ping 192.168.1.137
PING 192.168.1.137 (192.168.1.137) 56(84) bytes of data.
64 bytes from 192.168.1.137: icmp_seq=1 ttl=64 time=1.27 ms
64 bytes from 192.168.1.137: icmp_seq=2 ttl=64 time=0.236 ms
64 bytes from 192.168.1.137: icmp_seq=3 ttl=64 time=0.224 ms
64 bytes from 192.168.1.137: icmp_seq=4 ttl=64 time=0.216 ms
64 bytes from 192.168.1.137: icmp_seq=5 ttl=64 time=0.298 ms
64 bytes from 192.168.1.137: icmp_seq=6 ttl=64 time=0.268 ms
64 bytes from 192.168.1.137: icmp_seq=7 ttl=64 time=0.196 ms
64 bytes from 192.168.1.137: icmp_seq=8 ttl=64 time=0.198 ms
64 bytes from 192.168.1.137: icmp_seq=9 ttl=64 time=0.245 ms
64 bytes from 192.168.1.137: icmp_seq=10 ttl=64 time=0.227 ms
^C
--- 192.168.1.137 ping statistics ---
10 packets transmitted, 10 received, 0% packet loss, time 9001ms
rtt min/avg/max/mdev = 0.196/0.338/1.279/0.315 ms
[root@localhost ~]#

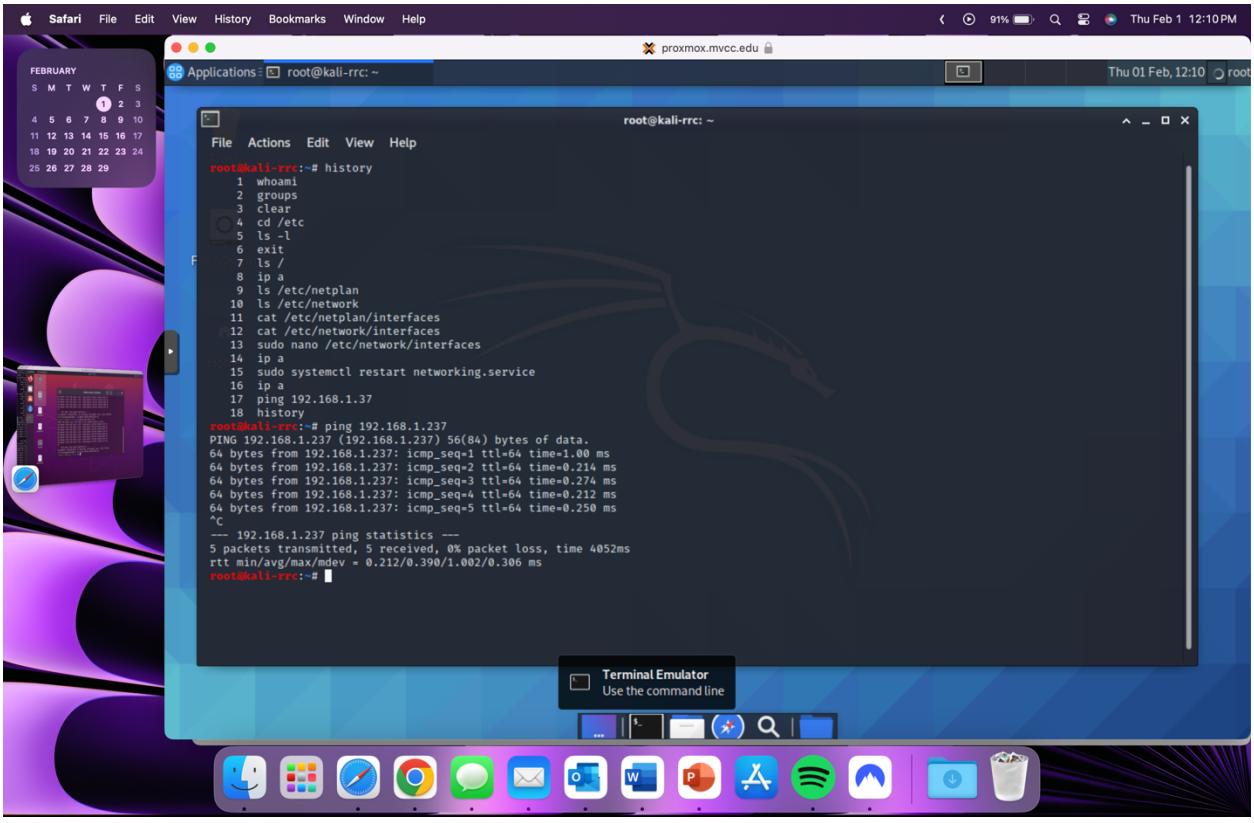
Safari File Edit View History Bookmarks Window Help
Thu Feb 1 12:10 PM
proxmox.mvcc.edu
Applications root@kali-rrc: ~
Thu 01 Feb, 12:10
root@kali-rrc: ~
File Actions Edit View Help
root@kali-rrc:~# history
1 whoami
2 groups
3 clear
4 cd /etc
5 ls -l
6 exit
7 ls /
8 ip a
9 ls /etc/netplan
10 ls /etc/network
11 cat /etc/netplan/interfaces
12 cat /etc/network/interfaces
13 sudo nano /etc/network/interfaces
14 ip a
15 sudo systemctl restart networking.service
16 ip a
17 ping 192.168.1.37
18 history
root@kali-rrc:~# ping 192.168.1.237
PING 192.168.1.237 (192.168.1.237) 56(84) bytes of data.
64 bytes from 192.168.1.237: icmp_seq=1 ttl=64 time=1.00 ms
64 bytes from 192.168.1.237: icmp_seq=2 ttl=64 time=0.214 ms
64 bytes from 192.168.1.237: icmp_seq=3 ttl=64 time=0.274 ms
64 bytes from 192.168.1.237: icmp_seq=4 ttl=64 time=0.212 ms
64 bytes from 192.168.1.237: icmp_seq=5 ttl=64 time=0.250 ms
^C
--- 192.168.1.237 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4052ms
rtt min/avg/max/mdev = 0.212/0.390/1.002/0.306 ms
root@kali-rrc:~#
Terminal Emulator
Use the command line

7. You can run “nc” command on two machines and let them able to communicate.

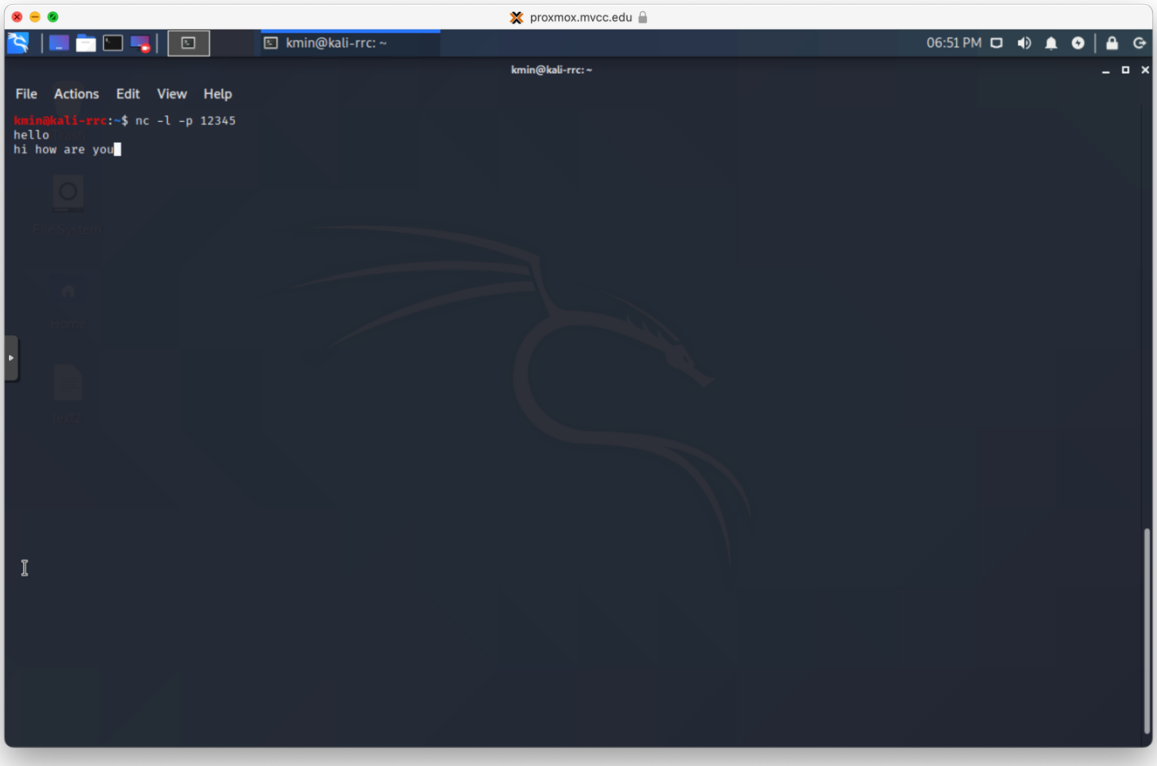

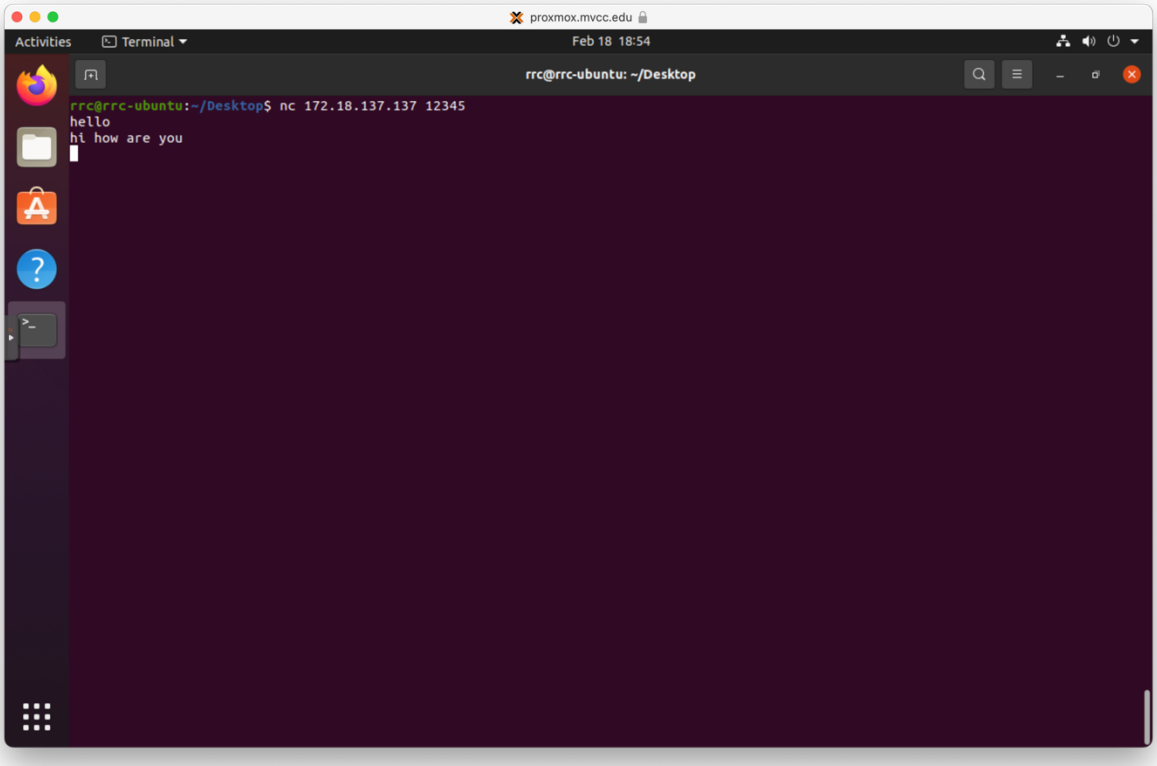

8. You can run this command forever using python3 code as shown. Use control+Z to stop.

