


1. You can use the “ifconfig” command to see your network configuration. This only works when you add net tools when you set up your machine.

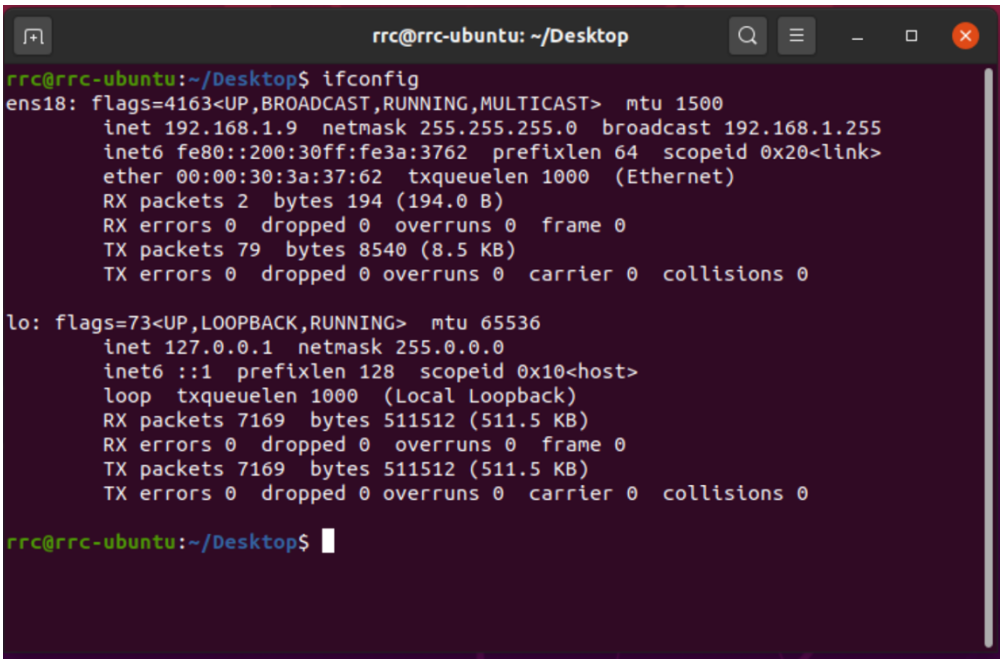


2. But, the “ip a” command will work throughout the entire Linux system providing the network configuration.

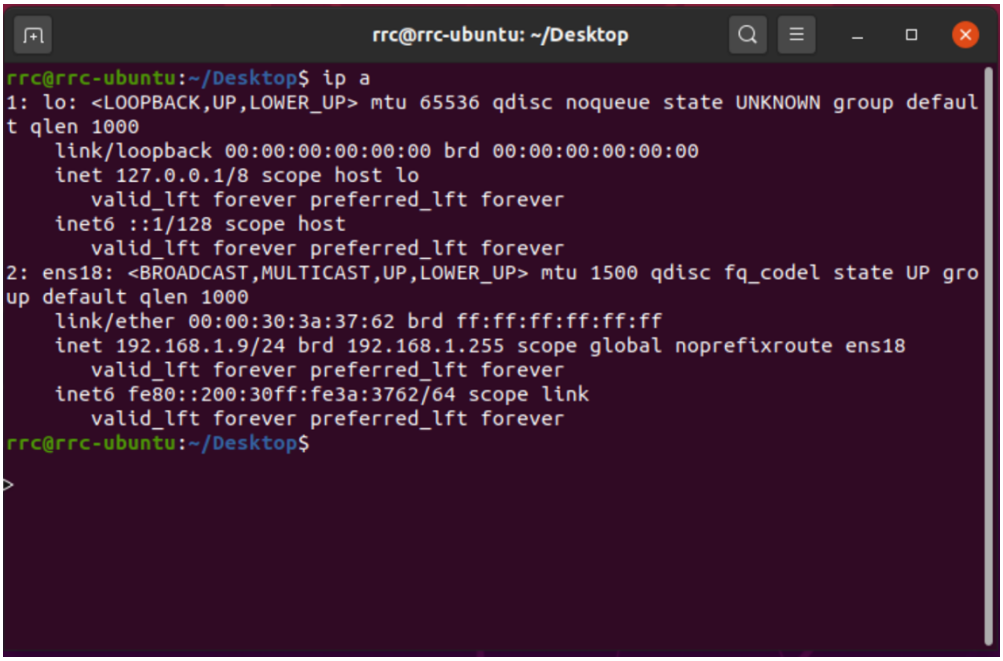


3. You can add ip address to your ens18 by editing the interface file.

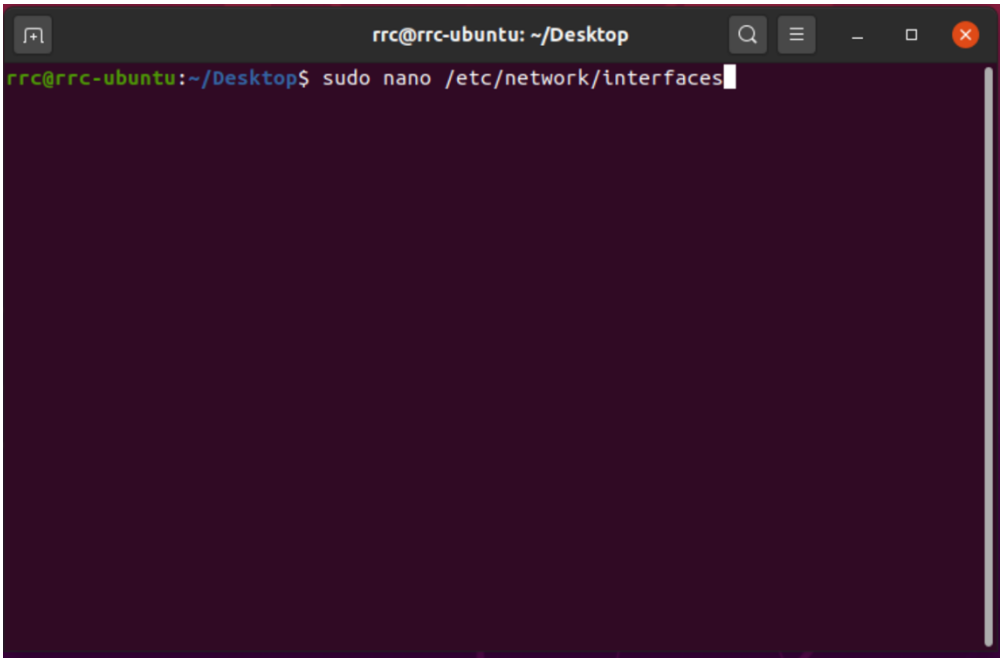


4. Type the following exactly apart from the address and the mask. And then, save it.

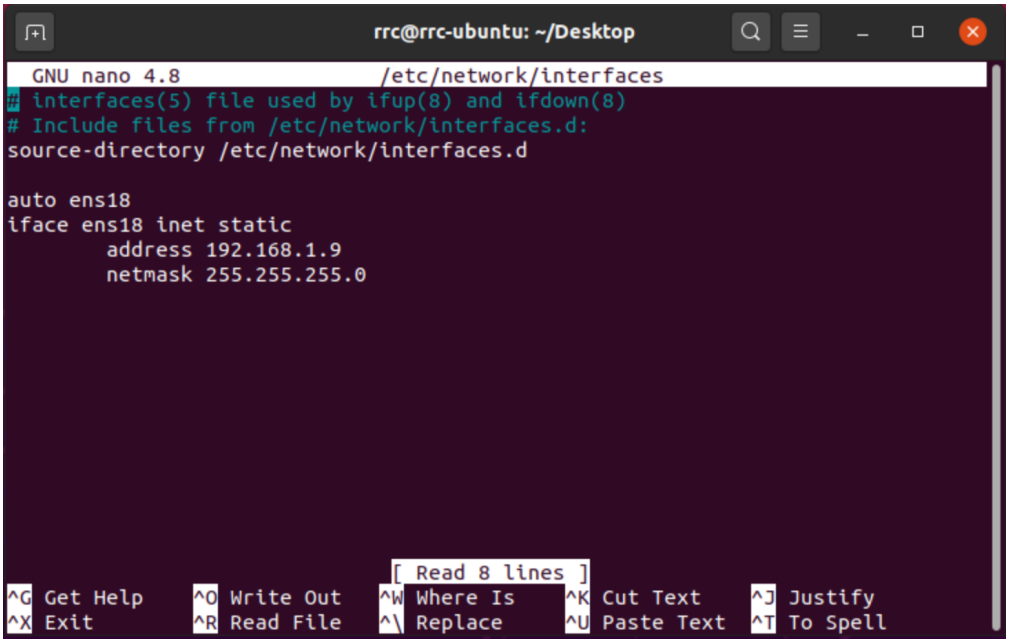


5. You will need to restart this part, NOT the computer, to start the service. The command for this is “sudo systemctl restart networking”

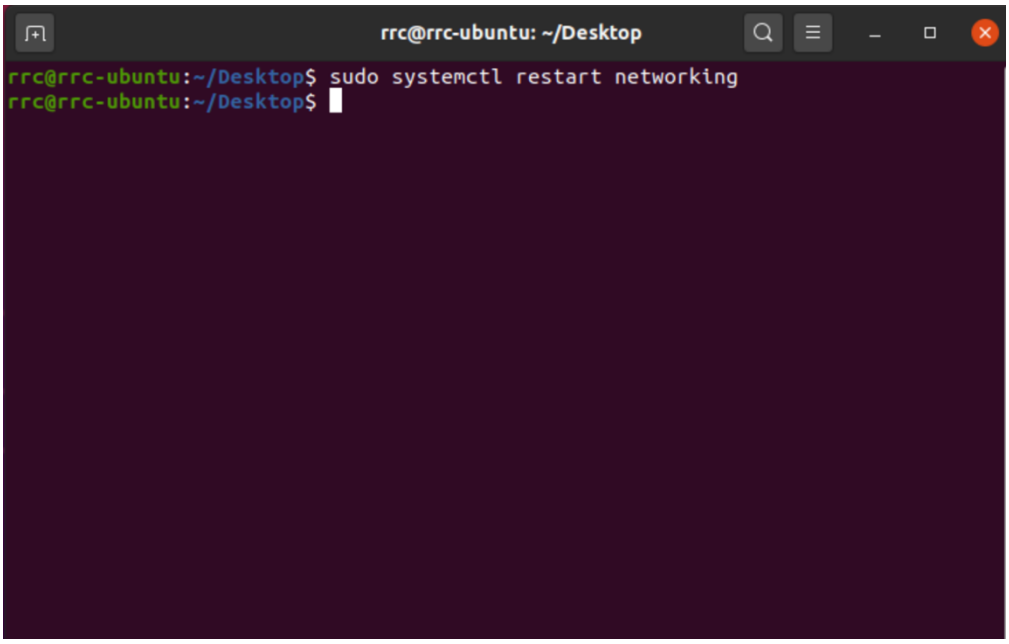


6. Now, you have statically assigned your IP address.

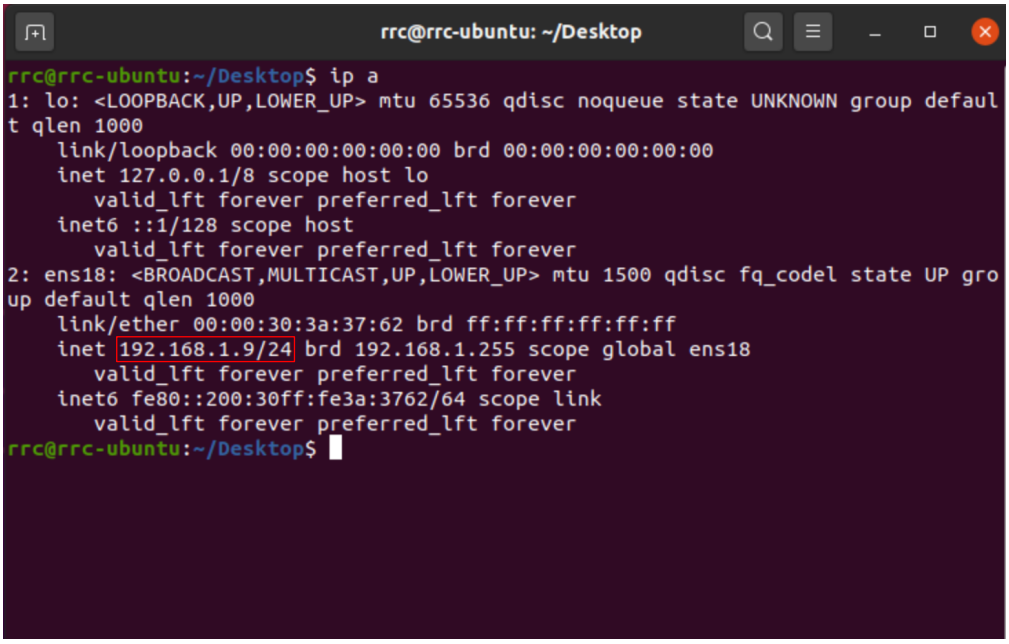


7. You can also dynamically assign your network with your router editing as follow in the interface file.

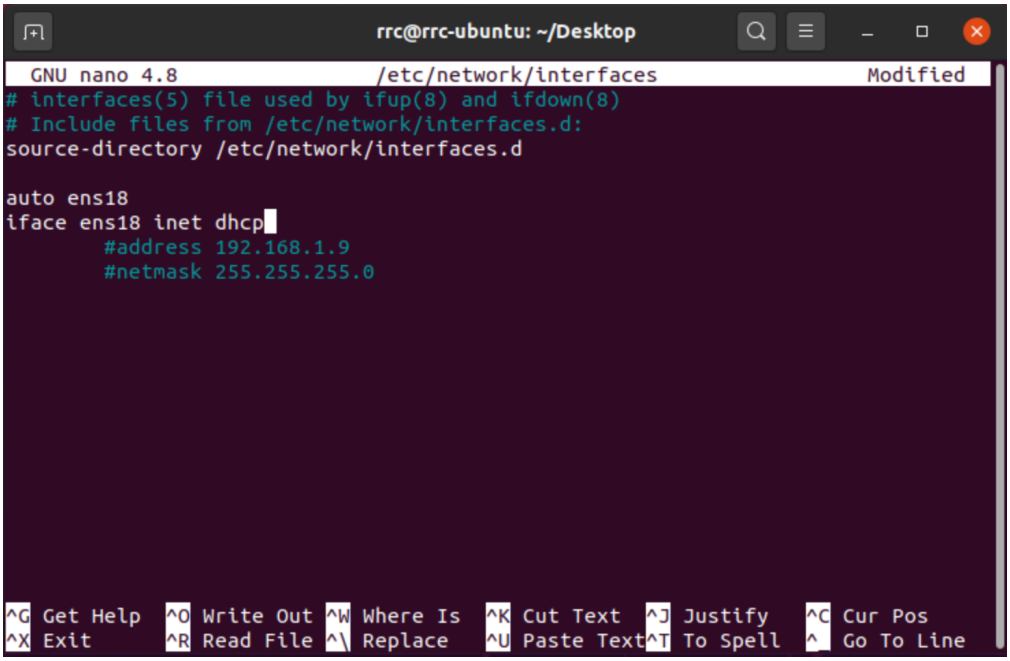


8. But when you try to restart the service, it will not work because there is no router to connect.

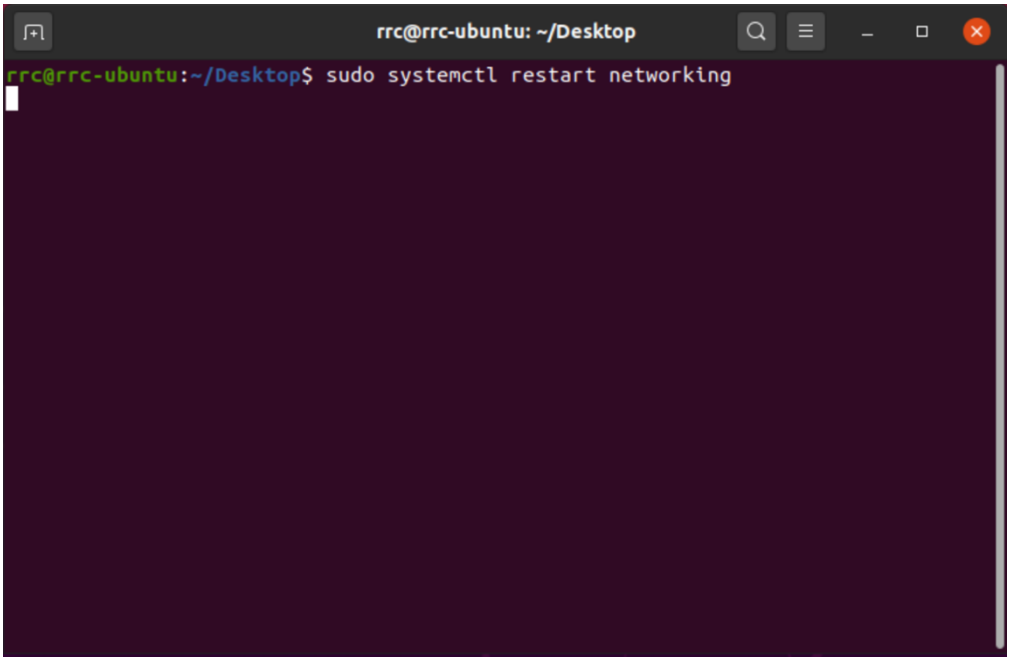


9. There is a new way to set up the network which is in the file shown below.

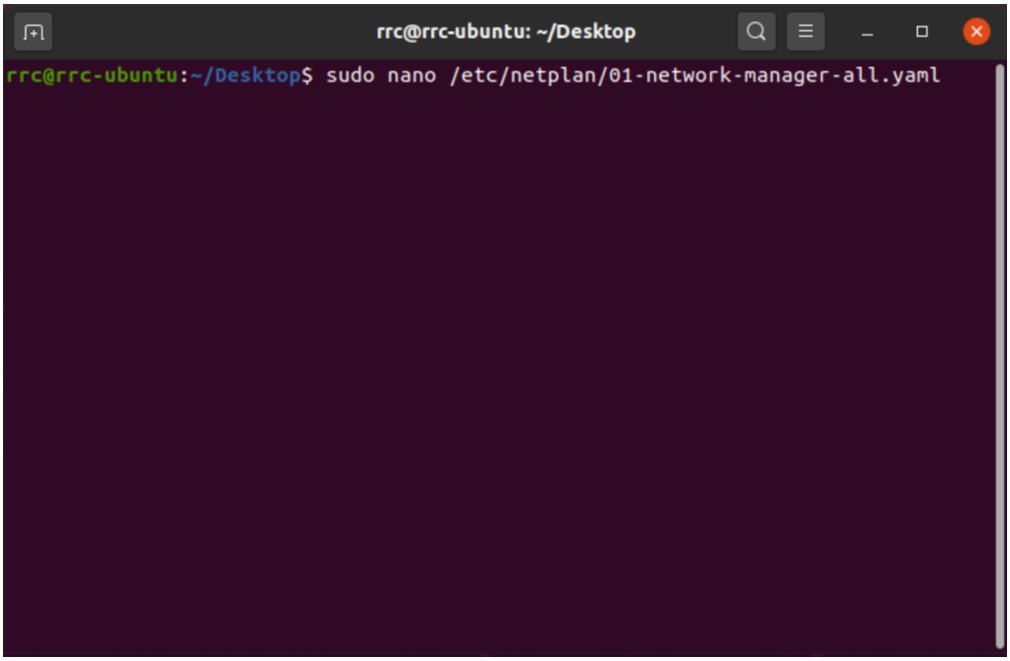


10. You will need to write exactly as shown. Spacing is important in this place.

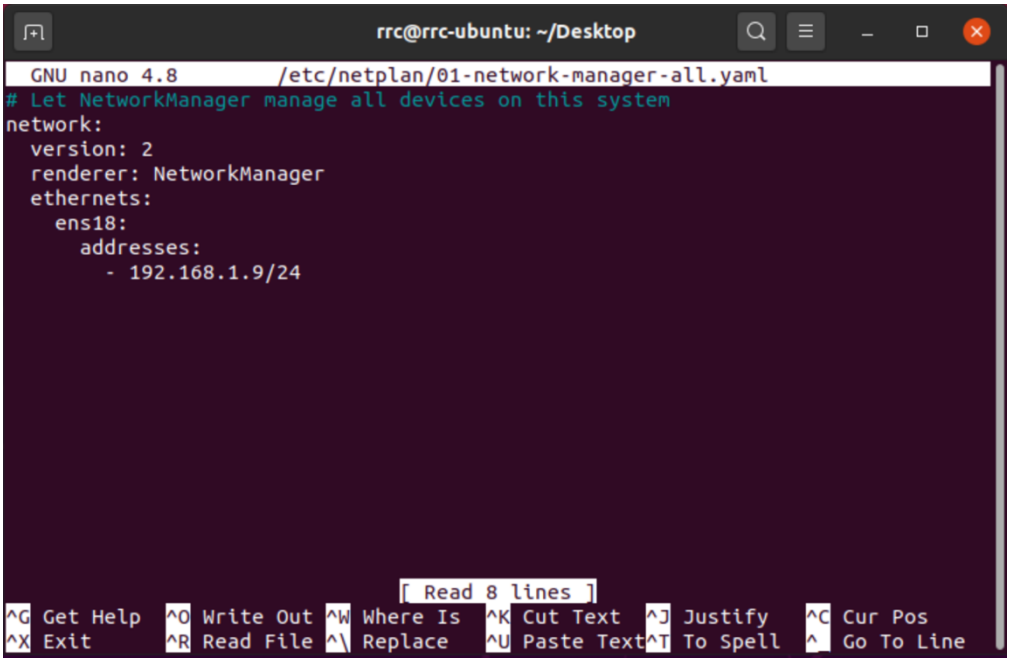

11. The new “netplan” has its own command to restart its own service.

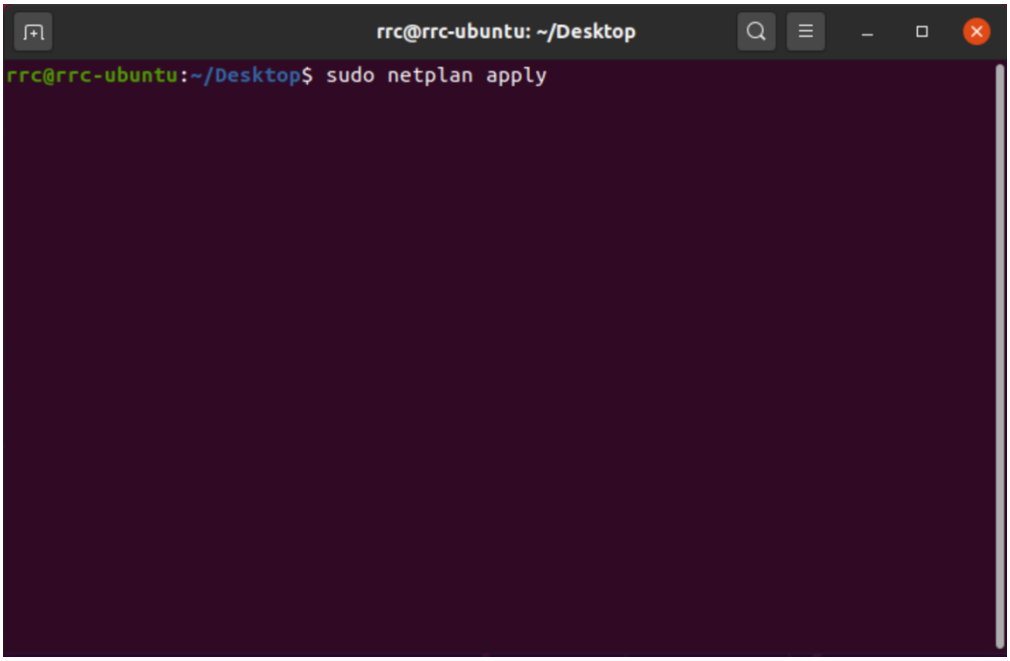

12. You can undo the network changes by using the command shown below.

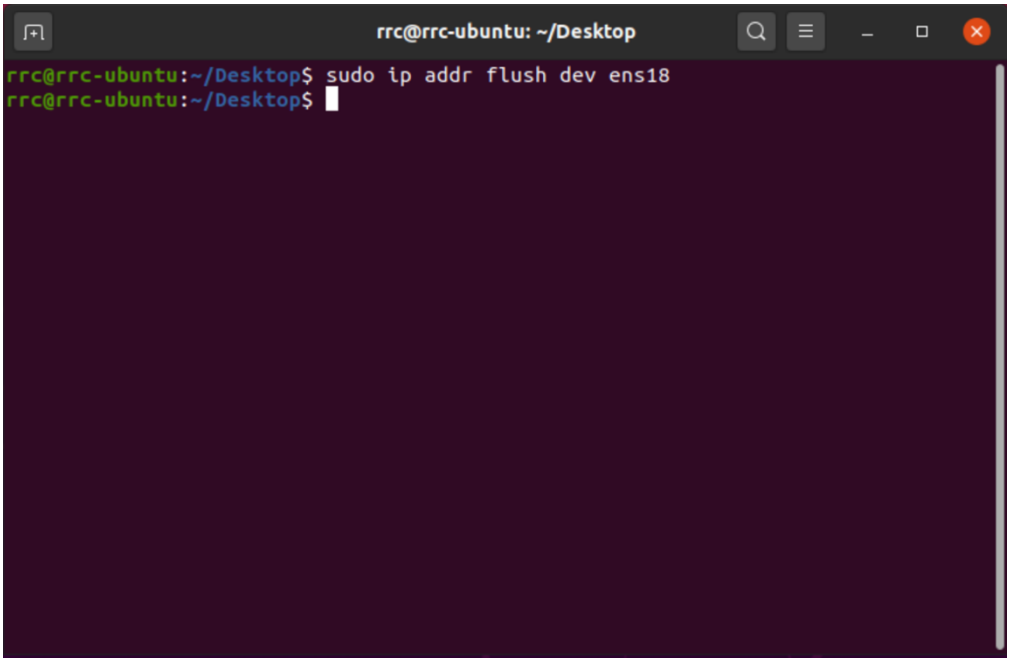

13. You can type the “ping” command that tires sending the signal to the IP address provided.

