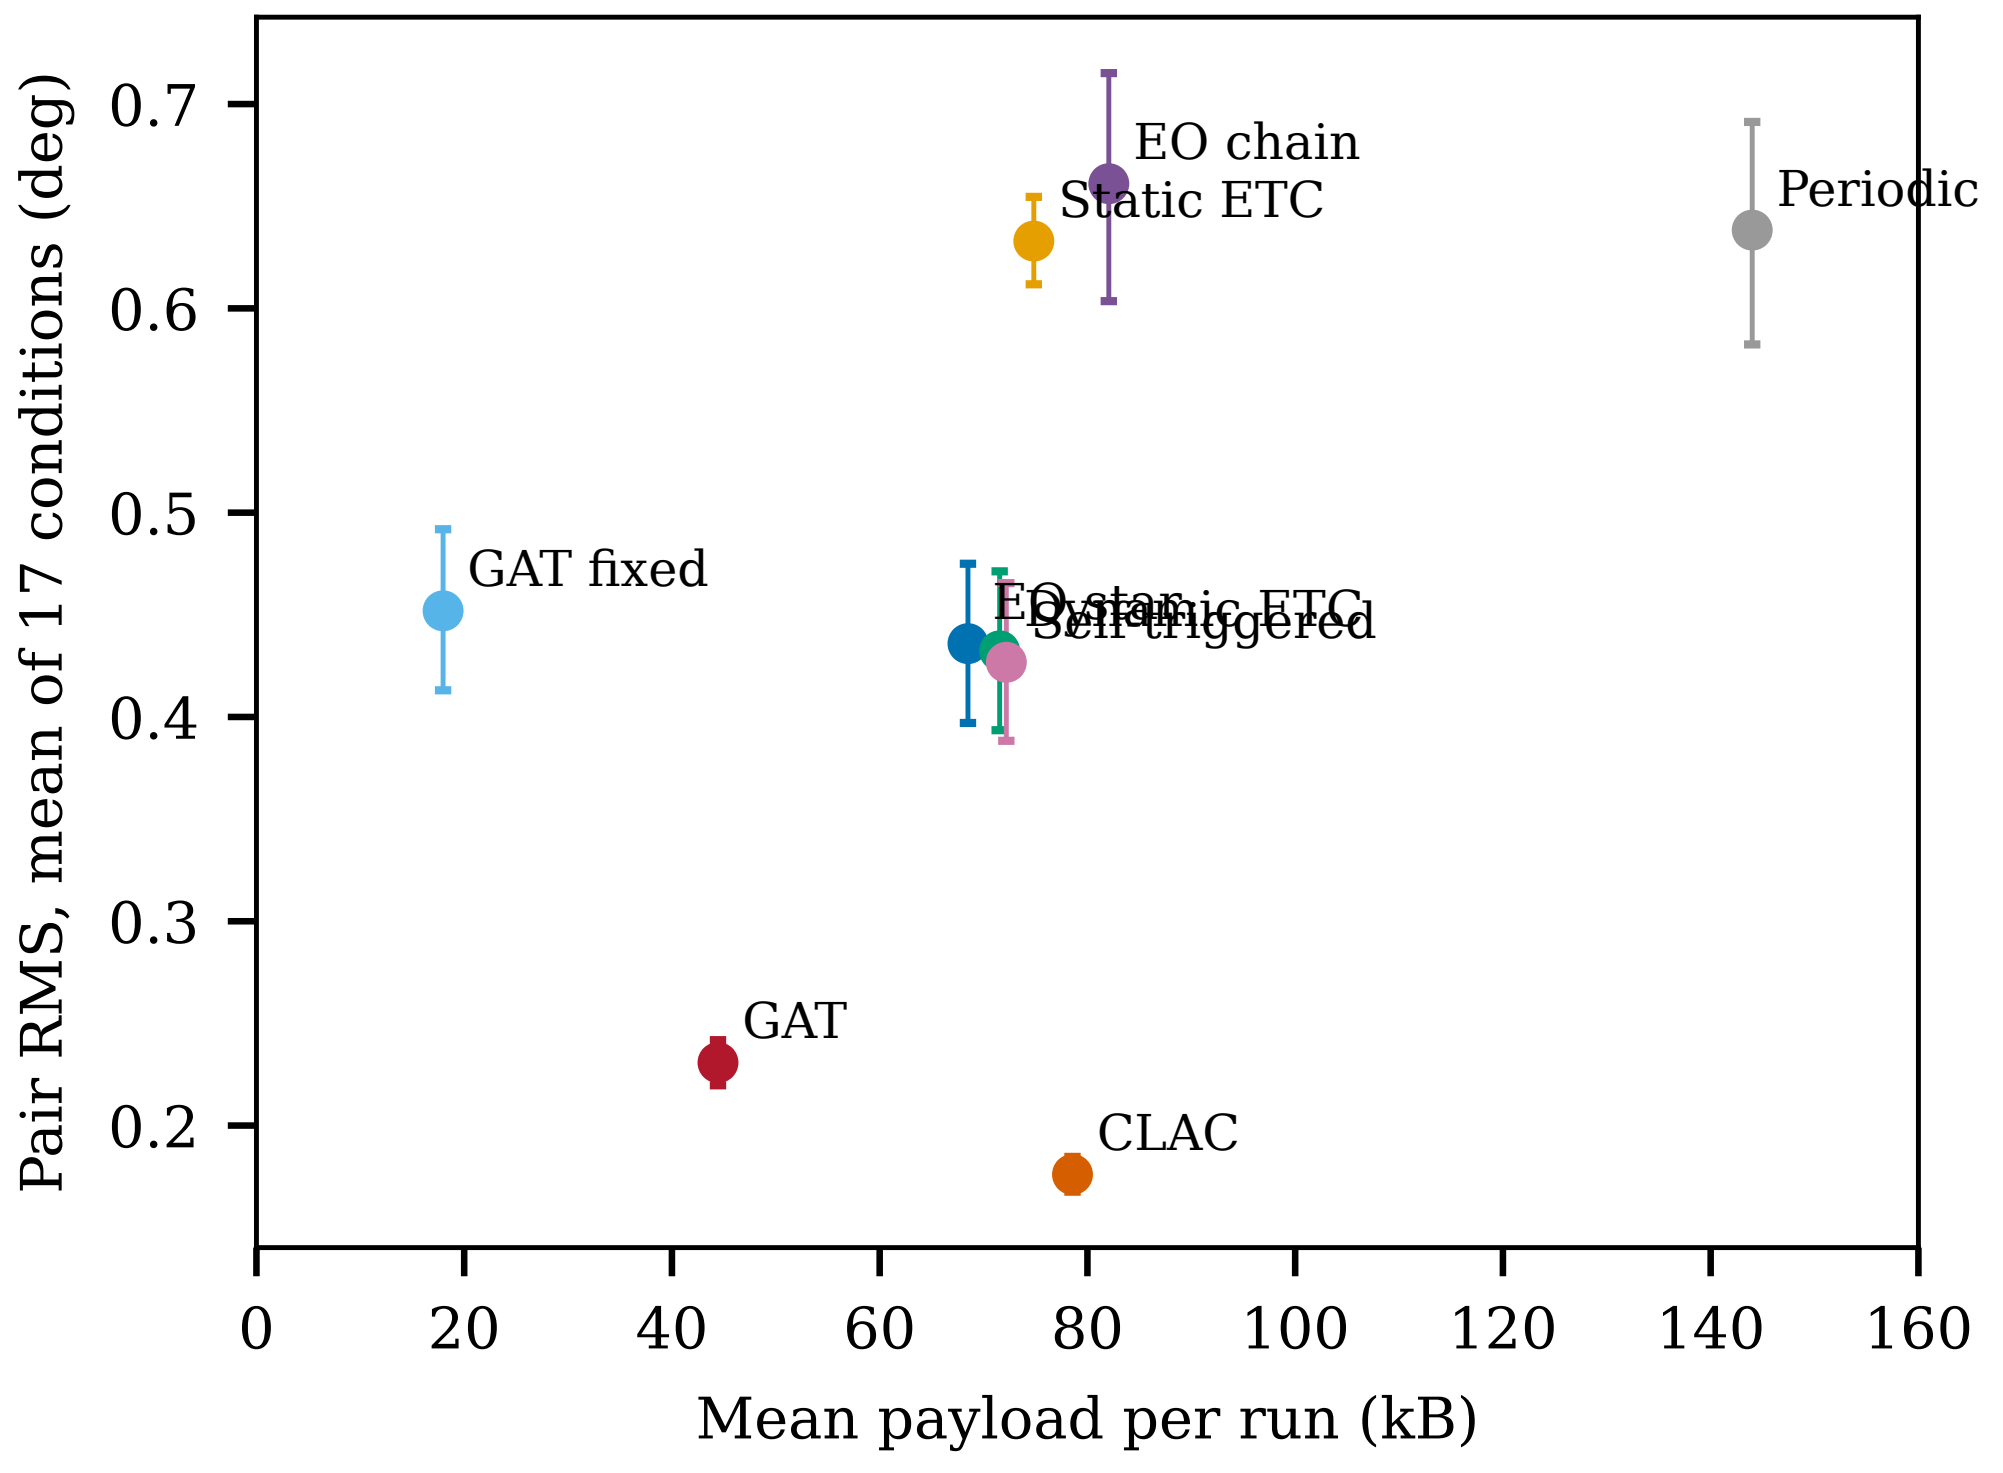
Pair RMS, mean of 17 conditions (deg)
0.7
0.6
0.5
0.4
0.3
0.2
EO chain
Static ETC
Periodic
GAT fixed
EO static ETC
Self-triggered
GAT
CLAC
0
20
40
60
80
100
120
140
160
Mean payload per run (kB)