Kavana

MP_Report

BMS Institute of Technology, Bengaluru

Document Details

Submission ID
trn:oid:::3618:157478483

Submission Date
Nov 6, 2026, 4:04 PM GMT+5:30

Download Date
Nov 6, 2026, 4:05 PM GMT+5:30

File Name
MP_Report_LaTeX (3).pdf

File Size
2.4 MB

55 Pages

9,736 Words

56,864 Characters

*% detected as AI

AI detection includes the possibility of false positives. Although some text in this submission is likely AI generated, scores below the 20% threshold are not surfaced because they have a higher likelihood of false positives.

Caution: Review required.

It is essential to understand the limitations of AI detection before making decisions about a student's work. We encourage you to learn more about Turnitin's AI detection capabilities before using the tool.

Disclaimer

Our AI writing assessment is designed to help educators identify text that might be prepared by a generative AI tool. Our AI writing assessment may not always be accurate (it may misidentify writing that is likely human generated as AI generated and likely AI generated as human generated) so it should not be used as the sole basis for adverse actions against a student. It takes further scrutiny and human judgment in conjunction with an organization's application of its specific academic policies to determine whether any academic misconduct has occurred.

Multi-Modal Stress and Cognitive Workload Assessment



PROJECT REPORT

Submitted by

Group Number: 50

Ikshitha P (1BM23CS118)
Jesvita Dias (1BM23CS126)
Kavana M A (1BM23CS145)
Khushi Nataraj (1BM23CS151)

in partial fulfillment for the award of the degree of

BACHELOR OF ENGINEERING

in

COMPUTER SCIENCE AND ENGINEERING

Under the Guidance of

Dr. Selva Kumar S

Professor & Head, Department of CSE, BMSCE



B.M.S. COLLEGE OF ENGINEERING

(Autonomous Institution under VTU)

BENGALURU - 560019

Academic Year - 2025–2026

Certificate

This is to certify that the project work entitled **"Multi-Modal Stress and Cognitive Workload Assessment"** carried out by **Ikshitha P (1BM23CS118), Jesvita Dias (1BM23CS126), Kavana M A (1BM23CS145) and Khushi Nataraj (1BM23CS151)**, who are bonafide students of B.M.S. College of Engineering, is submitted in partial fulfilment for the award of the degree of **Bachelor of Engineering in Computer Science and Engineering** of the Visvesvaraya Technological University, Belagavi, during the academic year 2025–2026. The project report has been approved as it satisfies the academic requirements in respect of Major Project (23CS6PWPP1) prescribed for the said degree.

Signature of the Guide	Signature of the HOD	Principal Signature
Dr. Selva Kumar S	**Dr. Kavitha Sooda**	**Dr. Bheemsha Arya**
Professor & Head Department of CSE, BMSCE, Bengaluru	Professor & Head Department of CSE, BMSCE, Bengaluru	Professor & Principal BMSCE, Bengaluru

External Viva

Name and signature of Examiners along with date

Examiner 1

Examiner 2

Abstract

Domain. Cognitive workload assessment is central to human–computer interaction, adaptive learning, clinical diagnosis and operator-performance monitoring in safety-critical fields such as aviation and healthcare. Brain-based sensing, in particular electroencephalography (EEG) and functional near-infrared spectroscopy (fNIRS), allows workload to be measured objectively rather than inferred from self-report.

Problem and research gap. Existing practice relies on subjective questionnaires and behavioural analysis, which are biased and cannot be applied continuously. Single-modality EEG systems are sensitive to eye-blink and muscle artefacts and carry no haemodynamic information, while single-modality fNIRS responds slowly. Prior EEG–fNIRS studies often use classical classifiers or subject-dependent evaluation, so their reported accuracy says little about how a model behaves on a person it has never seen. Few studies compare fusion strategies under strict subject-independent evaluation.

Proposed solution. This project develops a multimodal deep-learning framework that fuses EEG and fNIRS to classify cognitive workload as LOW (0-back) or HIGH (2-back, 3-back). EEG is encoded by a CNN–BiLSTM with temporal attention pooling, fNIRS (HbO and HbR) by a temporal CNN, and the two 128-dimensional representations are fused before classification.

Implementation. The public TU Berlin simultaneous EEG–fNIRS n-back dataset (24 subjects, 648 paired 42-second epochs) was band-pass filtered, mean-removed, common-average referenced (EEG) and baseline-corrected (fNIRS). Models were implemented in PyTorch with MNE-Python and scikit-learn, trained with class-weighted cross-entropy, and evaluated with a strict 24-fold Leave-One-Subject-Out (LOSO) protocol using a separate validation subject; all normalisation statistics came from training subjects only.

Results and conclusion. On unseen subjects the final representation-level model achieved 66.36% accuracy, 57.70% Macro-F1 and 0.7842 ROC-AUC, improving on EEG-only and fNIRS-only baselines. Simple 50:50 decision-level fusion gave the best Macro-F1 (62.26%). These scores are lower than many published figures, mainly because of strict subject-independent evaluation, a small sample and class imbalance. The work provides a leakage-safe benchmark of fusion strategies and a basis for future real-time brain–computer interface applications.

DECLARATION

We, hereby declare that the Major Project Phase-2 work entitled **"Multi-Modal Stress and Cognitive Workload Assessment"** is a bonafide work and has been carried out by us under the guidance of Dr. Selva Kumar S, Professor & Head, Department of Computer Science and Engineering, B.M.S. College of Engineering, Bengaluru, in partial fulfillment of the requirements of the degree of Bachelor of Engineering in Computer Science and Engineering of Visvesvaraya Technological University, Belagavi. We further declare that, to the best of our knowledge and belief, this project has not been submitted either in part or in full to any other university for the award of any degree.

Candidate details:

Sl. No.	Student Name	USN	Student's Signature
1	Ikshitha P	1BM23CS118	
2	Jesvita Dias	1BM23CS126	
3	Kavana M A	1BM23CS145	
4	Khushi Nataraj	1BM23CS151	

Place: Bengaluru **Date:** _____

Certified that these candidates are students of the Computer Science and Engineering Department of B.M.S. College of Engineering. They have carried out the project work titled "Multi-Modal Stress and Cognitive Workload Assessment" as Major Project Phase-2 work, in partial fulfilment of the requirement for the award of the B.E. degree by VTU. The work is original and duly certified.

Guide Name: Dr. Selva Kumar S **Date:** _____

Signature:

Acknowledgment

We would like to express our deepest gratitude to Dr. Bheemsha Arya, Principal of B.M.S. College of Engineering, and Dr. Kavitha Sooda, Head of the Department of Computer Science and Engineering, for providing the facilities and an enabling atmosphere for research and development.

We thank Dr. Selva Kumar S, Professor & Head of the Department of Computer Science and Engineering, BMS College of Engineering, for his valuable inputs throughout the project. His expertise in deep learning, brain-signal analysis and intelligent healthcare systems played an important role in the success of this study.

Lastly, we acknowledge the contribution of the other faculty and staff members of the Department of Computer Science and Engineering in developing this project.

Contents

1 Introduction **1**
1.1 Background of the Study . . . 1
1.2 Research Motivation . . . 1
1.3 Objective . . . 1
1.4 Scope . . . 2
1.5 SDG Justification . . . 2
1.6 Existing System . . . 2
1.7 Proposed System . . . 3
1.8 Work Plan . . . 3

2 Literature Survey **6**
2.1 Overview . . . 6
2.2 Detailed Survey . . . 6
2.2.1 EEG-based workload assessment . . . 6
2.2.2 fNIRS-based workload assessment . . . 6
2.2.3 Multimodal EEG–fNIRS fusion . . . 7
2.2.4 Sequence models, attention and tools . . . 7
2.2.5 Datasets . . . 7
2.2.6 Comparative analysis of the referred papers . . . 7
2.3 Research Gaps . . . 9
2.4 Mapping of Project Objectives with Research Gaps . . . 10

3 Requirement Analysis and Specification **12**
3.1 Stakeholders . . . 12
3.2 Functional Requirements . . . 12
3.3 Non-Functional Requirements . . . 13
3.4 System Requirements . . . 13
3.4.1 Hardware . . . 13
3.4.2 Software . . . 14
3.4.3 Cost estimation . . . 14
3.5 Data Requirements . . . 14
3.6 Constraints and Limitations . . . 14

3.7 Assumptions . . . 14
3.8 Risks and Challenges . . . 15

4 Designs **16**
4.1 System Architecture Overview . . . 16
4.2 Module/Component Design . . . 17
4.3 Detailed Design . . . 19
4.3.1 Use-case design . . . 19
4.3.2 Class design . . . 20
4.3.3 Sequence design . . . 21
4.4 Data Design . . . 22

5 Methodology **23**
5.1 Tools and Techniques . . . 23
5.2 Data Set with Explanation . . . 23
5.3 Flowchart of Methodology from Start to End . . . 24
5.4 Explanation of Methodology in Detail with Equations and Formulae . . . 26
5.4.1 Preprocessing . . . 26
5.4.2 Evaluation protocol and normalisation . . . 26
5.4.3 EEG branch: CNN–BiLSTM with temporal attention . . . 27
5.4.4 fNIRS branch: temporal CNN . . . 28
5.4.5 Representation-level fusion and classifier . . . 28
5.4.6 Decision-level fusion (comparison) . . . 29
5.4.7 Loss and training . . . 29
5.4.8 Evaluation metrics . . . 29

6 Results and Discussion **31**
6.1 Presentation of Results . . . 31
6.1.1 Comparison with reference models . . . 31
6.1.2 Best result among fusion variants . . . 32
6.1.3 Comparison with existing literature . . . 32
6.1.4 Why our results differ from published results . . . 32
6.1.5 How the gap can be narrowed . . . 33
6.2 Limitations of the Study . . . 33
6.3 Conclusion . . . 34

7 Conclusion **35**
7.1 Summary . . . 35
7.2 Conclusion . . . 35
7.3 Future Work . . . 35

REFERENCES **37**

Plagiarism **39**

A Snapshots **40**

B Details of List of Publications Related to this Project **41**

C Details of Patent **42**

D Details of Funding **43**

E POs and PSOs Mapped **44**

F Similarity Report and AI-Generated Report **45**

List of Figures

4.1 High-level design of multimodal signal processing, fusion and workload classification 16
4.2 System architecture of the proposed system 17
4.3 Use case diagram 19
4.4 Class diagram 20
4.5 Sequence diagram of the offline LOSO pipeline 21

5.1 Raw input data to preprocessed epochs 24
5.2 Final LOSO model: representation-level EEG–fNIRS fusion 25
5.3 EEG branch: CNN-BiLSTM with temporal attention pooling 27
5.4 fNIRS branch: temporal CNN 28

List of Tables

1.1 Technical implementation summary 3
1.2 Work plan 4

2.1 Comparative analysis of referred literature 7
2.2 Comparison with representative multimodal studies 10
2.3 Gap mapping 10

4.1 Module design 17
4.1 Module design 18

5.1 Dataset summary 23
5.2 Final model training settings 29

6.1 24-fold LOSO performance of the final model 31
6.2 Final model versus unimodal and baseline fusion references 31
6.3 Main fusion configurations (24-fold LOSO) 32
6.4 Evaluation choices that affect comparability 32

E.1 Programme outcomes mapping 44

iThenticate Page 13 of 57 - AI Writing Submission Submission ID trn:oid:::3618:157478483

Chapter 1 Introduction

1.1 Background of the Study

Modern work and study environments place a heavy load on human attention and memory. When demands exceed capacity, performance and psychological well-being suffer. *Cognitive workload* is the mental effort a person invests to meet task demands, and measuring it objectively is useful in education, healthcare, aviation, driving and human–machine systems.

Two non-invasive brain-sensing technologies are widely used. **Electroencephalography (EEG)** records the brain's electrical activity at millisecond resolution [1, 2]. **Functional Near-Infrared Spectroscopy (fNIRS)** uses near-infrared light to track changes in oxygenated (HbO) and deoxygenated (HbR) haemoglobin, a slow metabolic response linked to neural activity [3, 9]. This project combines both with hybrid neural networks [4, 5, 6] to learn the relationship between fast neuro-electrical activity and the slower haemodynamic response, and uses it to classify workload on unseen subjects.

1.2 Research Motivation

- **Artefact sensitivity:** EEG-only systems are strongly affected by eye-blink and muscle artefacts [7, 8], which lowers the signal-to-noise ratio (SNR) until brain activity is hard to separate from movement.
- **Latent fatigue detection:** Mental fatigue has a metabolic component. EEG captures immediate attentional change but not the cost of prolonged effort; fNIRS adds the haemodynamic information [3, 9] needed to detect fatigue before it causes errors.
- **Generalisation:** Many published systems are tuned per person. A model that works on new users without calibration is far more practical [15, 17].

1.3 Objective

The goal is a hardware-agnostic software framework that classifies mental workload from EEG and fNIRS more reliably than unimodal frameworks. The specific objectives are:

1. Build a pipeline that pairs millisecond-level EEG with second-level fNIRS using task event markers (TTL/software triggers in future acquisition).
2. Use standardised workload paradigms (N-back; Stroop and Corsi Block planned with PsychoPy [10]) that produce measurable changes in working memory and inhibitory control [11, 12].

iThenticate Page 13 of 57 - AI Writing Submission Submission ID trn:oid:::3618:157478483

3. Design CNN–BiLSTM–attention encoders and compare unimodal, decision-level and representation-level fusion.

4. Establish Macro-F1, Accuracy and ROC-AUC benchmarks under subject-independent (LOSO) evaluation [13, 14].

1.4 Scope

This phase covers computational modelling and comparative analysis. Because fNIRS hardware is expensive and unavailable, the scope is:

- **Secondary data analysis** using the public TU Berlin simultaneous EEG–fNIRS n-back dataset [15, 16].
- **Subject-independent training and evaluation** on completely unseen subjects, to reduce calibration needs [2, 5].
- **Binary classification** (LOW vs HIGH workload). Three-state classification, real-time acquisition, dashboard and API integration are outside this phase (see Chapter 7).
- **A PsychoPy set-up** [10] prepared as a plug-and-play environment for future hardware work.

1.5 SDG Justification

SDG 3 – Good Health and Well-being. Workload, stress and fatigue monitoring can support preventive care in high-stress settings such as healthcare, aviation and emergency response.

SDG 9 – Industry, Innovation and Infrastructure. The work advances AI, deep learning and brain–computer interfaces, and contributes to infrastructure for cognitive analytics.

SDG 17 – Partnerships for the Goals. It relies on open datasets, open-source tools and cross-disciplinary collaboration between neuroscience, biomedical engineering and AI.

1.6 Existing System

Current approaches use subjective questionnaires and behavioural measures, or single/multi-channel EEG with classical classifiers such as SVM and LDA [13]. Their limitations are:

- EEG cannot localise activity in the dorsolateral prefrontal cortex (dlPFC) and misses the metabolic cost of sustained effort.
- Questionnaires are biased and cannot run continuously [1].

- Fixed thresholds ignore inter-subject variability, giving poor generalisation [2, 17].
- Classical classifiers need hand-crafted features and cannot learn cross-modal relationships [13, 23].

1.7 Proposed System

The proposed system is a multimodal deep-learning pipeline with the following levels.

- **Data level:** paired EEG (electrical) and fNIRS (metabolic) epochs from the TU Berlin dataset.
- **Processing level:** band-pass filtering, mean/baseline removal and common-average referencing. ICA [8] and the Modified Beer–Lambert Law [18] belong to a full raw-data pipeline and are not applied to the already-converted dataset.
- **Feature/fusion level:** a CNN extracts local patterns from EEG [6], a BiLSTM models long-range dependencies [19], temporal attention [21] weights informative time steps, and a temporal CNN encodes fNIRS; the learned representations are fused.
- **Classification level:** Softmax output for LOW/HIGH, extendable to Rest, Optimal Flow and Cognitive Saturation.

Component	Technical implementation
Experimental tool	PsychoPy [10] for millisecond-accurate stimulation (future acquisition)
Cognitive tasks	N-back (used in dataset); Stroop and Corsi Block (planned)
Synchronisation	Event-marker (TTL-style) alignment of different sampling rates
Features	EEG: learned temporal representations (PSD/band power planned [14]); fNIRS: HbO, HbR
Model	CNN–BiLSTM with attention for EEG; temporal CNN for fNIRS; fusion MLP
Evaluation	Macro-F1 (primary), Accuracy, ROC-AUC, confusion matrix

Table 1.1: Technical implementation summary

1.8 Work Plan

The project ran in two phases over the academic year 2025–26: Phase-1 (study, design, dataset selection) and Phase-2 (implementation, experiments, analysis, documentation). Table 1.2 lists the activities, the deliverable of each and its status. **[Replace the week ranges with your actual calendar dates.]**

Table 1.2: Work plan

Sl.	Activity	Timeline	Deliverable / outcome	Status
1	Problem definition, literature survey of 26 references	Phase-1, Weeks 1–4	Research gaps and objective mapping (Ch. 2)	Completed
2	Requirement analysis, feasibility, tool selection	Phase-1, Weeks 4–6	SRS, tool-chain, cost estimate (Ch. 3)	Completed
3	Dataset selection (TU Berlin EEG–fNIRS n-back) and study of recording protocol	Phase-1, Weeks 6–8	Dataset summary, labelling rule (0-back $\rightarrow$ LOW; 2/3-back $\rightarrow$ HIGH)	Completed
4	System design: architecture, modules, use case, class and sequence design	Phase-1, Weeks 8–10	Design documents (Ch. 4)	Completed
5	Preprocessing and epoching (filtering, CAR, baseline removal)	Phase-2, Weeks 1–3	648 paired epochs: EEG 28×8400, fNIRS $36 \times 420 \times 2$	Completed
6	LOSO framework and leakage-safe normalisation	Phase-2, Weeks 3–4	24-fold split (22/1/1 subjects)	Completed
7	Unimodal EEG (CNN–BiLSTM) and fNIRS (CNN) baselines	Phase-2, Weeks 4–6	Baseline metrics (Table 6.2)	Completed
8	Fusion models: representation-level, decision-level (50:50, thresholded), learned and logistic fusion	Phase-2, Weeks 6–9	Comparison of fusion variants (Table 6.3)	Completed

Sl.	Activity	Timeline	Deliverable / outcome	Status
9	Temporal attention for EEG, hyper-parameter and dropout selection	Phase-2, Weeks 8–10	Final model	Completed
10	Result analysis, comparison with literature, error analysis	Phase-2, Weeks 10–12	Chapter 6	Completed
11	Report writing, review corrections, similarity check	Phase-2, Weeks 12–14	Final report	Completed
12	Hybrid features, LOW-class recall, calibration, ICA/motion correction, three-state classification	Next phase	Improved Macro-F1 (target ≥ 0.80)	Future work
13	Real-time acquisition with PsychoPy and hardware, dashboard and API integration	Next phase	Real-time prototype ($<$ 200 ms latency)	Future work

iThenticate Page 18 of 57 - AI Writing Submission Submission ID trn:oid:::3618:157478483

Chapter 2 Literature Survey

2.1 Overview

Cognitive Workload Assessment (CWA) has grown within neuroscience, biomedical engineering and AI because intelligent systems increasingly need real-time monitoring of cognitive state. Workload was traditionally measured with questionnaires and performance measures, which are useful but subjective and not continuous. Researchers therefore moved to physiological sensing.

EEG offers high temporal resolution and reflects attention, memory and stress through theta, alpha and beta activity [1, 2, 11, 14], but it is corrupted by blinks, muscle activity and movement [7, 8]. fNIRS measures haemodynamic changes (HbO/HbR) in the prefrontal cortex, giving metabolic information and better localisation [3, 9], but is slow. Combining them exploits neurovascular coupling and improves robustness [1, 2, 3]. Deep models (CNN, LSTM, CNN–LSTM) now extract spatio-temporal features from such data [4, 5, 6, 19], and attention-based fusion is emerging [21, 22].

2.2 Detailed Survey

2.2.1 EEG-based workload assessment

Gevins and Smith [11] showed that EEG spectral activity tracks workload and attention, which established theta and alpha bands as workload indicators. Welch's method [14] for power spectral density (PSD) became the standard frequency-domain tool. Gramfort et al. [7] released MNE-Python for filtering, epoching and artefact visualisation, and Hyvärinen and Oja [8] introduced ICA to separate neural signals from ocular and muscle artefacts. LeCun et al. [6] laid the foundation for CNN-based hierarchical feature learning. Kingphai and Moshfeghi [20] showed that deep networks outperform traditional machine learning for EEG workload prediction, and a review of deep approaches [5] highlights CNN, RNN and hybrid models. Sharma and Gupta [17] studied correlation-based channel selection for EEG workload classification.

2.2.2 fNIRS-based workload assessment

Ayaz et al. [3] used optical brain monitoring for operator training and found prefrontal HbO changes correlate with workload. Boas et al. [18] described diffuse optical tomography and the Modified Beer–Lambert Law that converts optical density into haemoglobin concentration. Abibullaev and An [13] classified workloads from fNIRS using wavelet features and SVM, confirming the value of HbO/HbR. Ho et al. [25] applied deep learning to multi-channel fNIRS

iThenticate Page 18 of 57 - AI Writing Submission Submission ID trn:oid:::3618:157478483

to discriminate workload levels, and a Frontiers study [9] reinforced fNIRS as an indicator of sustained mental workload. Vourvopoulos and Liarokapis [24] linked cognitive load during an emergency simulation game to prefrontal activation measured by fNIRS.

2.2.3 Multimodal EEG–fNIRS fusion

Hirachan et al. [1] built a multimodal sensing system showing improved robustness. Putze et al. [2] reviewed fusion techniques and reported that EEG–fNIRS fusion outperforms single modalities. Khan and Hasan [4] used a CNN–LSTM with decision-level fusion to classify cognitive tasks. Al-Shargie et al. [23] applied decision-level fusion to stress assessment with fewer errors. Asif et al. presented CLARE [22], a real-time multimodal load-assessment framework, and a further multimodal EEG–fNIRS study is listed as [26].

2.2.4 Sequence models, attention and tools

Hochreiter and Schmidhuber [19] introduced LSTM networks that learn long-term temporal dependencies. Vaswani et al. [21] introduced attention, now used for cross-modal fusion. Peirce [10] developed PsychoPy for millisecond-accurate experiment timing, and the defence-science study [12] used standardised tasks such as N-back with neurophysiological signals to measure load.

2.2.5 Datasets

Jo et al. [15] released MOCAS, a multimodal dataset for workload on simultaneous tasks, and Shin et al. [16] released the simultaneous EEG–NIRS open dataset on which this project is built. Such datasets make subject-independent evaluation possible.

2.2.6 Comparative analysis of the referred papers

Table 2.1 compares every paper cited in this report. The "limitation" column states what the work does not address relative to this project's aim of subject-independent, fusion-comparison evaluation.

Table 2.1: Comparative analysis of referred literature

Ref	Authors, year	Modality / type	Method and key finding	Limitation / difference from this work
[1]	Hirachan et al., 2022	EEG + fNIRS sensors	Multimodal workload measurement; better robustness and reliability	No controlled comparison of fusion strategies under LOSO

Ref	Authors, year	Modality / type	Method and key finding	Limitation / difference from this work
[2]	Putze et al., 2020	Review (multi-modal)	EEG–fNIRS fusion outperforms single modality; discusses calibration issues	Review only; no experiments on a common protocol
[3]	Ayaz et al., 2012	fNIRS	Prefrontal HbO rises with workload; operator training	Single modality, slow response, no deep model
[4]	Khan and Hasan, 2023	EEG + fNIRS	CNN–LSTM with decision-level fusion for cognitive tasks	Different tasks; subject independence and per-class recall not the focus
[5]	Review, PMC, 2024	EEG (deep learning review)	CNN, RNN and hybrids extract workload features effectively	Survey; no fNIRS fusion experiment
[6]	LeCun et al., 2015	Deep learning theory	Hierarchical feature learning with CNNs	General theory, not workload-specific
[7]	Gramfort et al., 2014	EEG/MEG software	MNE: filtering, epoching, visualisation	Tool, not a classifier
[8]	Hyvärinen and Oja, 2000	Signal processing	ICA separates neural activity from EOG/EMG artefacts	Needs raw data; not applied in this project's dataset pipeline
[9]	Frontiers Hum. Neurosci., 2022	fNIRS	fNIRS-based workload assessment through haemodynamics	Single modality
[10]	Peirce, 2007	Experiment software	PsychoPy, millisecond-precise stimulus timing	Stimulus delivery only; used here for planned acquisition
[11]	Gevins and Smith, 2003	EEG	Spectral EEG indices track workload; theta/alpha bands	No fNIRS or deep fusion
[12]	Defence Life Sci. J., 2020	Neurophysiological signals	Standardised tasks such as N-back for workload	Descriptive; no multimodal deep learning
[13]	Abibullaev and An, 2012	fNIRS	Wavelet features + SVM; HbO/HbR informative	Classical classifier, handcrafted features, no EEG
[14]	Welch, 1967	Spectral analysis	PSD estimation via averaged FFT	Planned as future hybrid feature
[15]	Jo et al., 2025	Dataset (MOCAS)	Multimodal data for objective workload on simultaneous tasks	Dataset paper; shows poor cross-subject generalisability
[16]	Shin et al., 2018	Dataset (EEG + NIRS)	Open simultaneous n-back data; used in this project	Small number of subjects and blocks
[17]	Sharma and Gupta, 2025	EEG	Correlation-based channel selection for workload	EEG only; channel selection not used here

Ref	Authors, year	Modality / type	Method and key finding	Limitation / difference from this work
[18]	Boas et al., 2004	fNIRS physics	Diffuse optical tomography; Modified Beer–Lambert Law	Theory; dataset already provides HbO/HbR
[19]	Hochreiter and Schmidhuber, 1997	Sequence model	LSTM learns long-term dependencies	Generic; BiLSTM variant used for EEG here
[20]	Kingphai and Moshfeghi, 2024	EEG	Deep models beat traditional ML for workload	EEG only, no haemodynamic information
[21]	Vaswani et al., 2017	Attention	Attention and transformers; basis of cross-modal fusion	NLP origin; adapted as temporal attention pooling
[22]	Asif et al. (CLARE), 2025	Multimodal, real time	Real-time load assessment, decision-level learning	Real-time focus; ours is offline with real-time as future work
[23]	Al-Shargie et al., 2017	EEG + fNIRS	Decision-level fusion lowers error in stress assessment	Stress task; classical features
[24]	Vourvopoulos and Liarokapis, 2022	fNIRS	Cognitive load in emergency game linked to prefrontal activation	Single modality, game-based task
[25]	Ho et al., 2019	fNIRS (multi-channel)	Deep learning for workload levels	Single modality; no EEG fusion
[26]	IEEE Xplore, 2024	EEG + fNIRS	Multimodal workload assessment with fusion	Details to be confirmed from source; fusion not compared under LOSO

Observations. (i) By modality, EEG papers [11, 17, 20] give temporal detail but are artefact-prone, fNIRS papers [3, 13, 25] give metabolic information but respond slowly, and the multimodal papers [1, 2, 4, 22, 23, 26] report that fusion helps. (ii) By technique, older work uses SVM/LDA with handcrafted features [13, 23], newer work uses CNN/LSTM [4, 20, 25], and attention is still rarely used for EEG–fNIRS [21]. (iii) By fusion level, most fusion studies use decision-level fusion [4, 23, 22]; representation-level fusion with attention is less explored. (iv) By evaluation, the cited works rarely stress strict leave-one-subject-out testing with a separate validation subject, and the dataset papers [15, 17] note poor cross-subject generalisation.

Table 2.2 places this work against the main multimodal studies.

2.3 Research Gaps

- **Artefact sensitivity of EEG:** low SNR and EOG/EMG/movement corruption [7, 8].

	[1]	[4]	[23]	**This work**
Modality	EEG+fNIRS	EEG+fNIRS	EEG+fNIRS	EEG+fNIRS
Classifier	Multimodal system	CNN–LSTM	Decision fusion	CNN–BiLSTM + attention, CNN
Fusion level	Sensor level	Decision	Decision	Representation and decision (compared)
Task	Workload	Cognitive tasks	Stress	n-back workload
Attention	No	No	No	Temporal attention
Evaluation	Not LOSO-focused	Not LOSO-focused	Not LOSO-focused	24-fold LOSO + validation subject

Table 2.2: Comparison with representative multimodal studies

- **No metabolic information in unimodal systems** [3, 9].
- **Time alignment:** millisecond EEG versus second-scale fNIRS [1, 2].
- **Reliance on classical ML** requiring feature engineering [13, 23].
- **Poor cross-subject generalisation** [15, 17].
- **Mostly offline studies;** little real-time monitoring [22].
- **Limited attention-based multimodal fusion** in a subject-independent setting [21].
- **Few scalable, hardware-independent frameworks** for medical, educational and practical use [2, 22].

2.4 Mapping of Project Objectives with Research Gaps

Table 2.3: Gap mapping

Research gap	**Proposed objective**
Artefacts (EOG, EMG, motion) in EEG [7, 8]	Preprocessing pipeline with filtering, referencing and baseline/mean removal (ICA planned)
No metabolic measurement in unimodal systems [3, 9]	Combine EEG and fNIRS (HbO/HbR)
Alignment of EEG and fNIRS [1, 2]	Event-marker alignment into 42-second paired epochs

Classical ML, manual features [13, 23]	Deep CNN and BiLSTM encoders with fusion
Generalisation across subjects [15, 17]	Public dataset with Leave-One-Subject-Out evaluation
Offline-only studies [22]	Offline evaluation now; architecture designed for later real-time use
Little attention-based fusion [21]	Temporal attention in the EEG encoder inside representation-level fusion
Hardware-dependent, unscalable systems [2, 22]	Software-based, hardware-agnostic framework

iThenticate Page 24 of 57 - AI Writing Submission Submission ID trn:oid:::3618:157478483

Chapter 3 Requirement Analysis and Specification

3.1 Stakeholders

Stakeholder	Interest
Researcher / administrator	Loads data, runs experiments, reads metrics and reports
Subject / user	Provides EEG–fNIRS data; benefits from workload feedback (future real-time system)
Guide and evaluators	Review technical soundness and reproducibility
Application developers	Future consumers of workload predictions via API
Domain users (education, healthcare, aviation)	Beneficiaries of workload monitoring

3.2 Functional Requirements

- **FR1 Data acquisition:** load multi-channel EEG and fNIRS (HbO/HbR) recordings and event markers.
- **FR2 Preprocessing:** EEG band-pass 0.5–45 Hz, channel mean removal, common-average reference; fNIRS band-pass 0.01–0.5 Hz, baseline and residual mean removal.
- **FR3 Epoching and labelling:** cut 42-second epochs from task markers; label 0-back as LOW and 2/3-back as HIGH.
- **FR4 Splitting and normalisation:** create LOSO folds (22 train, 1 validation, 1 test subject); compute normalisation from training subjects only.
- **FR5 Representation learning:** produce 128-D EEG and 128-D fNIRS features with CNN-based encoders.
- **FR6 Fusion and classification:** fuse the representations and output LOW/HIGH with probabilities.
- **FR7 Evaluation:** report Accuracy, Macro-Precision/Recall/F1, ROC-AUC and confusion matrices per fold and pooled.

iThenticate Page 24 of 57 - AI Writing Submission Submission ID trn:oid:::3618:157478483

- **FR8 (future)** Hybrid features (PSD, HbO/HbR statistics), three-state output, real-time streaming.

3.3 Non-Functional Requirements

- **Accuracy:** maximise Macro-F1 under subject-independent testing. The initial target $F1 \geq 0.80$ was not reached in this phase (achieved ≈ 0.58).
- **Latency (future):** classification in under 200 ms for real-time feedback [22].
- **Scalability and portability:** hardware-agnostic (OpenBCI, Muse, g.tec).
- **Robustness:** tolerate non-stationary signals [7].
- **Subject independence:** no information from the test subject may be used for normalisation, tuning or model selection.
- **Reproducibility:** identical preprocessing, 24-fold LOSO and random seed 42 for all experiments.

3.4 System Requirements

3.4.1 Hardware

Component	Specification	Reason
CPU	Intel Core i7 (12th gen)	Multi-threaded epoch processing
GPU	NVIDIA RTX 3060 (6 GB) or better; Colab/Kaggle optional	Faster CNN–BiLSTM training over 24 folds; code runs on CPU or GPU automatically
RAM	16 GB DDR4 minimum	Holds 648 epochs (EEG 28×8400, fNIRS $36 \times 420 \times 2$)
Storage	512 GB SSD	Dataset, checkpoints and per-fold results
EEG sensor (future)	Dry electrodes, 8–16 channels	Real-time deployment; not used now
fNIRS sensor (future)	Dual-wavelength NIR source/detector	HbO/HbR from prefrontal cortex; not used now

3.4.2 Software

OS: Windows 10/11 or Ubuntu 20.04 (recommended). Python 3.9+. PyTorch (CNN, BiLSTM, attention, fusion; class-weighted cross-entropy, Adam, ReduceLROnPlateau [6]). MNE-Python for loading, filtering, epoching and visualisation [7]. NumPy/SciPy/Pandas for filtering and tables. scikit-learn for metrics. PsychoPy for planned n-back/Stroop paradigms [10].

3.4.3 Cost estimation

All items (laptop/PC, open dataset, open-source software, free Colab/Kaggle, storage) are available at no cost: total **NIL**.

3.5 Data Requirements

Simultaneous EEG (28 channels, 200 Hz) and fNIRS (36 channels, 10 Hz, HbO and HbR) from the same subjects, with markers identifying 0-, 2- and 3-back blocks; at least 20 subjects so a subject-independent split is meaningful; labelled task conditions. The TU Berlin dataset [16] satisfies these (Section 5.2).

3.6 Constraints and Limitations

No fNIRS hardware is available, so only secondary data is used. Only 24 subjects and 27 epochs per subject exist. Training is limited to 12 epochs and runs on CPU/GPU chosen automatically, so extensive hyper-parameter search is not feasible. Labels are task conditions, not each person's measured effort.

3.7 Assumptions

(i) The public dataset is correctly synchronised and labelled. (ii) Task condition is a valid proxy for workload (0-back low, 2/3-back high). (iii) The subjects are representative enough for subject-independent evaluation. (iv) Results from this offline study indicate behaviour in a later real-time system.

3.8 Risks and Challenges

Risk	Mitigation
Overfitting with 22 training subjects	Simple fNIRS CNN, dropout, early stopping
Class imbalance (216 LOW : 432 HIGH)	Class-weighted loss; Macro-F1 as primary metric
Information leakage	Normalisation from training subjects only; separate validation subject
High inter-subject variability	Report mean $\pm$ SD and pooled results; avoid over-interpreting 1–2 point gaps
Noisy EEG	Filtering and referencing now; ICA planned
Unreliable tuning on a single validation subject	Fixed small search space; multi-seed runs planned

Chapter 4 Designs

4.1 System Architecture Overview

The system is organised in layers (Figures 4.1 and 4.2). The **input layer** supplies EEG, fNIRS and task events. The **preprocessing and synchronisation layer** cleans each modality and aligns them by event markers. The **feature/representation layer** turns each modality into a 128-D vector (learned in the implemented system; spectral and haemodynamic statistics in the full design). The **fusion layer** combines the two vectors. The **classification layer** (fully connected, dropout, softmax) outputs LOW/HIGH with confidence. The **training layer** (loss, optimiser, scheduler, validation) and **evaluation layer** (metrics) close the loop, and the **output layer** (dashboard, reports, API) is reserved for future real-time use.

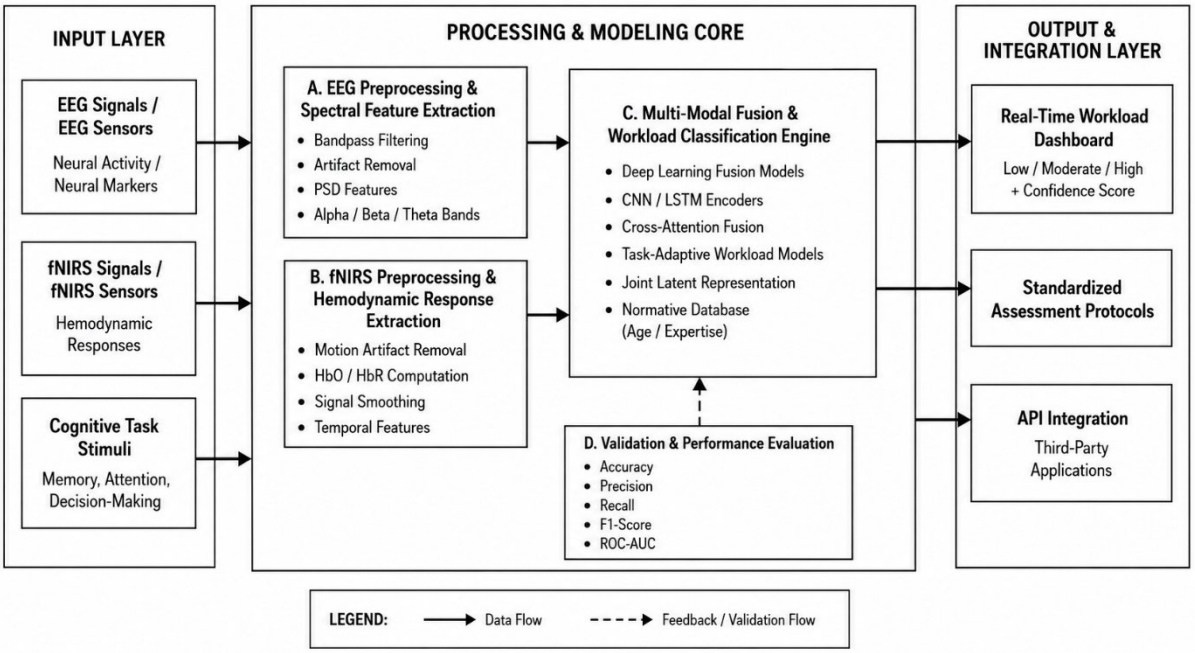


Figure 4.1: High-level design of multimodal signal processing, fusion and workload classification

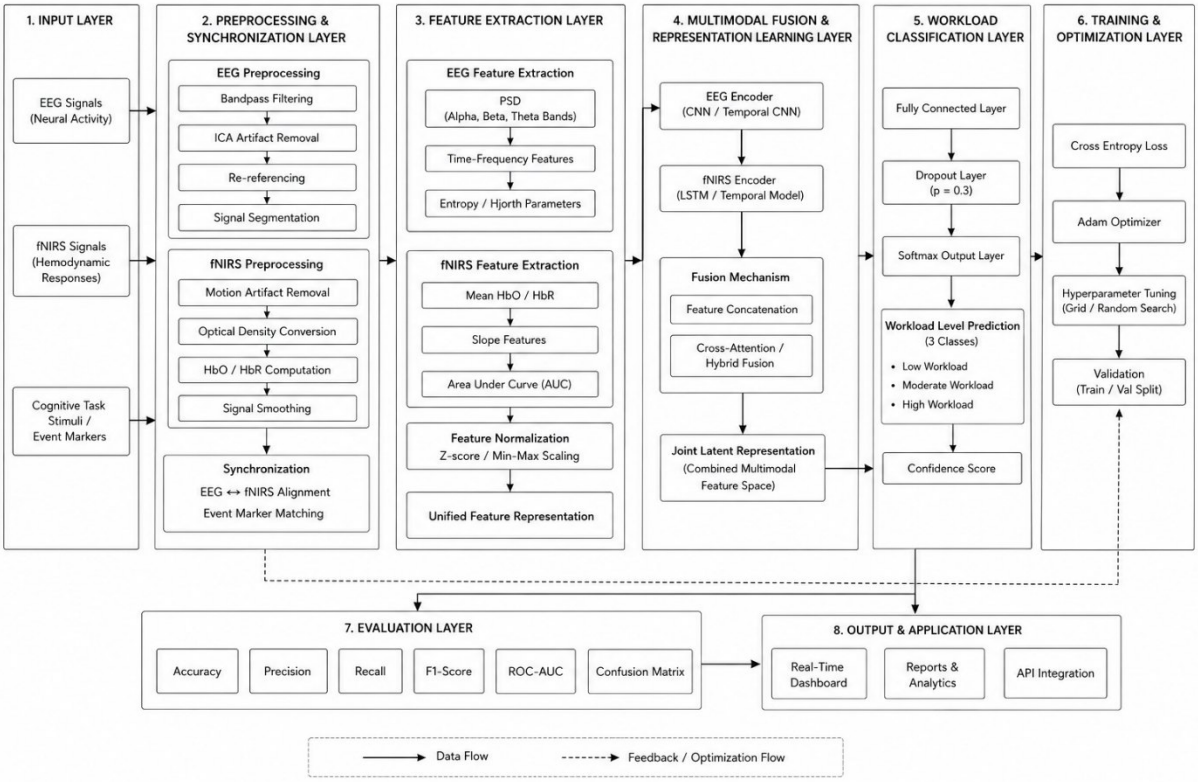


Figure 4.2: System architecture of the proposed system

4.2 Module/Component Design

Table 4.1: Module design

Module	Responsibility	Input	Output
Dataset loader	Reads recordings and markers for 24 subjects	Raw files	Raw EEG, fNIRS, markers
Preprocessing module	Filtering, mean removal, CAR, baseline removal, epoching, labelling	Raw signals, markers	Paired epochs and labels
LOSO splitter	Builds 24 folds with 22/1/1 subjects	648 epochs with subject IDs	Train, validation, test sets
Normaliser	Channel-wise z-score using training statistics only	Split sets	Normalised sets

Table 4.1: Module design

Module	**Responsibility**	**Input**	**Output**
EEG encoder	CNN $\rightarrow$ BiLSTM $\rightarrow$ attention pooling	28×8400	128-D vector
fNIRS encoder	Three Conv1D blocks + global average pooling	$36 \times 420 \times 2$ (HbO/HbR as 2 channels)	128-D vector
Fusion module	Concatenate, MLP $256 \rightarrow 128$, classifier $128 \rightarrow 2$	Two 128-D vectors	Logits / probabilities
Trainer	Class-weighted loss, Adam, scheduler, early stopping, checkpoint	Train and validation data	Best checkpoint per fold
Evaluator	Metrics and confusion matrix	Test predictions	Per-fold and pooled results

4.3 Detailed Design

4.3.1 Use-case design

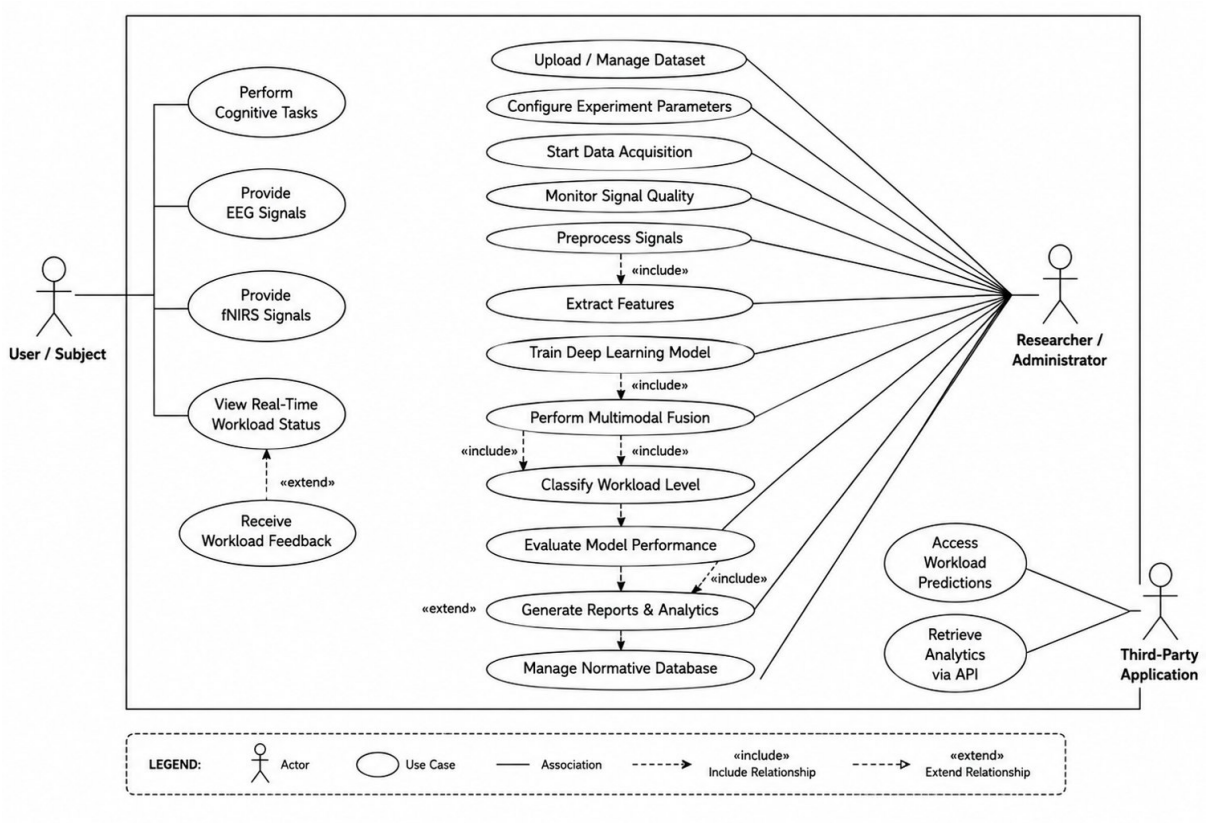


Figure 4.3: Use case diagram

Three actors interact with the system (Figure 4.3). The *subject* performs cognitive tasks, supplies EEG and fNIRS signals and, in the real-time design, views workload status and receives feedback. The *researcher/administrator* manages the whole experimental chain: uploading datasets, configuring experiments, starting acquisition, monitoring signal quality, preprocessing, extracting features, training, fusion, classification, evaluation, reporting and maintaining a normative database. A *third-party application* retrieves predictions and analytics through an API. Dependencies between use cases are significant: preprocessing is always *included* before feature extraction, fusion before classification, and training before evaluation; report generation *extends* evaluation and workload feedback *extends* status viewing, because they are optional add-ons. In the implemented offline prototype only the researcher's chain (load $\rightarrow$ preprocess $\rightarrow$ train $\rightarrow$ classify $\rightarrow$ evaluate) is realised.

4.3.2 Class design

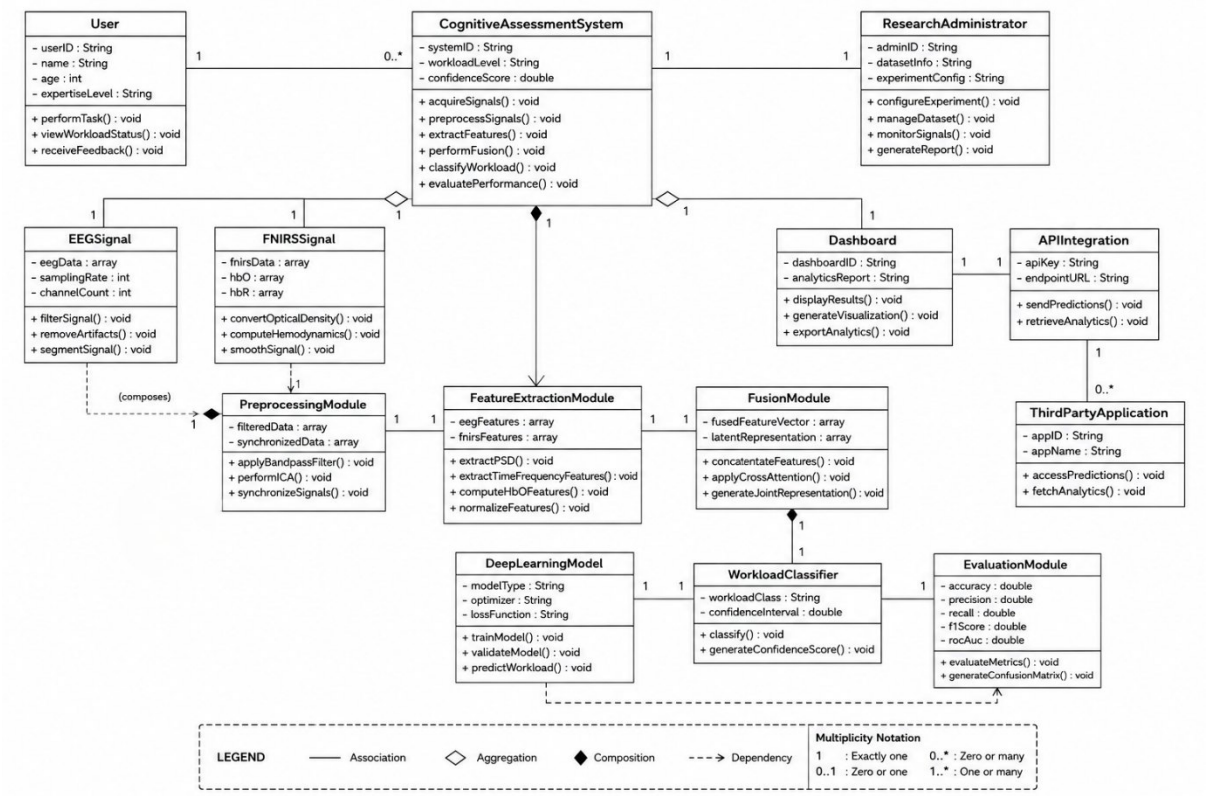


Figure 4.4: Class diagram

Figure 4.4 groups classes by responsibility. A central `CognitiveAssessmentSystem` controller owns the workflow and holds the current workload level and confidence. `EEGSignal` and `FNIRSSignal` hold raw arrays, sampling rate and channel count, and expose filtering, artefact removal, segmentation, optical-density conversion and smoothing. They are *aggregated* by the controller and *composed* into `PreprocessingModule`, which cannot exist without them and produces filtered, synchronised data. `FeatureExtractionModule` produces PSD/time-frequency features for EEG and HbO/HbR statistics for fNIRS and normalises them; `FusionModule` concatenates and optionally applies cross-attention to create a joint latent representation. `DeepLearningModel` trains and validates the network and predicts; `WorkloadClassifier` converts the representation into a class and confidence; `EvaluationModule` computes metrics. `Dashboard`, `APIIntegration` and `ThirdPartyApplication` expose results externally. In the implemented code these correspond to Python modules and PyTorch `nn.Module` classes: dataset loader, preprocessing functions, EEG encoder, fNIRS encoder, fusion head, training loop and metrics.

4.3.3 Sequence design

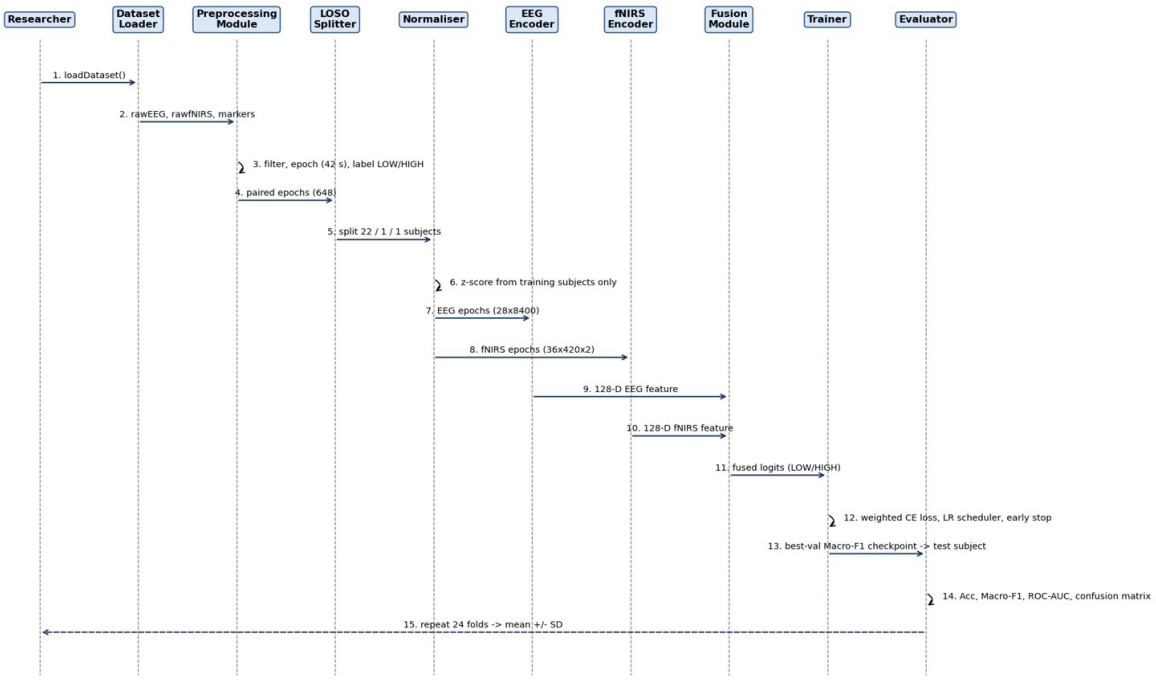


Figure 4.5: Sequence diagram of the offline LOSO pipeline

Figure 4.5 shows the ordered interaction between the Researcher, Dataset Loader, Preprocessing Module, LOSO Splitter, Normaliser, EEG Encoder, fNIRS Encoder, Fusion Module, Trainer and Evaluator:

1. The researcher calls `loadDataset()`.
2. The loader returns raw EEG, raw fNIRS and markers.
3. The preprocessing module filters and cuts 42-second epochs and labels them LOW/HIGH.
4. 648 paired epochs go to the LOSO splitter.
5. The splitter creates a 22/1/1 subject split for the current fold.
6. The normaliser computes z-score statistics from training subjects only.
7. EEG epochs (28×8400) go to the EEG encoder and
8. fNIRS epochs ($36 \times 420 \times 2$) to the fNIRS encoder.
9. The EEG encoder returns a 128-D feature, and
10. the fNIRS encoder returns a 128-D feature to the fusion module.
11. The fusion module returns LOW/HIGH logits to the trainer.
12. The trainer minimises weighted cross-entropy, adjusts the learning rate and stops early.
13. The best validation-Macro-F1 checkpoint predicts the test subject.
14. The evaluator records Accuracy, Macro-F1, ROC-AUC and the confusion matrix.
15. Steps 5–14 repeat for all 24 folds, and mean $\pm$ SD is returned to the researcher.

4.4 Data Design

Data item	Design
EEG epoch	Float tensor 28×8400 (channels $\times$ samples, 42 s at 200 Hz)
fNIRS epoch	Float tensor $36 \times 420 \times 2$ (channels $\times$ samples $\times$ {HbO, HbR}; 42 s at 10 Hz). For the CNN, HbO/HbR form 2 input channels over 420 time steps for each of the 36 channels
Label	0 = LOW (0-back); 1 = HIGH (2-/3-back)
Subject ID	VP001–VP011, VP014–VP026 (24 subjects), used to build LOSO folds
Dataset size	648 epochs = 24 subjects $\times$ 27 blocks (216 LOW, 432 HIGH)
Per-fold sets	Train: 22 subjects (594 epochs); validation: 1 subject (27); test: 1 subject (27)
Normalisation store	Channel-wise μ, σ per fold, from training subjects only
Outputs	Per-fold checkpoint, metrics table, confusion matrix, pooled predictions for all 648 test trials

Chapter 5 Methodology

5.1 Tools and Techniques

- **Paradigm:** N-back (0-, 2-, 3-back) as recorded in the TU Berlin dataset [16]; PsychoPy [10] planned for future data collection.
- **Signal processing:** band-pass filters, mean removal, common average referencing and baseline correction using MNE-Python [7] and SciPy; ICA [8] and the Modified Beer–Lambert Law [18] for raw-data pipelines.
- **Deep learning (PyTorch):** 1D CNN, bidirectional LSTM [19], temporal attention pooling [21], temporal CNN for fNIRS, fusion MLP.
- **Training:** class-weighted cross-entropy, Adam, per-fold dropout selection, ReduceLROnPlateau, early stopping.
- **Evaluation:** LOSO cross-validation; Macro-F1 (primary), Accuracy, Macro-Precision, Macro-Recall, ROC-AUC, confusion matrices (scikit-learn).

5.2 Data Set with Explanation

The TU Berlin simultaneous EEG–fNIRS dataset [16] is used. Twenty-four subjects (VP001–VP011, VP014–VP026) each perform 27 n-back blocks (9 of 0-back, 18 of 2-/3-back), giving 648 paired 42-second epochs: 216 LOW and 432 HIGH. Because HIGH is twice as frequent as LOW, Macro-F1 is the primary metric.

Item	Value
Subjects	24 (VP001–VP011, VP014–VP026)
Blocks per subject	27 (9 $\times$ 0-back, 18 $\times$ 2/3-back)
Epochs	648 paired 42-s epochs (216 LOW, 432 HIGH)
EEG	28 channels, 200 Hz, 8,400 samples per epoch
fNIRS	36 channels, 10 Hz, 420 samples, HbO and HbR
Labels	0-back $\rightarrow$ LOW (0); 2- and 3-back $\rightarrow$ HIGH (1)

Table 5.1: Dataset summary

5.3 Flowchart of Methodology from Start to End

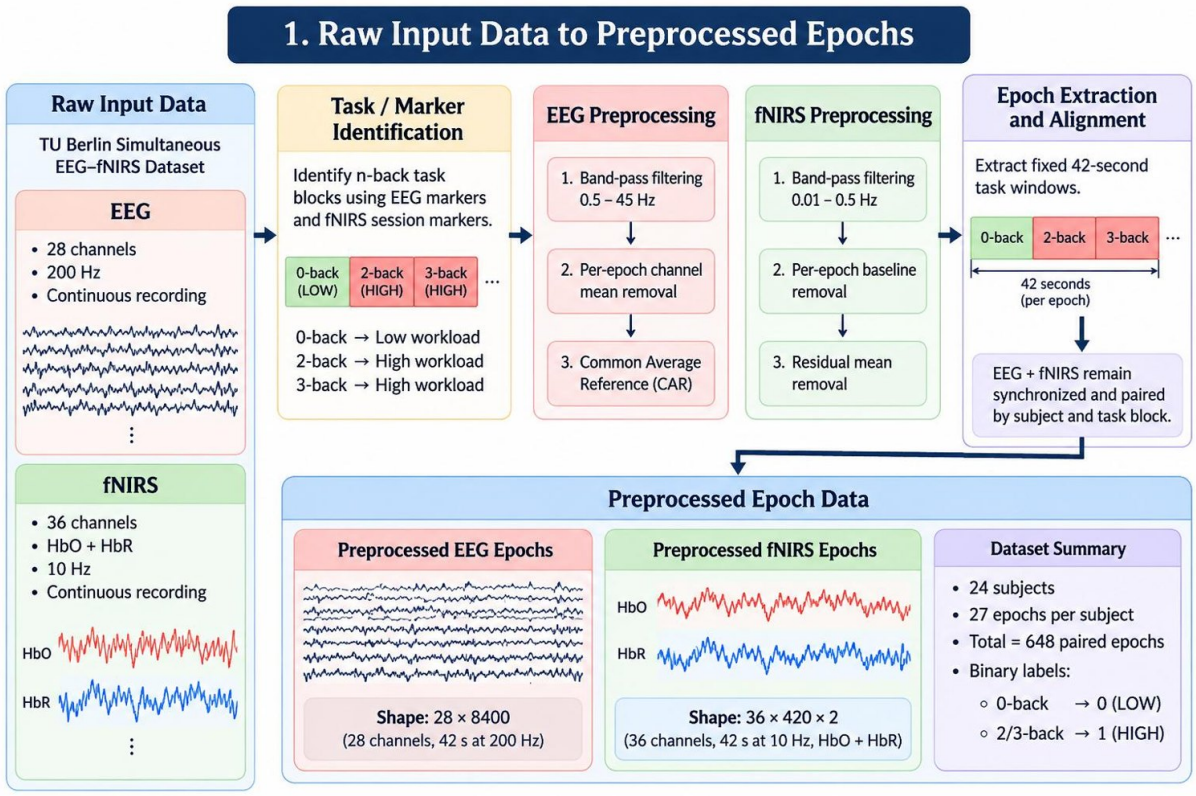


Figure 5.1: Raw input data to preprocessed epochs

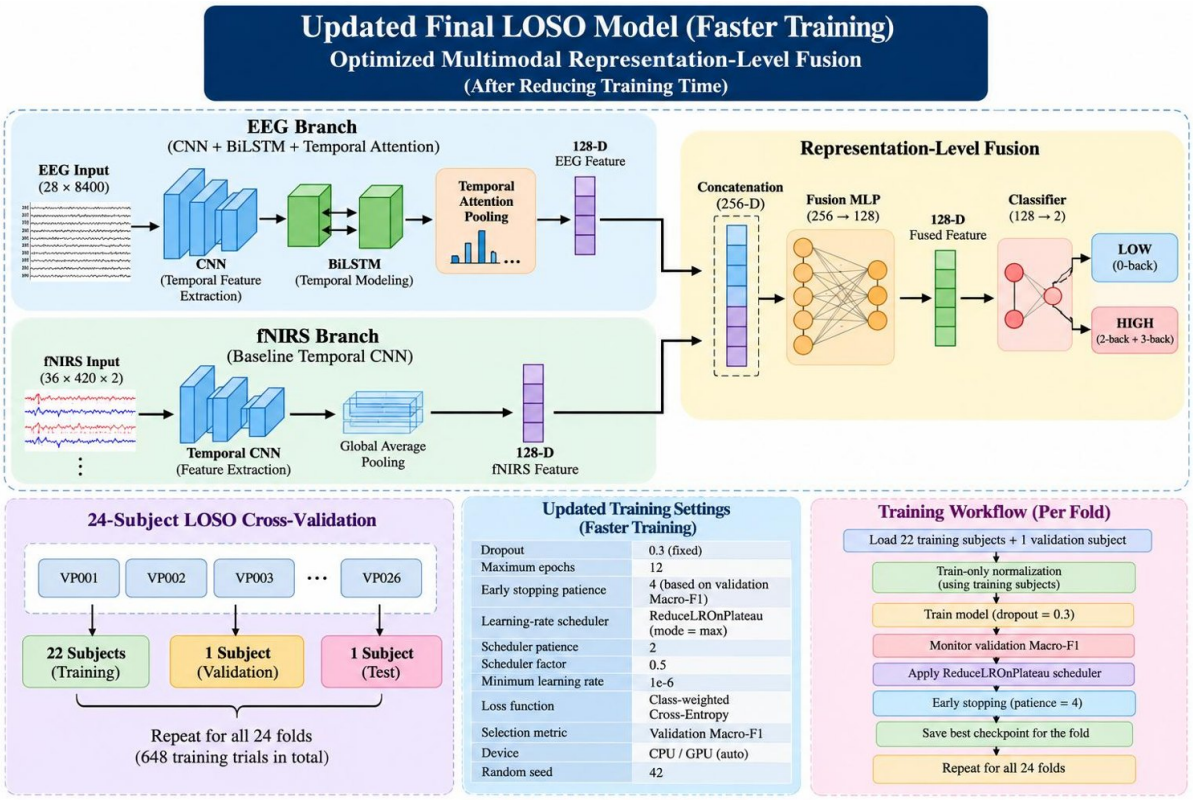


Figure 5.2: Final LOSO model: representation-level EEG–fNIRS fusion

The complete procedure, which can be followed step by step to reproduce the work, is:

1. **Obtain data.** Download the TU Berlin EEG–NIRS dataset [16]; keep subjects VP001–VP011 and VP014–VP026.

2. **Identify blocks.** Using the task markers, locate each n-back block (27 per subject) and its condition (0-, 2- or 3-back).

3. **Label.** 0-back $\rightarrow$ 0 (LOW); 2-/3-back $\rightarrow$ 1 (HIGH).

4. **Preprocess EEG.** Band-pass 0.5–45 Hz; subtract each channel's mean per epoch; apply common average reference. Result: 28×8400.

5. **Preprocess fNIRS.** Band-pass 0.01–0.5 Hz; remove baseline; remove residual mean for both HbO and HbR. Result: $36 \times 420 \times 2$.

6. **Epoch and pair.** Cut each block into a fixed 42-second window for both modalities so that EEG and fNIRS epochs of the same block stay paired. Total 648 pairs. No aggressive artefact rejection is applied.

7. **Create LOSO folds.** For fold $f = 1..24$: test subject = subject f; validation subject = another fixed subject (rotation rule from the code **[state the rule used]**); training = remaining 22.

8. **Normalise.** Compute channel-wise μ, σ on training subjects only; apply to validation and test.
9. **Select dropout.** For each $p \in \{0.2, 0.3, 0.5\}$ train briefly and pick p with best validation Macro-F1.
10. **Train.** Adam, class-weighted cross-entropy, ReduceLROnPlateau (factor 0.5, patience 2, min LR 10^{-6}), at most 12 epochs, early stopping with patience 4 on validation Macro-F1; keep the best checkpoint.
11. **Test.** Load the best checkpoint and predict the held-out subject; store labels, probabilities and metrics.
12. **Repeat and aggregate.** Repeat for all 24 folds; report mean $\pm$ SD and pooled results over 648 test trials.
13. **Fusion variants.** Repeat with unimodal models, decision-level fusion (average of probabilities, thresholded, learned) and logistic fusion for comparison.

5.4 Explanation of Methodology in Detail with Equations and Formulae

5.4.1 Preprocessing

Common average reference. For EEG sample $x_c(t)$ at channel c among $C = 28$ channels,

$$x_c^{\mathrm{CAR}}(t) = x_c(t) - \frac{1}{C}\sum_{j=1}^{C} x_j(t). \tag{5.1}$$

Channel mean removal. $x_c(t) \leftarrow x_c(t) - \frac{1}{T}\sum_t x_c(t)$, with $T = 8400$ (EEG).
Band-pass. EEG 0.5–45 Hz removes slow drift and line/muscle noise; fNIRS 0.01–0.5 Hz removes drift and cardiac/respiratory components while keeping the haemodynamic response.
Baseline and residual-mean removal (fNIRS). The baseline level of each channel and chromophore is subtracted so that only the task-related change remains.

5.4.2 Evaluation protocol and normalisation

In every fold, 22 subjects train, 1 validates and 1 tests; each subject is the test subject once. Normalisation, dropout selection, scheduling and checkpoint choice use only training and validation subjects. For channel c,

$$\hat{x}_c(t) = \frac{x_c(t) - \mu_c^{\mathrm{train}}}{\sigma_c^{\mathrm{train}}}. \tag{5.2}$$

5.4.3 EEG branch: CNN–BiLSTM with temporal attention

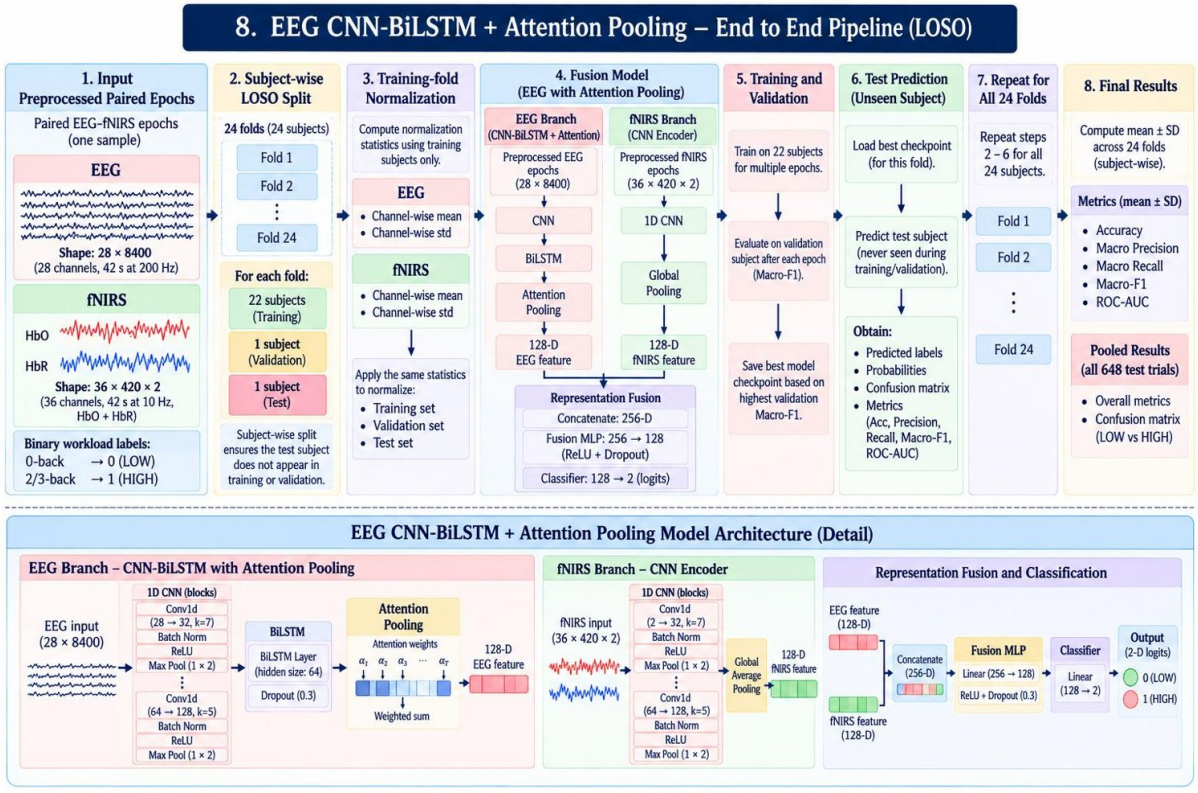


Figure 5.3: EEG branch: CNN-BiLSTM with temporal attention pooling

The 28×8400 epoch enters stacked Conv1D–BatchNorm–ReLU–MaxPool blocks (first block $28 \to 32$ channels, kernel 7; last block ends at 128 channels with kernel 5) **[verify intermediate layers against code]**. Pooling is kept mild so more of the 42-second window is retained. A 1D convolution computes

$$y_k(t) = \mathrm{ReLU}\Big(\sum_{c} \sum_{m=0}^{K-1} w_{k,c,m}\, x_c(t+m) + b_k \Big). \tag{5.3}$$

The CNN output sequence $\{u_t\}$ feeds a bidirectional LSTM (hidden size 64 per direction, so each $h_t \in \mathbb{R}^{128}$). Each LSTM direction uses

$$i_t = \sigma(W_i u_t + U_i h_{t-1} + b_i), \qquad f_t = \sigma(W_f u_t + U_f h_{t-1} + b_f), \tag{5.4}$$

$$o_t = \sigma(W_o u_t + U_o h_{t-1} + b_o), \qquad \tilde{c}_t = \tanh(W_c u_t + U_c h_{t-1} + b_c), \tag{5.5}$$

$$c_t = f_t \odot c_{t-1} + i_t \odot \tilde{c}_t, \qquad h_t = o_t \odot \tanh(c_t), \tag{5.6}$$

iThenticate Page 40 of 57 - AI Writing Submission Submission ID trn:oid:::3618:157478483

and $h_t = [\overrightarrow{h_t}; \overleftarrow{h_t}]$. **Temporal attention pooling** replaces mean/max pooling:

$$e_t = v^\top \tanh(W_a h_t + b_a), \quad \alpha_t = \frac{\exp(e_t)}{\sum_s \exp(e_s)}, \quad \mathbf{h}_{\text{EEG}} = \sum_t \alpha_t h_t, \tag{5.7}$$

giving the 128-D EEG representation. Attention lets the model weight the time positions most related to workload, since changes are not uniform across the epoch.

5.4.4 fNIRS branch: temporal CNN

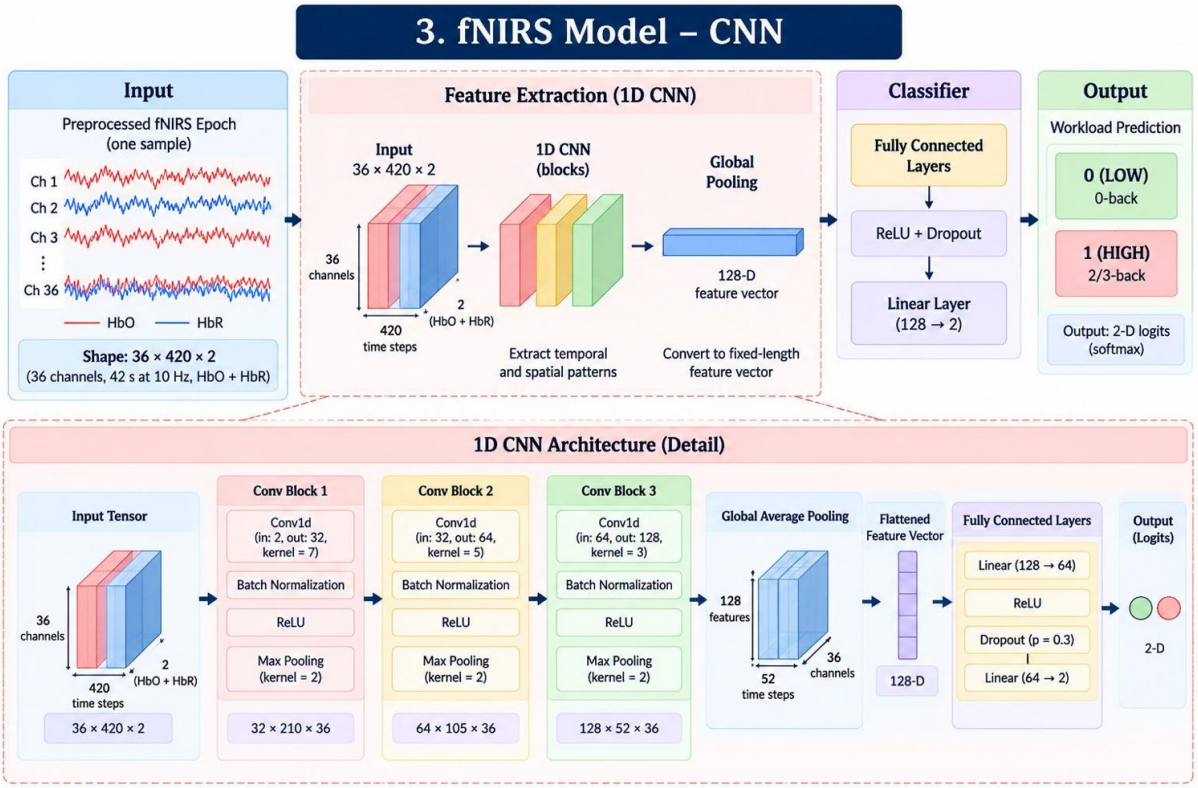


Figure 5.4: fNIRS branch: temporal CNN

HbO and HbR are two input channels. Three Conv1D blocks ($2 \to 32$, $k = 7$; $32 \to 64$, $k = 5$; $64 \to 128$, $k = 3$), each followed by BatchNorm, ReLU and MaxPool (kernel 2), extract slow haemodynamic patterns. Global average pooling over time gives $\mathbf{h}_{\text{fNIRS}} \in \mathbb{R}^{128}$. A deliberately simple CNN is used because fNIRS is slow and smooth and only 24 subjects are available, so larger models overfit.

5.4.5 Representation-level fusion and classifier

$$\mathbf{z} = [\mathbf{h}_{\text{EEG}}; \mathbf{h}_{\text{fNIRS}}] \in \mathbb{R}^{256}, \qquad \hat{\mathbf{y}} = \text{softmax}\big(W_2\,\text{Dropout}(\text{ReLU}(W_1\mathbf{z} + b_1)) + b_2\big), \tag{5.8}$$

iThenticate Page 40 of 57 - AI Writing Submission Submission ID trn:oid:::3618:157478483

with $W_1 \in \mathbb{R}^{128\times256}$ and $W_2 \in \mathbb{R}^{2\times128}$. Fusing learned features before the decision lets the classifier use the fast electrical and slow haemodynamic information together.

5.4.6 Decision-level fusion (comparison)

The EEG and fNIRS models are trained separately and their class probabilities are averaged:

$$p(\text{HIGH}) = w\, p_{\text{EEG}} + (1-w)\, p_{\text{fNIRS}}, \qquad w = 0.5 \text{ (50:50 fusion).} \tag{5.9}$$

Variants tested: thresholded decision, learned dual-temporal-CNN fusion and logistic regression on frozen embeddings.

5.4.7 Loss and training

$$\mathcal{L} = -\frac{1}{N}\sum_{i=1}^{N} w_{y_i} \log \hat{y}_{i,y_i}, \tag{5.10}$$

where w_k compensates the 1:2 LOW:HIGH ratio (inverse class frequency, e.g. $w_k = N/(2N_k)$ **[confirm exact weights]**). Settings are in Table 5.2.

Setting	Value
Loss	Class-weighted cross-entropy
Optimiser	Adam (learning rate **[fill from code]**; batch size **[fill from code]**)
Dropout	Selected per fold from $\{0.2, 0.3, 0.5\}$ on validation Macro-F1
LR scheduler	ReduceLROnPlateau on validation Macro-F1 (factor 0.5, patience 2, min LR 10^{-6})
Max epochs / early stopping	12 / patience 4 on validation Macro-F1
Checkpoint	Best validation Macro-F1 per fold
Normalisation	Channel-wise mean/std from training subjects only
Seed / device	42 / CPU or GPU (automatic)

Table 5.2: Final model training settings

5.4.8 Evaluation metrics

With TP_k, FP_k, FN_k for class $k \in \{\text{LOW}, \text{HIGH}\}$:

$$\text{Accuracy} = \frac{\sum_k TP_k}{N}, \tag{5.11}$$

$$\text{Precision}_k = \frac{TP_k}{TP_k + FP_k}, \quad \text{Recall}_k = \frac{TP_k}{TP_k + FN_k}, \tag{5.12}$$

$$F1_k = \frac{2\,\text{Precision}_k \text{Recall}_k}{\text{Precision}_k + \text{Recall}_k}, \quad \text{Macro-F1} = \frac{1}{2}\sum_k F1_k. \tag{5.13}$$

ROC-AUC is the area under the true-positive vs false-positive curve over all thresholds. A classifier that always predicts HIGH scores $432/648 = 66.7\%$ accuracy but Macro-F1 $= (0.80 + 0)/2 = 0.40$, which is why Macro-F1 is primary.

Chapter 6 Results and Discussion

6.1 Presentation of Results

Metric	Mean ± SD over 24 folds
Accuracy	66.36% ± 15.48%
Macro-F1 (primary)	57.70% ± 17.78%
ROC-AUC	0.7842 ± 0.1502
Macro-Precision (pooled)	63.16%
Macro-Recall (pooled)	62.15%
HIGH-class recall	74.8%
LOW-class recall	49.5%

Table 6.1: 24-fold LOSO performance of the final model

The model reaches 66.36% accuracy and 0.7842 ROC-AUC on unseen subjects. Large standard deviations (15–18 points) reflect strong inter-subject variability typical of subject-independent EEG–fNIRS decoding. HIGH workload is recognised well (74.8% recall) but LOW less reliably (49.5%), because LOW is the minority class (216 of 648 epochs).

6.1.1 Comparison with reference models

Model	Accuracy	Macro-F1	ROC-AUC
EEG baseline (CNN–BiLSTM)	60.80%	52.16%	0.7814
fNIRS baseline (CNN)	63.27%	56.99%	0.6407
Baseline representation fusion	64.51%	59.12%	0.7482
Final model (EEG attention + fNIRS CNN)	66.36%	57.70%	0.7842

Table 6.2: Final model versus unimodal and baseline fusion references

- Versus EEG alone, the final model gains 5.56 points of accuracy and 5.54 of Macro-F1; versus fNIRS alone, 3.09 and 0.71. Fusion therefore adds value over either modality.
- Versus baseline representation fusion, accuracy rises 1.85 points and ROC-AUC 0.036, but Macro-F1 is 1.42 points lower; given the 15–18 point SD this is within fold-to-fold variation.
- The temporal-attention EEG branch has a standalone ROC-AUC of 0.8138, above the plain CNN–BiLSTM (0.7814).

6.1.2 Best result among fusion variants

Simple 50:50 decision-level fusion obtained the best Macro-F1 among the fixed approaches (62.26%), above the optimised representation-level model (57.70%). Logistic fusion on frozen

Configuration	Acc.	Macro-F1	ROC-AUC
50:50 decision-level fusion (best fixed)	67.44%	62.26%	0.7521
Thresholded decision-level (separate run)	68.06%	62.89%	n/a
Learned dual-temporal-CNN fusion	66.82%	61.18%	0.7855
Logistic embedding fusion	67.59%	61.16%	0.7630
Optimised representation fusion (final)	66.36%	57.70%	0.7842

Table 6.3: Main fusion configurations (24-fold LOSO)

embeddings raised accuracy by 0.15 points and ROC-AUC by 0.0109 over 50:50 fusion but lowered Macro-F1 by 1.10 points, did not improve calibration and took about 68 minutes on a CPU, so it was kept as diagnostic evidence only. Thresholded fusion is a separate run, so its figures are shown as reported. The final model has the highest ROC-AUC except for the learned dual-temporal-CNN variant (0.7855), yet a lower Macro-F1, showing that better class ranking did not translate into better predictions at the default decision rule.

6.1.3 Comparison with existing literature

Published studies differ in dataset, task, classes and evaluation protocol, so accuracies cannot be set directly against ours. Table 2.2 and Table 6.4 summarise what differs. Our results agree with the main conclusion of [1, 2, 4, 23]: combining EEG and fNIRS improves on either modality alone.

Aspect	Often seen in published studies	This work
Test subjects	Same subjects may be in training and test	Test subject never seen (LOSO)
Samples	Many short windows per subject	One 42-s epoch per block: 648 in total
Classes/metric	Balanced classes or task vs rest; accuracy	1:2 imbalance; Macro-F1 primary; majority baseline 66.7%
Model selection	Sometimes on data related to test data	Separate validation subject
Artefacts	ICA and rejection common	Filtering and referencing only

Table 6.4: Evaluation choices that affect comparability

6.1.4 Why our results differ from published results

- **Strict subject-independent evaluation.** A fixed 18/3/3 subject split gave 72.84% accuracy and 68.85% Macro-F1 for the same representation-fusion idea, against 64.51% and 59.12% in 24-fold LOSO (indicative only, three test subjects).

- **Inter-subject variability and small sample.** Per-fold SDs of roughly 12–22 points mean some subjects are near chance [15, 17]; 1–3 point differences lie within this variation.
- **Class imbalance and metric.** Always predicting HIGH gives 66.7% accuracy, so accuracy alone overstates performance.
- **Task definition.** 0-back vs 2-/3-back is a harder contrast than task vs rest [23, 24]; labels are conditions, not measured effort.
- **Epoch construction.** Whole 42-s blocks are kept together, avoiding the leakage of window-level splits.
- **Minimal artefact handling.** No ICA or motion correction [7, 8], consistent with the weak EEG-only Macro-F1 (52.16%).
- **Limited tuning on one validation subject.** Weight selection on one validation subject improved 9 folds and worsened 11 (mean Macro-F1 -4.32 points).
- **Modality characteristics.** EEG ranks classes better (AUC 0.78 vs 0.64), fNIRS is more stable in accuracy and Macro-F1; they are complementary [1, 2].

Our lower scores mainly reflect a stricter test, a small dataset, an imbalanced binary task and conservative preprocessing and tuning, not a failure of fusion. A like-for-like claim against a specific published method requires re-running it on this dataset under the same LOSO protocol (future work).

6.1.5 How the gap can be narrowed

Class-weighted unimodal encoders and balanced-accuracy model selection; validation-only threshold selection and calibration; hybrid band-power and HbO/HbR statistics; ICA and motion correction; transfer learning or short calibration blocks; multi-seed runs with paired tests across subjects.

6.2 Limitations of the Study

- High variance across subjects; differences of 1–2 points are within one standard deviation.
- Low LOW-class recall (49.5%) due to imbalance.
- Binary only; the three-state design is not implemented.
- Offline evaluation on a public dataset; real-time latency untested.
- Tuning on a single validation subject; training limited to 12 epochs.

6.3 Conclusion

Fusing EEG and fNIRS improved on either modality alone on unseen subjects, with the final model reaching 66.36% accuracy, 57.70% Macro-F1 and 0.7842 ROC-AUC, while simple 50:50 decision fusion gave the best Macro-F1 (62.26%). The absolute scores are modest because the evaluation is strict, and the main weakness is recall of the LOW class.

iThenticate Page 47 of 57 - AI Writing Submission Submission ID trn:oid:::3618:157478483

Chapter 7 Conclusion

7.1 Summary

This project built a multimodal EEG–fNIRS framework for cognitive workload assessment. The TU Berlin dataset was preprocessed into 648 paired 42-second epochs (EEG 28×8400, fNIRS $36 \times 420 \times 2$). The final model combines a CNN–BiLSTM encoder with temporal attention pooling for EEG and a temporal CNN for fNIRS, fused by an MLP, and was trained with class-weighted cross-entropy, per-fold dropout selection, ReduceLROnPlateau and early stopping under 24-fold LOSO evaluation.

7.2 Conclusion

- The final model achieved 66.36% accuracy, 57.70% Macro-F1 and 0.7842 ROC-AUC, improving on EEG alone or fNIRS alone and supporting multimodal fusion.
- Temporal attention in the EEG branch improved class ranking, and a simple CNN suited the slow fNIRS signal.
- HIGH workload is recognised well (recall 74.8%) while LOW workload is recognised less reliably (recall 49.5%).
- Subject variability is large (about $\pm$15–18 points), so 1–2 point improvements may not be significant.
- Simple equal-weight decision fusion gave the best Macro-F1 (62.26%).
- Scores are lower than some published results because of strict LOSO evaluation, a small dataset, class imbalance and conservative preprocessing and tuning; results cannot be compared directly with studies that use other tasks.
- The initial target of $F1 \geq 0.80$ was not achieved (about 0.58 under LOSO).

7.3 Future Work

- Improve LOW-class recall with class-weighted unimodal encoders and balanced-accuracy model selection.
- Tune the decision threshold and calibrate probabilities using validation data only.

iThenticate Page 47 of 57 - AI Writing Submission Submission ID trn:oid:::3618:157478483

- Audit fNIRS channel quality, motion artefacts and epoch timing; add ICA and motion correction.
- Hybrid fusion of deep features with EEG band power and HbO/HbR statistics.
- Logistic meta-fusion using out-of-fold predictions to avoid leakage.
- Three workload states, real-time acquisition with PsychoPy once fNIRS hardware is available, plus dashboard and API integration.
- Re-run selected published methods on this dataset for a fair comparison, with multiple seeds and paired subject-level tests.

REFERENCES

[1] N. Hirachan, A. Mathews, J. Romero, R. F. Rojas, "Measuring Cognitive Workload Using Multimodal Sensors," IEEE EMBC, pp. 4921–4924, 2022.

[2] F. Putze, S. Jarvis, T. Schultz, "Multimodal Fusion for Objective Assessment of Cognitive Workload: A Review," IEEE Trans. Cybernetics, 2020.

[3] H. Ayaz et al., "Optical brain monitoring for operator training and mental workload assessment," NeuroImage, vol. 59, no. 1, 2012.

[4] S. Khan, M. Hasan, "Deep learning networks based decision fusion model of EEG and fNIRS for classification of cognitive tasks," Cognitive Neurodynamics, vol. 18, 2023.

[5] "Deep Learning Approaches for Cognitive Workload Assessment," PubMed Central (PMC), 2024.

[6] Y. LeCun, Y. Bengio, G. Hinton, "Deep learning," Nature, vol. 521, no. 7553, pp. 436–444, 2015.

[7] A. Gramfort et al., "MNE software for processing MEG and EEG data," NeuroImage, vol. 86, pp. 446–460, 2014.

[8] A. Hyvärinen, E. Oja, "Independent component analysis: algorithms and applications," Neural Networks, vol. 13, no. 4–5, pp. 411–430, 2000.

[9] "Functional Near-Infrared Spectroscopy Based Cognitive Workload Assessment," Frontiers in Human Neuroscience, 2022.

[10] J. W. Peirce, "PsychoPy—Psychophysics software in Python," J. Neuroscience Methods, vol. 162, no. 1–2, pp. 8–13, 2007.

[11] A. K. Gevins, M. E. Smith, "Neurophysiological measures of cognitive workload during human-computer interaction," Theoretical Issues in Ergonomics Science, vol. 4, no. 1–2, pp. 113–131, 2003.

[12] "Cognitive Workload Assessment using Neurophysiological Signals," Defence Life Science Journal, 2020.

[13] M. Abibullaev, J. An, "Classification of frontal cortex haemodynamic responses during cognitive tasks using wavelet transforms and support vector machines," Medical Engineering & Physics, vol. 34, no. 10, 2012.

[14] P. Welch, "The use of fast Fourier transform for the estimation of power spectra," IEEE Trans. Audio Electroacoustics, vol. 15, no. 2, pp. 70–73, 1967.

[15] W. Jo et al., "MOCAS: A Multimodal Dataset for Objective Cognitive Workload Assessment on Simultaneous Tasks," IEEE Trans. Affective Computing, vol. 16, no. 1, 2025.

[16] J. Shin et al., "Simultaneous acquisition of EEG and NIRS during cognitive tasks for an open access dataset," Scientific Data, vol. 5, 180003, 2018.

[17] M. Sharma, A. Gupta, "Correlation-based channel selection for cognitive workload assessment and classification using EEG signals," Biomedical Engineering Letters, 2025.

[18] D. A. Boas et al., "Noninvasive imaging of cerebral activation with diffuse optical tomography," NeuroImage, vol. 23, pp. S275–S288, 2004.

[19] S. Hochreiter, J. Schmidhuber, "Long short-term memory," Neural Computation, vol. 9, no. 8, pp. 1735–1780, 1997.

[20] S. Kingphai, Y. Moshfeghi, "Mental Workload Assessment Using Deep Learning Models from EEG Signals," IEEE Access, 2024.

[21] A. Vaswani et al., "Attention is all you need," NeurIPS, vol. 30, 2017.

[22] A. S. Asif, M. Islam, M. Hasan, "CLARE: Cognitive Load Assessment in Real-Time With Multimodal Data," IEEE Trans. Cognitive and Developmental Systems, 2025.

[23] F. Al-Shargie, T. B. Tang, M. Kiguchi, "Stress Assessment Based on Decision Fusion of EEG and fNIRS Signals," IEEE Access, vol. 5, pp. 19889–19896, 2017.

[24] N. C. Vourvopoulos, F. A. Liarokapis, "Neural Correlates of Cognitive Load While Playing an Emergency Simulation Game: A fNIRS Study," IEEE Access, 2022.

[25] T. K. K. Ho, J. Gwak, C. M. Park, J. I. Song, "Discrimination of Mental Workload Levels from Multi-Channel fNIRS Using Deep Learning-Based Approaches," IEEE Access, vol. 7, pp. 24392–24403, 2019.

[26] "Multimodal Cognitive Workload Assessment using EEG and fNIRS," IEEE Xplore, 2024.

Plagiarism

Similarity index: **[__%]** AI-generated content index: **[__%]**

Tool used: **[Turnitin / other]** Date of check: **[date]**

[Attach the similarity report and the AI-generated content report here (Appendix F).]

Appendix A: Snapshots

[Add screenshots of code, training logs and result plots. Design and architecture figures are in Chapter 4.]

Appendix B: Details of List of Publications Related to this Project

Author names:

Paper title:

Conference/Journal:

Place of conference:

Date of conference:

Appendix C: Details of Patent

Appendix D: Details of Funding

Appendix E: POs and PSOs Mapped

Table E.1: Programme outcomes mapping

PO	Level	Justification
PO1	3	Applies engineering, signal-processing and deep-learning knowledge to EEG–fNIRS workload classification.
PO2	3	Analyses limitations of unimodal sensing, artefacts, synchronisation and subject variability through a research-gap analysis.
PO3	3	Designs a full multimodal pipeline: preprocessing, encoders, fusion, classification.
PO4	3	Controlled 24-fold LOSO experiments with baselines and fusion variants, with analysis.
PO5	3	Uses Python, PyTorch, MNE-Python, scikit-learn and PsychoPy.
PO6	2	Supports workload and fatigue monitoring relevant to healthcare, aviation and education.
PO7	1	Open datasets and software avoid extra hardware and cost.
PO8	2	Leakage-free, transparent reporting and an openly licensed public dataset.
PO9	3	Developed collaboratively by a four-member team.
PO10	2	Clear documentation, figures and result tables.
PO11	2	Completed at NIL cost using college and free cloud resources.
PO12	2	Identifies future improvements supporting continued learning.
PSO1	1	Minimal networking; API integration and real-time streaming are future work.
PSO2	3	Applies software-engineering practices and AI to a real-world workload problem.
PSO3	3	Integrates deep learning and information systems into a scalable, hardware-agnostic solution.

Appendix F: Similarity Report and AI-Generated Report

[Attach reports here.]