
NUC tach simulator — Mode A (fixed RPM)

BIOS reads RPM = 30 x tach frequency. 50 Hz = 1500 RPM, 133 Hz = 4000 RPM.

J2: pin1 -> Arduino D9, pin2 -> 5V into the Pro Mini's RAW pin, pin3 -> GND. 3.3V / 8MHz board: its own regulator makes 3.3V, so 5V never goes to VCC. Header is rated 0.25A total.

J1 pin numbers are this board's labels, not Intel's. Intel publishes no pinout for this header — identify the four wires with a meter first.

Q1 is open-collector: it only ever pulls NUC_TACH low. The pull-up lives in the NUC.

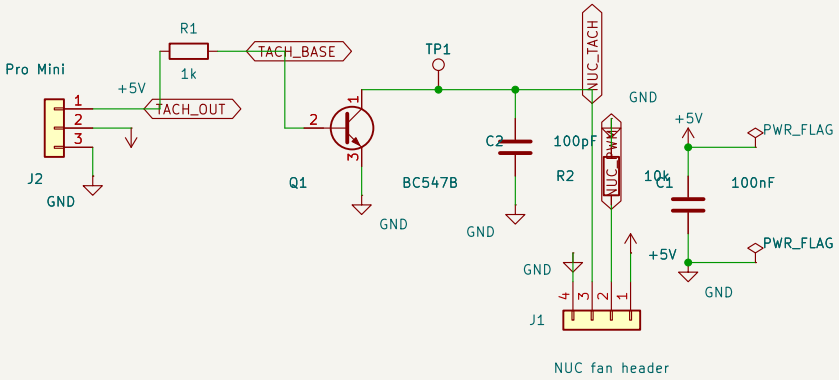

Sheet: /		
File: nuc-tach-sim.kicad_sch		
Title:		
Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.6		Id: 1/1