

En.no:3

Date: 30/01/26

PACKET TRACER TOOL INSTALLATION AND USER INTERFACE OVERVIEW.

Aim:-

To understand environment of CISCO PACKET TRACER to design simple network.

d) Analyse the behaviour of network devices using CISCO PACKET TRACER Simulator.

1. From the network component box, click and drag-and-drop the below components:

a. 4 Generic PCs and One HUB

b. 4 Generic PCs and One Switch.

2. Click on connections:

a. Click on Copper - Straight through cable

b. Select one of the PC and connect it to HUB using the cable. The Link LED should glow in green, indicating that the link is up. Similarly remaining 3 PCs to the HUB.


c. Similarly connect 4 PCs to the switch using Copper straight-through cable.

3. Click on the PCs connected to hub and switch, go to the desktop tab. click on IP configuration, and enter an IP address that starts with 10.1.1.0 and subnet mask.

4. Drag and drop the PDU icon in One PC (Source) and drop it on another PC (Destination) connected to hub and switch.

5. Observe the flow of PDU from source PC to Destination PC by selecting the Realtime mode of simulation.

6. Observe how HUB and Switch are forwarding the PDU.

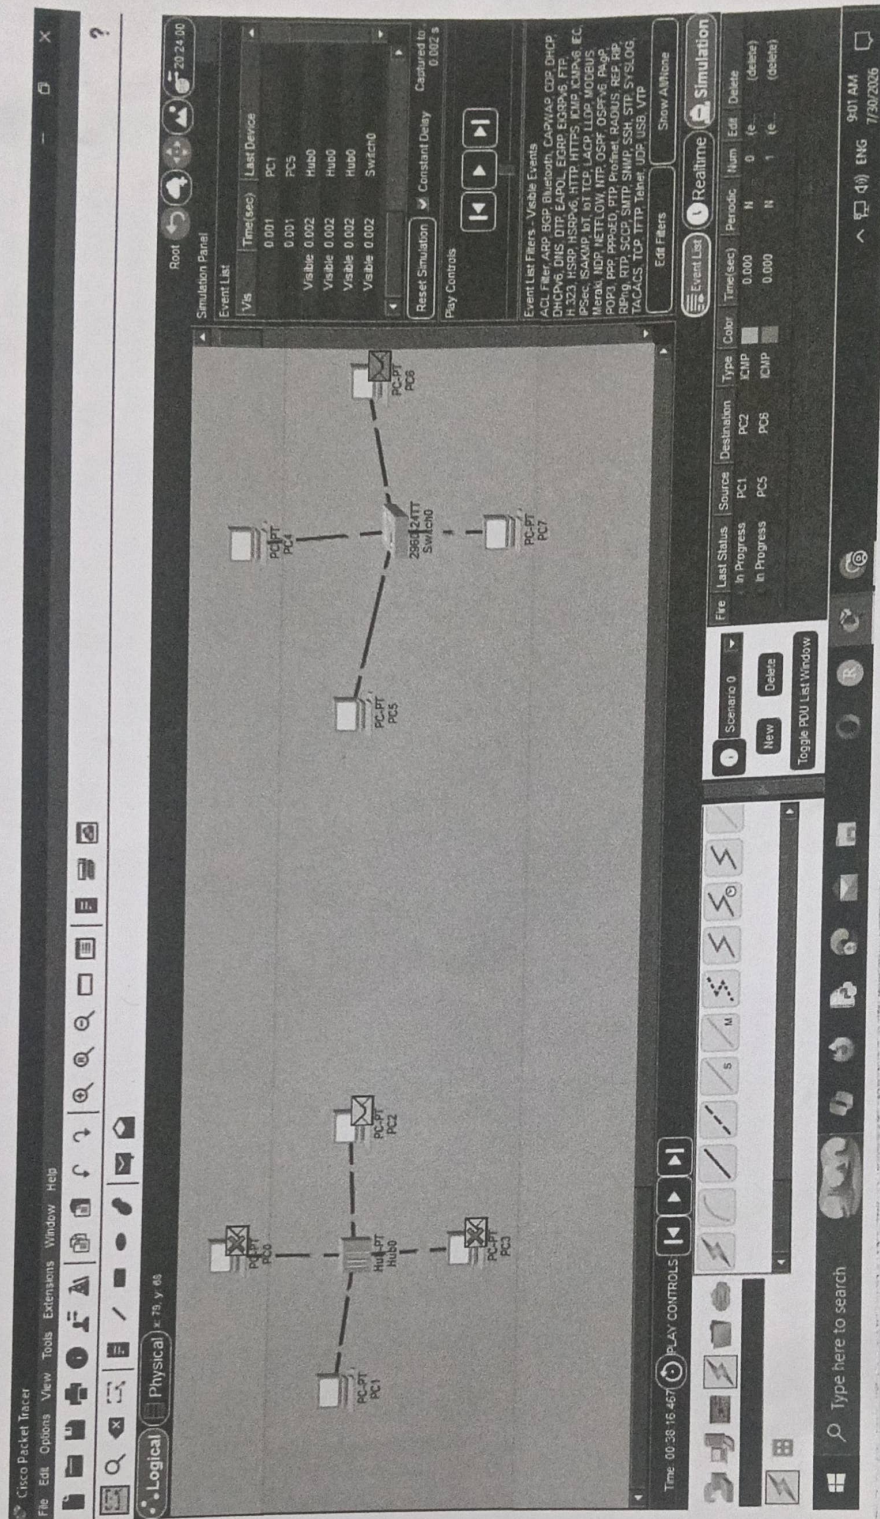

Results:-

Thus the connection between the server and the switch / Hub was made successfully through

the cable.