

Exno: 10 28/9/26 a) InterNetworking with routers in CISCO PACKET TRACER simulator.

Aim:-

To design and configure a simple internetwork using a router in Cisco Packet Tracer and test connectivity between two PCs.

Procedure:-

Step 1:- Configuring Router 1


- * Select the router and Open CLI.
- * Press Enter to start Configuring Router 1.
- * Type enable to activate the privileged mode.

Step 2:-

- * Assign IP addresses to every PC in the network.
- * Select the PC, Go to the desktop and select IP configuration and assign an IP address, Default gateway, Subnet mask.
- * Assign the default gateway of PC0 as 192.168.10.1
- * Assign the default gateway of PC1 as 192.168.20.1

Step 3:-

- * Connect Fast Ethernet 0 port of PC0 with Fast Ethernet 0/0 port of Router1 using a copper straight-through cable.
- * Connect Fast Ethernet 0 port of PC1 with Fast Ethernet 0/1 port of Router1 using a copper straight-through cable.

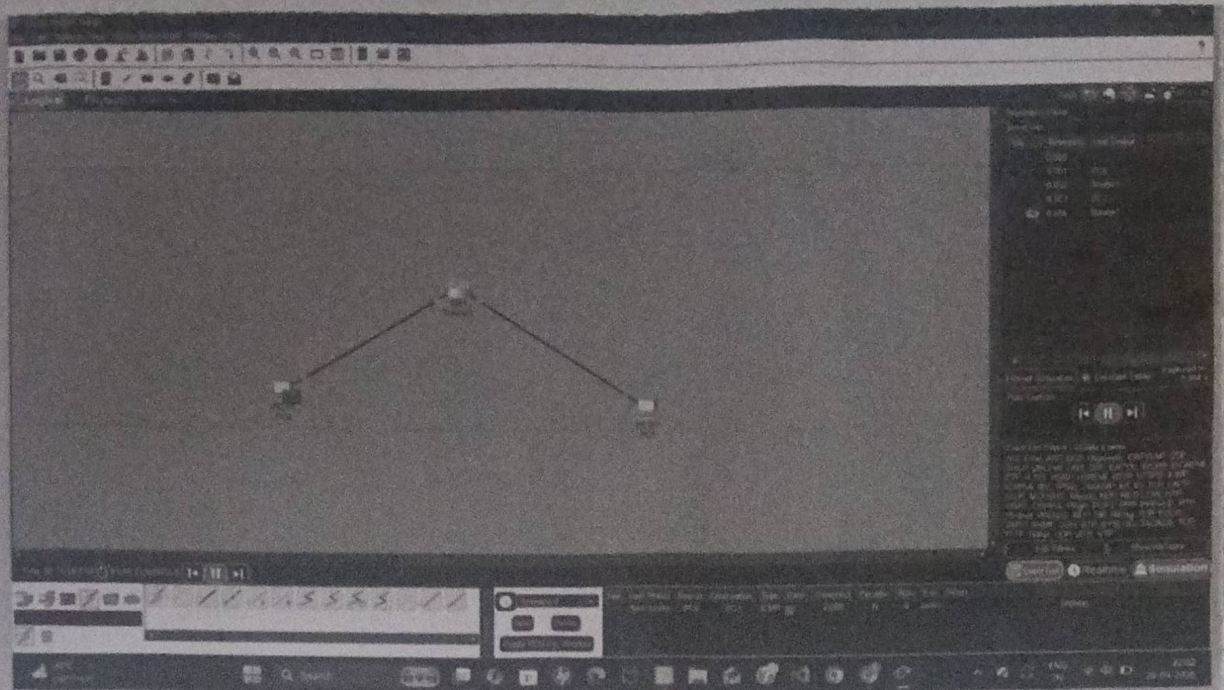

Router

Q.11 The simple internetwork was successfully designed and configured using a router.

Connectivity between PC0 and PC1 was successfully verified using PDU.