




# pcM OpenMC-MOOSE thermal convergence

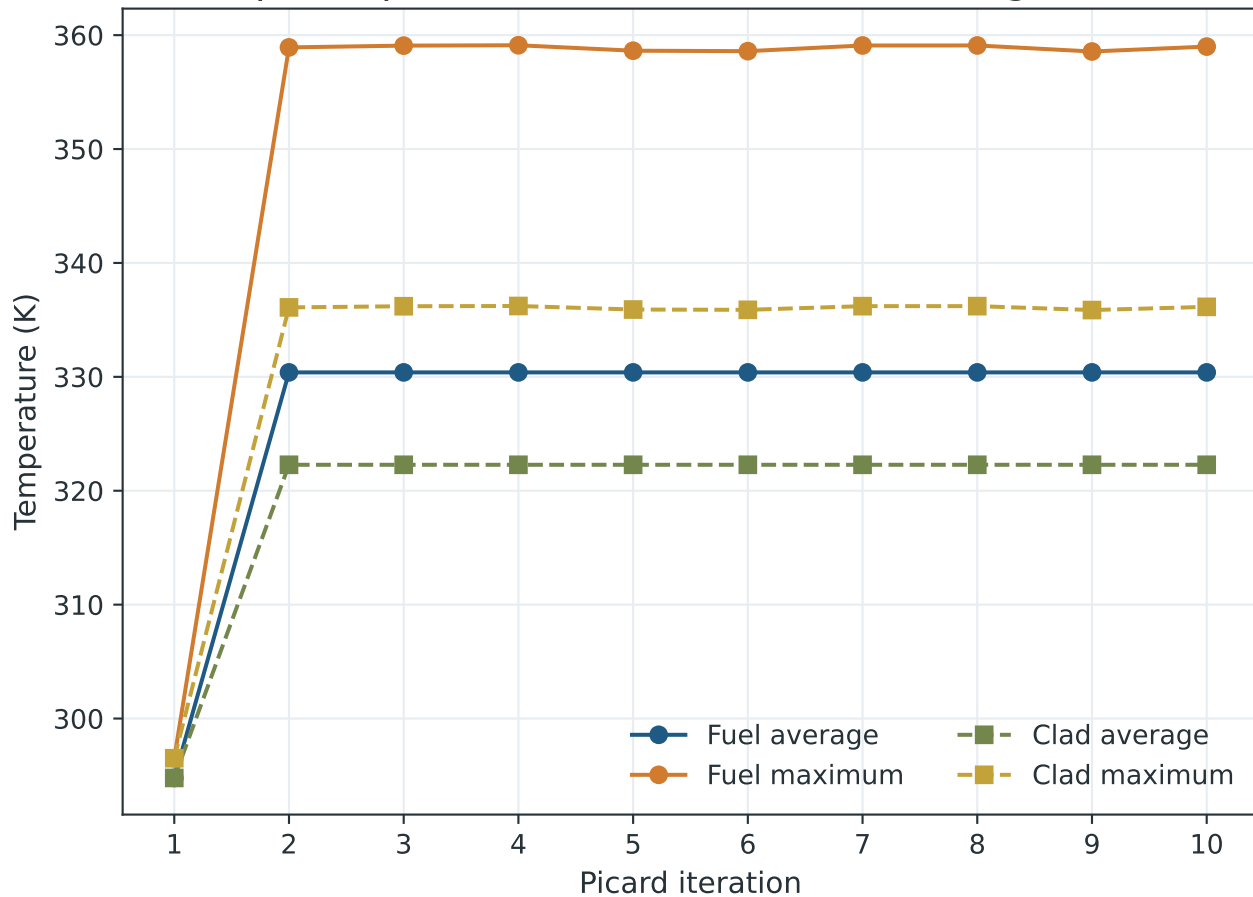

# Late-iteration change

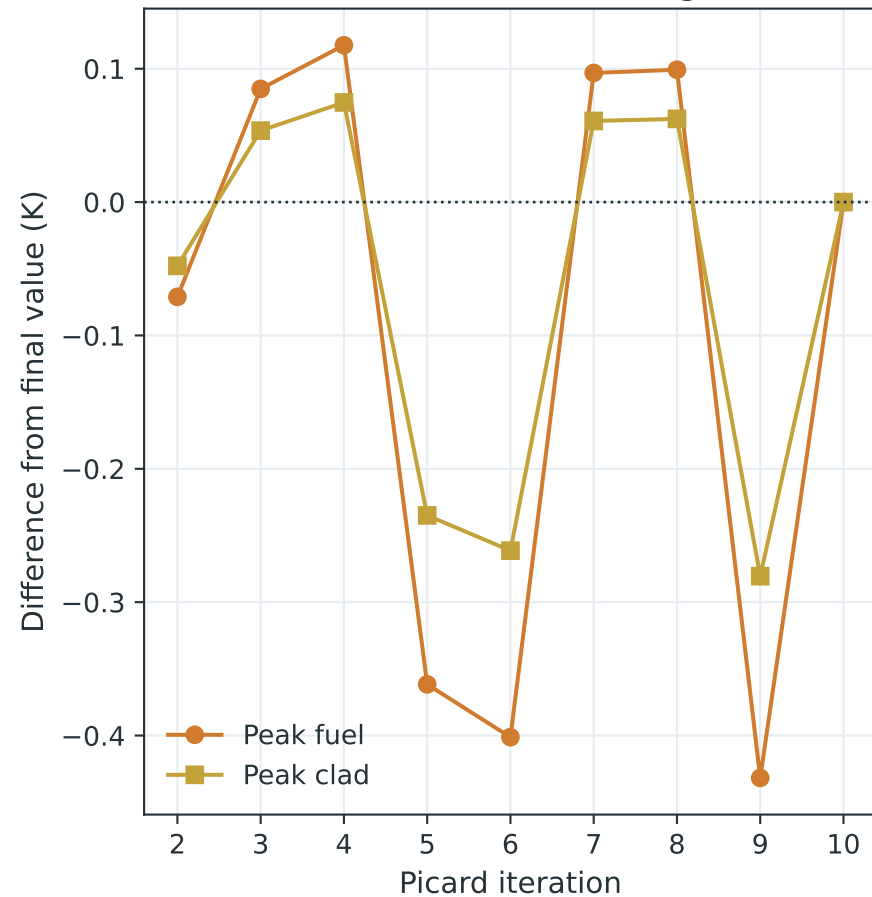


# pcM neutronics convergence and tally precision

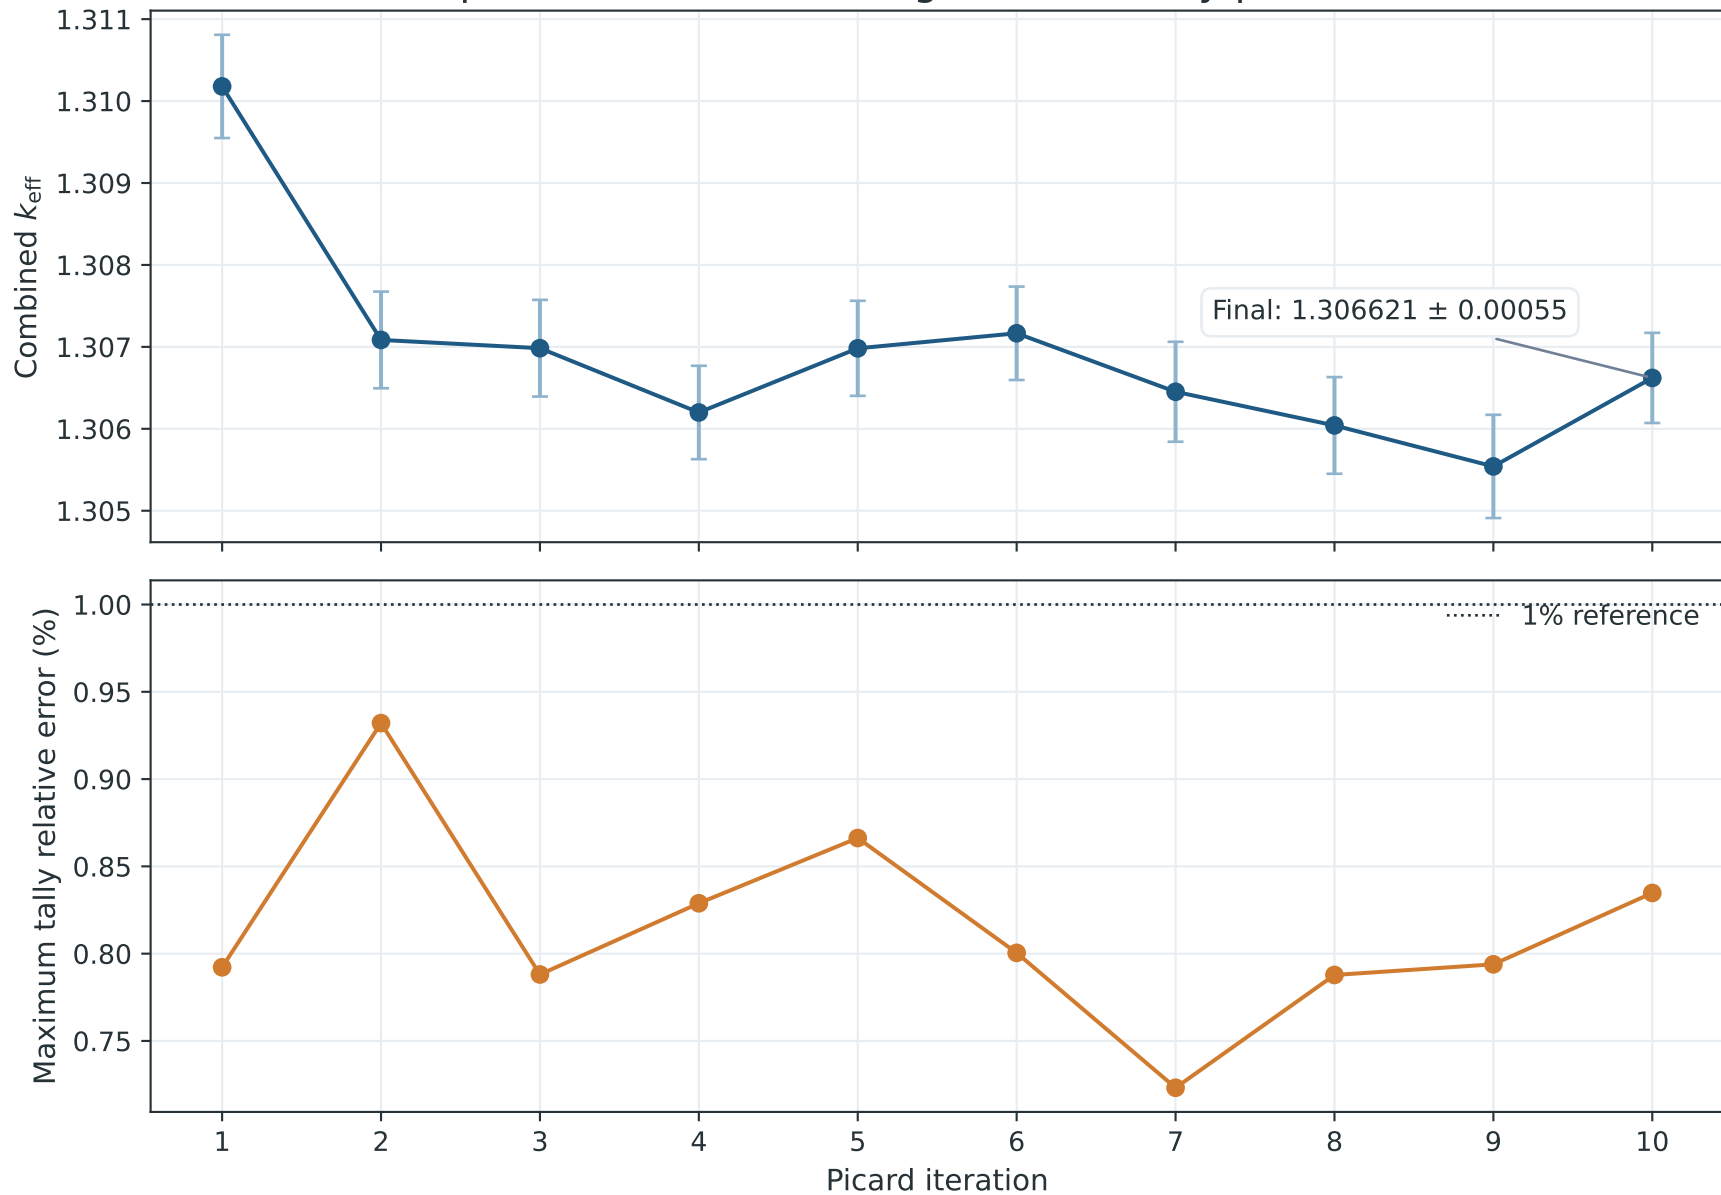

# pcM coupled production result

## Final solid temperatures

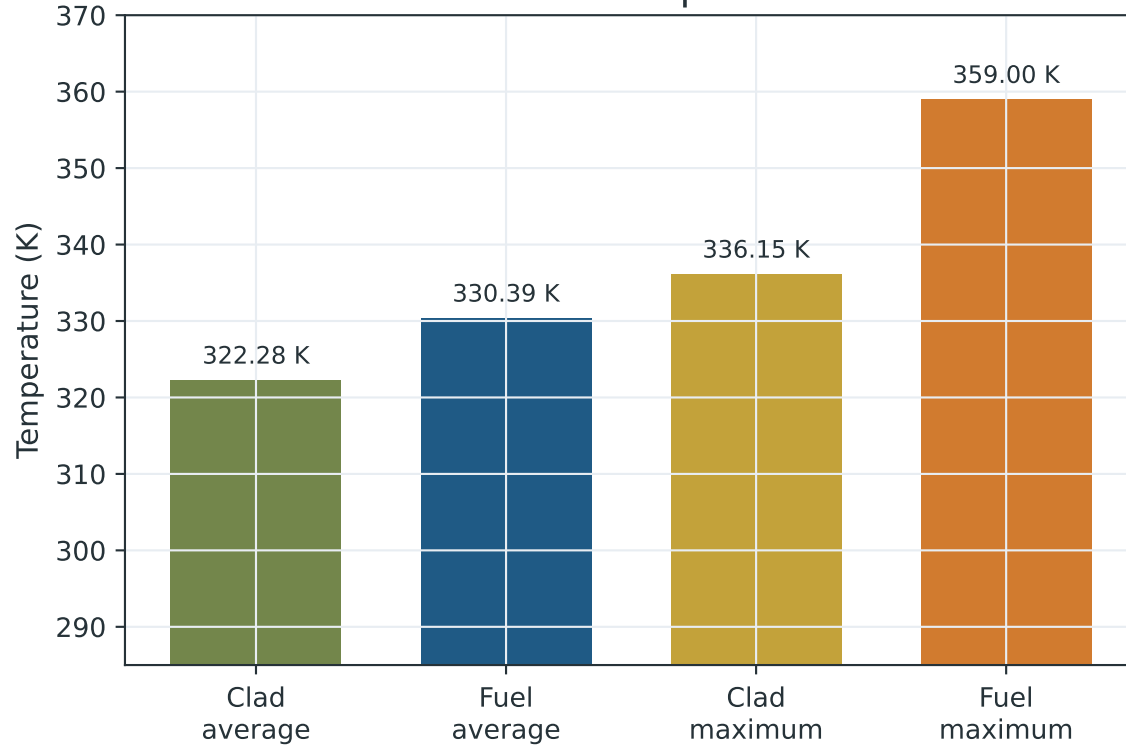

## Power conservation

**2,083.33 W**


integrated fission heating

Prescribed: 2,083.33 W


Difference: +0.000e+00 W

# Final pcM fuel-and-clad temperature field


## Midplane at $z = 30.0$ cm

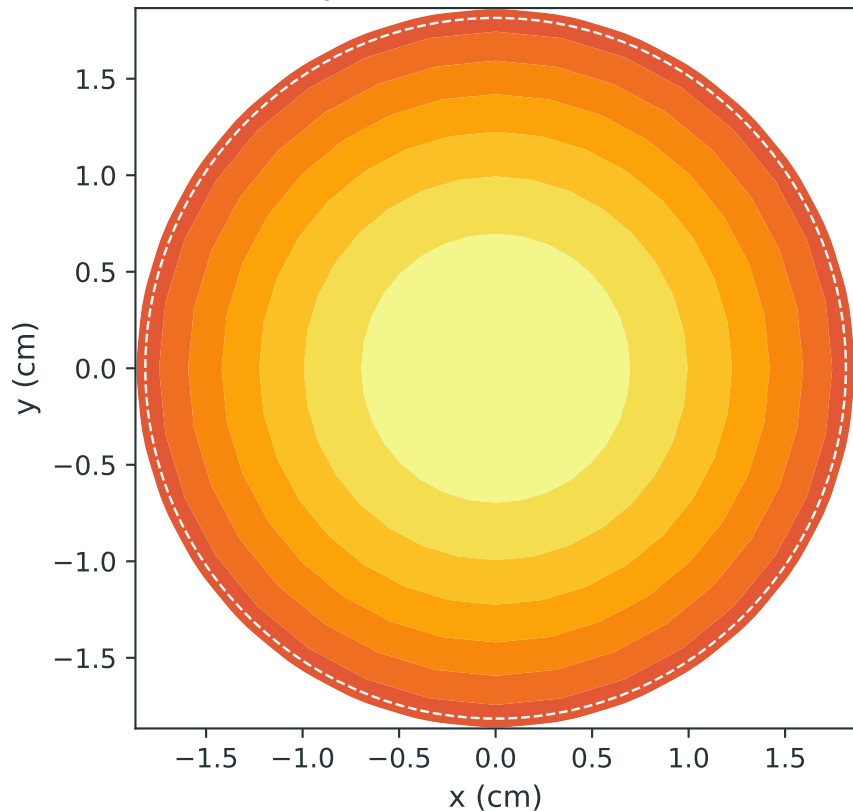

## Axial meridian at $y = 0$

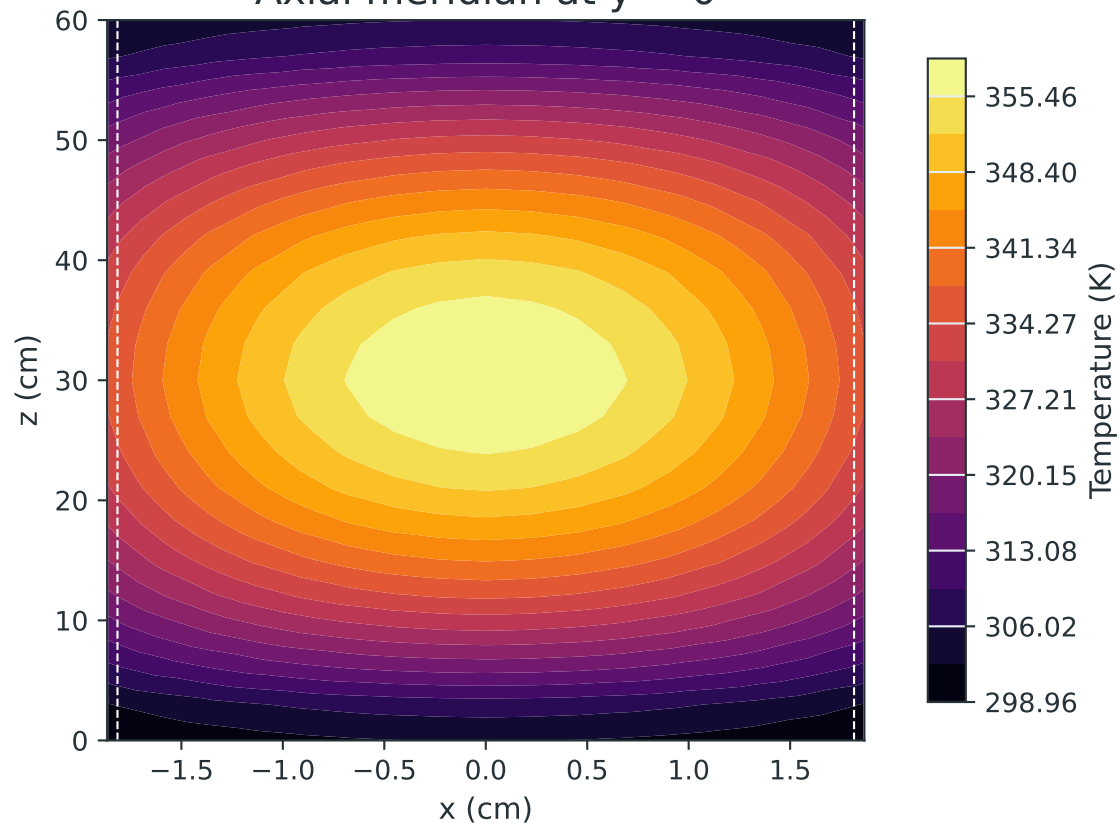

Temperature (K)

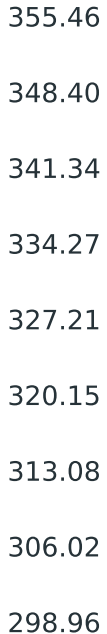

Dashed interface: fuel radius 1.815 cm • solid interface: clad radius 1.866 cm