

Content

Ultimate pursuit of lighting comfort.

> High bay

01 LED Bay Light



> Panel light

03 LED Panel Light

05 Slim LED Panel Light

07 Baffle Slim Panel Light



> Downlight

10 QK-TD-BM

11 QK-DL-LM

12 QK-DL-YD

13 QK-QM

14 QK-JD

15 QK-DL-CMD



> Tube Light

17 LED T8 Integrated Tube Light

19 Single T5 Integrated Tube Light



> Spotlight

■ Residential Design


Product and suggestion, innovation and efficiency. We start with cooperation, loyal to service. To light up your life, Qike will be here with you.




LED Bay Light



- The lamp body is made of high-purity aluminum, integrated die-casting, large heat dissipation area, good thermal conductivity, high temperature resistance, corrosion, suitable for a variety of harsh working environments.
- It is easy to install, firm and durable, simple and generous.

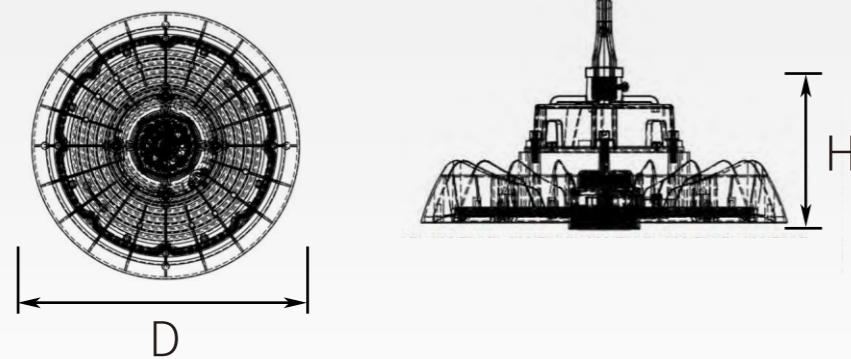





Model No	Watt	DxH	Voltage	Lumens(lm)	Dimmable	PF	CRI	Beam angle
QK-GKD-ETL-100W	100W	φ264.9*116.8	AC100-277V	15000lm	1-10V Dimmable	>0.9	>80Ra	90/120°
QK-GKD-ETL-150W	150W	φ299.7*119.5	AC100-277V	22500lm	1-10V Dimmable	>0.9	>80Ra	90/120°
QK-GKD-ETL-200W	200W	φ325.7*121.3	AC100-277V	30000lm	1-10V Dimmable	>0.9	>80Ra	90/120°
QK-GKD-ETL-240W	240W	φ350.7*123.9	AC100-277V	36000lm	1-10V Dimmable	>0.9	>80Ra	90/120°

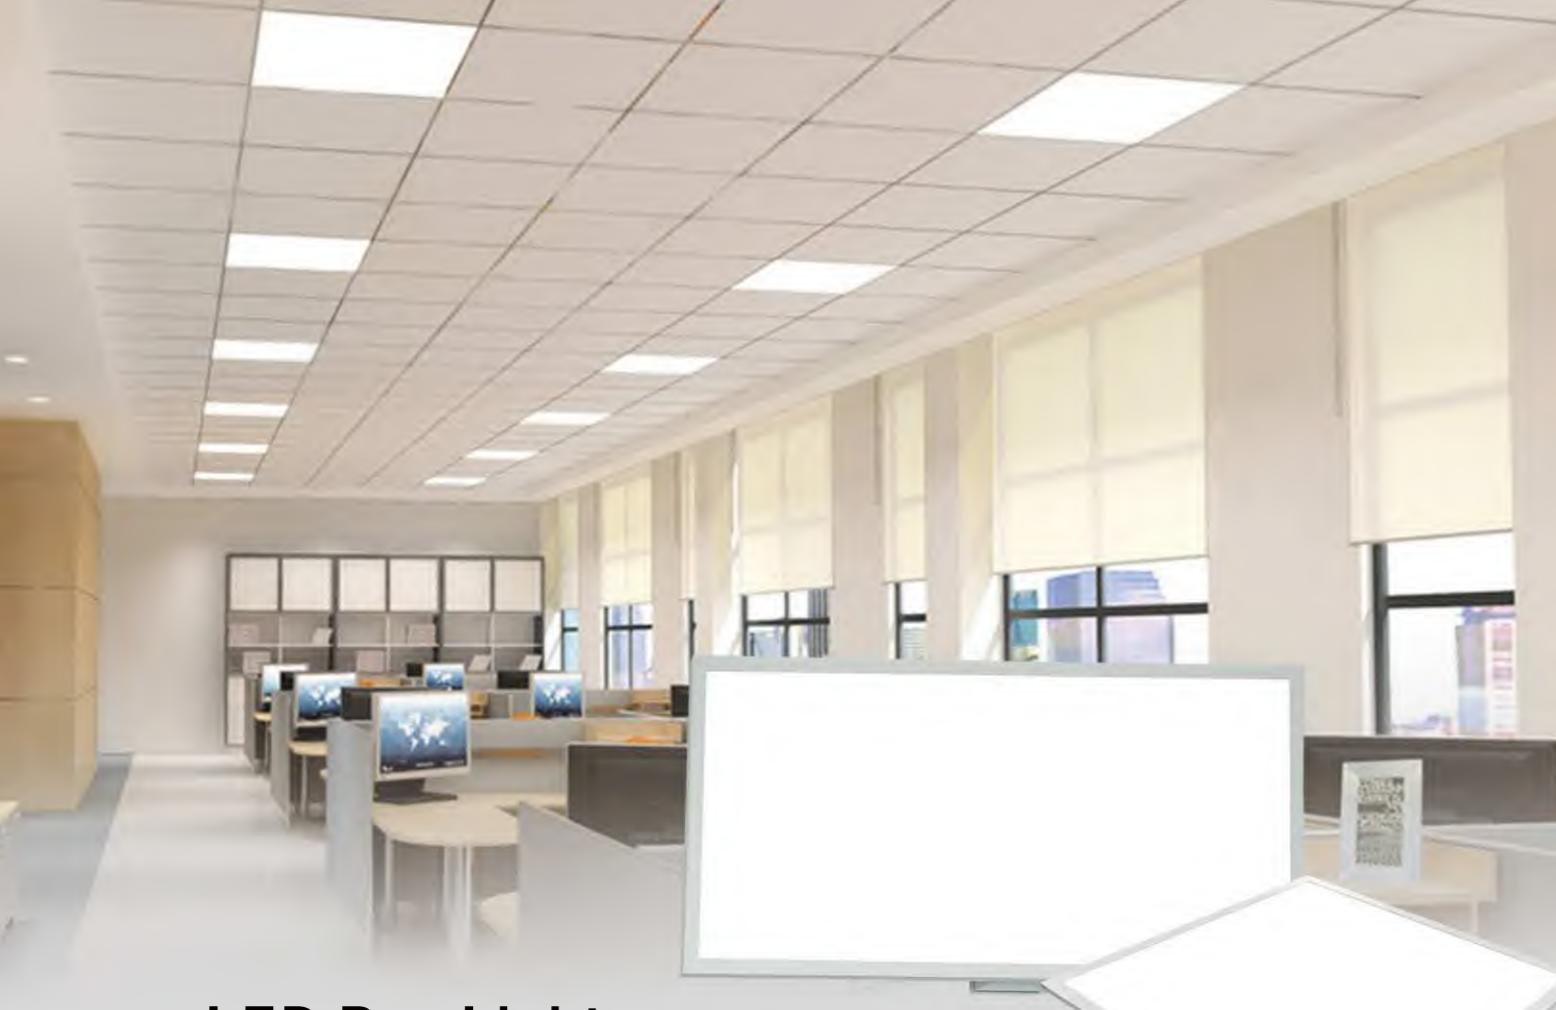

LED Bay Light



- The panel light with uniform and soft luminance , high lumen efficacy, saving energy and protecting environment.
- High quality material, great heat dissipation and low light decay.
- 0-10V dimming, no-flicker, PF>0.9.
- Upgrade quality of Light guide plate, no turning yellow problem.

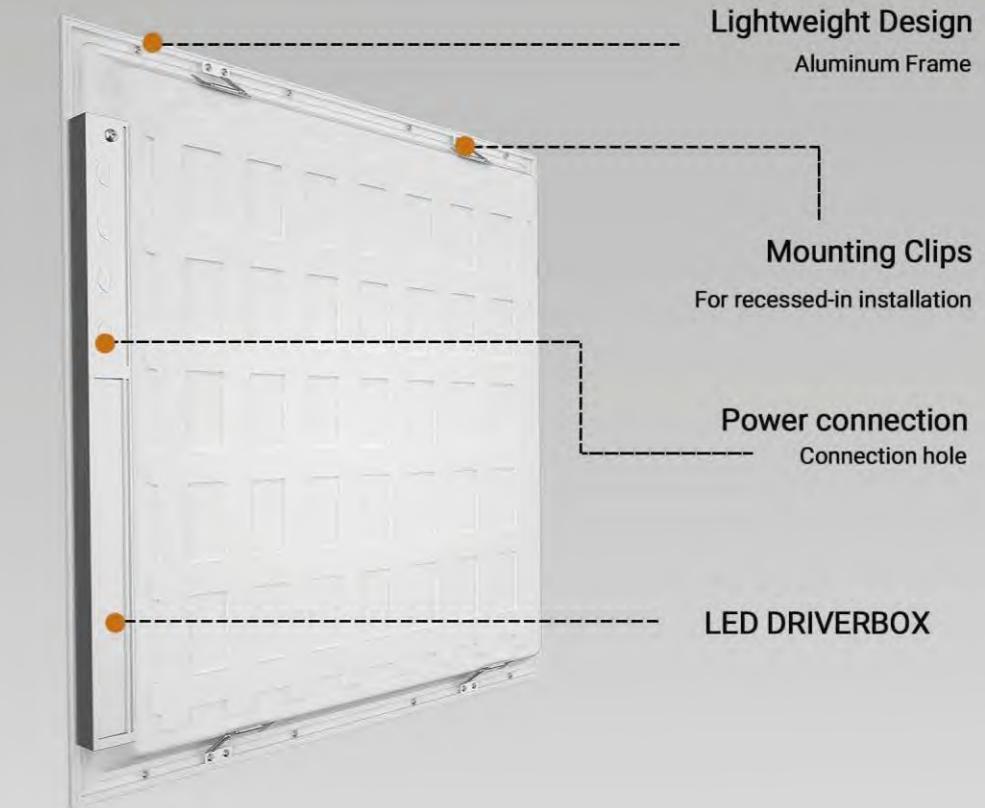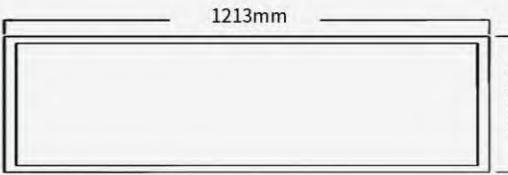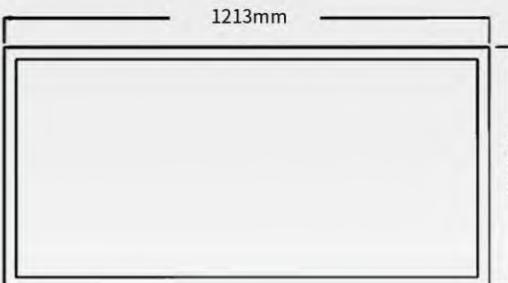


Model No	Size	Wattage(W)	Voltage	Lumens(lm)	CCT	CRI
QK603*603-36W-ETL-Axx	2x2	25/30/36	AC100V-277V	110/125LM/W	CCT	>80Ra
QK603*603-36W-ETL-3C-Axx	2x2	25/30/36	AC100V-277V	110/125LM/W	3.5K/4K/5K	>80Ra
QK603*603-50W-ETL-Axx	2x2	30/40/50	AC100V-277V	100/110LM/W	CCT	>80Ra
QK603*603-50W-ETL-3C-Axx	2x2	30/40/50	AC100V-277V	100/110LM/W	3.5K/4K/5K	>80Ra
QK1213*303-36W-ETL-Axx	1x4	25/30/36	AC100V-277V	110/125LM/W	CCT	>80Ra
QK1213*303-36W-ETL-3C-Axx	1x4	25/30/36	AC100V-277V	110/125LM/W	3.5K/4K/5K	>80Ra
QK1213*303-50W-ETL-Axx	1x4	30/40/50	AC100V-277V	100/110LM/W	CCT	>80Ra
QK1213*303-50W-ETL-3C-Axx	1x4	30/40/50	AC100V-277V	100/110LM/W	3.5K/4K/5K	>80Ra
QK1213*603-50W-ETL-Axx	2x4	30/40/50	AC100V-277V	110/125LM/W	CCT	>80Ra
QK1213*603-50W-ETL-3C-Axx	2x4	30/40/50	AC100V-277V	110/125LM/W	3.5K/4K/5K	>80Ra
QK1213*603-60W-ETL-Axx	2x4	40/50/60	AC100V-277V	100/110LM/W	CCT	>80Ra
QK1213*603-60W-ETL-3C-Axx	2x4	40/50/60	AC100V-277V	100/110LM/W	3.5K/4K/5K	>80Ra

Slim LED Panel Light





- LED panel light with Seoul South Korea SMD2835. High lumen, top quality.
- Official authority of Seoul Korea, can affix trademark on products.
- IC constant driver, PF>0.9, Triac dimmable, no flickers.
- Environmental painting technology.

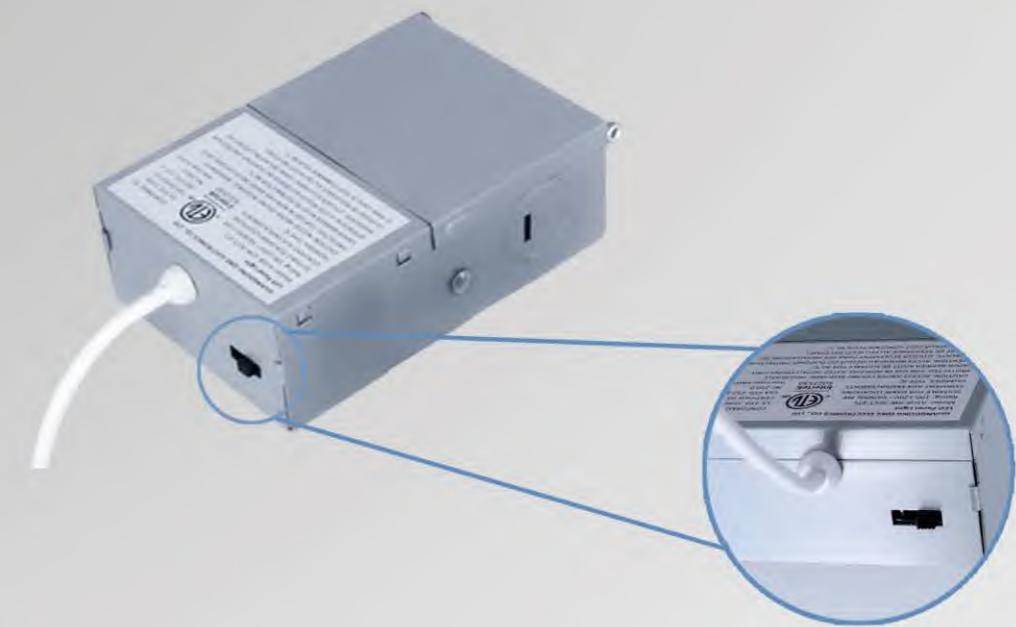

AVAILABLE OPTIONS

- Color changable: 3000K/4000K/5000K
- Color changable: 3000K/4000K/5000K by light Switch
- Color changable: 2.7K/3K/3.5K/4K/5K

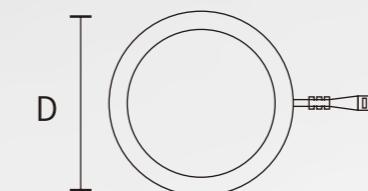

Model No	Size	DxH	Hole cutout	Voltage	Lumens(lm)	Chip brand	Dimmable	PF
A1QK-9W-ETL	4 inch	Φ120xH22	Φ105	AC100V-120V	750-820lm	Seoul	Triac	>0.9
A1QK-12W-ETL	6 inch	Φ173xH22	Φ155	AC100V-120V	1000-1050lm	Seoul	Triac	>0.9

AVAILABLE OPTIONS

- Color changable: 3000K/4000K/5000K
- Color changable: 3000K/4000K/5000K by light Switch
- Color changable: 2.7K/3K/3.5K/4K/5K

Baffle Slim Panel Light




- LED panel light with Seoul South Korea SMD2835. High lumen, top quality.
- Official authority of Seoul Korea, can affix trademark on products.
- IC constant driver, PF>0.9, Triac dimmable, no flickers.
- Environmental painting technology.



AVAILABLE OPTIONS

- Color changable: 3000K/4000K/5000K
- Color changable: 3000K/4000K/5000K by light Switch
- Color changable: 2.7K/3K/3.5K/4K/5K

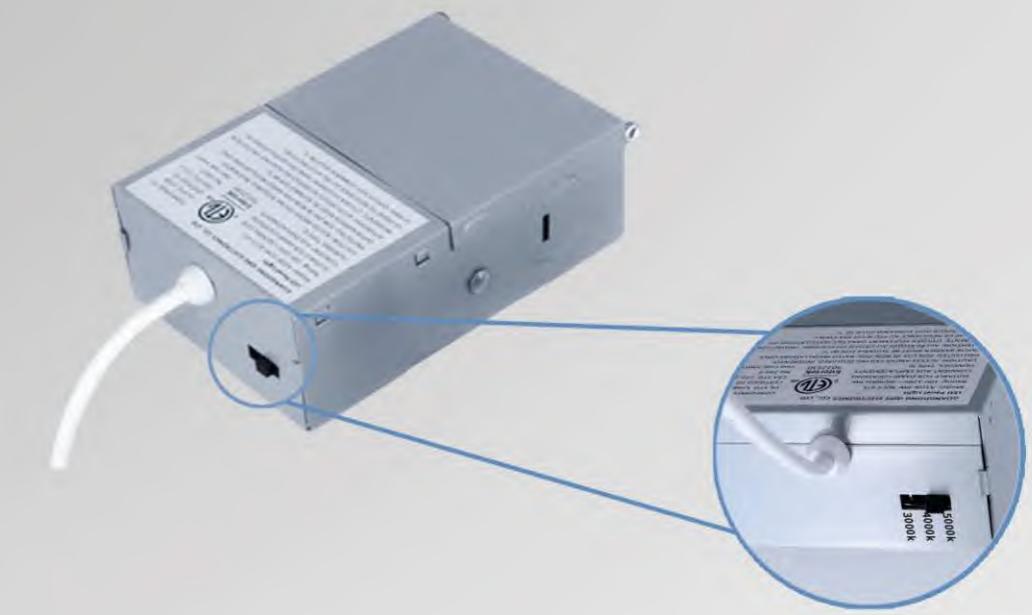

AVAILABLE OPTIONS

- Color changable: 3000K/4000K/5000K
- Color changable: 3000K/4000K/5000K by light Switch
- Color changable: 2.7K/3K/3.5K/4K/5K




Model No	Size	DxH	Hole cutout	Voltage	Lumens(lm)	Chip brand	Dimmable	PF
A1QK-9W-ETL	4 inch	Φ120xH22	Φ105	AC100V-120V	750-820lm	Seoul	Triac	>0.9
A1QK-12W-ETL	6 inch	Φ173xH22	Φ155	AC100V-120V	1000-1050lm	Seoul	Triac	>0.9



QK-TD-BM



- New design downlight with rotation angle 24 degree.
- High quality LED chip, RA90, High lumen.
- Triac dimmable, No flickers, No dark area, IC constant, eyes protection.
- Die-casting aluminum material with environmental painting technique.


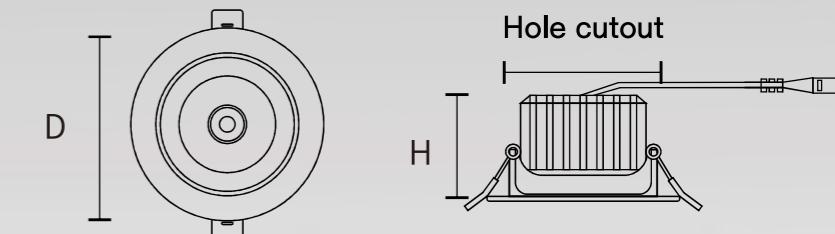


Model No	Size	DxH	Hole cutout	Watt	Voltage	Lumens(lm)	Dimmable	PF	CRI	Beam angle
QK-BM-7W-3CCT	3 inch	Φ90xH55	Φ75	7W	AC100V-120V	450-550lm	Triac dimmable	>0.9	>90Ra	24°
QK-BM-12W-3CCT	4 inch	Φ110xH60	Φ95	12W	AC100V-120V	840-960lm	Triac dimmable	>0.9	>90Ra	24°

QK-DL-LM



- Anti-glare design with honeycomb inside, soft lighting, protected eyes from shining light.
- High quality LED chip, 90RA.
- Triac dimmable, No flickers, IC constant.
- Die-casting aluminum material with environmental painting technique.


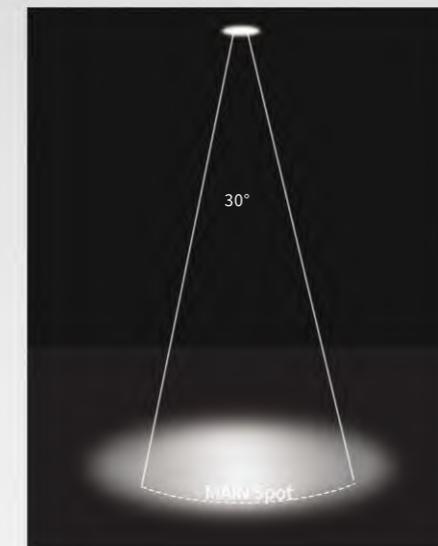
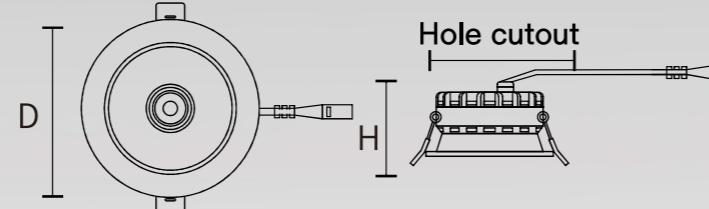


Model No	Size	DxH	Hole cutout	Watt	Voltage	Lumens(lm)	Dimmable	PF	CRI	Beam angle
QK-DL-LM-7W	3 inch	Φ85xH57	Φ75	7W	AC100V-120V	450-550lm	Triac dimmable	>0.9	>90Ra	24°~30°
QK-DL-LM-12W	4 inch	Φ100xH60	Φ90	12W	AC100V-120V	840-960lm	Triac dimmable	>0.9	>90Ra	24°~30°

QK-DL-YD



- Adjust beam angle from 10-60 degree as per different objects in applications.
- High quality LED chip, 90RA.
- Triac dimmable, No flickers, IC constant.
- Die-casting aluminum material with environmental painting technique.

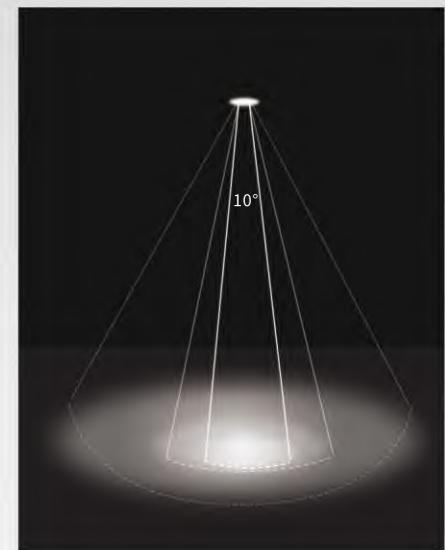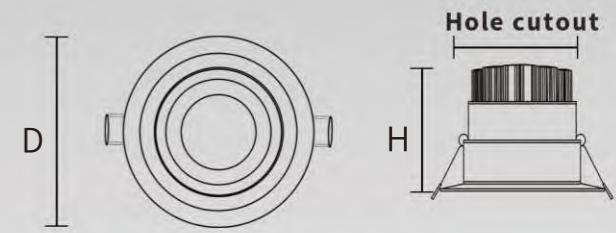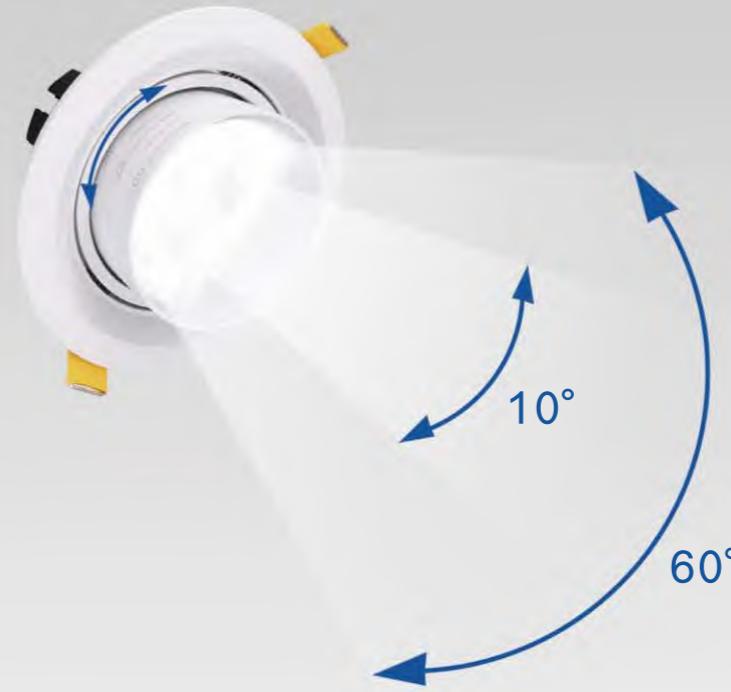


Model No	Size	DxH	Hole cutout	Watt	Voltage	Lumens(lm)	Dimmable	PF	CRI	Beam angle
QK-DL-YD-7W	3 inch	Φ95xH70	Φ75	7W	AC100V-120V	450-550lm	Triac dimmable	>0.9	>90Ra	10/30/60°
QK-DL-YD-12W	4 inch	Φ115xH75	Φ95	12W	AC100V-120V	840-960lm	Triac dimmable	>0.9	>90Ra	10/30/60°

QK-QM



- Provides high-performance basic lighting and high visual comfort.
- It emphasizes its patented heat dissipation system to ensure its longevity.
- It is equipped with a unique optical system with multi-step anti-glare, efficient.
- light-emitting lenses, embedded, embedded formats and optical characteristics.


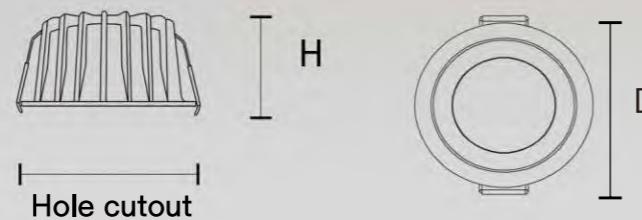


Model No	Size	DxH	Hole cutout	Watt	Voltage	Lumens(lm)	Dimmable	PF	CRI	Beam angle
QK-QM-9W	3 inch	Φ87xH45	Φ75	9W	AC100V-120V	650-720lm	Triac dimmable	>0.9	>90Ra	15/24/36°
QK-QM-12W	4 inch	Φ110xH54	Φ95	12W	AC100V-120V	840-960lm	Triac dimmable	>0.9	>90Ra	15/24/36°
QK-QM-24W	5 inch	Φ135xH61	Φ120	24W	AC100V-120V	1680-1920lm	Triac dimmable	>0.9	>90Ra	15/24/36°

QK-JD



- The use of high-quality LED chip, pure light color, high explicit finger, good lighting effect; Can be environmentally friendly.
- High light efficiency, small light decay, long service life, low power consumption, FSL saving High quality light source chip.

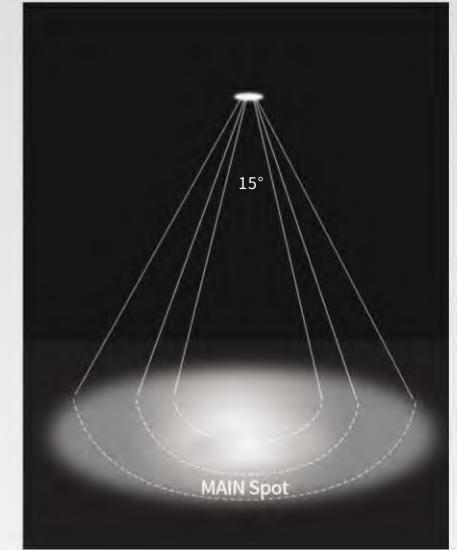
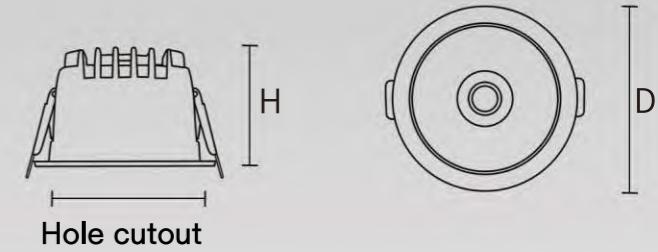


Model No	Size	DxH	Hole cutout	Watt	Voltage	Lumens(lm)	Dimmable	PF	CRI	Beam angle
QK-JD-9W	3 inch	Φ88xH55	Φ75	9W	AC100V-120V	630-720lm	Triac dimmable	>0.9	>90Ra	15/24/36°
QK-JD-12W	4 inch	Φ104xH60	Φ95	12W	AC100V-120V	840-960lm	Triac dimmable	>0.9	>90Ra	15/24/36°
QK-JD-24W	5 inch	Φ138xH84	Φ120	24W	AC100V-120V	1680-1920lm	Triac dimmable	>0.9	>90Ra	15/24/36°

QK-DL-CMD



- Simple elegant design of downlight for different applications.
- Energy saving, super brightness.
- Triac dimmable, No flickers, IC constant.
- Die-casting aluminum material with environmental painting technique.

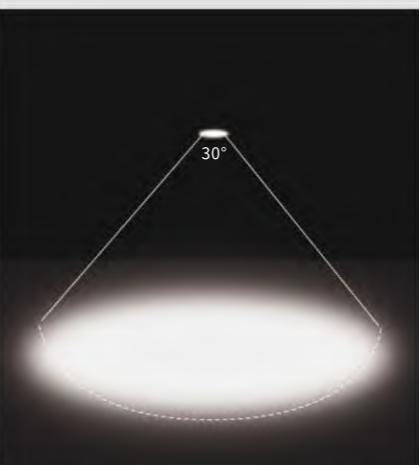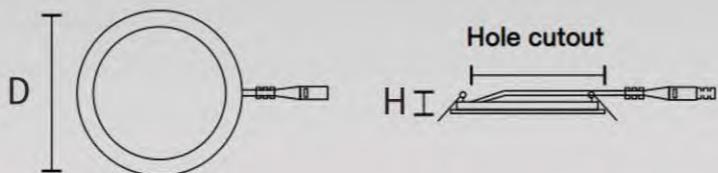

Model No	Size	DxH	Hole cutout	Watt	Voltage	Lumens(lm)	Dimmable	CCT	PF	CRI
QK-DL-CMD-9W	4 inch	Φ120xH30	Φ95	9W	AC100V-120V	810-950lm	Triac dimmable	3CCT(3K/4K/5K)	>0.9	>90Ra
QK-DL-CMD-12W	6 inch	Φ175xH35	Φ145	12W	AC100V-120V	1000-1350lm	Triac dimmable	3CCT(3K/4K/5K)	>0.9	>90Ra



LED T8 Integrated Tube Light



- Classical Integrative Original Design
- Seamless Connection
- Curved Lens Provides >120° Beam



■ Connection Ways



■ Standard Clip




V-Shaped Available

Power
On The Back

PIR Sensor Optional

••• Product Line Drawing (Size:mm)

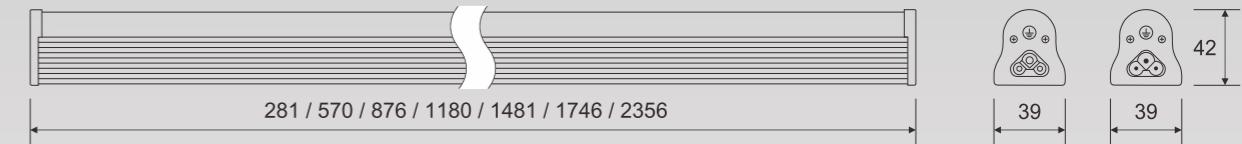

••• Product Specification

Material : AL+PC	PC Cover : Frosted / Clear	CCT: <input checked="" type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6000K
------------------	----------------------------	---

Model NO	Size	Watt	CRI	Beam Angle	Package
QK-T8DL300-5W	1ft	5W	>80	120	435*240*205 (mm) 20pcs/ctn
QK-T8DL600-9W	2ft	9W	>80	120	725*240*205 (mm) 20pcs/ctn
QK-T8DL900-13W	3ft	13W	>80	120	1035*240*205 (mm) 20pcs/ctn
QK-T8DL1200-18W	4ft	18W	>80	120	1335*240*205 (mm) 20pcs/ctn
QK-T8DL1200-22W	4ft	22W	>80	120	1335*240*205 (mm) 20pcs/ctn
QK-T8DL1500-25W	5ft	25W	>80	120	1640*240*205 (mm) 20pcs/ctn
QK-T8DL1800-28W	6ft	28W	>80	120	1900*240*205 (mm) 20pcs/ctn
QK-T8DL2400-44W	8ft	44W	>80	120	2510*150*166 (mm) 9pcs/ctn

••• Applications: Storage, Retail And Grocery Store, Parking Lot etc

Single T5 Integrated Tube Light



- Great Performance, Reasonable Cost
- Seamless Connection
- CCT Adjustable Optional



■ Connection Ways



■ Connection Cable



■ Standard Clip




CCT Adjustable



On/Off Switch



••• Product Line Drawing (Size:mm)

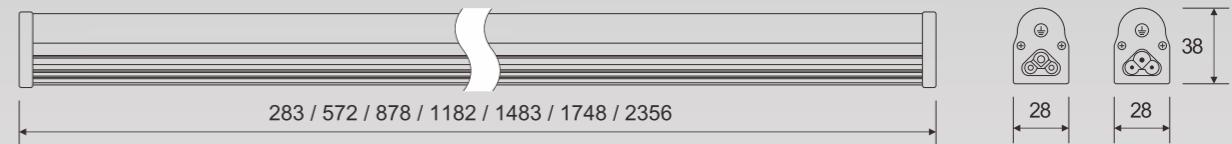

••• Product Specification

Material : AL+PC	PC Cover : Frosted / Clear	CCT : <input checked="" type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6000K
------------------	----------------------------	--


Model	Size	Power	CRI	Beam Angle	Package
QK-T5DL300-4W	1ft	4W	>80	120	490*175*230 (mm) 25pcs/ctn
QK-T5DL600-7W	2ft	7W	>80	120	780*175*230 (mm) 25pcs/ctn
QK-T5DL900-12W	3ft	12W	>80	120	1085*175*230 (mm) 25pcs/ctn
QK-T5DL1200-15W	4ft	15W	>80	120	1390*175*230 (mm) 25pcs/ctn
QK-T5DL1500-20W	5ft	20W	>80	120	1690*175*230 (mm) 25pcs/ctn
QK-T5DL1800-22W	6ft	22W	>80	120	1955*175*190 (mm) 20pcs/ctn
QK-T5DL2400-30W	8ft	30W	>80	120	2565*175*145 (mm) 15pcs/ctn

••• Applications: Restaurant, Store, Supermarket, Display Rack etc


Smile wash wall
spotlight kit products



The material is international aluminum, and the spotlight line is more concentrated and the lighting is strong It can better highlight the sense of hierarchy and focus on local lighting, which can enhance the effect of halos.


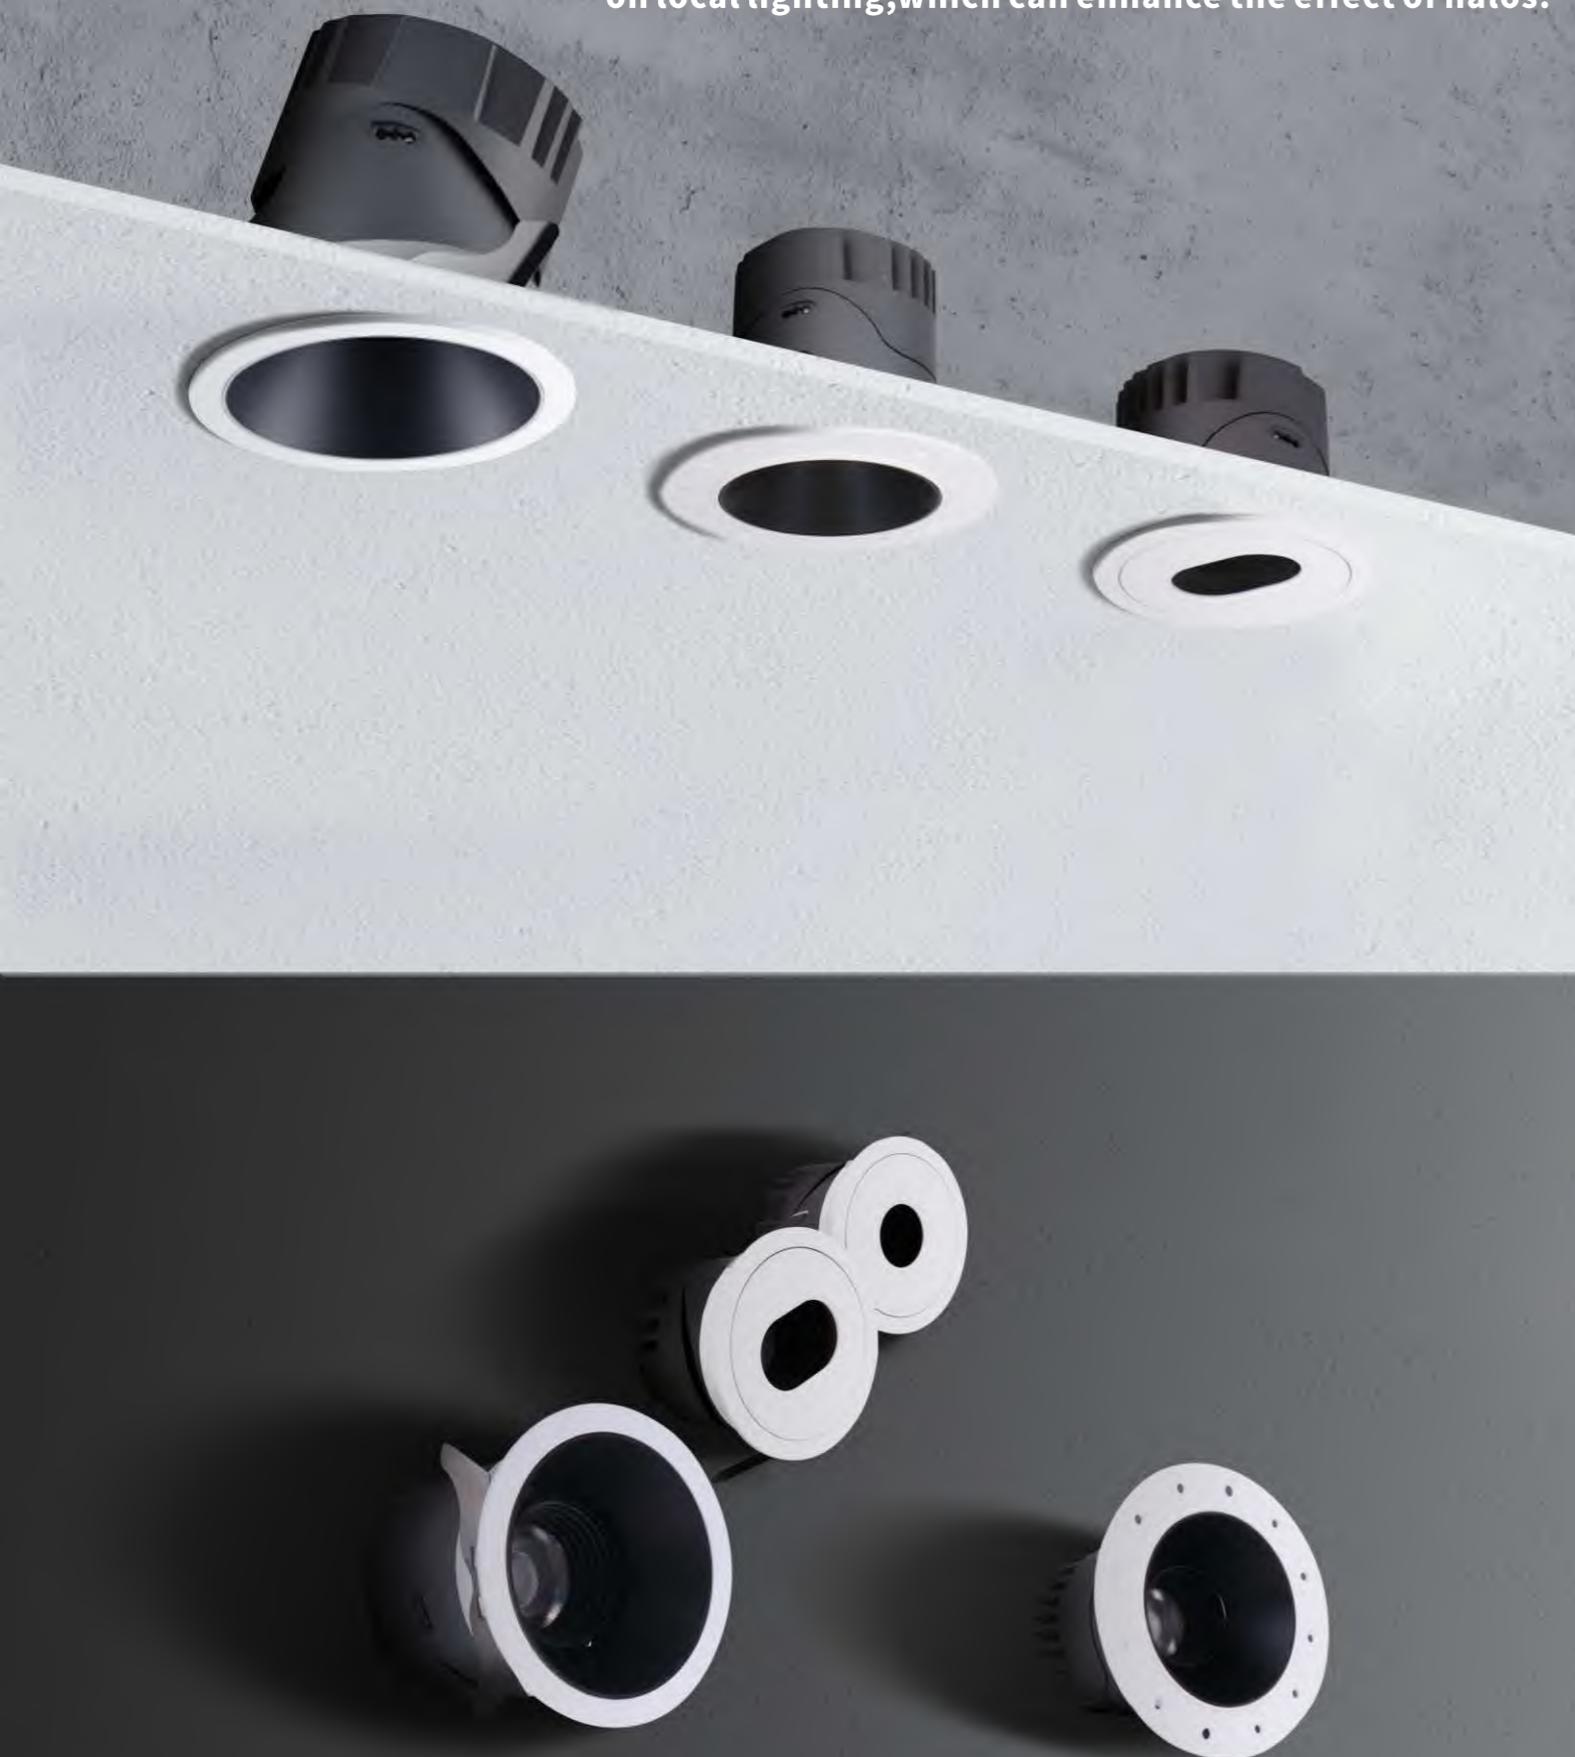


75 circular wash wall spotlights


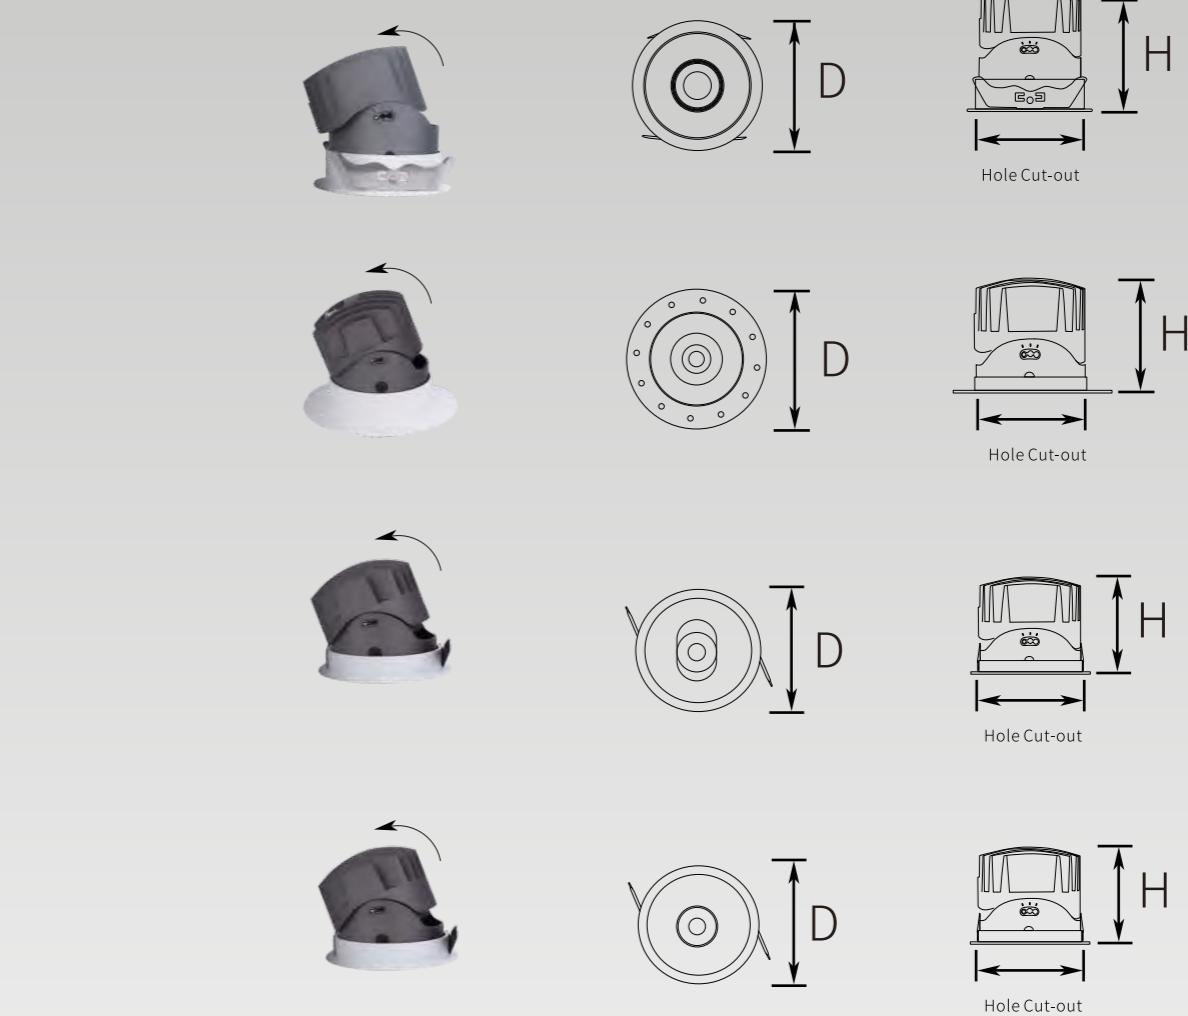


Product model	watt	D x H	Hole Cut-out	Voltage	Lumens(lm)	Dimmable	PF	CRI	Beam angle
AL-SD75001	9W	φ85*H83	φ75mm	AC100-120V	600-700lm	Triac	>0.9	>90Ra	15/24/36/50°
AL-SD750011	9W	φ100*H83	φ75mm	AC100-120V	600-700lm	Triac	>0.9	>90Ra	15/24/36/50°
AL-SD75001Y	9W	φ85*H70	φ75mm	AC100-120V	600-700lm	Triac	>0.9	>90Ra	15/24°
AL-SD75001T	9W	φ85*H70	φ75mm	AC100-120V	600-700lm	Triac	>0.9	>90Ra	15/24°

95 circular wash wall spotlights




75 square wash wall spotlights







Product model	watt	D x H	Hole Cut-out	Voltage	Lumens(lm)	Dimmable	PF	CRI	Beam angle
/	12W	φ110*H110	φ95mm	AC100-120V	800-960lm	Triac	>0.9	>90Ra	15/24/36/50°
AL-SD75001F	9W	L85*W85*H95	75*75mm	AC100-120V	600-700lm	Triac	>0.9	>90Ra	15/24°

Spotlight heads can generally be rotated and even controlled beam angles.


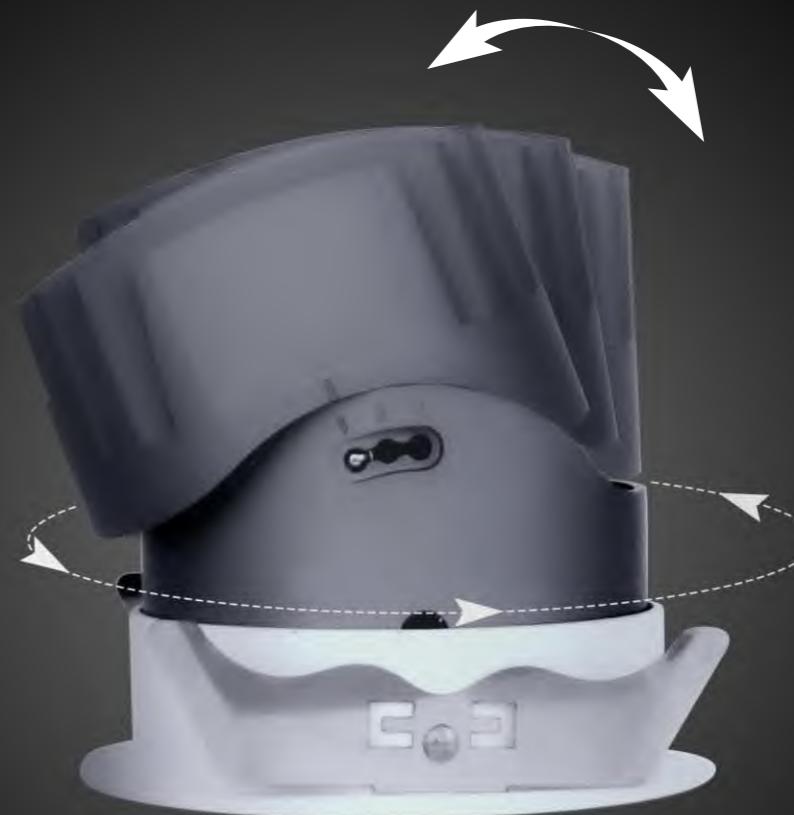




Square spotlights





Square double-headed spotlight

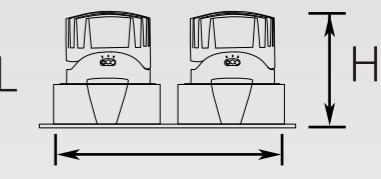

Product model	watt	DxH	Hole Cut-out	Voltage	Lumens(lm)	Dimmable	PF	CRI	Beam angle
AL-GS95101F	12W	φ106*H95	φ95mm	AC100-120V	800-960lm	Triac	>0.9	>90Ra	15/24/36/50°
AL-GS95102F	12W	L106*W106*H88	95*95mm	AC100-120V	800-960lm	Triac	>0.9	>90Ra	15/24°
AL-GS95201	2*12W	L203*W106*H88	190*95mm	AC100-120V	1600-1920lm	Triac	>0.9	>90Ra	15/24°

Round spotlights

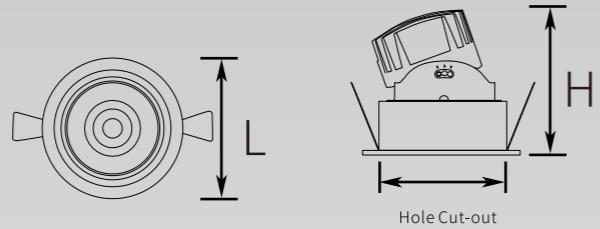

Product model	watt	D x H	Hole Cut-out	Voltage	Lumens(lm)	Dimmable	PF	CRI	Beam angle
AL-GS95101	12W	φ106*H95	φ95mm	AC100-120V	800-960lm	Triac	>0.9	>90Ra	15/24/36/50°
AL-GS95102	12W	φ106*H88	φ95mm	AC100-120V	800-960lm	Triac	>0.9	>90Ra	15/24°

Main lighting, special lighting.
It is generally used for places where lighting is emphasized and expressed, such as video walls, hanging paintings, handicrafts, etc.

