AtmoSPHERE

Jay Feng, William Hwang, Joseph Wu, Mingyu Zhang

CSE 477, Spring 2015

ABSTRACT

Air quality is an upstream component of human health, which cannot be addressed through primary care health facilities. In this work, we present AtmoSPHERE, a connected, wearable air monitor. Our system is comprised of a wrist-worn sensor suite, a connected smartphone, and a cloud service. The sensor suite measures two major categories of airborne health risks: particulate matter and volatile organics. The phone tags the data with location data and is used to communicate between the sensors and cloud. From the cloud service, we display a dashboard to highlight air quality in travelled areas. To evaluate the system, we collected data from 2 users over the course of a week of normal activity.

ACM Classification Keywords

J.3 Health

Author Keywords

Air quality; Upstream health; Wearable; Connected devices; Distributed sensors.

INTRODUCTION

Approximately half of all known health conditions originate from environmental factors[3]. These factors are generally labelled "upstream" factors due to how they are detached from a person's immediate symptoms during illness. Upstream factors include variables such as the sanitation of a person's home, the condition of their workplace, or the local air. The existing health care system is not equipped to handle issues outside the hospital or clinic. However, many upstream factors are simple to identify, straight forward to address. We envision a device that can inform the user and others in the vicinity about one subset of upstream health risks.

In this project, we introduce AtmoSPHERE, a wearable air monitor for both particulate matter and volatile organic compounds (VOC). Particulate matter (PM), is any microscopic matter suspended in the atmosphere. Particulates include dust as well as more dangerous varieties classified by their diameter in microns, known as PM10 and PM2.5. A PM sensor is comprised of an infrared emitting diode and a phototransistor placed diagonally[2]. As particles pass through the path between the two components, deflected light is recorded by the

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee.

phototransistor. This approach can detect visible dust as well as finer particles, such as PM2.5.

Volatile organic compounds (VOC) are compounds with high vapor pressure at room temperature. VOCs are numerous and varied, and include harmful compounds such as benzene, chlorofluorocarbons, and methylene chloride. A VOC sensor comes in many forms. A semiconductor VOC sensor uses a chemical reaction between the air and a heated substrate, such as Tin Dioxide[1]. As the concentration of VOC in the air increases, the corresponding resistance of the substrate drops by a measurable amount.

AtmoSPHERE is intended to allow distributed sensing of environmental risks. The wearable is linked to a smartphone and through that, our cloud service and data API. By aggregating data from multiple users, we can build substantial maps of local air quality. We expect this device can be used to inform lifestyle changes.

THEORY OF OPERATION

The only physical requirement of the AtmoSPHERE is sufficient air flow through the device. The wearable is designed to be worn on the wrist, where the movement of the arms will agitate air into the sensors. However, the device can be attached to any other location on the body. The wearable also doubles as a stationary air monitor, such as when taken off during charging. While stationary, diffusion is also an acceptable means of passing air over the sensor.

For data collection, the wearable should always be within a short distance of a paired Android phone. The wearable and phone communicate via Bluetooth, so the maximum separation of the two devices should not exceed 10 meters. At the same time, the phone should have location services enabled and at least an intermittent internet connection.

IMPLEMENTATION DETAILS

Figure 1 shows the system architecture and data flow. In this section, we will detail the hardware design, the software features, and the data API.

Hardware

Figure 2

Phone Application TODO

Web Application TODO

Data API TODO

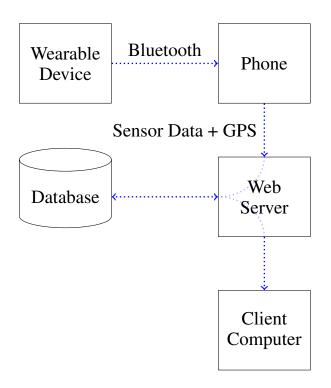


Figure 1. System architecture and data flow.

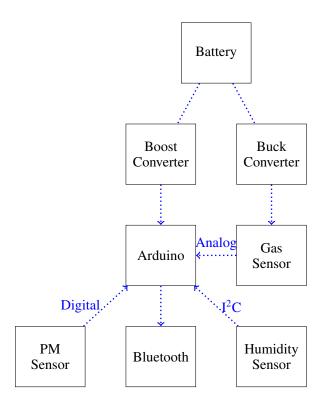


Figure 2. Components of the wearable device.

RESULTS TODO

CHALLENGES TODO

FUTURE WORK AND DISCUSSION TODO

CONCLUSION TODO

REFERENCES

- 1. AMS AG. 2015. AS-MLV-P2 Datasheet. Online. (May 2015). Retrieved May 10, 2015 from http://ams.com/eng/content/download/686543/1787717/348218.
- Sharp Corporation. 2006. GP2Y1010AU0F Datasheet.
 Online. (1 December 2006). Retrieved April 12, 2015 from http://www.sparkfun.com/datasheets/ Sensors/gp2y1010au_e.pdf.
- 3. Rishi Manchanda. 2014. What makes us get sick? Look upstream. Video. (August 2014). Retrieved April 12, 2015 from www.ted.com/talks/rishi_manchanda_what_makes_us_get_sick_look_upstream.