


Military Institute of Science and Technology
Department of CSE
CSE-310

RIP (Routing Information Protocol)

Design the following network in Packet Tracer. Use RIP protocol for dynamic routing. Ensure that each PC can communicate with each other.

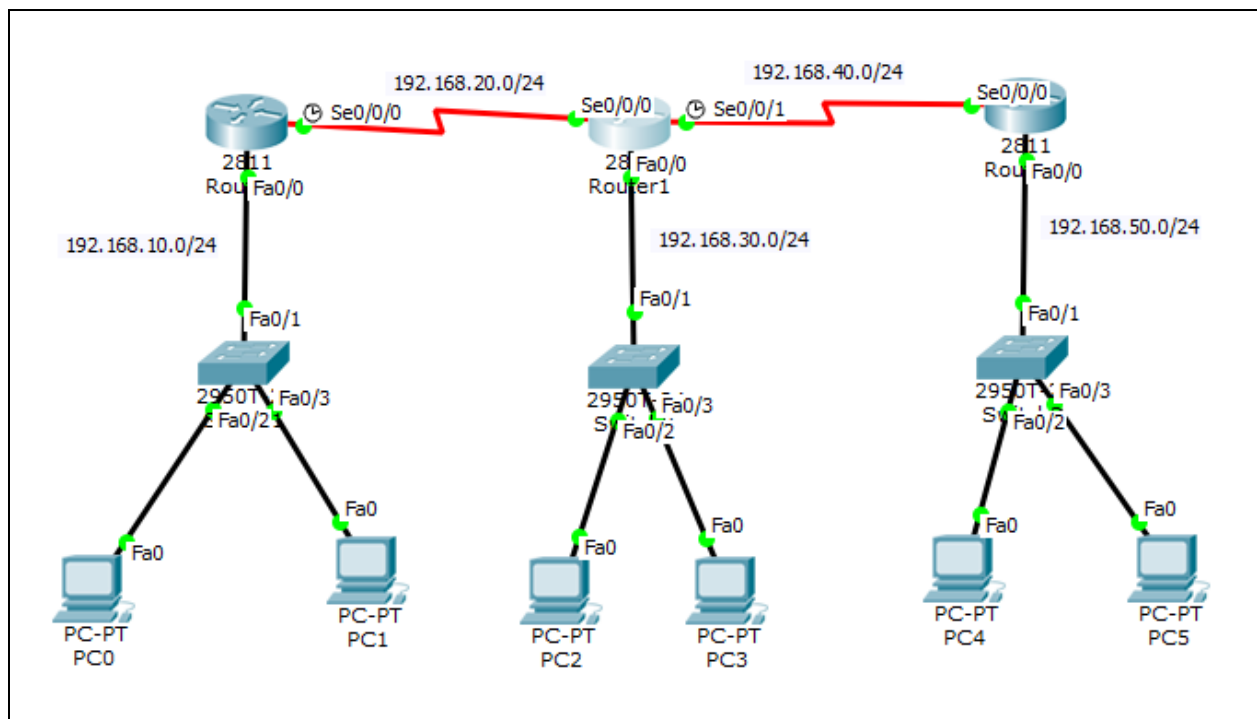


Step-1: Configure Router0, Router1, Router2 and PCs.

Step2: Apply RIP to each of the router to ensure that each PC can communicate with each other.

EIGRP (Enhanced Interior Gateway Routing Protocol)

Design the following network in Packet Tracer. Use EIGRP protocol for dynamic routing. Ensure that each PC can communicate with each other.

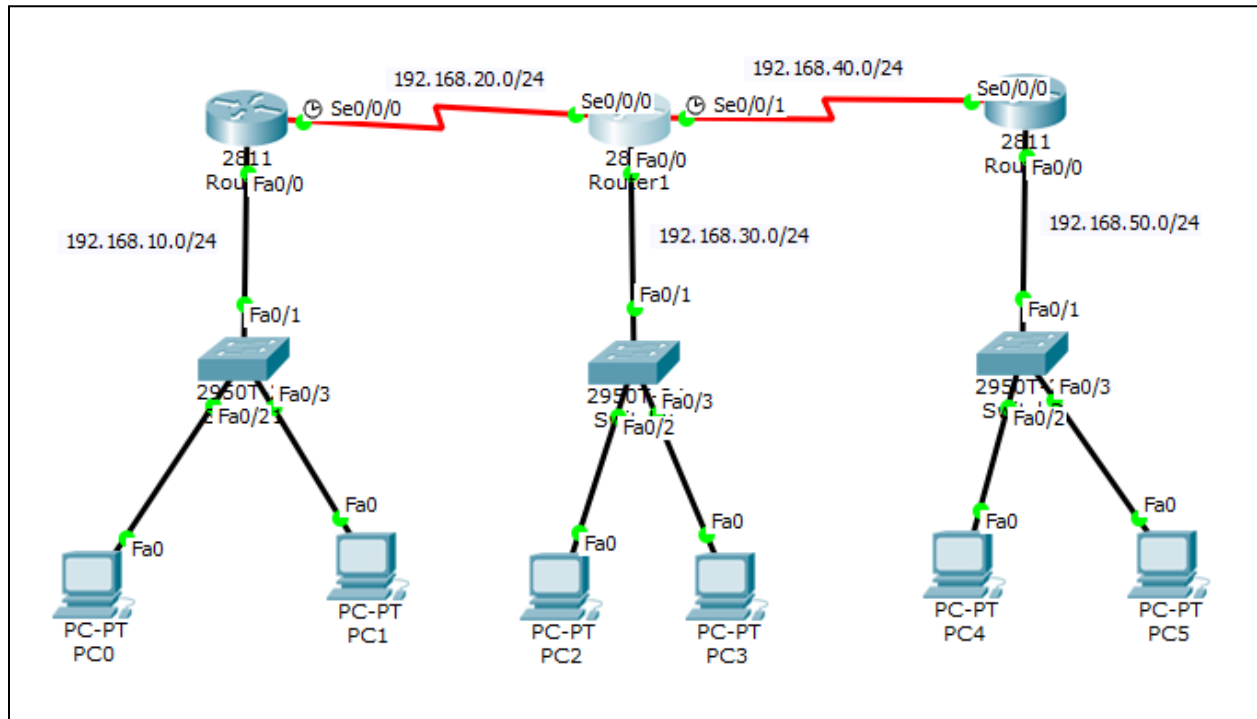

Step-1: Configure Router0, Router1, Router2 and PCs.

Step2: Apply EIGRP to each of the router to ensure that each PC can communicate with each other.