Chapter 3

Arithmetic for Computers

Arithmetic for Computers

- Operations on integers
  - Addition and subtraction
  - Multiplication and division
  - Dealing with overflow
- Floating-point real numbers
  - Representation and operations

Integer Addition

- Example: 7 + 6

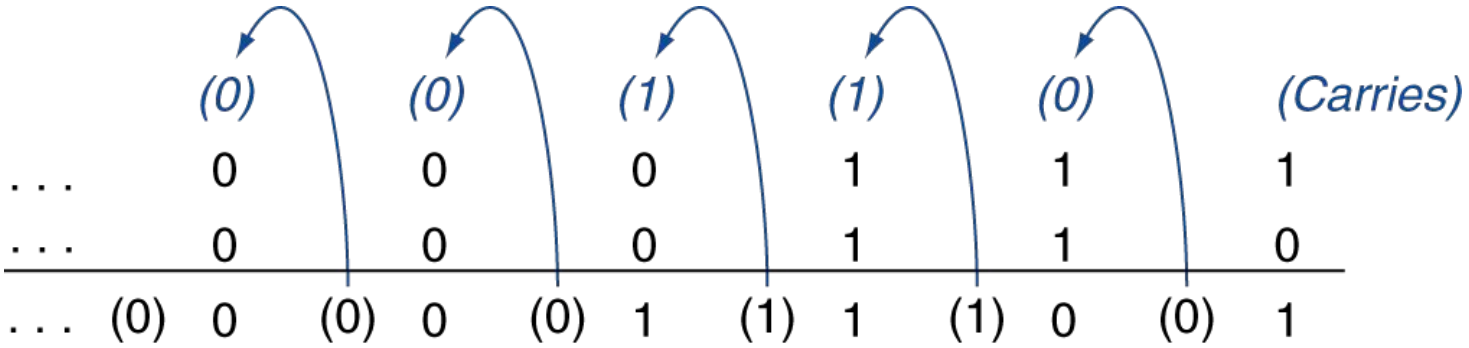

- Overflow if result out of range
  - Adding +ve and –ve operands, no overflow
  - Adding two +ve operands
    - Overflow if result sign is 1
  - Adding two –ve operands
    - Overflow if result sign is 0

Integer Subtraction

- Add negation of second operand
- Example: 7 – 6 = 7 + (–6)

  +7: 0000 0000 … 0000 0111
  –6: 1111 1111 … 1111 1010
  +1: 0000 0000 … 0000 0001

- Overflow if result out of range
  - Subtracting two +ve or two –ve operands, no overflow
  - Subtracting +ve from –ve operand
    - Overflow if result sign is 0
  - Subtracting –ve from +ve operand
    - Overflow if result sign is 1

Multiplication

- Start with long-multiplication approach

multiplicand

multiplier

product

```
  1000
× 1001
------
  1000
 0000
0000
1000
-------
1001000
```

Length of product is the sum of operand lengths

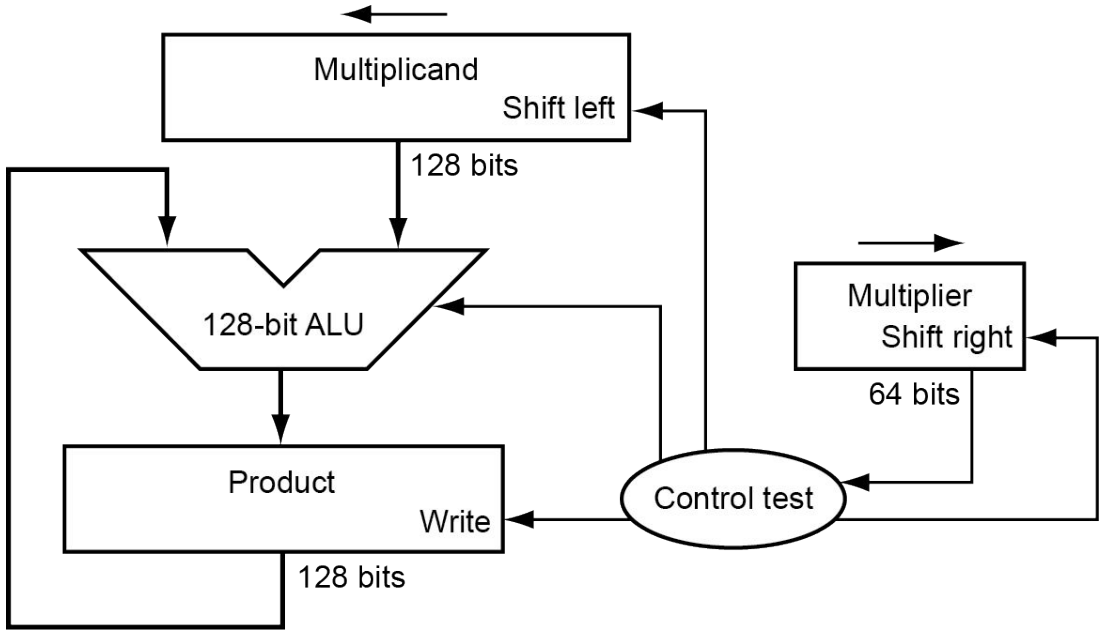

Multiplication Hardware

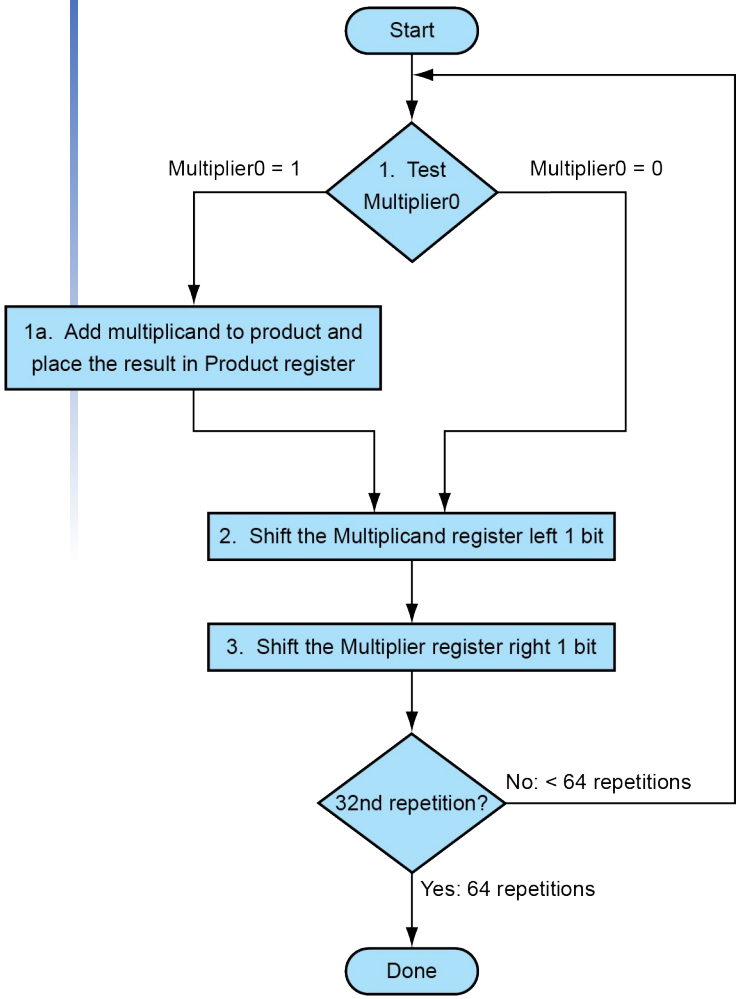

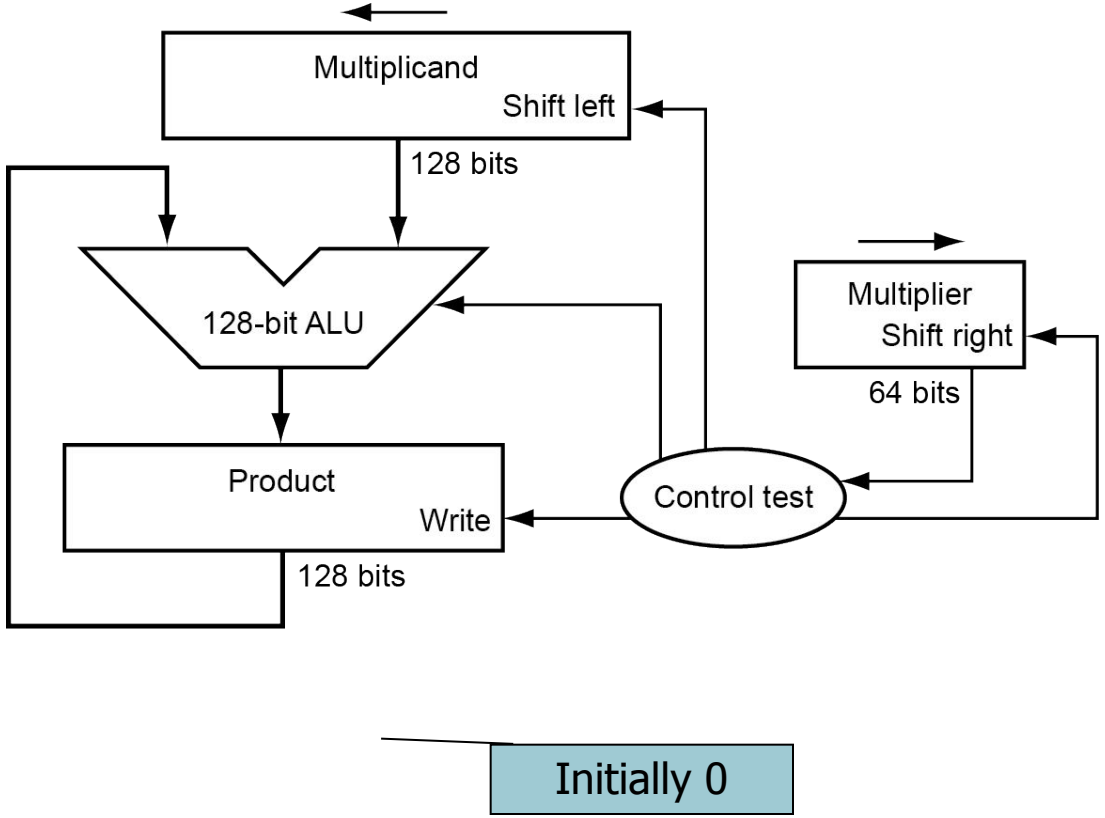

Optimized Multiplier

- Perform steps in parallel: add/shift

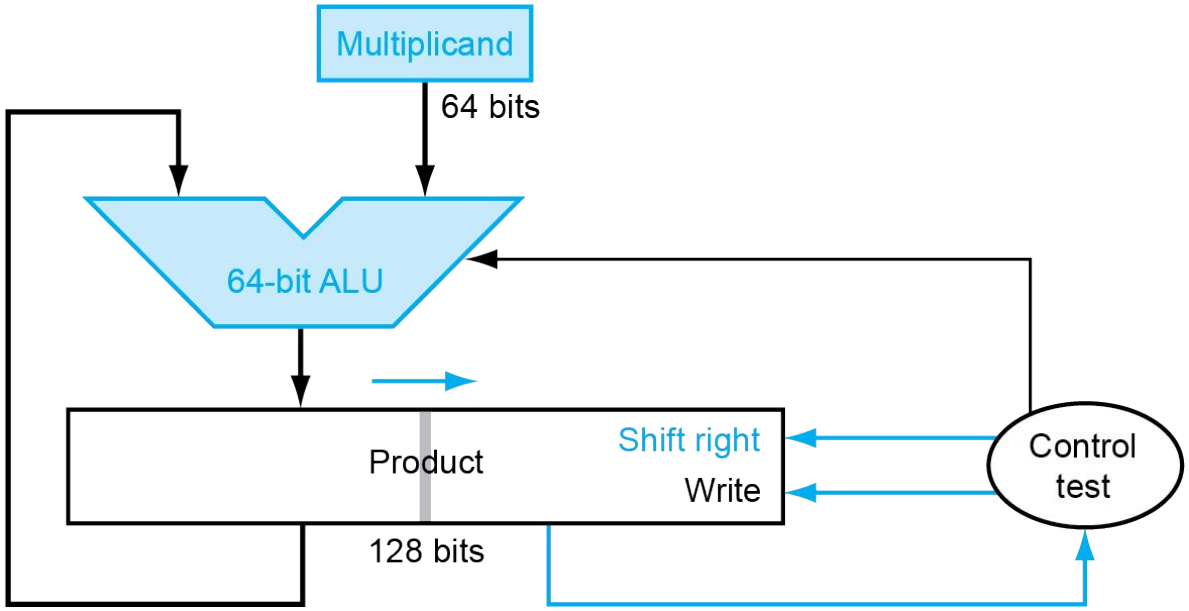

- One cycle per partial-product addition
  - That's ok, if frequency of multiplications is low

RISC-V Multiplication

- Four multiply instructions:
  - mul: multiply
    - Gives the lower 64 bits of the product
  - mulh: multiply high
    - Gives the upper 64 bits of the product, assuming the operands are signed
  - mulhu: multiply high unsigned
    - Gives the upper 64 bits of the product, assuming the operands are unsigned
  - mulhsu: multiply high signed/unsigned
    - Gives the upper 64 bits of the product, assuming one operand is signed and the other unsigned
  - Use mulh result to check for 64-bit overflow

Floating Point

- Representation for non-integral numbers
  - Including very small and very large numbers
- Like scientific notation
  - -2.34×10^{56}
  - $+0.002 \times 10^{-4}$
  - $+987.02 \times 10^{9}$
- In binary
  - $\pm 1.xxxxxxx_2 \times 2^{yyyy}$
- Types float and double in C

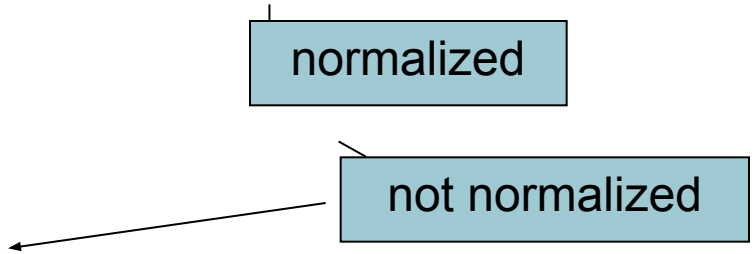

Floating Point Standard

- Defined by IEEE Std 754-1985
- Developed in response to divergence of representations
  - Portability issues for scientific code
- Now almost universally adopted
- Two representations
  - Single precision (32-bit)
  - Double precision (64-bit)

IEEE Floating-Point Format

single: 8 bits
double: 11 bits

single: 23 bits
double: 52 bits

$$x = (-1)^S \times (1 + \text{Fraction}) \times 2^{(\text{Exponent} - \text{Bias})}$$

- S: sign bit (0 ⇒ non-negative, 1 ⇒ negative)
- Normalize significand: 1.0 ≤ |significand| < 2.0
  - Always has a leading pre-binary-point 1 bit, so no need to represent it explicitly (hidden bit)
  - Significand is Fraction with the “1.” restored
- Exponent: excess representation: actual exponent + Bias
  - Ensures exponent is unsigned
  - Single: Bias = 127; Double: Bias = 1203

Single-Precision Range

- Exponents 00000000 and 11111111 reserved
- Smallest value
  - Exponent: 00000001
    ⇒ actual exponent = 1 – 127 = –126
  - Fraction: 000…00 ⇒ significand = 1.0
  - $\pm 1.0 \times 2^{-126} \approx \pm 1.2 \times 10^{-38}$
- Largest value
  - exponent: 11111110
    ⇒ actual exponent = 254 – 127 = +127
  - Fraction: 111…11 ⇒ significand ≈ 2.0
  - $\pm 2.0 \times 2^{+127} \approx \pm 3.4 \times 10^{+38}$

Double-Precision Range

- Exponents 0000…00 and 1111…11 reserved
- Smallest value
  - Exponent: 00000000001
    ⇒ actual exponent = 1 – 1023 = –1022
  - Fraction: 000…00 ⇒ significand = 1.0
  - $\pm 1.0 \times 2^{-1022} \approx \pm 2.2 \times 10^{-308}$
- Largest value
  - Exponent: 11111111110
    ⇒ actual exponent = 2046 – 1023 = +1023
  - Fraction: 111…11 ⇒ significand ≈ 2.0
  - $\pm 2.0 \times 2^{+1023} \approx \pm 1.8 \times 10^{+308}$

Floating-Point Precision

- Relative precision
  - all fraction bits are significant
  - Single: approx 2^{-23}
    - Equivalent to $23 \times \log_{10}2 \approx 23 \times 0.3 \approx 6$ decimal digits of precision
  - Double: approx 2^{-52}
    - Equivalent to $52 \times \log_{10}2 \approx 52 \times 0.3 \approx 16$ decimal digits of precision

Floating-Point Example

- Represent –0.75
  - $-0.75 = (-1)^1 \times 1.1_2 \times 2^{-1}$
  - S = 1
  - Fraction = $1000\ldots00_2$
  - Exponent = –1 + Bias
    - Single: –1 + 127 = 126 = 01111110_2
    - Double: –1 + 1023 = 1022 = 01111111110_2
- Single: 10111111101000…00
- Double: 10111111111101000…00

Floating-Point Example

- What number is represented by the single-precision float

  1100000010100 0…00

  - S = 1
  - Fraction = $01000\ldots00_2$
  - Fxponent = $10000001_2 = 129$
- $x = (-1)^1 \times (1 + 01_2) \times 2^{(129 - 127)}$

  $= (-1) \times 1.25 \times 2^2$

  $= -5.0$

Denormal Numbers

- Exponent = 000...0 ⇒ hidden bit is 0

$$x = (-1)^S \times (0 + \text{Fraction}) \times 2^{-\text{Bias}}$$

- Smaller than normal numbers
  - allow for gradual underflow, with diminishing precision
- Denormal with fraction = 000...0

$$x = (-1)^S \times (0 + 0) \times 2^{-\text{Bias}} = \pm 0.0$$

Two representations of 0.0!

Infinities and NaNs

- Exponent = 111...1, Fraction = 000...0
  - ±Infinity
  - Can be used in subsequent calculations, avoiding need for overflow check
- Exponent = 111...1, Fraction ≠ 000...0
  - Not-a-Number (NaN)
  - Indicates illegal or undefined result
    - e.g., 0.0 / 0.0
  - Can be used in subsequent calculations

Floating-Point Addition

- Consider a 4-digit decimal example
  - $9.999 \times 10^{1} + 1.610 \times 10^{-1}$
- 1. Align decimal points
  - Shift number with smaller exponent
  - $9.999 \times 10^{1} + 0.016 \times 10^{1}$
- 2. Add significands
  - $9.999 \times 10^{1} + 0.016 \times 10^{1} = 10.015 \times 10^{1}$
- 3. Normalize result & check for over/underflow
  - 1.0015×10^{2}
- 4. Round and renormalize if necessary
  - 1.002×10^{2}

Floating-Point Addition

- Now consider a 4-digit binary example
  - $1.000_2 \times 2^{-1} + -1.110_2 \times 2^{-2}$ (0.5 + –0.4375)
- 1. Align binary points
  - Shift number with smaller exponent
  - $1.000_2 \times 2^{-1} + -0.111_2 \times 2^{-1}$
- 2. Add significands
  - $1.000_2 \times 2^{-1} + -0.111_2 \times 2^{-}1 = 0.001_2 \times 2^{-1}$
- 3. Normalize result & check for over/underflow
  - $1.000_2 \times 2^{-4}$, with no over/underflow
- 4. Round and renormalize if necessary
  - $1.000_2 \times 2^{-4}$ (no change) = 0.0625

Floating-Point Multiplication

- Consider a 4-digit decimal example
  - $1.110 \times 10^{10} \times 9.200 \times 10^{-5}$
- 1. Add exponents
  - For biased exponents, subtract bias from sum
  - New exponent = 10 + –5 = 5
- 2. Multiply significands
  - $1.110 \times 9.200 = 10.212 \Rightarrow 10.212 \times 10^{5}$
- 3. Normalize result & check for over/underflow
  - 1.0212×10^{6}
- 4. Round and renormalize if necessary
  - 1.021×10^{6}
- 5. Determine sign of result from signs of operands
  - $+1.021 \times 10^{6}$

Floating-Point Multiplication

- Now consider a 4-digit binary example
  - $1.000_2 \times 2^{-1} \times -1.110_2 \times 2^{-2}$ (0.5 × –0.4375)
- 1. Add exponents
  - Unbiased: –1 + –2 = –3
  - Biased: (–1 + 127) + (–2 + 127) = –3 + 254 – 127 = –3 + 127
- 2. Multiply significands
  - $1.000_2 \times 1.110_2 = 1.1102 \Rightarrow 1.110_2 \times 2^{-3}$
- 3. Normalize result & check for over/underflow
  - $1.110_2 \times 2^{-3}$ (no change) with no over/underflow
- 4. Round and renormalize if necessary
  - $1.110_2 \times 2^{-3}$ (no change)
- 5. Determine sign: +ve × –ve ⇒ –ve
  - $-1.110_2 \times 2^{-3} = -0.21875$

FP Arithmetic Hardware

- FP multiplier is of similar complexity to FP adder
  - But uses a multiplier for significands instead of an adder
- FP arithmetic hardware usually does
  - Addition, subtraction, multiplication, division, reciprocal, square-root
  - FP ↔ integer conversion
- Operations usually takes several cycles
  - Can be pipelined

FP Instructions in RISC-V

- Separate FP registers: f0, …, f31
  - double-precision
  - single-precision values stored in the lower 32 bits
- FP instructions operate only on FP registers
  - Programs generally don’t do integer ops on FP data, or vice versa
  - More registers with minimal code-size impact
- FP load and store instructions
  - flw, fld
  - fsw, fsd

FP Instructions in RISC-V

- Single-precision arithmetic
  - fadd.s, fsub.s, fmul.s, fdiv.s, fsqrt.s
    - e.g., fadds.s f2, f4, f6
- Double-precision arithmetic
  - fadd.d, fsub.d, fmul.d, fdiv.d, fsqrt.d
    - e.g., fadd.d f2, f4, f6
- Single- and double-precision comparison
  - feq.s, flt.s, fle.s
  - feq.d, flt.d, fle.d
  - Result is 0 or 1 in integer destination register
    - Use beq, bne to branch on comparison result
- Branch on FP condition code true or false
  - B.cond

Concluding Remarks

- Bits have no inherent meaning
  - Interpretation depends on the instructions applied
- Computer representations of numbers
  - Finite range and precision
  - Need to account for this in programs

Concluding Remarks

- ISAs support arithmetic
  - Signed and unsigned integers
  - Floating-point approximation to reals
- Bounded range and precision
  - Operations can overflow and underflow