


**NAMA** : Rahmat Mekazo  
**NIM** : 09010282327039  
**KELAS** : MI 3A  
**MK** : PRAKTIKUM JAKROM

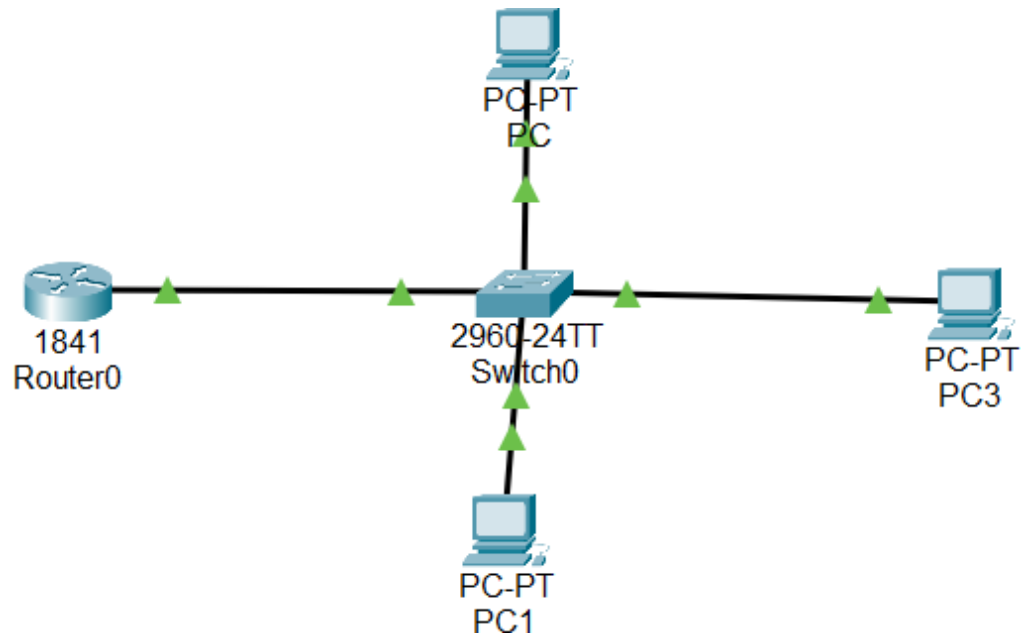

```

Destination filename [startup-config]? show vlan
%Error copying nvram:show vlan (Invalid argument)
switch_09010282327032#show vlan

```

VLAN	Name	Status	Ports
1	default	active	Fa0/4, Fa0/5, Fa0/6, Fa0/7 Fa0/8, Fa0/9, Fa0/10, Fa0/11 Fa0/12, Fa0/13, Fa0/14, Fa0/15 Fa0/16, Fa0/17, Fa0/18, Fa0/19 Fa0/20, Fa0/21, Fa0/22, Fa0/23 Fa0/24, Gig0/1, Gig0/2
2	humas	active	Fa0/1
3	keuangan	active	Fa0/2
4	it	active	Fa0/3
5	pimpinan	active	
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
1	enet	100001	1500	-	-	-	-	-	0	0
2	enet	100002	1500	-	-	-	-	-	0	0

--More--

VLAN	Name	Status	Port
1	Default	Active	Fa0/4, Fa0/5, Fa0/6, Fa0/7, Fa0/8, Fa0/9, Fa0/10, Fa0/11, Fa0/12, Fa0/13, Fa0/14, Fa0/15, Fa0/16, Fa0/17, Fa0/18, Fa0/19, Fa0/20, Fa0/21, Fa0/22, Fa0/23, Fa0/1, Fa0/2,
2	Humas	Active	Fa0/1,
3	Keuangan	Active	Fa0/2,
4	IT	Active	Fa0/3,
5	Pimpinan	Active	

```
Pinging 192.168.100.1 with 32 bytes of data:
```

```
Reply from 192.168.100.1: bytes=32 time<1ms TTL=255  
Reply from 192.168.100.1: bytes=32 time<1ms TTL=255  
Reply from 192.168.100.1: bytes=32 time<1ms TTL=255  
Reply from 192.168.100.1: bytes=32 time<1ms TTL=255
```

```
Ping statistics for 192.168.100.1:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 192.168.150.1
```

```
Pinging 192.168.150.1 with 32 bytes of data:
```

```
Reply from 192.168.150.1: bytes=32 time<1ms TTL=255  
Reply from 192.168.150.1: bytes=32 time<1ms TTL=255  
Reply from 192.168.150.1: bytes=32 time<1ms TTL=255  
Reply from 192.168.150.1: bytes=32 time<1ms TTL=255
```

```
Ping statistics for 192.168.150.1:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>
```

```
C:\>ping 192.168.100.1
```

```
Pinging 192.168.100.1 with 32 bytes of data:
```

```
Reply from 192.168.100.1: bytes=32 time=11ms TTL=255  
Reply from 192.168.100.1: bytes=32 time<1ms TTL=255  
Reply from 192.168.100.1: bytes=32 time<1ms TTL=255  
Reply from 192.168.100.1: bytes=32 time<1ms TTL=255
```

```
Ping statistics for 192.168.100.1:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 0ms, Maximum = 11ms, Average = 2ms
```

```
C:\>192.168.150.1
```

```
Invalid Command.
```

```
C:\>ping 192.168.150.1
```

```
Pinging 192.168.150.1 with 32 bytes of data:
```

```
Reply from 192.168.150.1: bytes=32 time<1ms TTL=255  
Reply from 192.168.150.1: bytes=32 time<1ms TTL=255  
Reply from 192.168.150.1: bytes=32 time<1ms TTL=255  
Reply from 192.168.150.1: bytes=32 time<1ms TTL=255
```

```
Ping statistics for 192.168.150.1:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>ping 192.168.200.1
```

```
Pinging 192.168.200.1 with 32 bytes of data:
```

```
Reply from 192.168.200.1: bytes=32 time<1ms TTL=255  
Reply from 192.168.200.1: bytes=32 time<1ms TTL=255  
Reply from 192.168.200.1: bytes=32 time<1ms TTL=255  
Reply from 192.168.200.1: bytes=32 time<1ms TTL=255
```

```
Ping statistics for 192.168.200.1:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
Approximate round trip times in milli-seconds:  
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\>
```

```

Ping statistics for 192.168.100.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 192.168.150.1

Pinging 192.168.150.1 with 32 bytes of data:

Reply from 192.168.150.1: bytes=32 time<1ms TTL=255
Reply from 192.168.150.1: bytes=32 time<1ms TTL=255
Reply from 192.168.150.1: bytes=32 time<1ms TTL=255
Reply from 192.168.150.1: bytes=32 time=1ms TTL=255

Ping statistics for 192.168.150.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.100.1

Pinging 192.168.100.1 with 32 bytes of data:

Reply from 192.168.100.1: bytes=32 time<1ms TTL=255
Reply from 192.168.100.1: bytes=32 time<1ms TTL=255
Reply from 192.168.100.1: bytes=32 time<1ms TTL=255
Reply from 192.168.100.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.100.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.200.1

Pinging 192.168.200.1 with 32 bytes of data:

Reply from 192.168.200.1: bytes=32 time<1ms TTL=255
Reply from 192.168.200.1: bytes=32 time<1ms TTL=255
Reply from 192.168.200.1: bytes=32 time<1ms TTL=255
Reply from 192.168.200.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.200.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

```

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.200.2

Subnet Mask 255.255.255.0

Default Gateway 192.168.200.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80:2E0:F7FF:FEE8:A075

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Physical Config **Desktop** Programming Attributes

IP Configuration X

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.100.2

Subnet Mask 255.255.255.0

Default Gateway 192.168.100.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80:260:3EFF:FEB1:75D9

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password

Physical Config Desktop Programming Attributes

IP Configuration

X

Interface FastEthernet0

▼

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 192.168.150.2

Subnet Mask 255.255.255.0

Default Gateway 192.168.150.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::260:70FF:FE9A:B2E4

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

▼

Username

Password