


LAPORAN HASIL PRAKTIKUM

Nama : Rahmat Mekazo
 Nim : 09010282327039
 Jurusan : Manajemen Informatika

Judul Percobaan : VLAN

Hasil Percobaan :

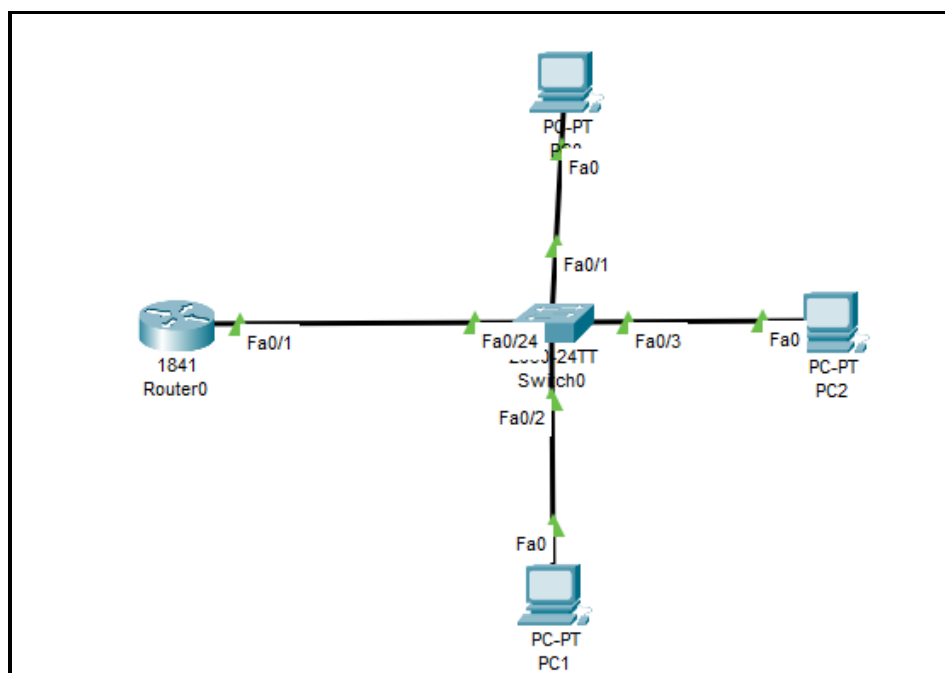

VLAN	Name	Status	Port
1	Default	Active	Fa0/4, Fa0/5, Fa0/6, Fa0/7, Fa0/8, Fa0/9, Fa0/10, Fa0/11 Fa0/12, Fa0/13, Fa0/14, Fa0/15 Fa0/16, Fa0/17, Fa0/18, Fa0/19 Fa0/20, Fa0/21, Fa0/22, Fa0/23 Gig0/1, Gig0/2
2	Humas	Active	Fa0/1
3	Keuangan	Active	Fa0/2
4	IT	Active	Fa0/3
5	Pimpinan	Active	

Hasil Percobaan :

VLAN Name	Status	Ports							
1 default	active	Fa0/4, Fa0/5, Fa0/6, Fa0/7 Fa0/8, Fa0/9, Fa0/10, Fa0/11 Fa0/12, Fa0/13, Fa0/14, Fa0/15 Fa0/16, Fa0/17, Fa0/18, Fa0/19 Fa0/20, Fa0/21, Fa0/22, Fa0/23 Fa0/24, Gig0/1, Gig0/2							
2 humas	active	Fa0/1							
3 keuangan	active	Fa0/2							
4 IT	active	Fa0/3							
5 pimpinan	active								
1002 fddi-default	active								
1003 token-ring-default	active								
1004 fddinet-default	active								
1005 trnet-default	active								
VLAN Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
1 enet	100001	1500	-	-	-	-	-	0	0
2 enet	100002	1500	-	-	-	-	-	0	0
--More--									

No	Nama Device	Alamat	Netmask
1	PC1	192.168.100.2	255.255.255.0
2	PC2	192.168.200.2	255.255.255.0
3	PC3	192.168.150.2	255.255.255.0

PC 1

Physical Config **Desktop** Programming Attributes

IP Configuration [X]

Interface: FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address: 192.168.200.2

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.200.1

DNS Server: 0.0.0.0

PC 2

Physical Config **Desktop** Programming Attributes

IP Configuration [X]

Interface: FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address: 192.168.100.2

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.100.1

DNS Server: 0.0.0.0

PC 3

Physical Config **Desktop** Programming Attributes

IP Configuration [X]

Interface: FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address: 192.168.150.2

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.150.1

DNS Server: 0.0.0.0

Hasill Percobaan :

No	Sumber	Tujuan	Hasil	
			Ya	Tidak
1	PC 1	PC 2	Ya	
		PC 3	Ya	
2	PC 2	PC 1	Ya	
		PC 3	Ya	
3	PC 3	PC 1	Ya	
		PC 2	Ya	

PC 1

```
C:\>ping 192.168.100.2

Pinging 192.168.100.2 with 32 bytes of data:

Reply from 192.168.100.2: bytes=32 time<1ms TTL=127
Reply from 192.168.100.2: bytes=32 time=12ms TTL=127
Reply from 192.168.100.2: bytes=32 time=13ms TTL=127
Reply from 192.168.100.2: bytes=32 time=14ms TTL=127

Ping statistics for 192.168.100.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 14ms, Average = 9ms

C:\>ping 192.168.150.2

Pinging 192.168.150.2 with 32 bytes of data:

Reply from 192.168.150.2: bytes=32 time=1ms TTL=127
Reply from 192.168.150.2: bytes=32 time=12ms TTL=127
Reply from 192.168.150.2: bytes=32 time=12ms TTL=127
Reply from 192.168.150.2: bytes=32 time=12ms TTL=127

Ping statistics for 192.168.150.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 12ms, Average = 9ms
```

PC 2

```
C:\>ping 192.168.200.2

Pinging 192.168.200.2 with 32 bytes of data:

Reply from 192.168.200.2: bytes=32 time<1ms TTL=127
Reply from 192.168.200.2: bytes=32 time=12ms TTL=127
Reply from 192.168.200.2: bytes=32 time=12ms TTL=127
Reply from 192.168.200.2: bytes=32 time=12ms TTL=127

Ping statistics for 192.168.200.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 12ms, Average = 9ms

C:\>ping 192.168.150.2

Pinging 192.168.150.2 with 32 bytes of data:

Reply from 192.168.150.2: bytes=32 time<1ms TTL=127
Reply from 192.168.150.2: bytes=32 time=11ms TTL=127
Reply from 192.168.150.2: bytes=32 time=12ms TTL=127
Reply from 192.168.150.2: bytes=32 time=11ms TTL=127

Ping statistics for 192.168.150.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 12ms, Average = 8ms
```

PC 3

```
C:\>ping 192.168.200.2

Pinging 192.168.200.2 with 32 bytes of data:

Reply from 192.168.200.2: bytes=32 time<1ms TTL=127
Reply from 192.168.200.2: bytes=32 time=12ms TTL=127
Reply from 192.168.200.2: bytes=32 time<1ms TTL=127
Reply from 192.168.200.2: bytes=32 time=13ms TTL=127

Ping statistics for 192.168.200.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 13ms, Average = 6ms

C:\>ping 192.168.100.2

Pinging 192.168.100.2 with 32 bytes of data:

Reply from 192.168.100.2: bytes=32 time<1ms TTL=127
Reply from 192.168.100.2: bytes=32 time<1ms TTL=127
Reply from 192.168.100.2: bytes=32 time=12ms TTL=127
Reply from 192.168.100.2: bytes=32 time=11ms TTL=127

Ping statistics for 192.168.100.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 12ms, Average = 5ms
```

Analisi Percobaan :

Jadi untuk melakukan Tes koneksi antar PC maka pada saat melakukan settingan IP configuration pada setiap PC maka tambahkan default gateway-nya sesuai dengan IP yang telah kita buat di dalam CLI pada router yang berguna untuk memastikan bahwa PC bisa berkomunikasi dengan jaringan lain di luar subnet lokal, melalui router yang sudah dikonfigurasi.

Kesimpulan Percobaan :

Tes koneksi antar tiga PC menunjukkan bahwa setiap PC dapat berkomunikasi dengan baik dalam VLAN yang sama. Penambahan default gateway pada konfigurasi IP setiap PC terbukti penting untuk memungkinkan komunikasi di luar subnet lokal melalui router yang sudah dikonfigurasi. Secara keseluruhan, konfigurasi VLAN dan default gateway berfungsi dengan baik, mendukung komunikasi di dalam dan di luar subnet VLAN.