


В СЦЕНАРІЇ від x-flight + Казуар Авіа ПРИСУТНІ обидва VOR/DME **SMF 116.6 MHz** і **SI 112.2 MHz**.


Вони встановлені в одному і тому ж місці, використовуйте будь-який з них.

Частоти ILS співпадають і в сценаріях і на чартах нижче.

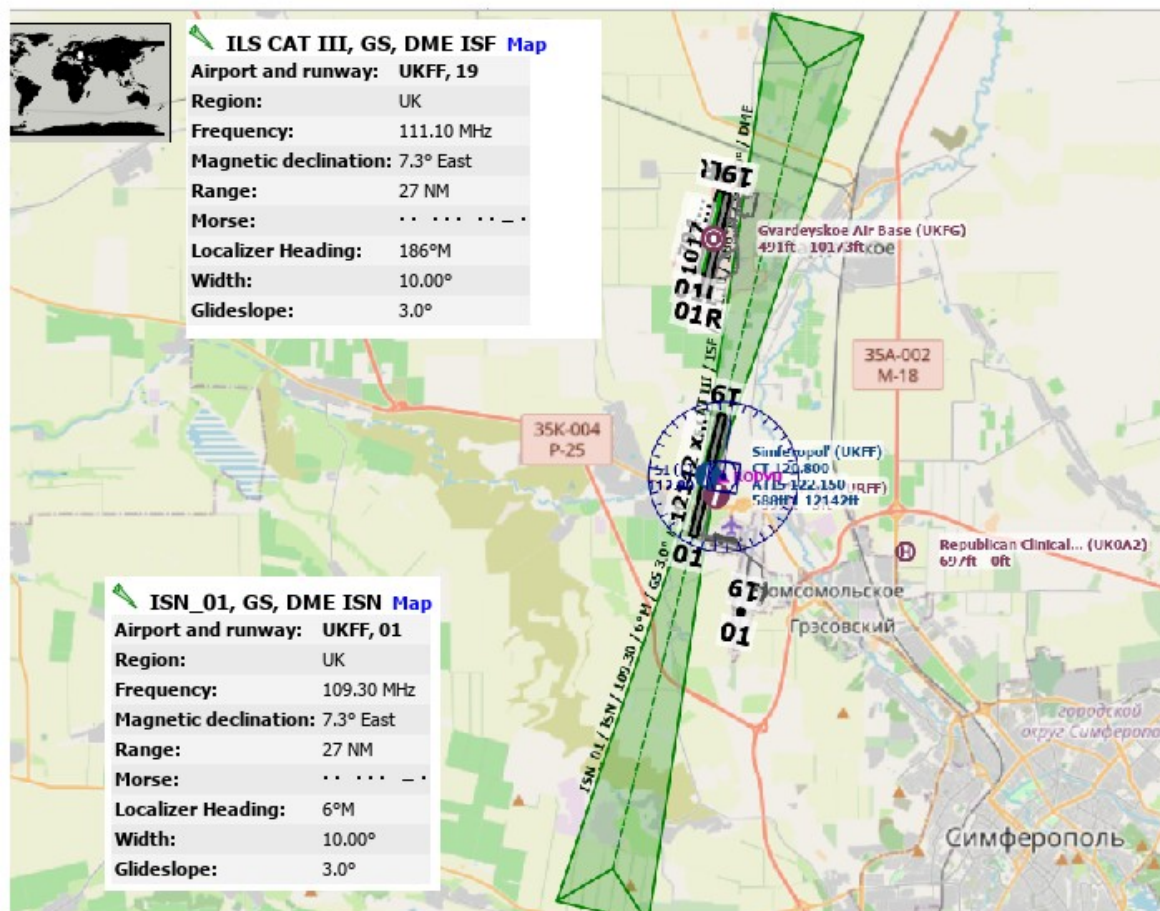


Apt Elev
597'

Alt Set: MM (hPa on request)
Trans level: By ATC Trans alt: 10010'
This chart may only be used for
cross-checking of altitudes assigned
while under RADAR control.



FT/METER CONVERSION	
	QNH
10010'	- 3050m
7060'	- 2150m
6070'	- 1850m
4430'	- 1350m
2960'	- 900m



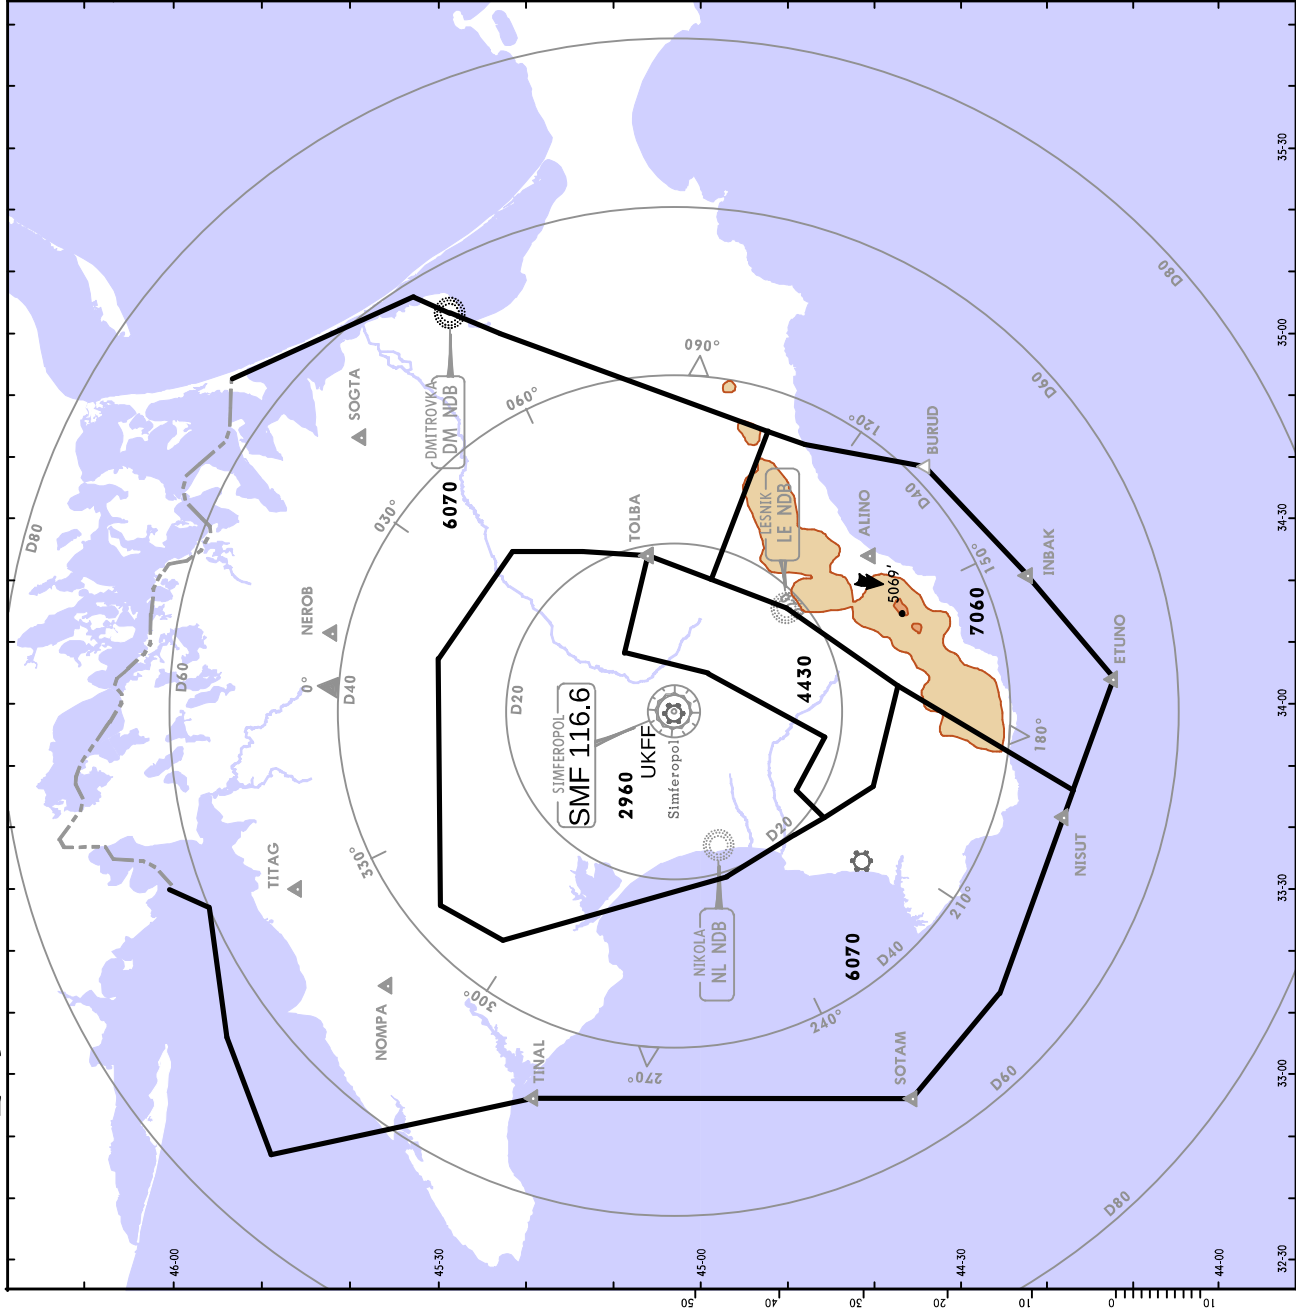


ATIS	Apt Elev
122.150 _(Russian) 127.2)	Alt Set: MM (hPa on request) Trans level: By ATC Trans alt: 10010'


A diagram showing a circular target with a crosshair. A line of sight extends from the target to a point labeled "DMITROVKA". The angle between the line of sight and a horizontal reference line is labeled "73.2°".

BURUD 1Y
DM 1Y
INBAK 1Y


RWY 01 RNAV ARRIVALS
RNAV (GNSS)
RNAV 1 (P-RNAV) APPROVAL REQUIRED
OTHERWISE ADVISE ATC
SPEED: MAX 250 KT
BELOW 10010'

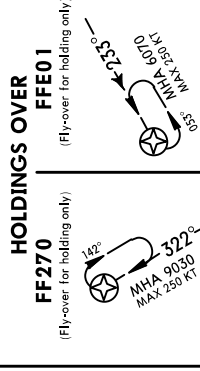



STAR	ROUTING
BURUD 1Y	BURUD (F1140 ⁺) - FF275 (9030 ⁺) - FF270 (9030 ⁺) - FF501 (6070 ⁺) - FF260 (7060 ⁺ , 4930 ⁺ , K220-) - FF255 (6070 ⁺ , 4430 ⁺) - FF250 (6070 ⁺ , 4430 ⁺) - FF245 (6070 ⁺ , 4430 ⁺) - FF215 (4930 ⁺ , 2960 ⁺) - FF210 (2960 ⁺).
DM 1Y	DM (8040 ⁺) - FFE01 (6070 ⁺) - FF265 - FF260 (7060 ⁺ , 4930 ⁺ , K220-) - FF255 (6070 ⁺ , 4430 ⁺) - FF250 (6070 ⁺ , 4430 ⁺) - FF245 (6070 ⁺ , 4430 ⁺) - FF215 (4930 ⁺ , 2960 ⁺) - FF210 (2960 ⁺).
INBAK 1Y	INBAK (10010 ⁺) - FF275 (9030 ⁺) - FF270 (9030 ⁺) - FF501 (6070 ⁺) - FF260 (7060 ⁺ , 4930 ⁺ , K220-) - FF255 (6070 ⁺ , 4430 ⁺) - FF250 (6070 ⁺ , 4430 ⁺) - FF245 (6070 ⁺ , 4430 ⁺) - FF215 (4930 ⁺ , 2960 ⁺) - FF210 (2960 ⁺).

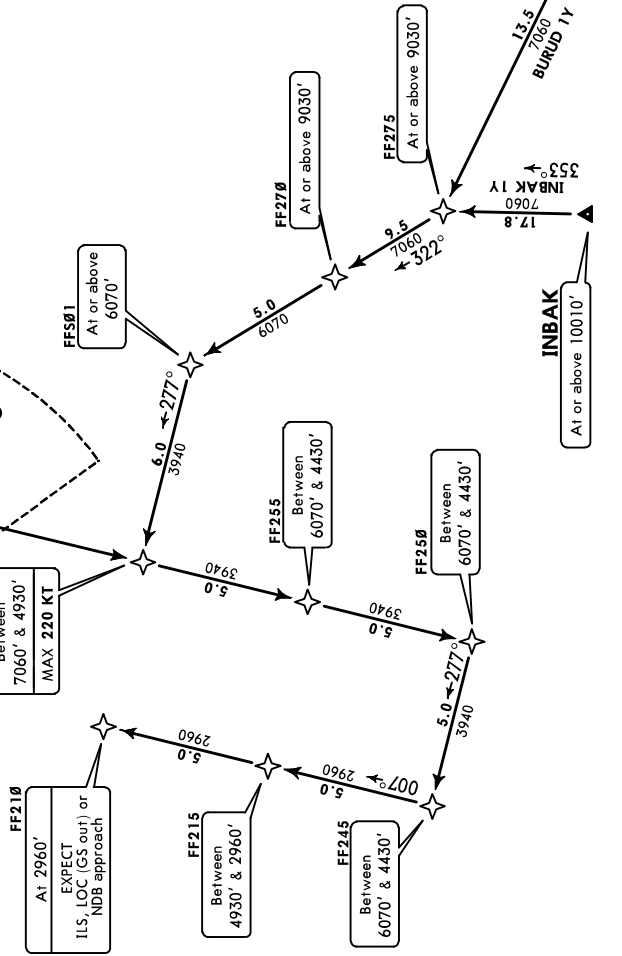

FT/METER CONVERSION	QNH
10010'	- 3050m
9030'	- 2750m
8040'	- 2450m
7060'	- 2150m
6070'	- 1850m
4930'	- 1500m
4430'	- 1350m
2960'	- 900m

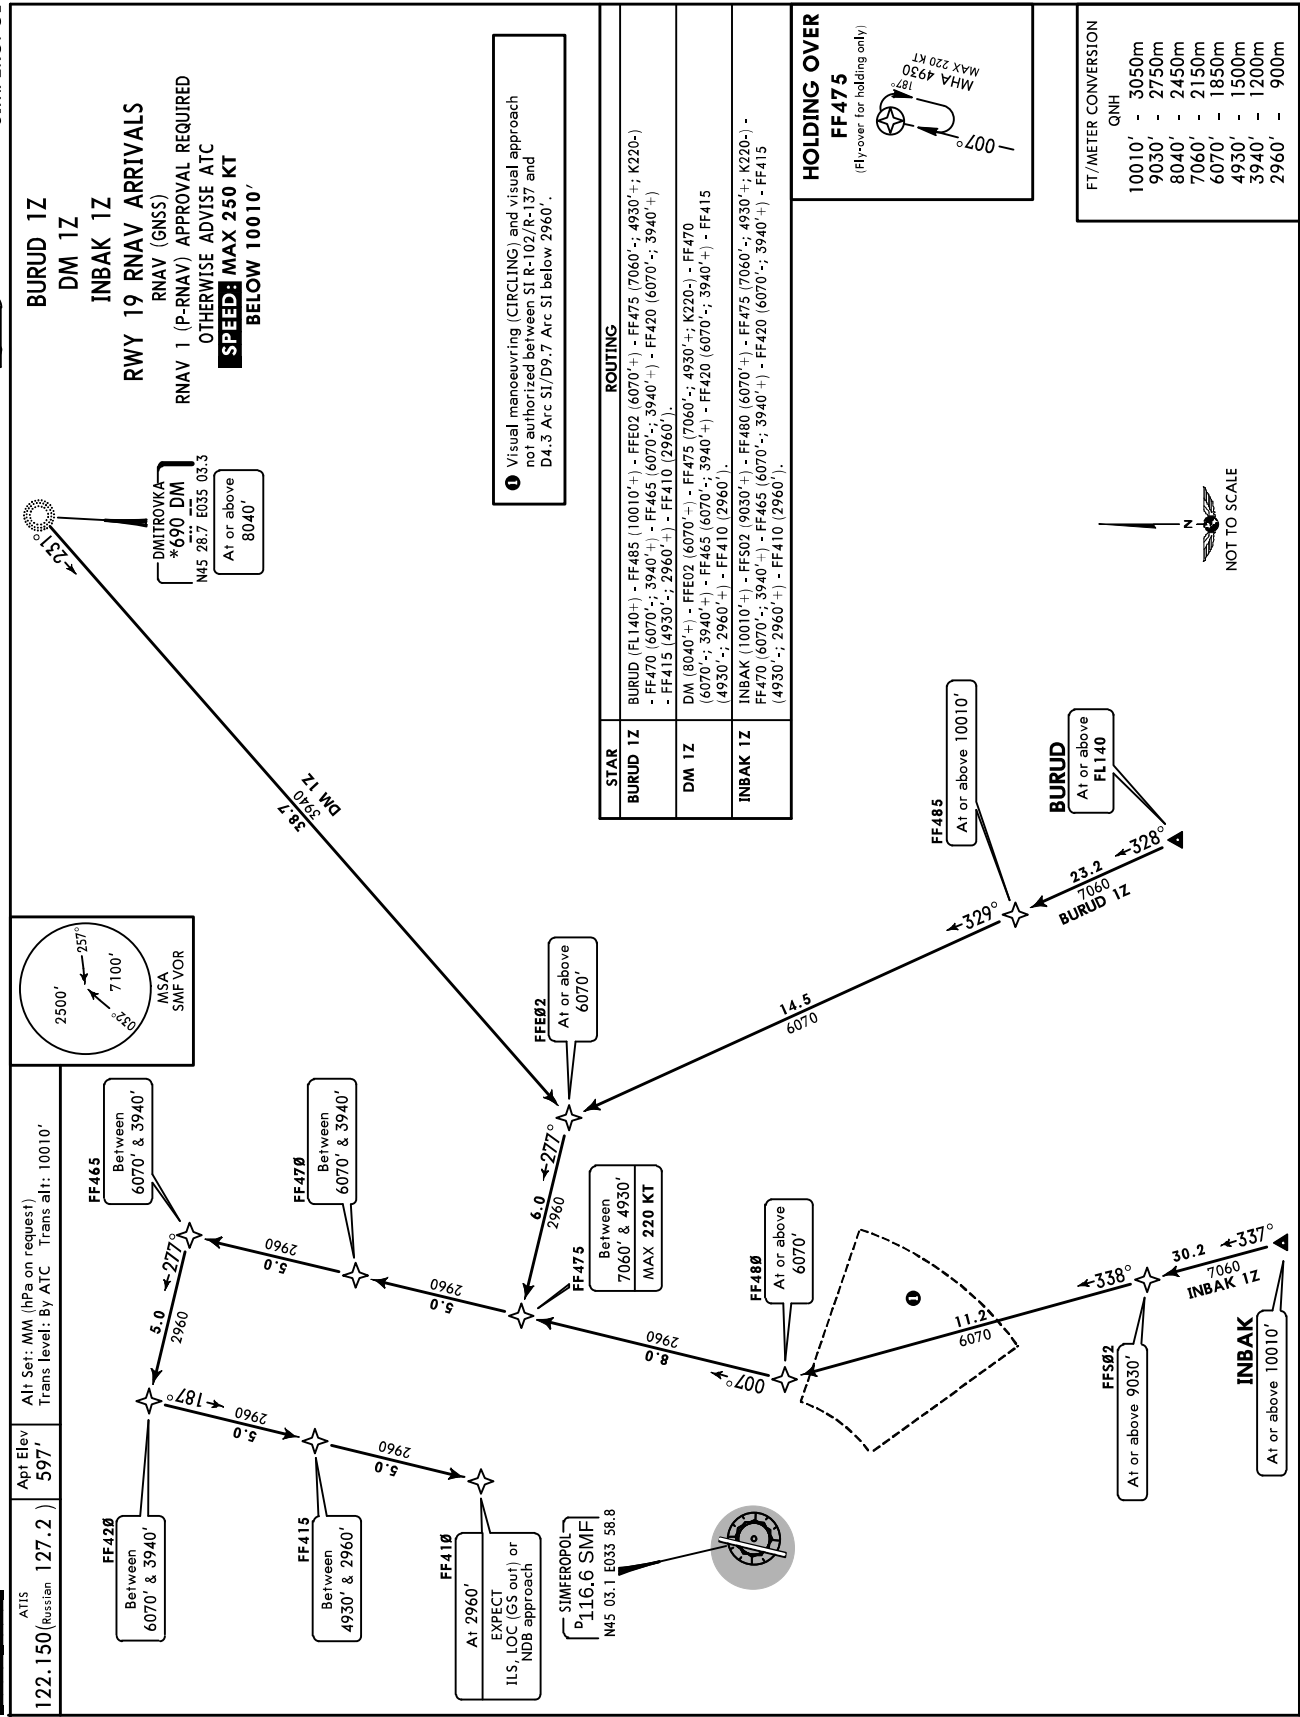

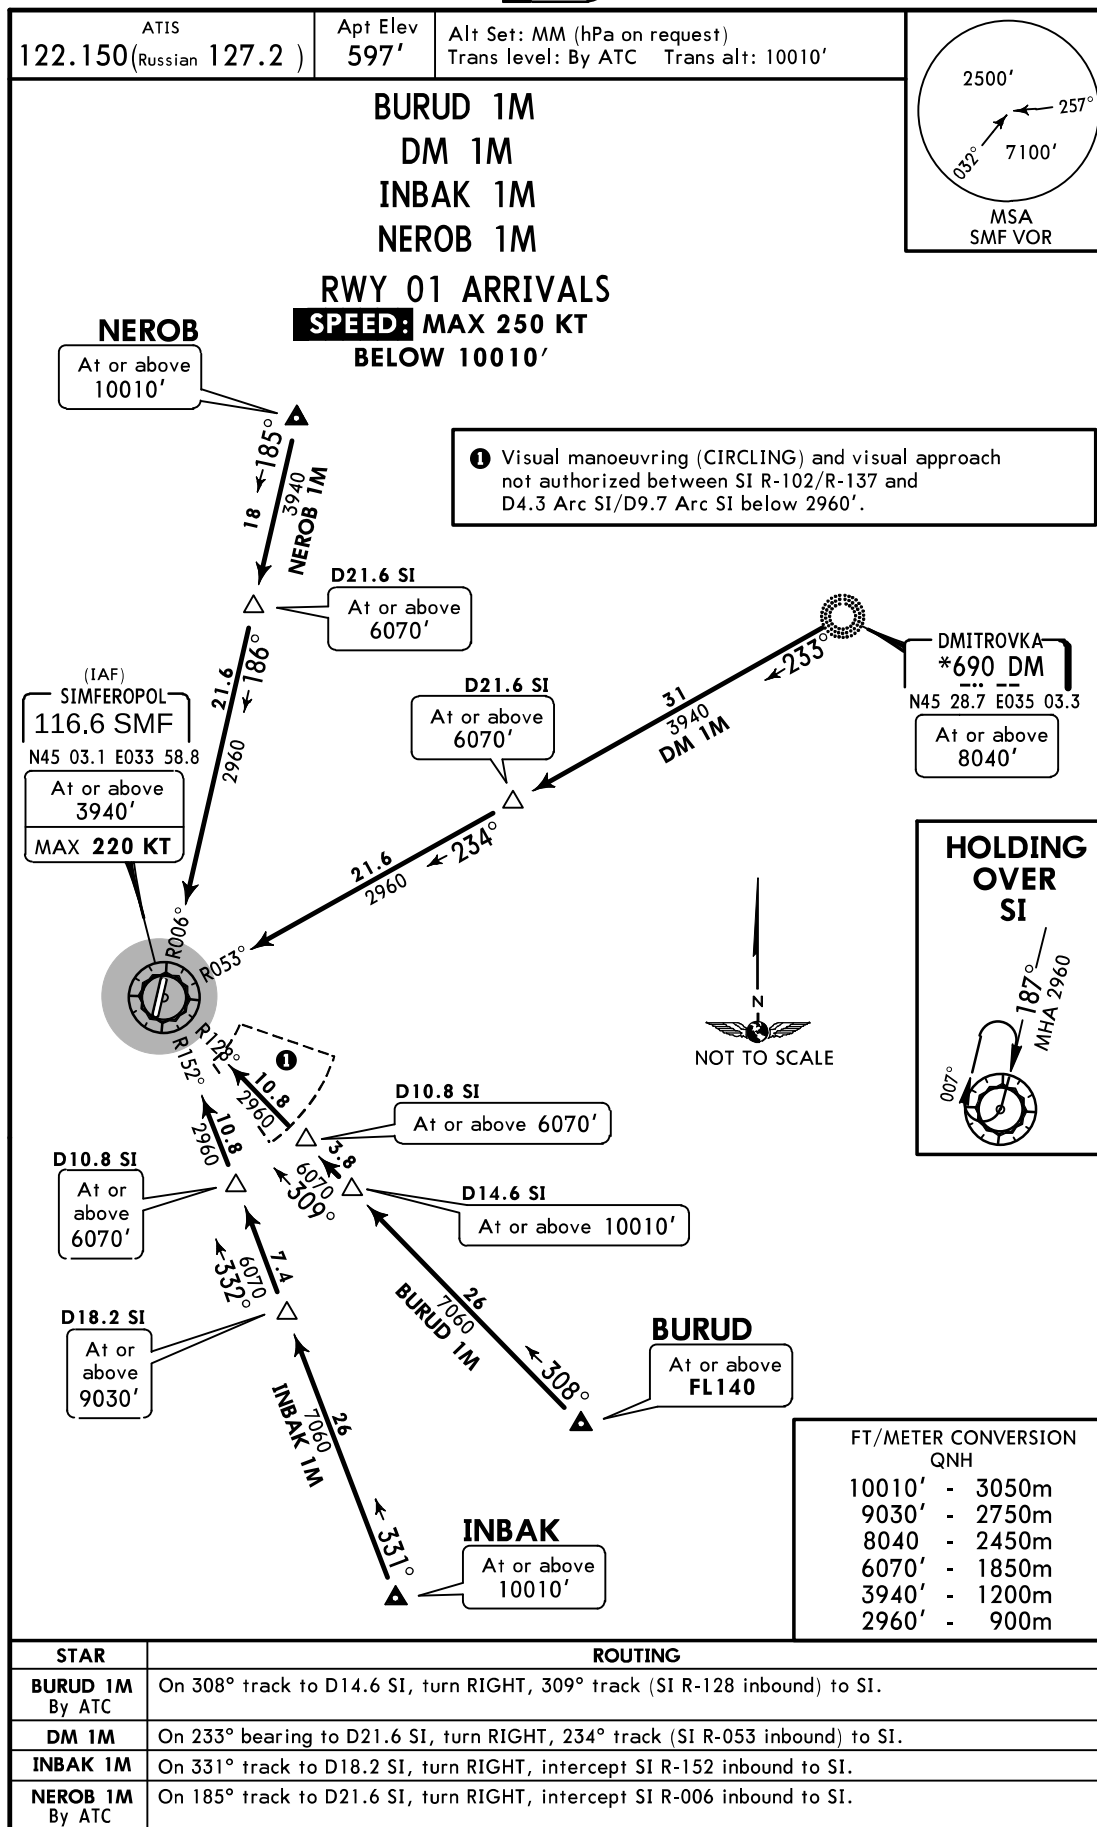


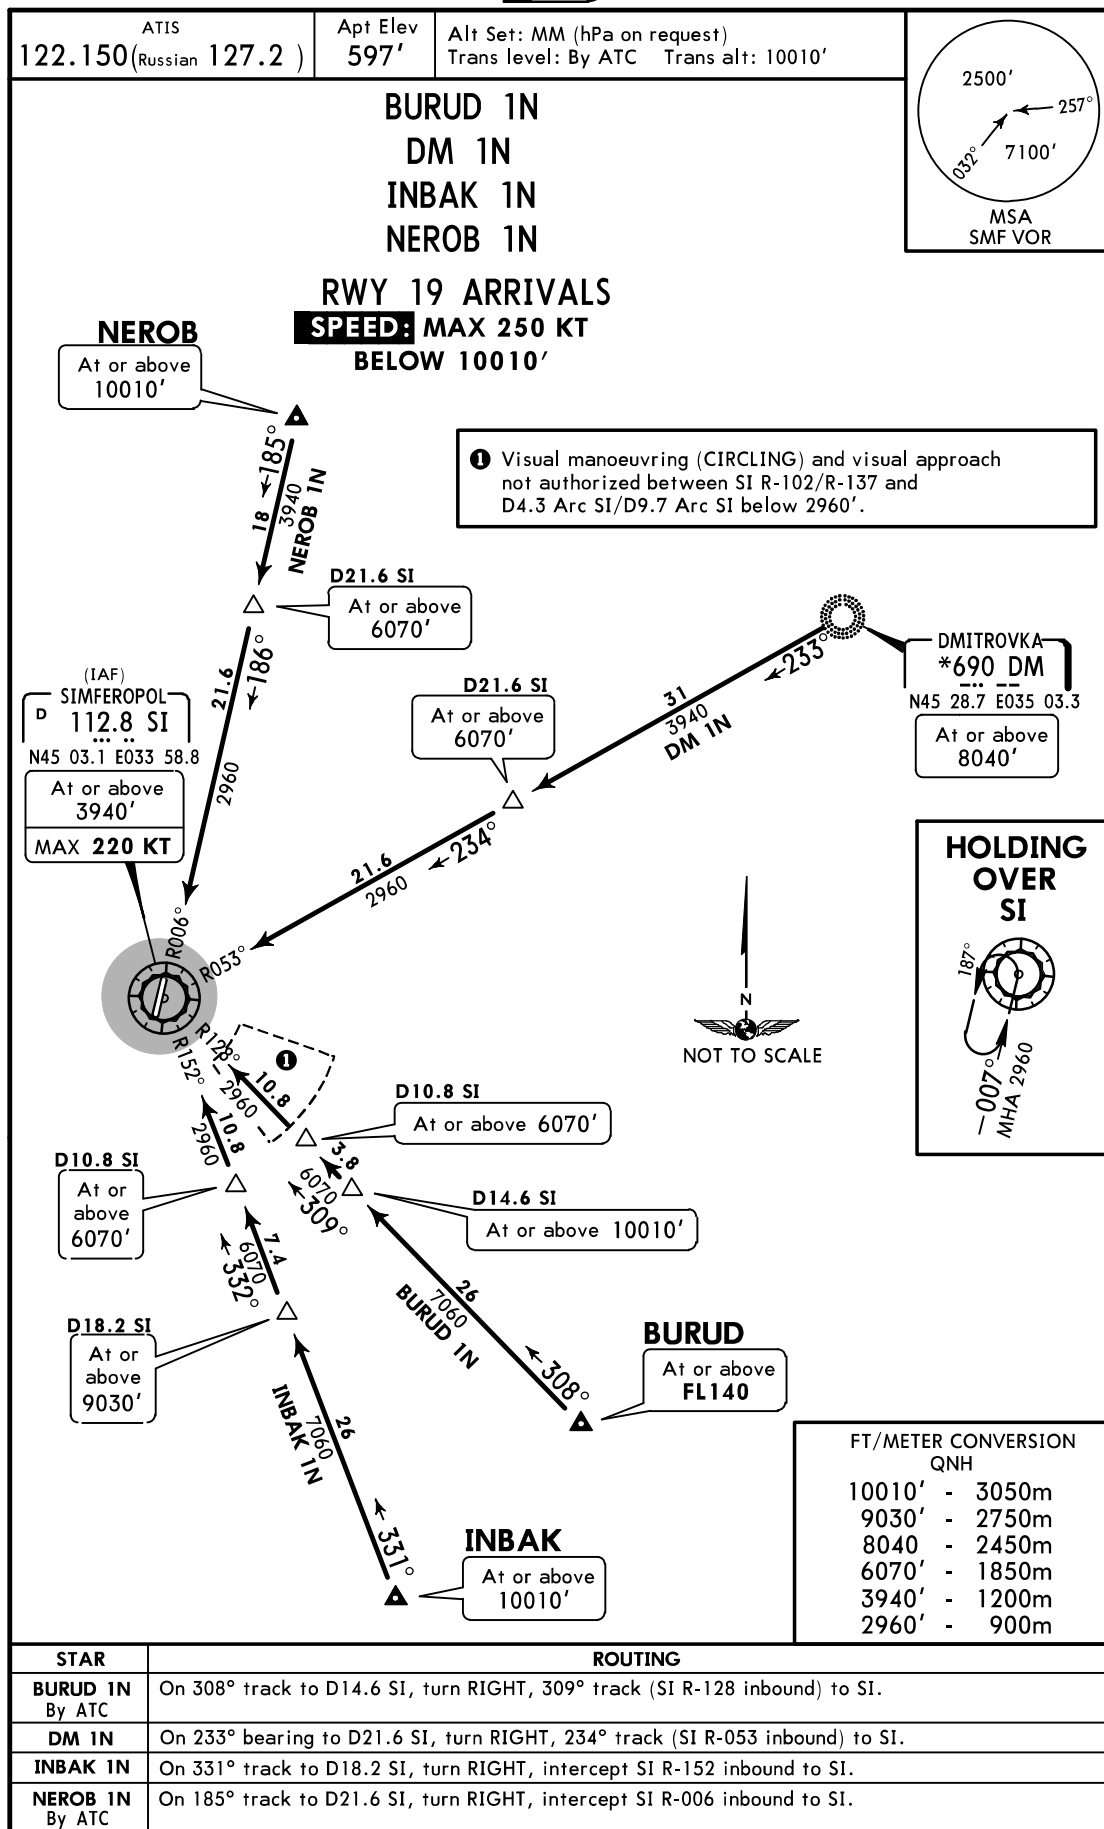

UKFF
SIMFEROPOL

JEPPESSEN
24 AUG 18 10-2F

SIMFEROPOL
STAR

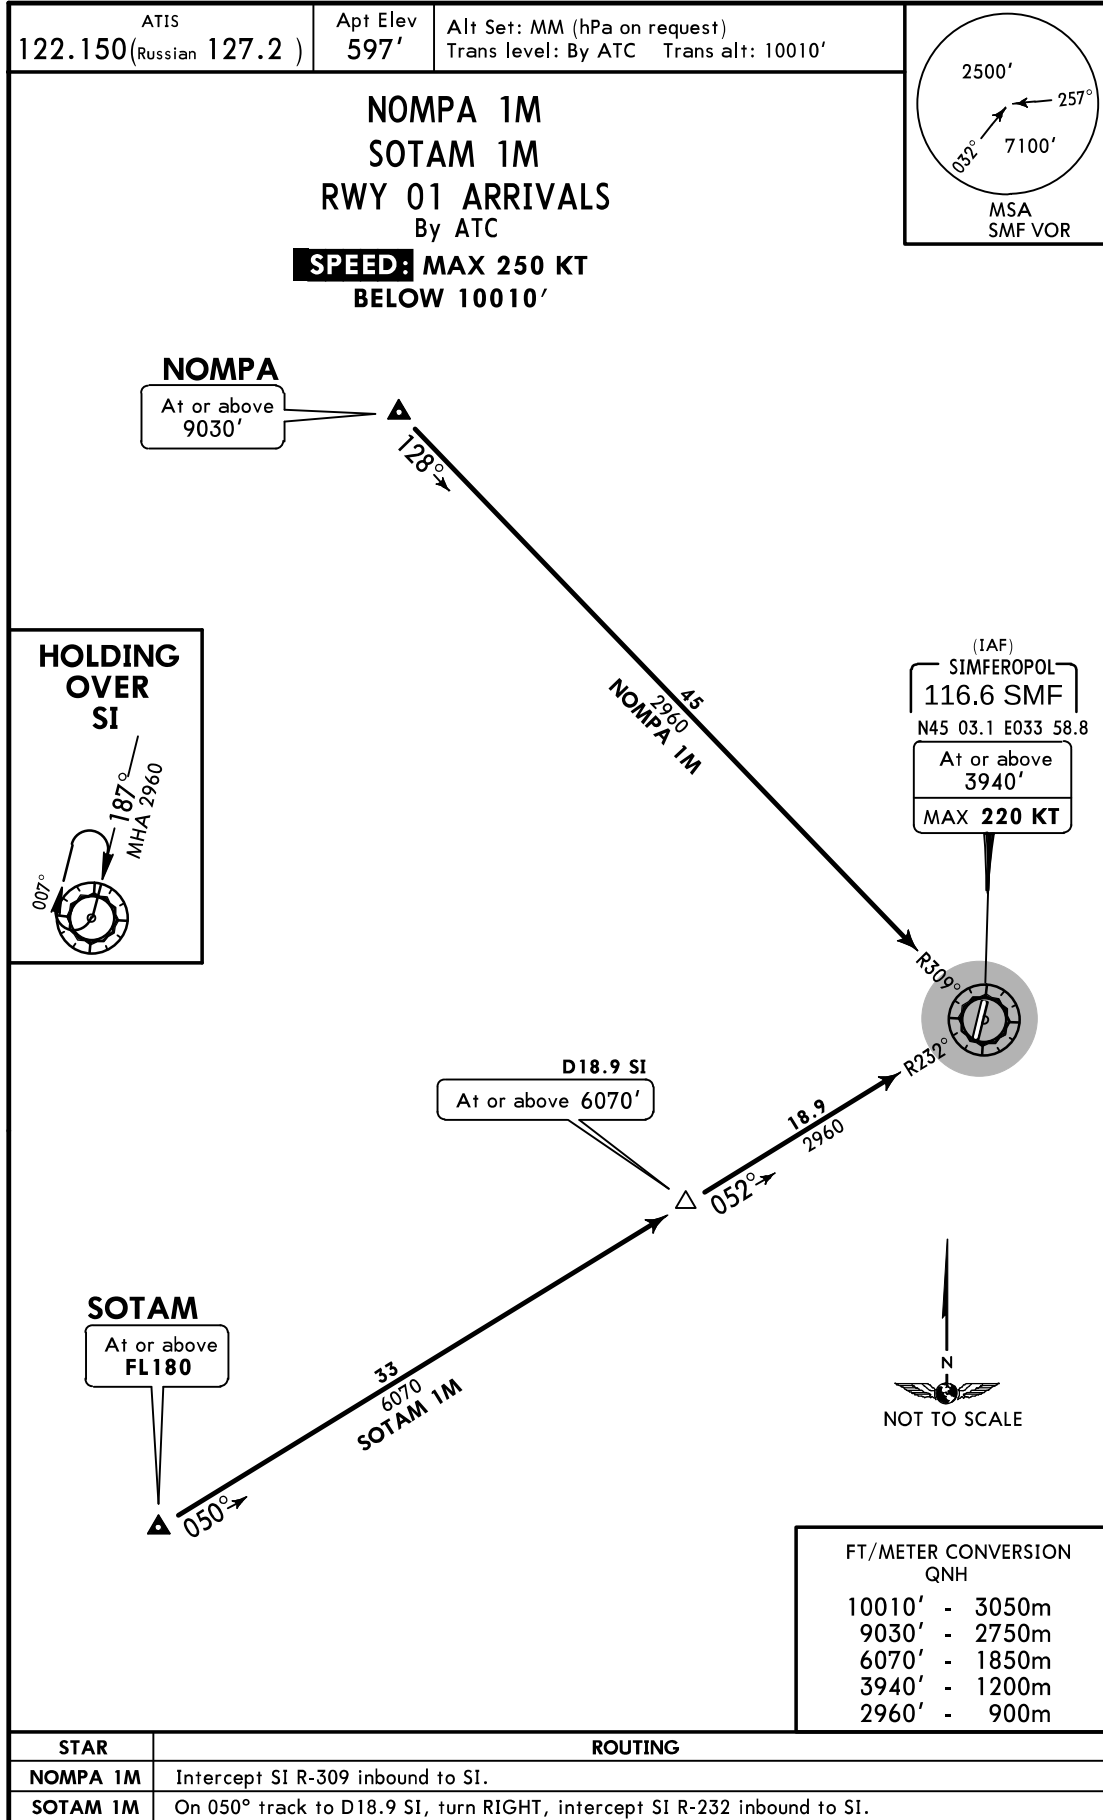

CHANGES: SMF VOR DME revised SI VOR DME.

© JEPPESEN, 2014, 2018. ALL RIGHTS RESERVED.

UKFF

JEPPesen

SIMFEROPOL

SIMFEROPOL


24 AUG 18 10-2G

STAR

ATIS
122.150 (Russian 127.2)

Apt Elev
597'

Alt Set: MM (hPa on request)
Trans level: By ATC Trans alt: 10010'



NOMPA 1N
SOTAM 1N
RWY 19 ARRIVALS
By ATC
SPEED: MAX 250 KT
BELOW 10010'

NOMPAAt or above
9030'**HOLDING
OVER
SI**

(IAF)

SIMFEROPOL
116.6 SMF
N45 03.1 E033 58.8
At or above
3940'
MAX 220 KT

D18.9 SI

At or above 6070'

SOTAMAt or above
FL180

FT/METER CONVERSION
QNH

10010' - 3050m
9030' - 2750m
6070' - 1850m
3940' - 1200m
2960' - 900m

STAR	ROUTING
NOMPA 1N	Intercept SI R-309 inbound to SI.
SOTAM 1N	On 050° track to D18.9 SI, turn RIGHT, intercept SI R-232 inbound to SI.

CHANGES: SMF VOR DME revised SI VOR DME.


© JEPPESEN, 2014, 2018. ALL RIGHTS RESERVED.

UKFF
SIMFEROPOL

JEPPESSEN
24 AUG 18 10-2H

SIMFEROPOL
STAR

ATIS
122.150 (Russian 127.2)
Apt Elev
597'
Alt Set: MM (hPa on request)
Trans level: By ATC Trans alt: 10010'



TINAL 1M
TITAG 1M
RWY 01 ARRIVALS
By ATC
SPEED: MAX 250 KT
BELOW 10010'


TITAG

At or above
9030'



TINAL


At or above
FL150



47
2960
TINAL 1M

48
2960
TITAG 1M

HOLDING
OVER
SI




(IAF)

SIMFEROPOL
116.6 SMF

N45 03.1 E033 58.8

At or above
3940'

MAX 220 KT



NOT TO SCALE

FT/METER CONVERSION
QNH
10010' - 3050m
9030' - 2750m
3940' - 1200m
2960' - 900m

STAR	ROUTING
TINAL 1M	Intercept SI R-283 inbound to SI.
TITAG 1M	Intercept SI R-328 inbound to SI.

CHANGES: SMF VOR DME revised SI VOR DME.


© JEPPESSEN, 2014, 2018. ALL RIGHTS RESERVED.

UKFF
SIMFEROPOL

JEPPesen
24 AUG 18 10-2J

SIMFEROPOL
STAR

ATIS
122.150 (Russian 127.2)
Apt Elev
597'
Alt Set: MM (hPa on request)
Trans level: By ATC Trans alt: 10010'



TINAL 1N
TITAG 1N
RWY 19 ARRIVALS
By ATC
SPEED: MAX 250 KT
BELOW 10010'

TITAG

At or above
9030'




HOLDING
OVER
SI



TINAL

At or above
FL150



TITAG 1N
48
2960

TINAL 1N
47
2960


(IAF)

SIMFEROPOL
116.6 SMF

N45 03.1 E033 58.8

At or above
3940'

MAX 220 KT



NOT TO SCALE

FT/METER CONVERSION
QNH
10010' - 3050m
9030' - 2750m
3940' - 1200m
2960' - 900m


STAR	ROUTING
TINAL 1N	Intercept SI R-283 inbound to SI.
TITAG 1N	Intercept SI R-328 inbound to SI.

CHANGES: SMF VOR DME revised SI VOR DME.

© JEPPESEN, 2014, 2018. ALL RIGHTS RESERVED.


Apt Elev
597'

Trans level: By ATC Trans alt: 10010'



**NOMPA 1X, SOTAM 1X
TINAL 1X, TITAG 1X
RWY 19 RNAV DEPARTURES**
RNAV (GNSS)

RNAV 1 (P-RNAV) APPROVAL REQUIRED, OTHERWISE ADVISE ATC

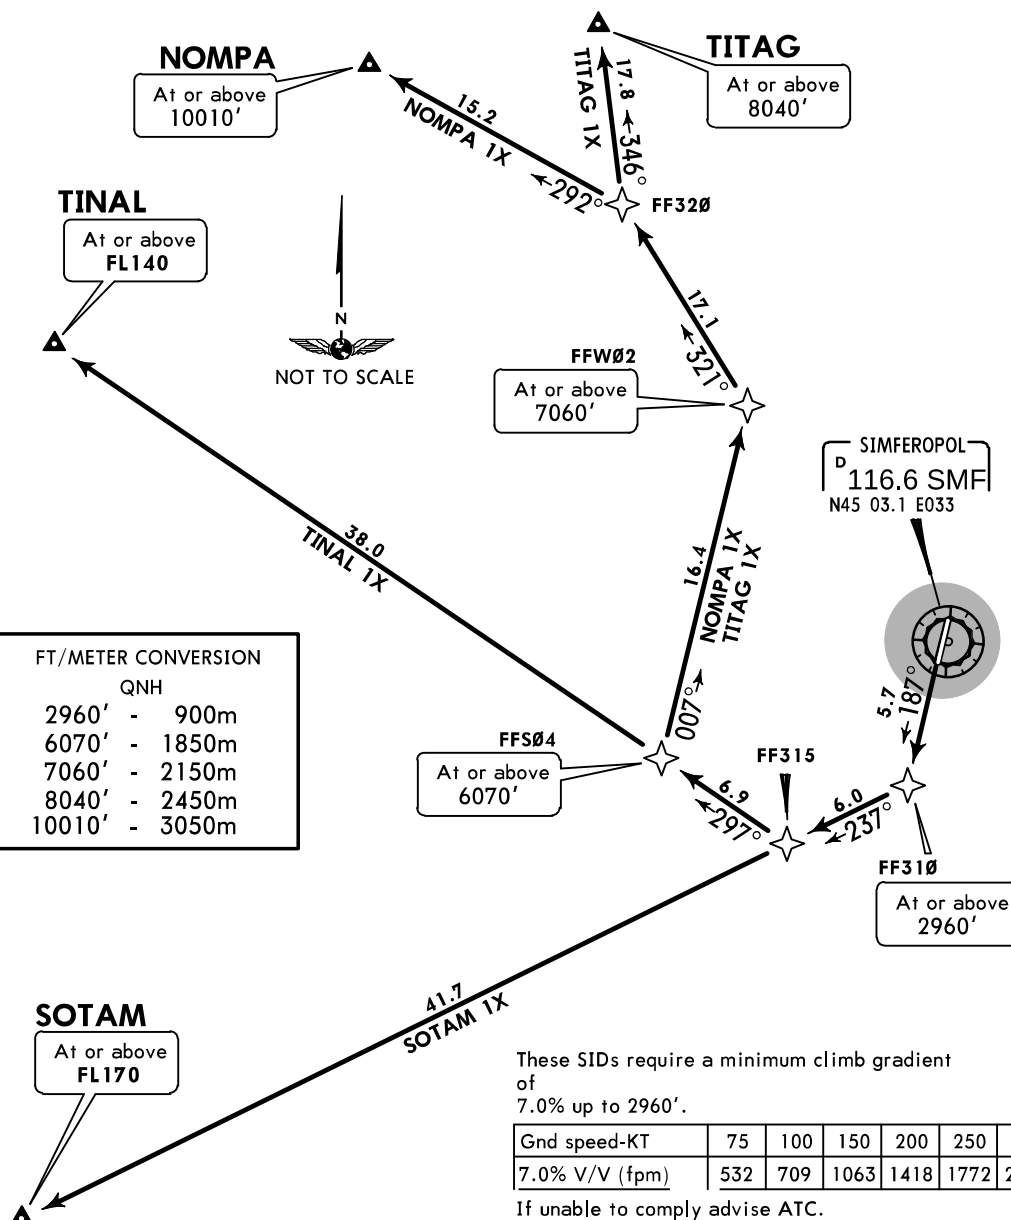


SID	ROUTING
NOMPA 1X	FF310 (2960'+) - FF315 - FFS04 (6070'+) - FFW02 (7060'+) - FF320 - NOMPA (10010'+).
SOTAM 1X	FF310 (2960'+) - FF315 - SOTAM (FL170+).
TINAL 1X	FF310 (2960'+) - FF315 - FFS04 (6070'+) - TINAL (FL140+).
TITAG 1X	FF310 (2960'+) - FF315 - FFS04 (6070'+) - FFW02 (7060'+) - FF320 - TITAG (8040'+).

Apt Elev
597'

Trans level: By ATC Trans alt: 10010'


RENBA 1K
RENBA 1L
RWYS 01, 19 DEPARTURES



FT/METER CONVERSION

QNH

2960'	-	900m
3940'	-	1200m
4430'	-	1350m
8040'	-	2450m
9030'	-	2750m
10010'	-	3050m

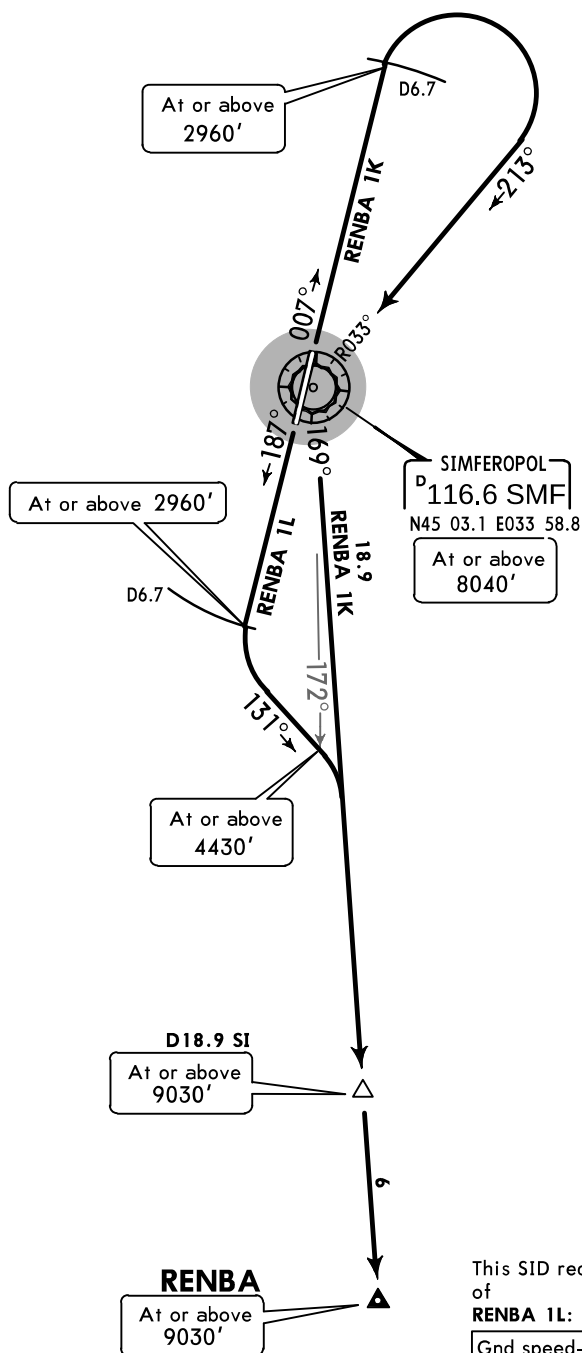

This SID requires a minimum climb gradient of
RENBA 1L: 7.5% up to 9030'.

Gnd speed-KT	75	100	150	200	250	300
7.5% V/V (fpm)	570	760	1139	1519	1899	2279

If unable to comply advise ATC.

SID	RWY	ROUTING
RENBA 1K	01	Climb on 007° track to D6.7 SI, turn RIGHT, 213° track to SI, turn LEFT, SI R-169 to RENBA.
RENBA 1L	19	Climb on 187° track to D6.7 SI, turn LEFT, 131° track, at SI R-172 turn RIGHT to RENBA.


UKFF
SIMFEROPOL

JEPPESEN
24 AUG 18 10-3F

SIMFEROPOL
SID

Apt Elev
597'

Trans level: By ATC Trans alt: 10010'



SOGTA 1K
SOGTA 1L
SOGTA 2L
SOTAM 1K
SOTAM 1L
RWYS 01, 19 DEPARTURES


FT/METER CONVERSION

QNH	
2960'	- 900m
4430'	- 1350m
6070'	- 1850m
8040'	- 2450m
10010'	- 3050m



NOT TO SCALE

NIKOLA
*326 NL
N44 58.0 E033 37.2

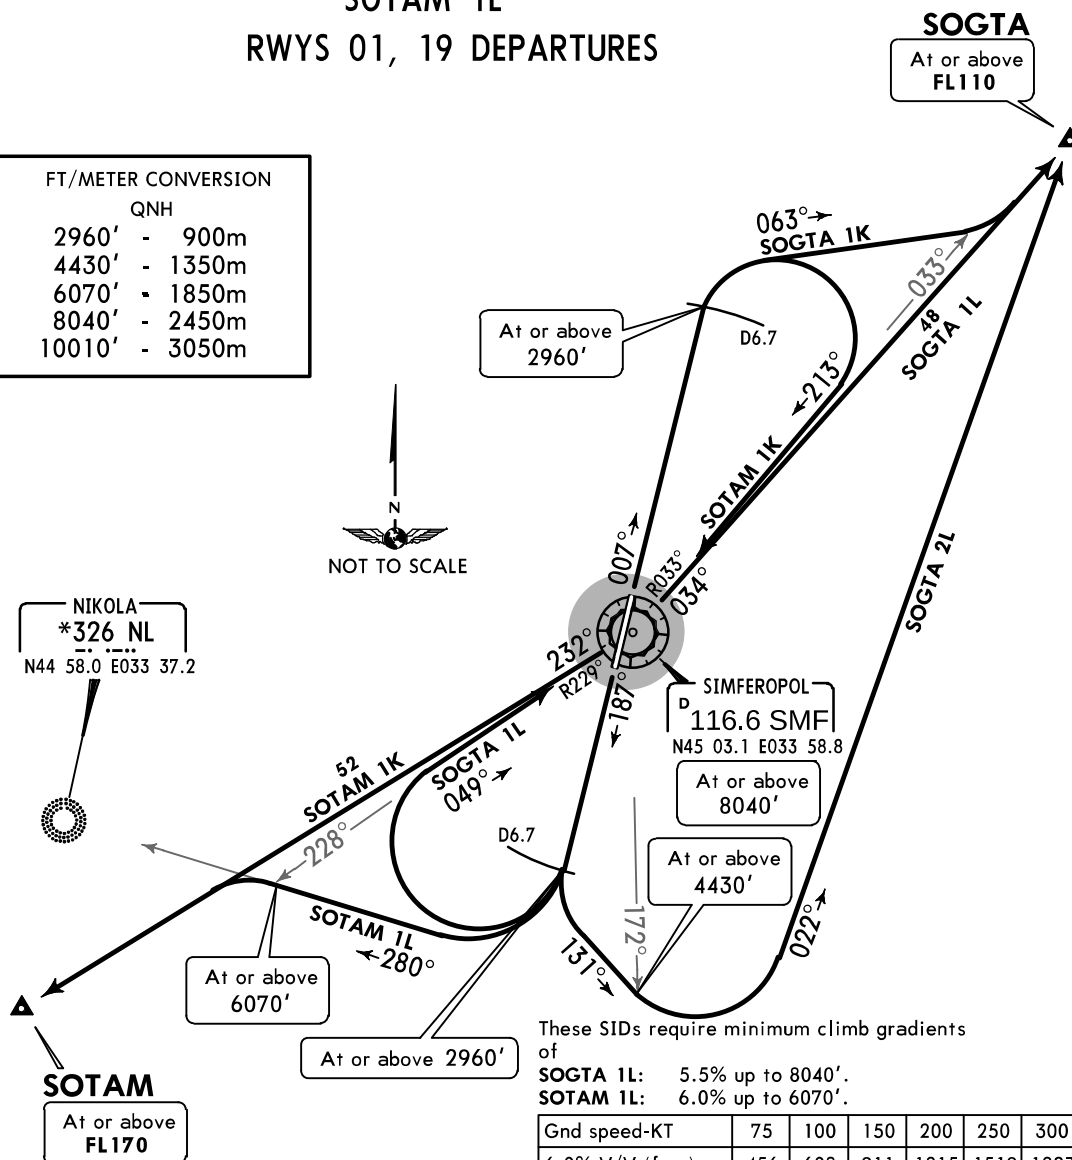

These SIDs require minimum climb gradients of

SOGTA 1L: 5.5% up to 8040'.
SOTAM 1L: 6.0% up to 6070'.

Gnd speed-KT	75	100	150	200	250	300
6.0% V/V (fpm)	456	608	911	1215	1519	1823
5.5% V/V (fpm)	418	557	835	1114	1392	1671

If unable to comply advise ATC.


SID	RWY	ROUTING
SOGTA 1K	01	Climb on 007° track to D6.7 SI, turn RIGHT, 063° track, at SI R-033 turn LEFT, intercept SI R-034 to SOGTA.
SOGTA 1L	19	Climb on 187° track to D6.7 SI, turn RIGHT, 049° track to SI, turn LEFT, SI R-034 to SOGTA.
SOGTA 2L		Climb on 187° track to D6.7 SI, turn LEFT, 131° track, at SI R-172, turn LEFT, 022° track to SOGTA.
SOTAM 1K By ATC	01	Climb on 007° track to D6.7 SI, turn RIGHT, 213° track to SI, turn RIGHT, SI R-232 to SOTAM.
SOTAM 1L By ATC	19	Climb on 187° track to D6.7 SI, turn RIGHT, intercept 280° bearing towards NL, at SI R-228 turn LEFT, intercept SI R-232 to SOTAM.

CHANGES: SMF VOR DME revised SI VOR DME.

© JEPPESEN, 2014, 2018. ALL RIGHTS RESERVED.

Apt Elev
597'

Trans level: By ATC Trans alt: 10010'



TINAL 1K
TINAL 1L
TITAG 1K
TITAG 1L
RWYS 01, 19 DEPARTURES
By ATC

TITAG
At or above
8040'

FT/METER CONVERSION	
QNH	
2960'	900m
6070'	1850m
8040'	2450m
10010'	3050m

TINAL
At or above
FL140




NOT TO SCALE

This SID requires a minimum climb gradient of

TITAG 1L: 5.5% up to 8040'.

Gnd speed-KT	75	100	150	200	250	300
5.5% V/V (fpm)	418	557	835	1114	1392	1671


If unable to comply advise ATC.

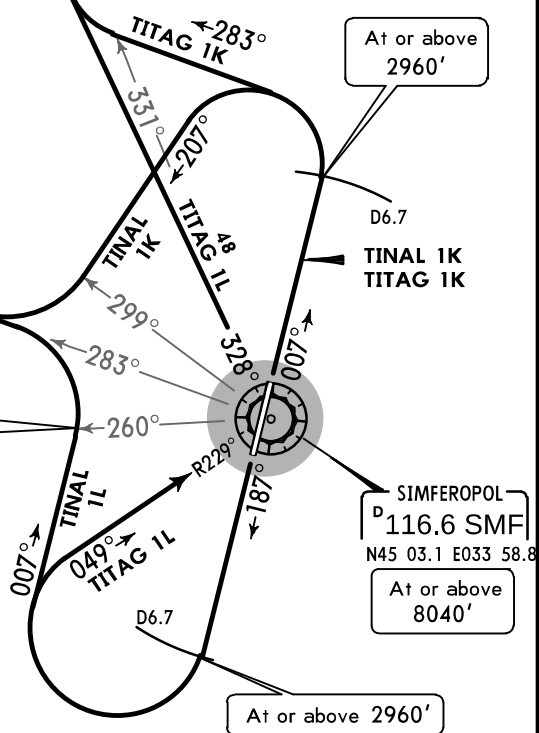

SID	RWY	ROUTING
TINAL 1K	01	Climb on 007° track to D6.7 SI, turn LEFT, 207° track, at SI R-299 turn RIGHT, intercept SI R-283 to TINAL.
TINAL 1L	19	Climb on 187° track to D6.7 SI, turn RIGHT, 007° track, at SI R-260 turn LEFT, intercept SI R-283 to TINAL.
TITAG 1K	01	Climb on 007° track to D6.7 SI, turn LEFT, 283° track, at SI R-331 turn RIGHT, intercept SI R-328 TITAG.
TITAG 1L	19	Climb on 187° track to D6.7 SI, turn RIGHT, 049° track to SI, turn LEFT, SI R-328 to TITAG.


Apt Elev
597'

Trans level: By ATC Trans alt: 10010'



ETUNO 1W
INBAK 1W
SOGTA 1W
RWY 01 RNAV DEPARTURES
RNAV (GNSS)

RNAV 1 (P-RNAV) APPROVAL REQUIRED, OTHERWISE ADVISE ATC

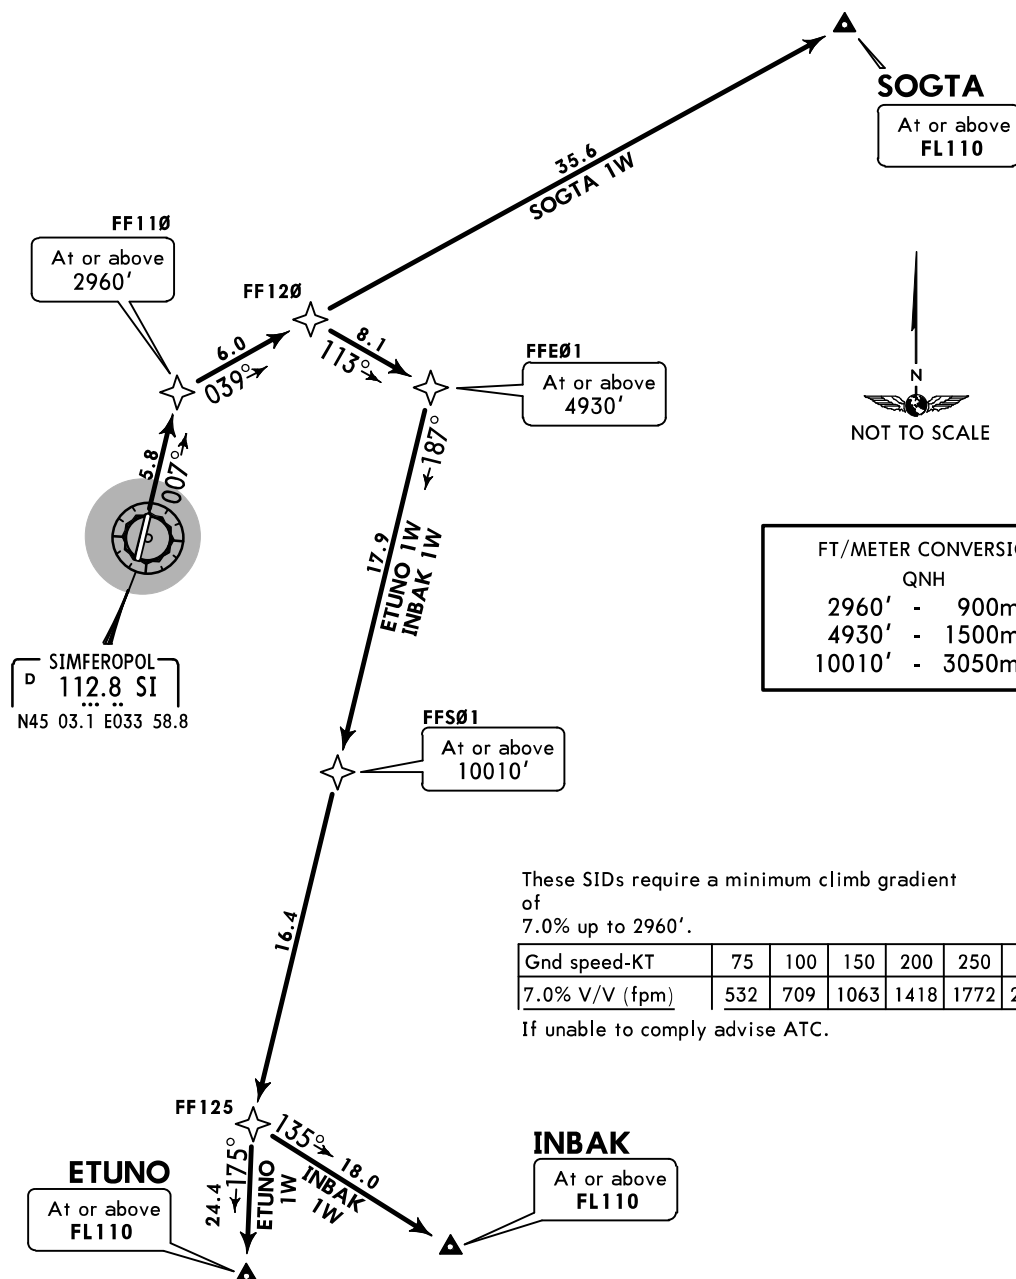

FT/METER CONVERSION	
QNH	
2960'	- 900m
4930'	- 1500m
10010'	- 3050m

These SIDs require a minimum climb gradient
of
7.0% up to 2960'.


Gnd speed-KT	75	100	150	200	250	300
7.0% V/V (fpm)	532	709	1063	1418	1772	2127

If unable to comply advise ATC.

SID	ROUTING
ETUNO 1W	FF110 (2960'+) - FF120 - FFE01 (4930'+) - FFS01 (10010'+) - FF125 - ETUNO (FL110+).
INBAK 1W	FF110 (2960'+) - FF120 - FFE01 (4930'+) - FFS01 (10010'+) - FF125 - INBAK (FL110+).
SOGTA 1W	FF110 (2960'+) - FF120 - SOGTA (FL110+).


Apt Elev
597'

Trans level: By ATC Trans alt: 10010'



ETUNO 1X
INBAK 1X
SOGTA 1X
RWY 19 RNAV DEPARTURES
RNAV (GNSS)


RNAV 1 (P-RNAV) APPROVAL REQUIRED, OTHERWISE ADVISE ATC

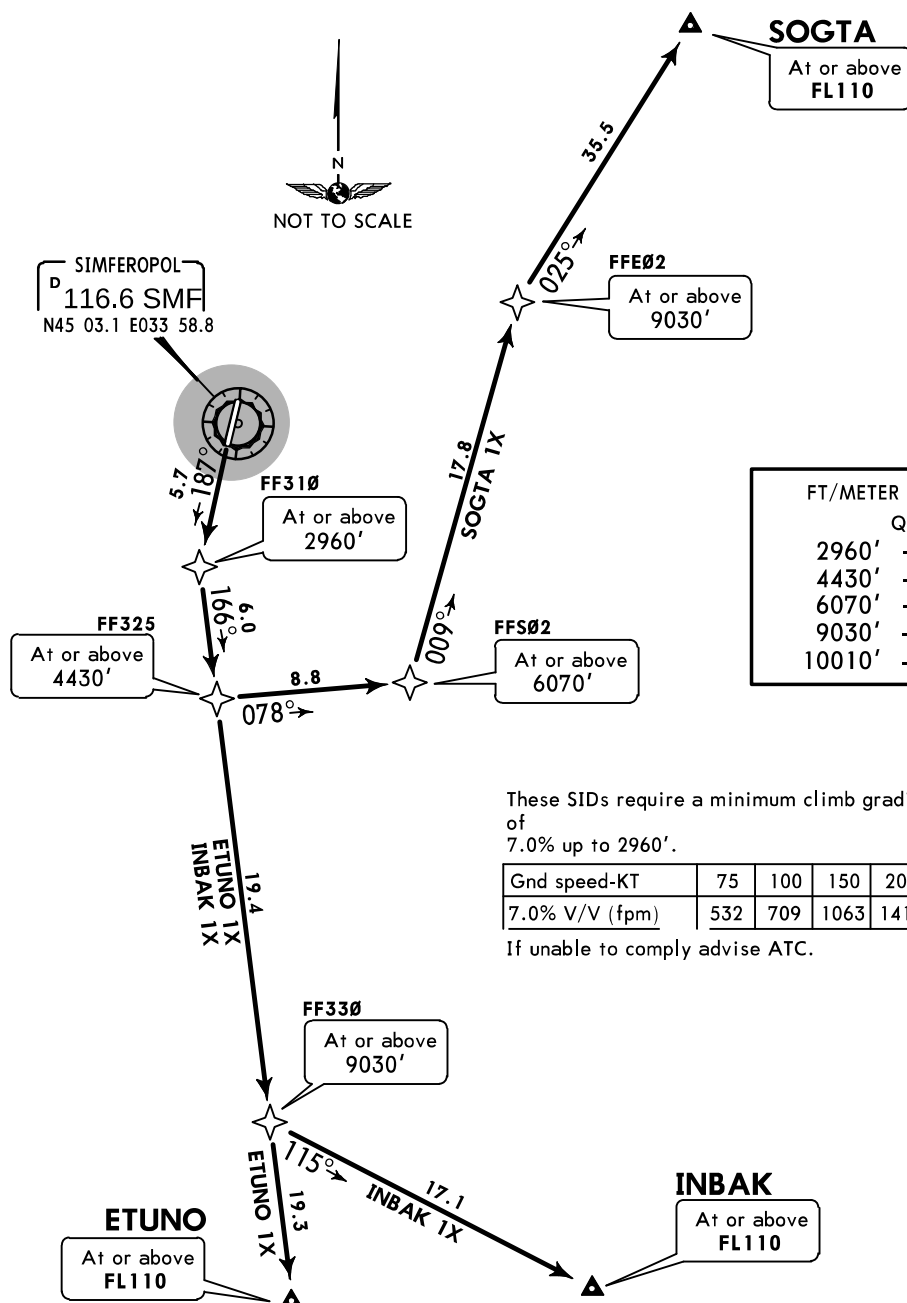

SID	ROUTING
ETUNO 1X	FF310 (2960'+) - FF325 (4430'+) - FF330 (9030'+) - ETUNO (FL110+).
INBAK 1X	FF310 (2960'+) - FF325 (4430'+) - FF330 (9030'+) - INBAK (FL110+).
SOGTA 1X	FF310 (2960'+) - FF325 (4430'+) - FFS02 (6070'+) - FFE02 (9030'+) - SOGTA (FL110+).


Apt Elev
597'

Trans level: By ATC Trans alt: 10010'




**NOMPA 1W, SOTAM 1W
TINAL 1W, TITAG 1W
RWY 01 RNAV DEPARTURES**
RNAV (GNSS)

RNAV 1 (P-RNAV) APPROVAL REQUIRED, OTHERWISE ADVISE ATC

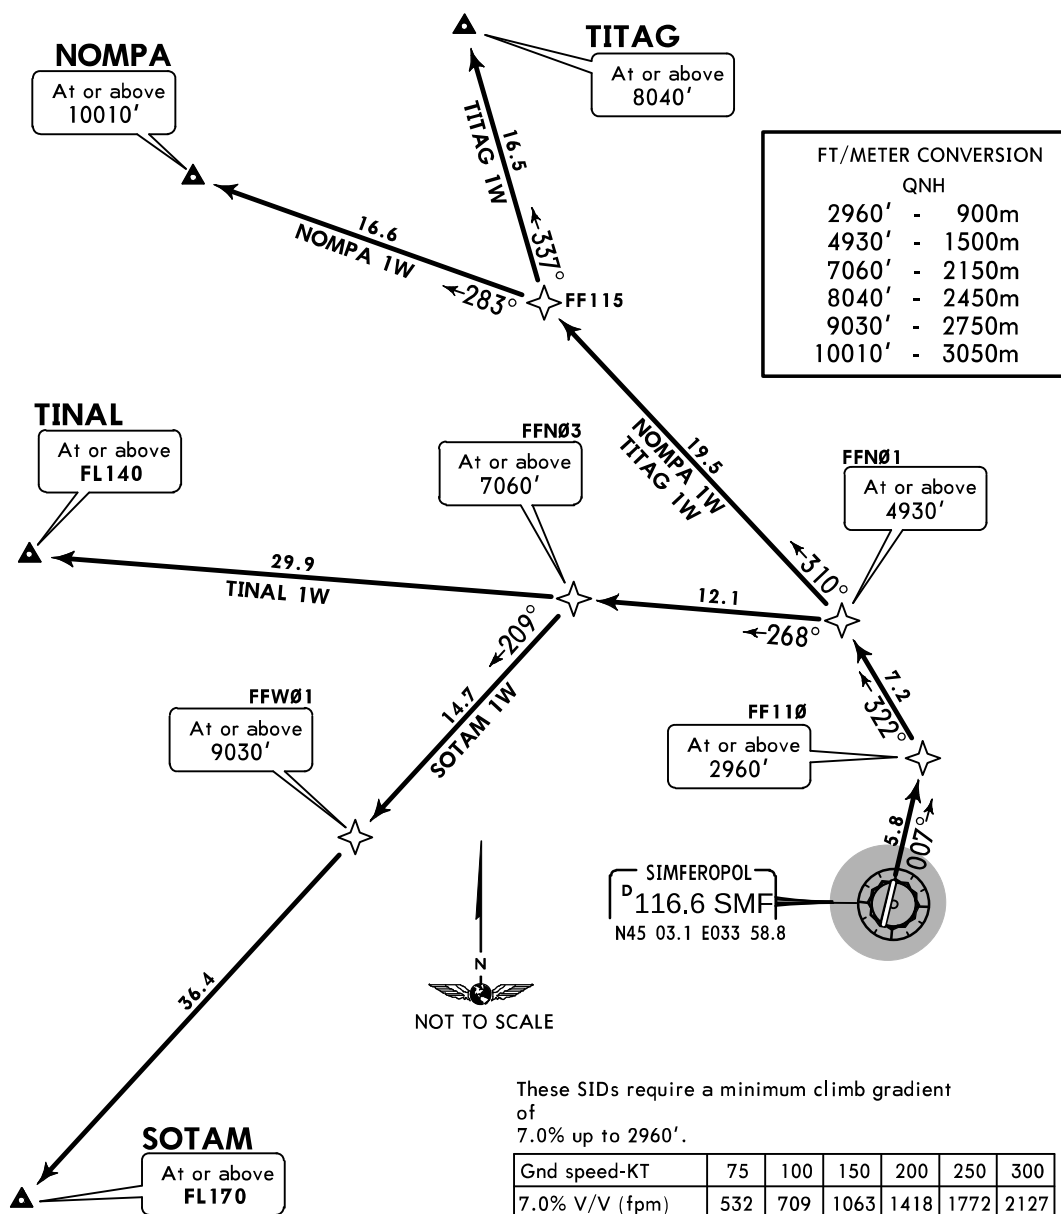

SID	ROUTING
NOMPA 1W	FF110 (2960'+) - FFN01 (4930'+) - FF115 - NOMPA (10010'+).
SOTAM 1W	FF110 (2960'+) - FFN01 (4930'+) - FFN03 (7060'+) - FFW01 (9030'+) - SOTAM (FL170+).
TINAL 1W	FF110 (2960'+) - FFN01 (4930'+) - FFN03 (7060'+) - TINAL (FL140+).
TITAG 1W	FF110 (2960'+) - FFN01 (4930'+) - FF115 - TITAG (8040'+).

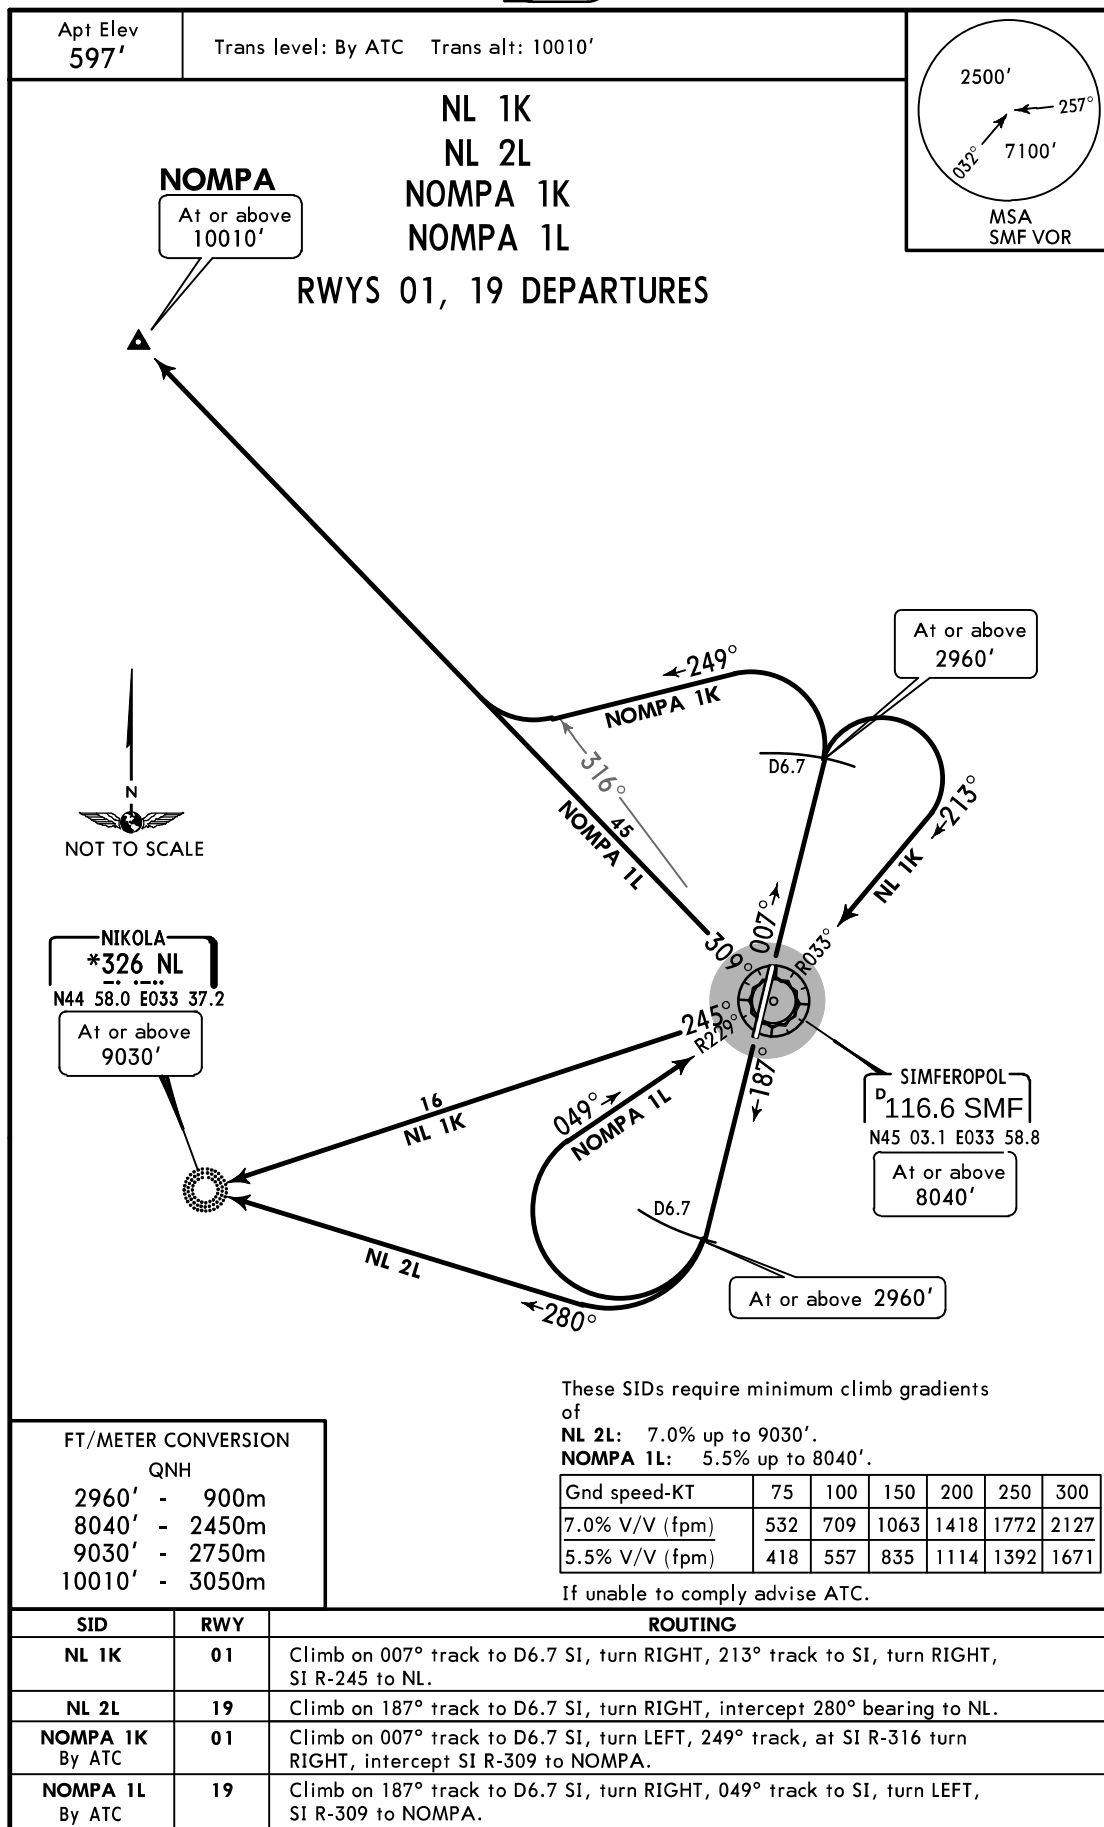

NOISE ABATEMENT

GENERAL

Noise abatement procedures during take-off and landing shall be carried out by crews of all aircraft, but not at the expense of flight safety.

DEPARTURES

NADP 1 and NADP 2 is applied for take-off and climbing procedures.

Restrictions



1. Take-off shall be carried out from RWY beginning.
2. Termination of noise abatement procedures shall not be carried out before 3.2NM from RWY THRs.

TRANS LEVEL: BY ATC
TRANS ALT: 10010'

SPECIAL ENGINE FAILURE PROCEDURE

"Advise ATC of Intentions"

RWY	PROCEDURE
19	At D7.0 SI RIGHT turn DCT to SI. HLDG: at SI, INB 007, LEFT turn (MHA 2150 ft).

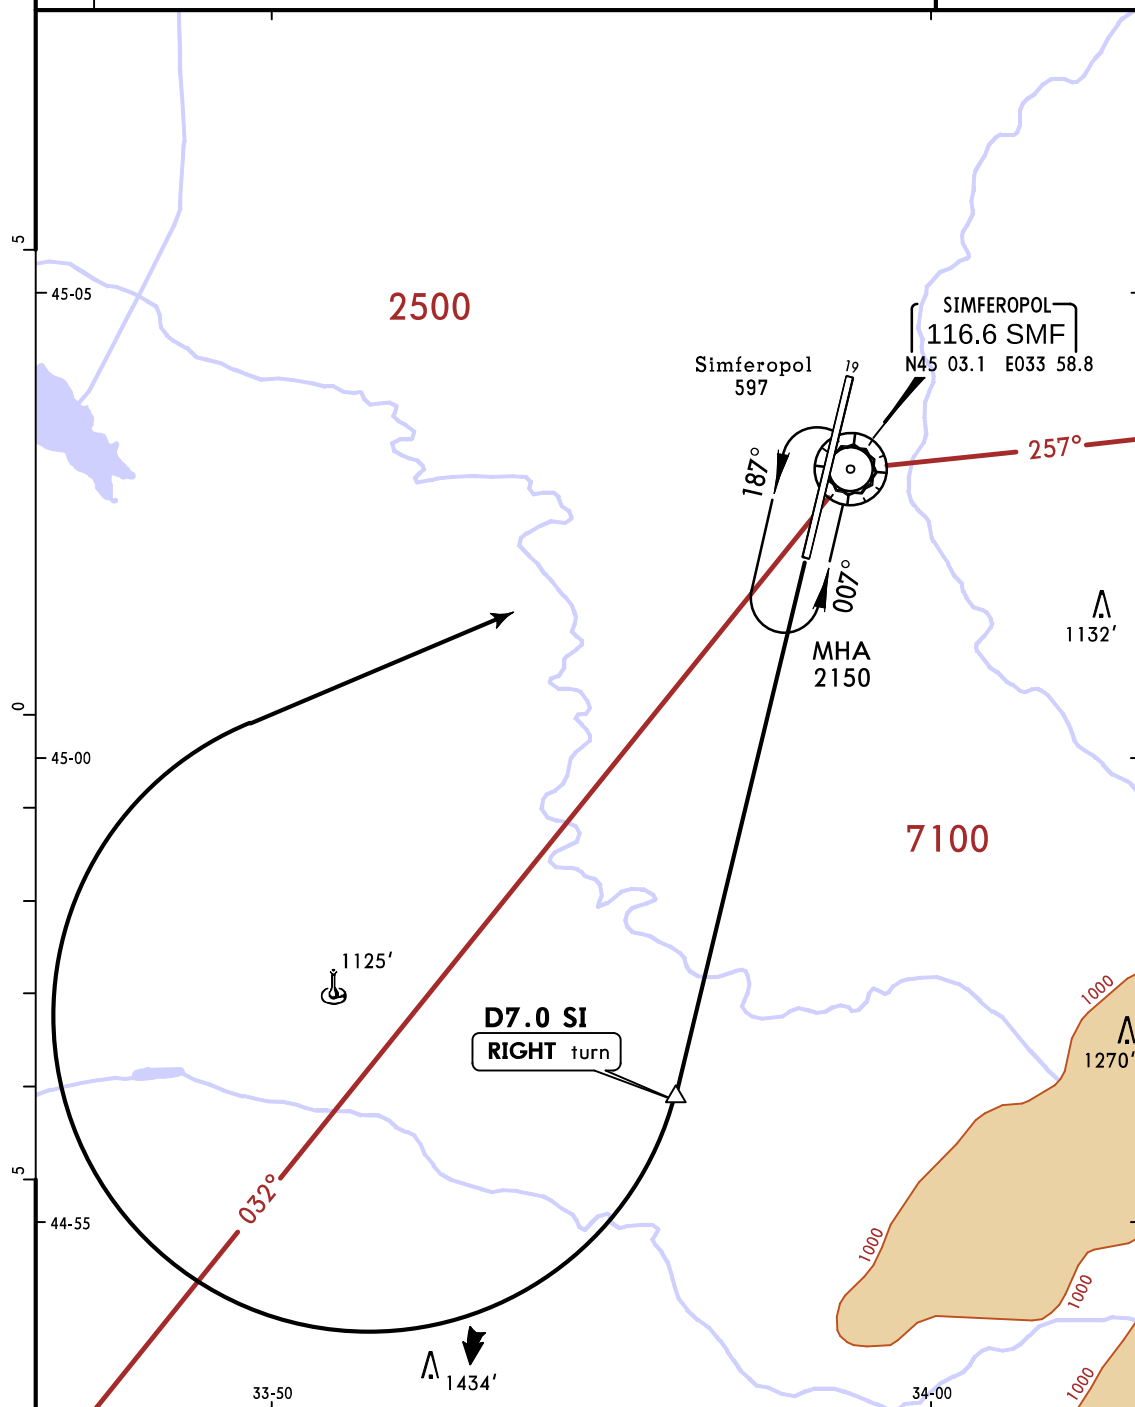

CHANGES: Procedure.

© JEPPESEN, 2018. ALL RIGHTS RESERVED.

UKFF


Apt Elev **597'**
N45 03.1 E033 58.4

JEPPESEN

23 FEB 18 **10-9** Eff 1 Mar

SIMFEROPOL

SIMFEROPOL

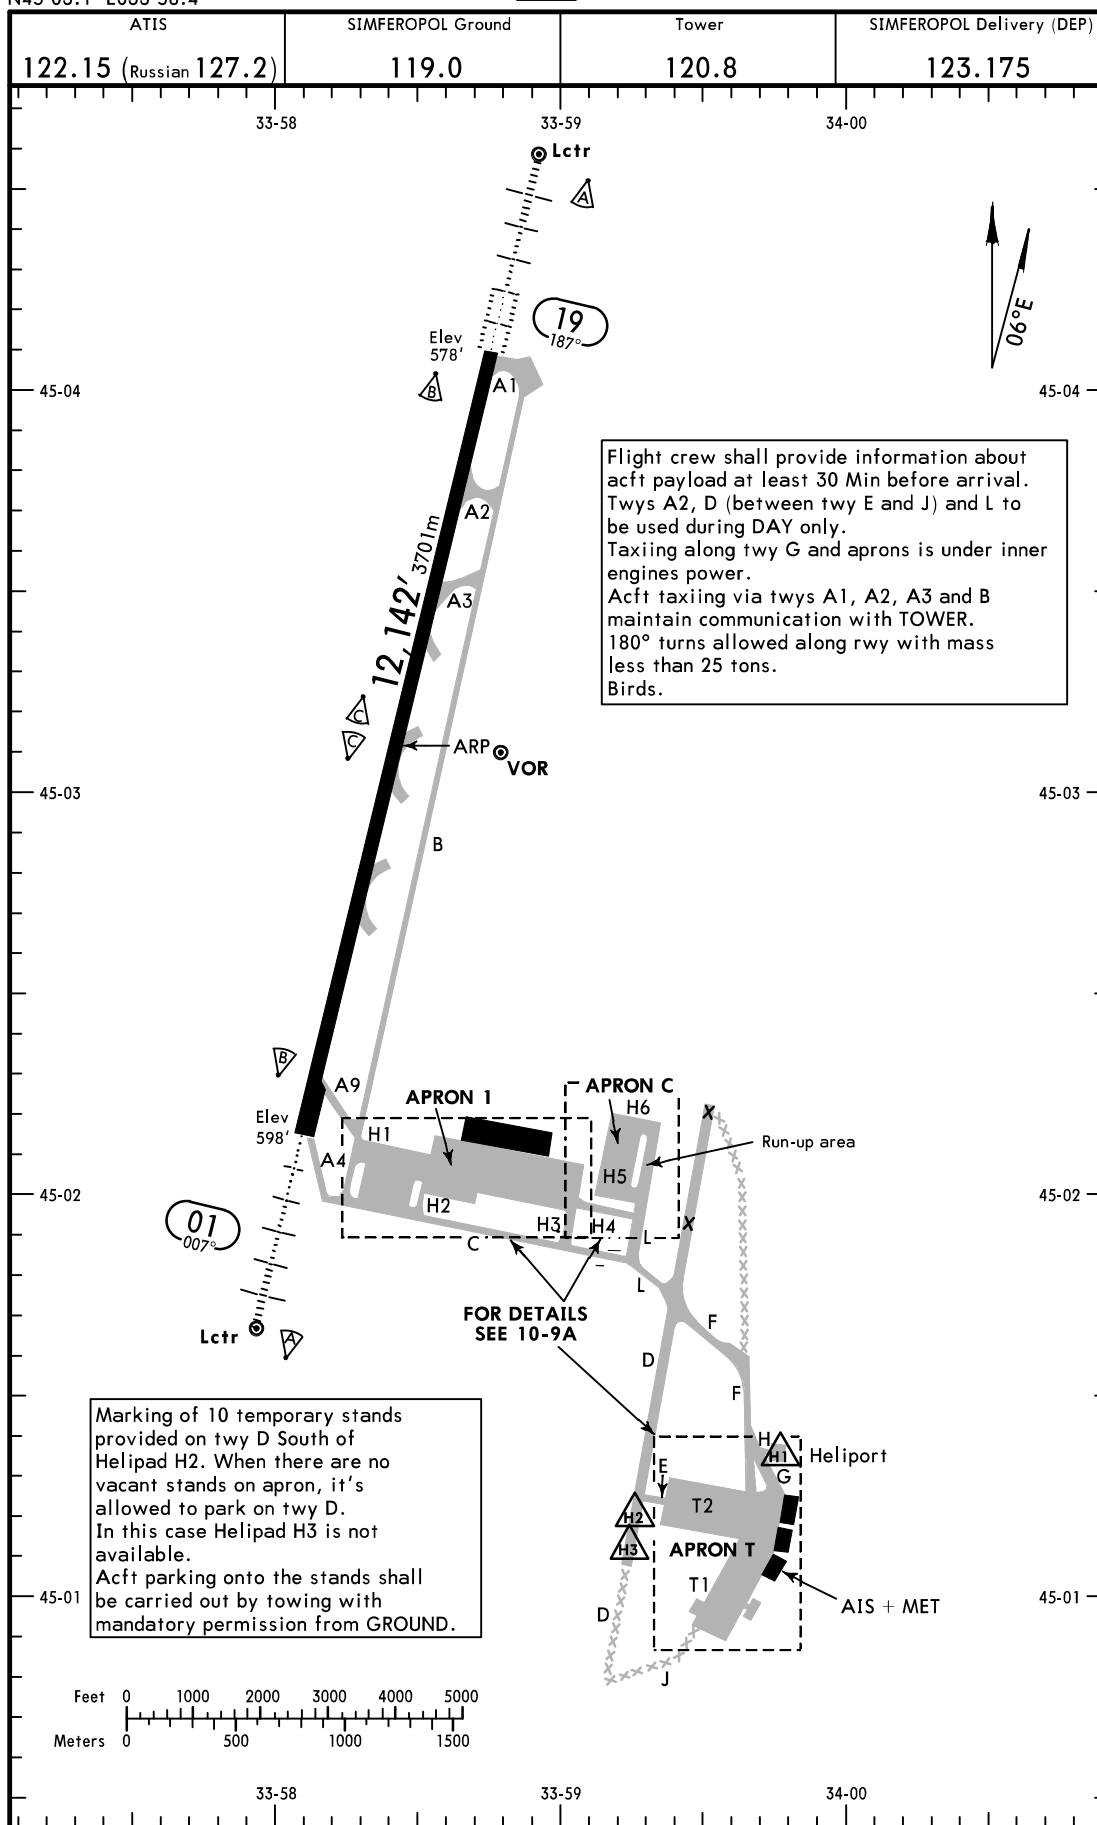

CHANGES: Apron. Twys.

© JEPPESEN, 2000, 2018. ALL RIGHTS RESERVED.

UKFF


Apt Elev **597'**
N45 03.1 E033 58.4

JEPPESEN

21 DEC 18 **10-9** Eff 3 Jan


SIMFEROPOL

SIMFEROPOL

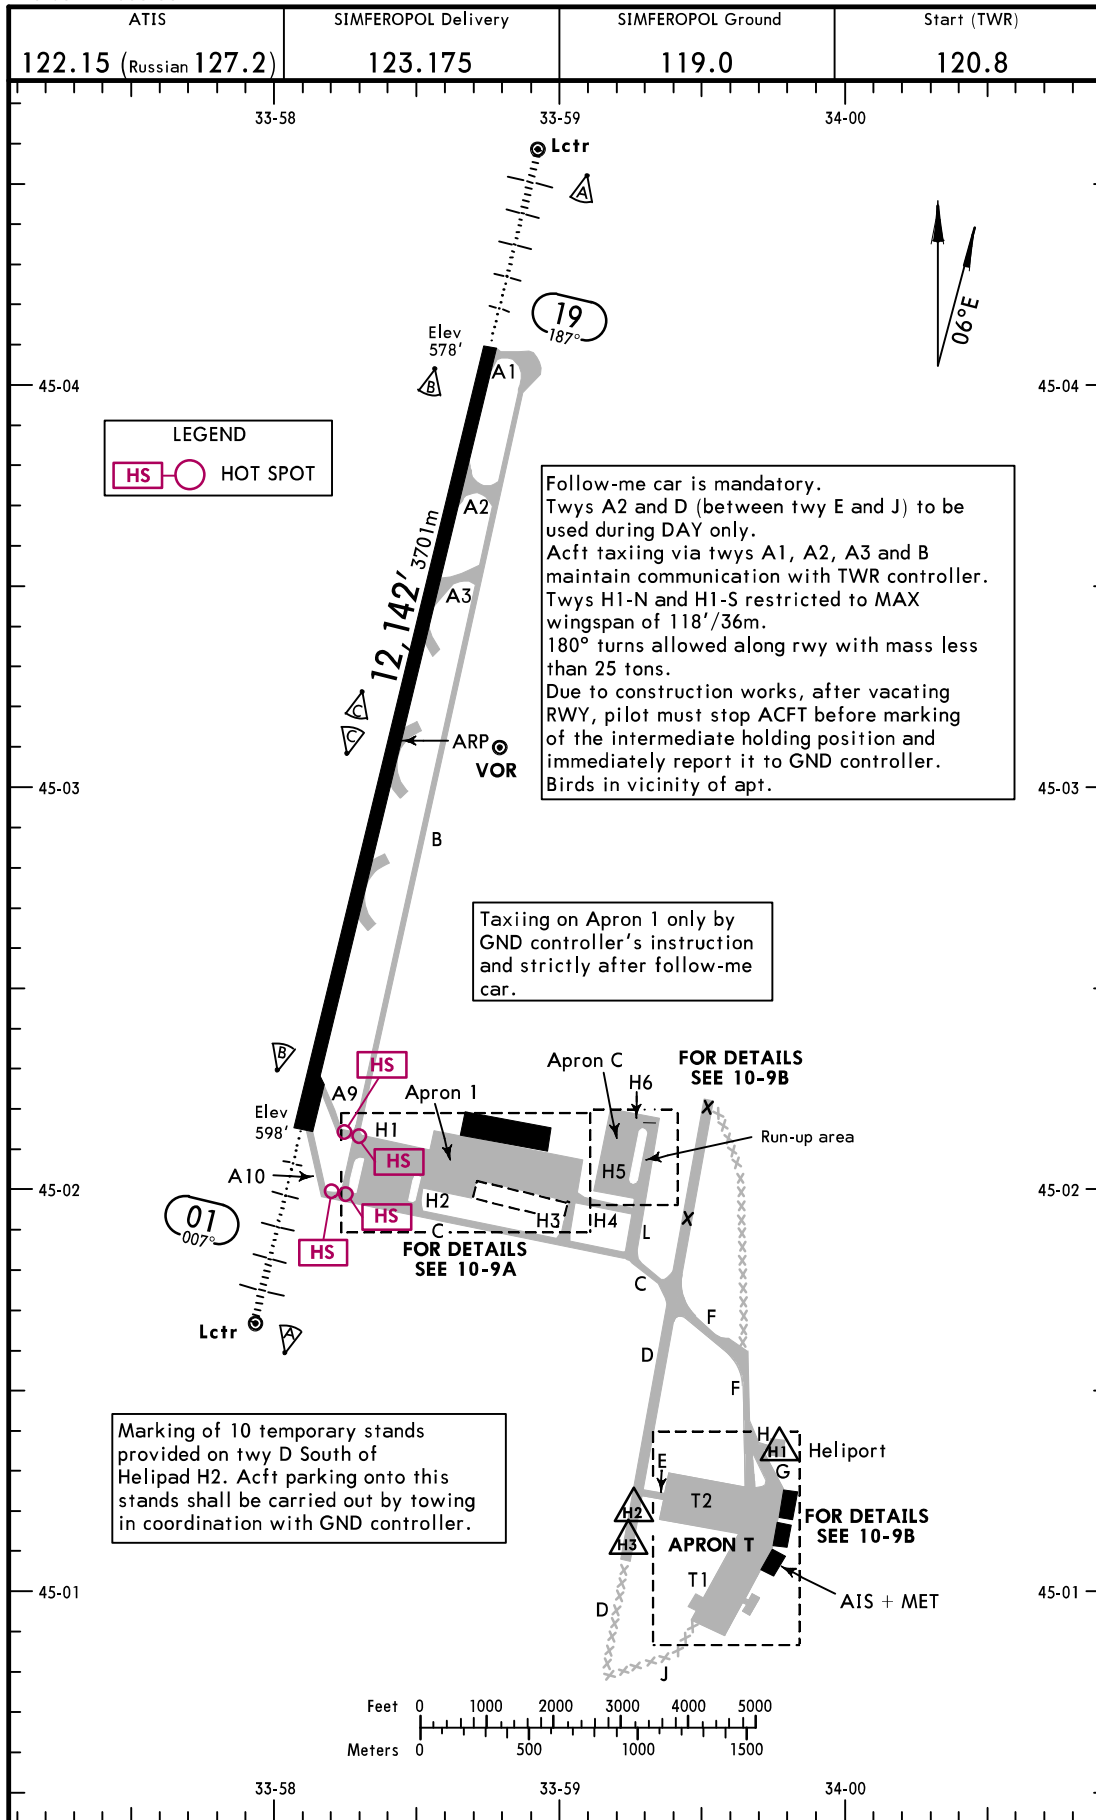

CHANGES: Communications. Lights. Twy designator. Notes. Hot spots.

© JEPPESEN, 2000, 2018. ALL RIGHTS RESERVED.

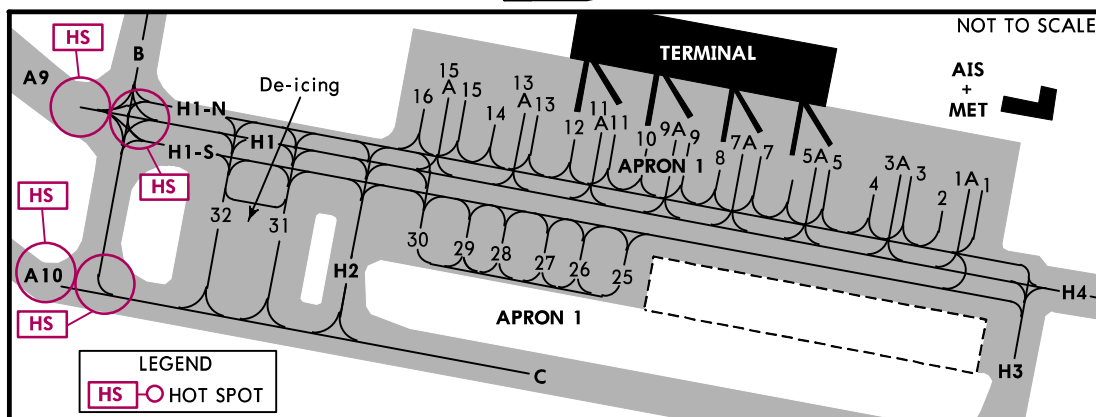

INS COORDINATES

STAND No.	COORDINATES	STAND No.	COORDINATES
1	N45 02.0 E033 59.1	9 thru 11	N45 02.1 E033 58.8
1A	N45 02.1 E033 59.1	11A thru 13A	N45 02.1 E033 58.7
2	N45 02.0 E033 59.1	14 thru 16	N45 02.1 E033 58.6
3 thru 5	N45 02.1 E033 59.0		
5A thru 8	N45 02.1 E033 58.9		

ADDITIONAL RUNWAY INFORMATION

RWY		RVR	USABLE LENGTHS		TAKE-OFF	WIDTH
			Threshold	Landing Beyond Glide Slope		
01	HIRL (60m) CL (15m) HIALS PAPI-L (3.0°)	RVR		11,109' 3386m	1	197' 60m
19	HIRL (60m) CL (15m) HIALS TDZ PAPI-L (3.0°)	RVR		10,988' 3349m		

1 TAKE-OFF RUN AVAILABLE

RWY 01: From rwy head 12,142' (3701m)
twy A2 int 10,007' (3050m)
twy A3 int 8038' (2450m)

RWY 19: From rwy head 12,142' (3701m)
twy A9 int 11,417' (3480m)

LOW VISIBILITY PROCEDURE (LVP)

LVP shall be applied when RVR is 600m or less and/or ceiling is 60m or less.

Pilots will be informed by ATIS and ATC about beginning of LVP.

- After landing pilots should report about leaving RWY and location.
- Taxiing and parking is performed with follow-me car only.
- Only one acft allowed on the manoeuvring area at a time.

TAKE-OFF

AIR CARRIER (JAA)
All Rwys



LVP must be in force

	RL & CL	RCLM (DAY only) or RL	RCLM (DAY only) or RL
A			
B	200m (150m)	250m	400m
C			
D	250m (200m)	300m	

RVR in parentheses if TDZ RVR is supplemented by Mid and/or Rollout RVR.

CHANGES: Hot spots. Usable lengths. Coord. Aprons C & T transferred to 10-9B.

© JEPPESSEN, 2000, 2018. ALL RIGHTS RESERVED.

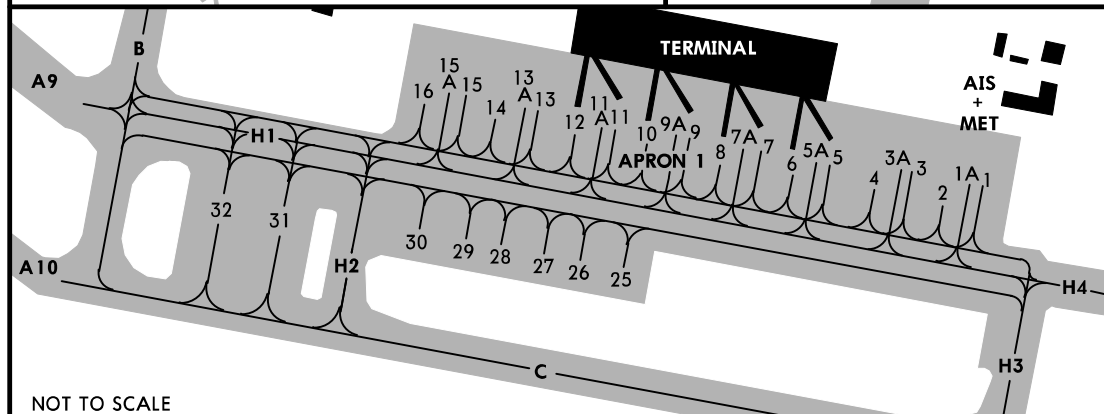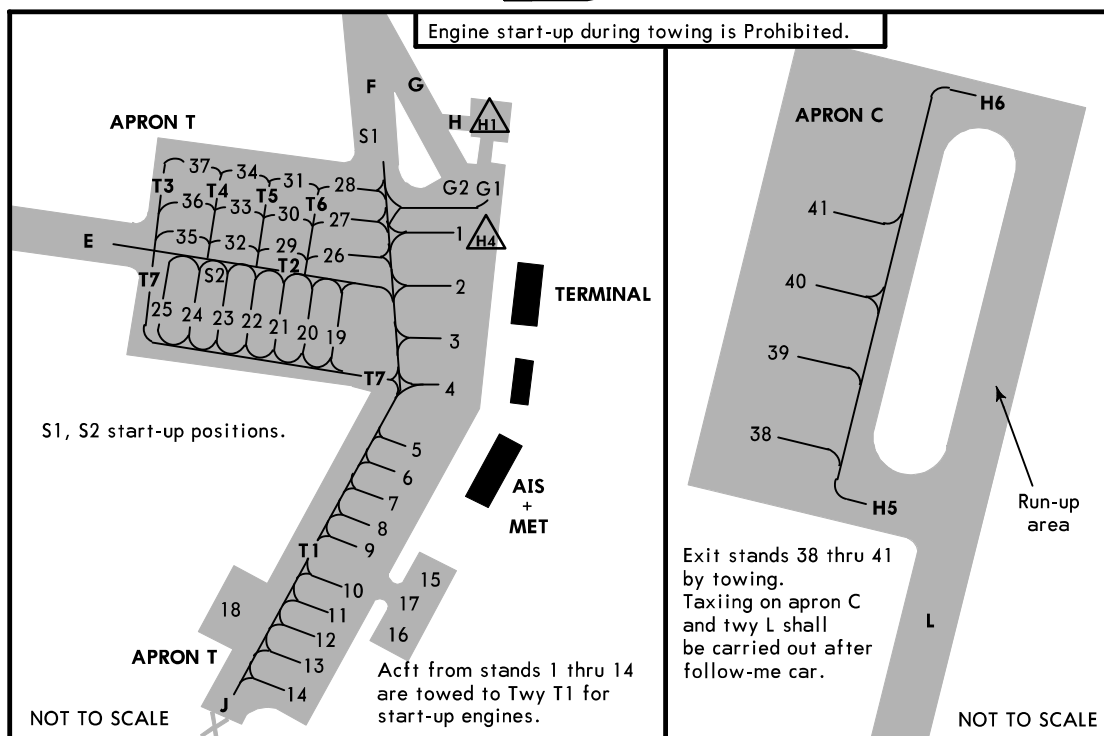

ADDITIONAL RUNWAY INFORMATION

RWY		LANDING BEYOND	USABLE LENGTHS		TAKE-OFF	WIDTH
			Threshold	Glide Slope		
01	HIRL (60m) CL (15m) HIALS PAPI-L (3.0°) RVR			11,109' 3386m		197'
19	HIRL (60m) CL (15m) HIALS TDZ PAPI-L (3.0°) RVR			10,988' 3349m		60m

LOW VISIBILITY PROCEDURE (LVP)


- LVP shall be applied when RVR is less than 600m.
Pilots will be informed by ATIS and ATC about beginning of LVP.
- After landing pilots should report about leaving RWY and location.
 - Taxiing and parking is performed with follow-me car only.
 - Only one acft allowed on the manoeuvring area at a time.

TAKE-OFF

AIR CARRIER (JAA) All Rwys

LVP must be in force

	RL & CL	RCLM (DAY only) or RL	RCLM (DAY only) or RL
A			
B	200m	250m	400m
C			
D	250m	300m	

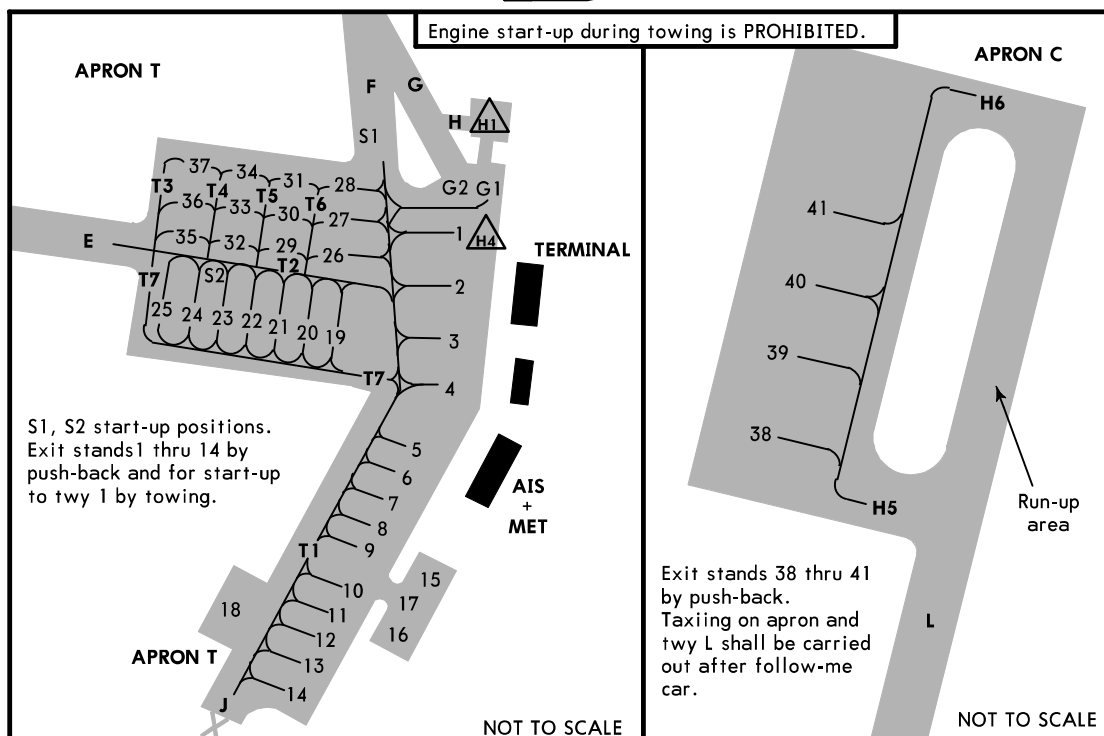

INS COORDINATES

STAND No.	COORDINATES	STAND No.	COORDINATES
G1, G2	N45 01.3 E033 59.8	24, 25	N45 01.2 E033 59.5
H1	N45 01.4 E033 59.8	26	N45 01.2 E033 59.7
H2	N45 01.3 E033 59.3	27, 28	N45 01.3 E033 59.7
H3	N45 01.2 E033 59.3	29 thru 34	N45 01.3 E033 59.6
H4, 1 thru 4	N45 01.2 E033 59.8	35 thru 37	N45 01.3 E033 59.5
5	N45 01.1 E033 59.8	38	N45 02.0 E033 59.2
6, 7	N45 01.1 E033 59.7	39 thru 41	N45 02.1 E033 59.2
8 thru 11	N45 01.0 E033 59.7		
12	N45 01.0 E033 59.6		
13, 14	N45 00.9 E033 59.6		
15, 16	N45 01.0 E033 59.8		
17	N45 01.0 E033 59.7		
18	N45 01.0 E033 59.5		
19, 20	N45 01.2 E033 59.7		
21 thru 23	N45 01.2 E033 59.6		

INS COORDINATES APRON C & T			
STAND No.	COORDINATES	STAND No.	COORDINATES
G1, G2	N45 01.3 E033 59.8	24, 25	N45 01.2 E033 59.5
H1	N45 01.4 E033 59.8	26	N45 01.2 E033 59.7
H2	N45 01.3 E033 59.3	27, 28	N45 01.3 E033 59.7
H3	N45 01.2 E033 59.3	29 thru 34	N45 01.3 E033 59.6
H4, 1 thru 4	N45 01.2 E033 59.8	35 thru 37	N45 01.3 E033 59.5
5	N45 01.1 E033 59.8	38	N45 02.0 E033 59.2
6, 7	N45 01.1 E033 59.7	39 thru 41	N45 02.1 E033 59.2
8 thru 11	N45 01.0 E033 59.7		
12	N45 01.0 E033 59.6		
13, 14	N45 00.9 E033 59.6		
15, 16	N45 01.0 E033 59.8		
17	N45 01.0 E033 59.7		
18	N45 01.0 E033 59.5		
19, 20	N45 01.2 E033 59.7		
21 thru 23	N45 01.2 E033 59.6		

STRAIGHT-IN RWY		A	B	C	D
01	ILS	797' (200')	797' (200')	797' (200')	797' (200')
	FULL	R550m	R550m	R550m	R550m
	Limited	R750m	R750m	R750m	R750m
	ALS out	R1200m	R1200m	R1200m	R1200m
	LOC ①	910' (313')	910' (313')	910' (313')	910' (313')
	with D4.3	R750m	R750m	R750m	R750m
	ALS out	R1400m	R1400m	R1400m	R1400m
	LOC ①	1100' (503')	1100' (503')	1100' (503')	1100' (503')
	w/o D4.3	R1500m	R1500m	R1600m	R1600m
	ALS out	R1500m	R1500m	C2400m	C2400m
	VOR ①	1040' (443')	1040' (443')	1040' (443')	1040' (443')
	ALS out	R1400m	R1400m	R1400m	R1400m
19	ILS	777' (200')	777' (200')	777' (200')	777' (200')
	FULL	R550m	R550m	R550m	R550m
	Limited	R750m	R750m	R750m	R750m
	ALS out	R1200m	R1200m	R1200m	R1200m
	LOC ①	970' (393')	970' (393')	970' (393')	970' (393')
	ALS out	R1100m	R1100m	R1100m	R1100m
	ALS out	R1500m	R1500m	R1800m	R1800m
	VOR ①	970' (393')	970' (393')	1010' (433')	1020' (443')
	ALS out	R1100m	R1100m	R1300m	R1400m
	ALS out	R1500m	R1500m	R2000m	C2100m
	NDB ①	970' (393')	970' (393')	970' (393')	970' (393')
	ALS out	R1100m	R1100m	R1100m	R1100m
	ALS out	R1500m	R1500m	R1800m	R1800m

① Continuous Descent Final Approach.

CIRCLE-TO-LAND	100 KT	135 KT	180 KT	205 KT
After ILS, LOC apch to rwy 01	1100' (503')	1100' (503')	1530' (933')	1530' (933')
After VOR apch to rwy 01	1070' (473')	1100' (503')	1530' (933')	1530' (933')
After NDB apch to rwy 01	1120' (523')	1120' (523')	1530' (933')	1530' (933')
After apch to rwy 19 ②	1070' (493')	1100' (523')	1530' (953')	1530' (953')
	V1500m	V1600m	V2400m	V3600m

② Circling height based on rwy 19 thresh elev of 577'.

TAKE-OFF RWY 01, 19

Approved Operators		LVP must be in force			
HIRL, CL & mult. RVR req	RL, CL & mult. RVR req	RL & CL	RCLM (DAY only) or RL	RCLM (DAY only) or RL	NIL (DAY only)
A					
B	125m	150m	200m	250m	400m
C					500m
D	150m	200m	250m	300m	

CHANGES: Minimums.



© JEPPESEN, 2010, 2014. ALL RIGHTS RESERVED.

UKFF SIMFEROPOL

JEPPesen
24 AUG 18 (11-1)

SIMFEROPOL ILS or LOC Rwy 01

ATIS	SIMFEROPOL Approach	SIMFEROPOL Radar (TWR)	SIMFEROPOL Tower	Ground
122.15 (Russian 127.2)	124.7	135.775	120.8	119.0
LOC ISN 109.3	Final Apch Crs 007°	GS LOM 1362' (765')	ILS DA(H) 797' (200')	Apt Elev 597' Rwy 597'
MISSED APCH: ① Climb on 007° to 2960', then as directed. MISSED APCH RADIO COMM FAILURE: ② Climb on 007° to 3940', then turn RIGHT climbing to 4930' to SMF VOR, then according to chart.				
Alt Set: MM (hPa on req) Rwy Elev: 22 hPa Trans level: By ATC Trans alt: 10010'				MSA SMF VOR

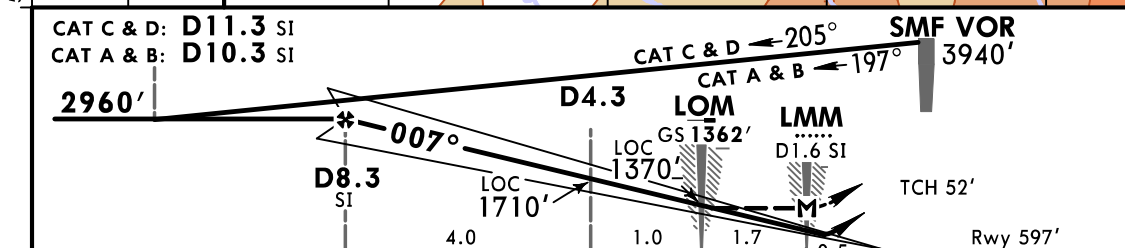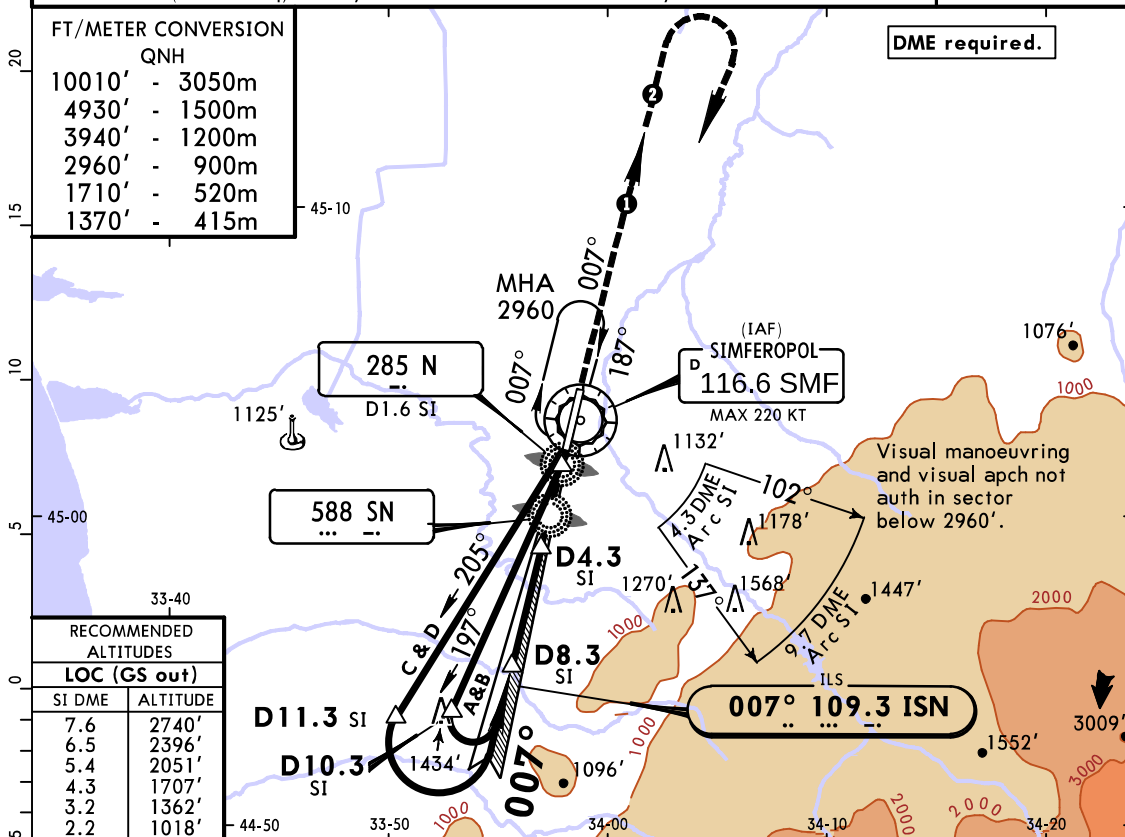

Gnd speed-Kts	70	90	100	120	140	160		HIALS	Refer to Missed Apch above
ILS GS or LOC Descent Angle 3.00°	372	478	531	637	743	849		PAPI	
MAP at LMM/D1.6 SI									

STRAIGHT-IN LANDING RWY 01						CIRCLE-TO-LAND		
ILS		with D4.3 LOC (GS out)		w/o D4.3				
DA(H) 797' (200')		MDA(H) 910' (313')		MDA(H) 1100' (503')				
FULL	ALS out		ALS out		ALS out	Max Kts	MDA(H)	
A						100	1100' (503') 1600m	
B	RVR 720m		RVR 720m		RVR 1500m	135		
C	VIS 800m	1200m	RVR 1500m		VIS 1600m	180	1530' (933') 4400m	
D			1200m		2400m	205	1530' (933') 4800m	


CHANGES: Comm. VOR ident and frequency.

© JEPPESEN, 2000, 2018. ALL RIGHTS RESERVED.

UKFF SIMFEROPOL

JEPPESSEN
24 AUG 18 **(11-2)**

SIMFEROPOL ILS or LOC Rwy 19


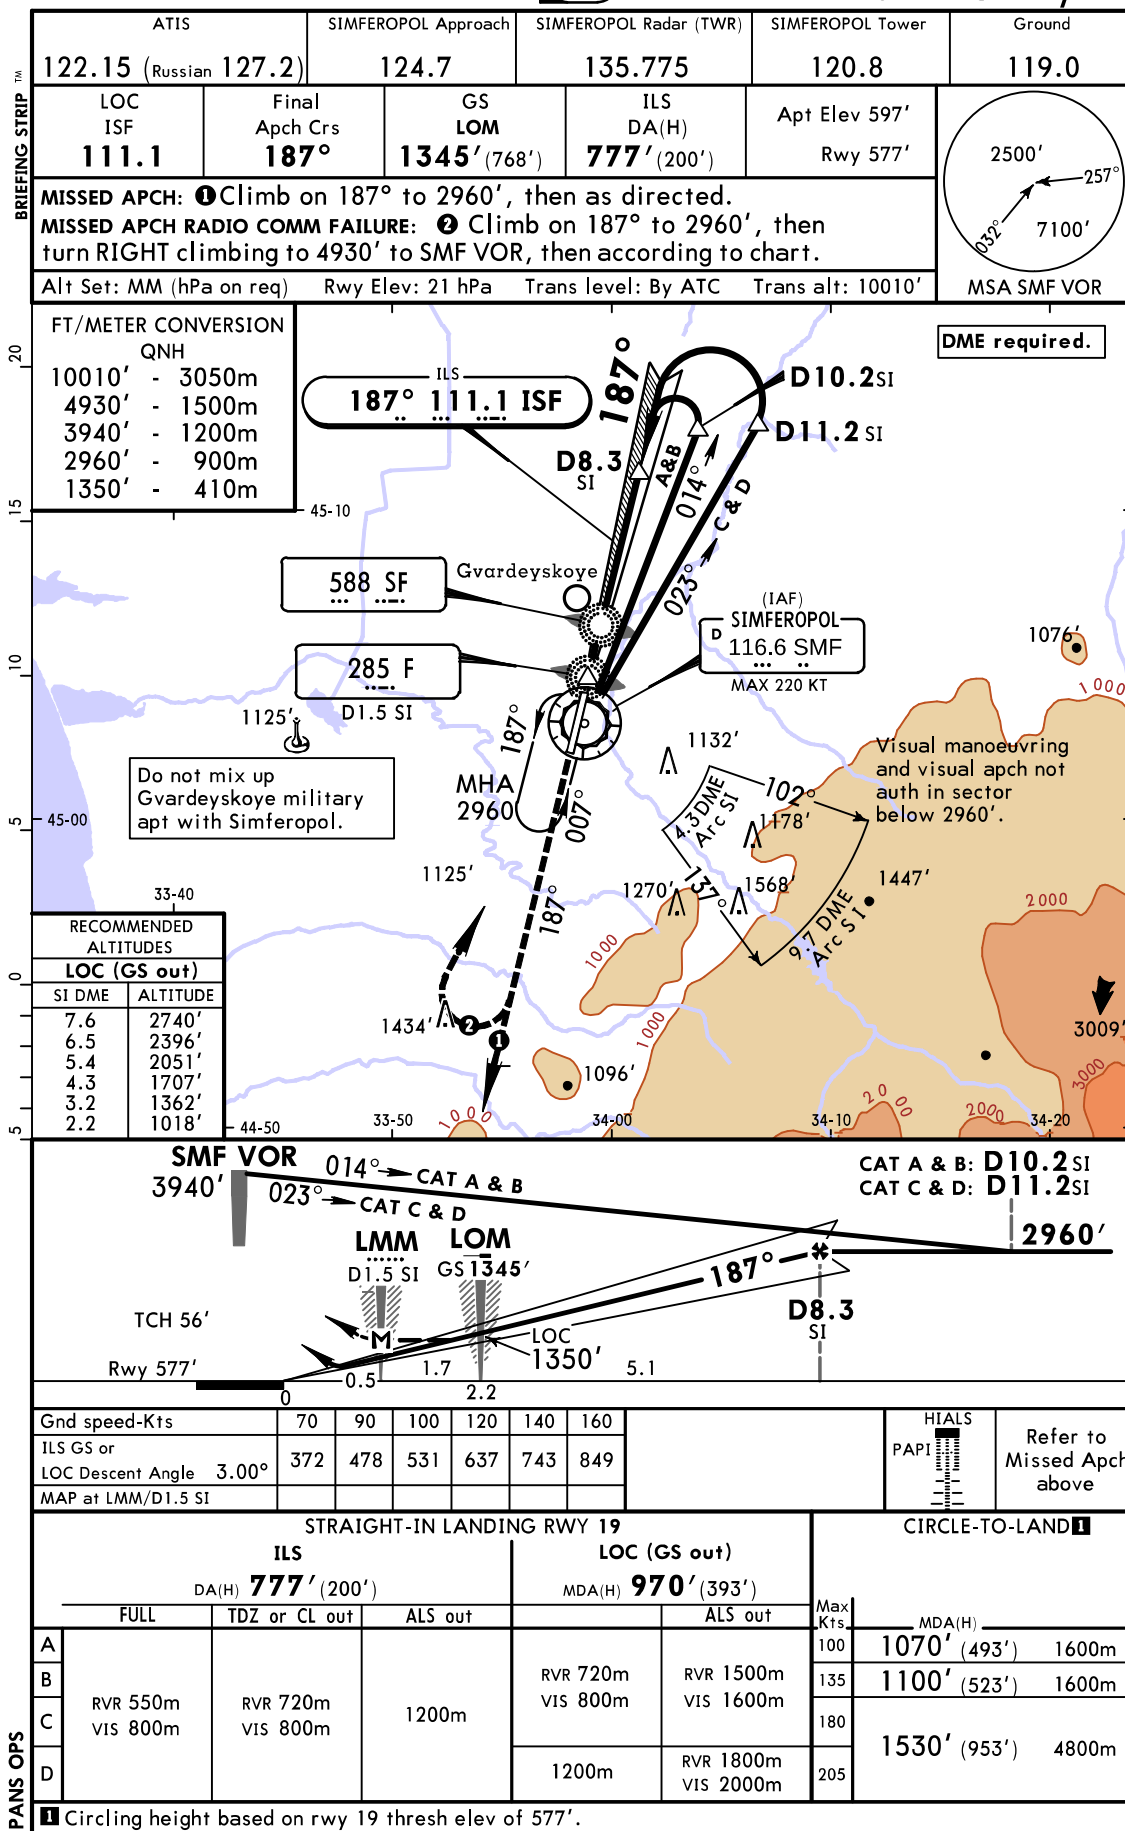


UKFF SIMFEROPOL

JEPPESSEN
24 AUG 18 **(13-1)**

SIMFEROPOL VOR Rwy 01

ATIS	SIMFEROPOL Approach	SIMFEROPOL Radar (TWR)	SIMFEROPOL Tower	Ground
122.15 (Russian 127.2)	124.7	135.775	120.8	119.0
VOR SMF 116.6	Final Apch Crs 015°	Minimum Alt D8.4 2960' (2363')	MDA(H) 1040' (443')	Apt Elev 597' Rwy 597'
MISSED APCH: ① Climb on 015° to 2960', then as directed. MISSED APCH RADIO COMM FAILURE: ② Climb on 015° to 3940', then turn RIGHT climbing to 4930' to VOR, then according to chart.				
Alt Set: MM (hPa on req) Rwy Elev: 22 hPa Trans level: By ATC Trans alt: 10010'				MSA SMF VOR

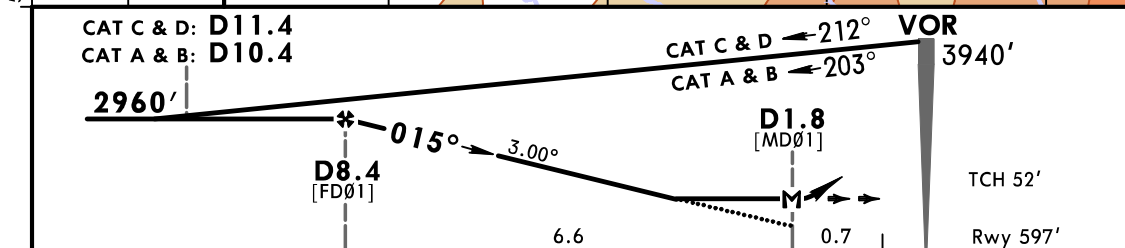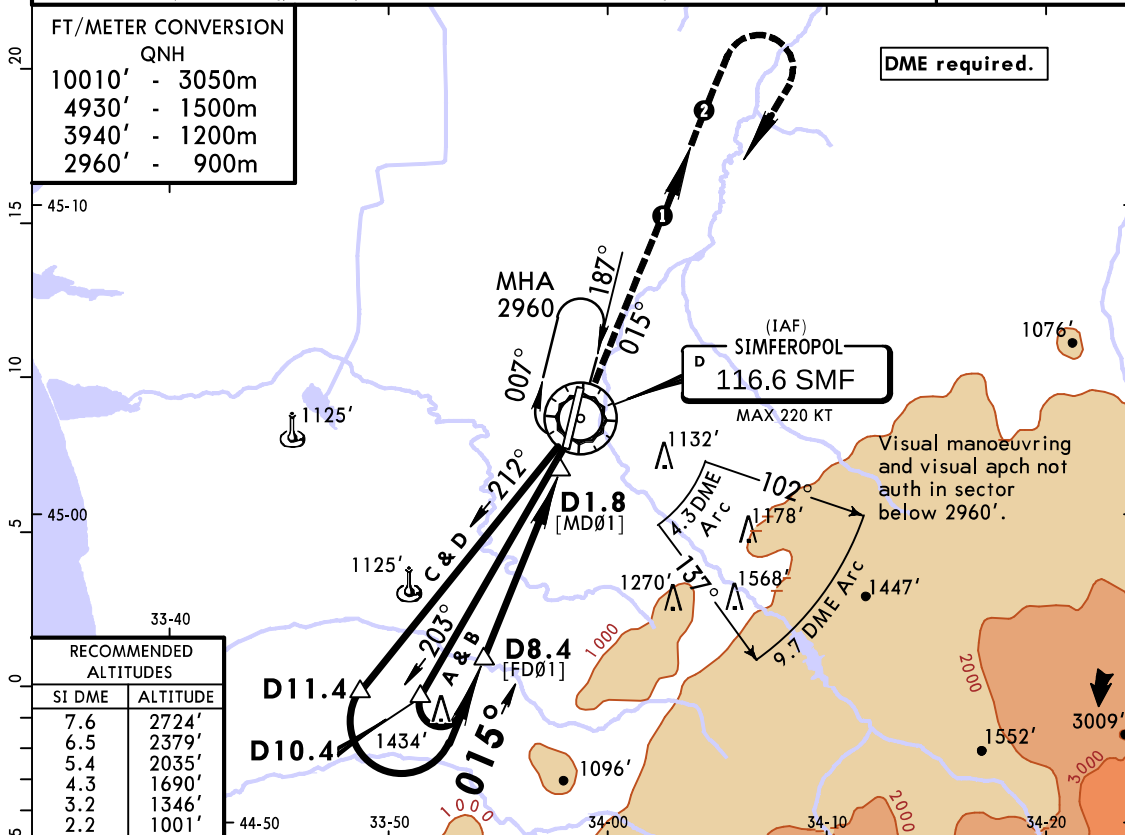

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at D1.8						

STRAIGHT-IN LANDING RWY 01				CIRCLE-TO-LAND	
MDA(H) 1040' (443')				Max Kts	MDA(H)
ALS out				100	1070' (473') 1600m
A	RVR 720m VIS 800m	RVR 1500m VIS 1600m		135	1100' (503') 1600m
B				180	1530' (933') 4400m
C	1200m	RVR 1800m VIS 2000m		205	1530' (933') 4800m
D	RVR 1500m VIS 1600m	2400m			


CHANGES: Comm. VOR ident and frequency.



© JEPPESSEN, 2000, 2018. ALL RIGHTS RESERVED.

UKFF SIMFEROPOL

JEPPESSEN
24 AUG 18 **13-2**

SIMFEROPOL VOR Rwy 19

ATIS	SIMFEROPOL Approach	SIMFEROPOL Radar (TWR)	SIMFEROPOL Tower	Ground
122.15 (Russian 127.2)	124.7	135.775	120.8	119.0
VOR SMF 116.6	Final Apch Crs 178°	Minimum Alt D8.3 2960' (2383')	MDA(H) Refer to Minimums Apt Elev 597' Rwy 577'	
MISSED APCH: ① Climb on 178° to 2960', then as directed. MISSED APCH RADIO COMM FAILURE: ② Climb on 178° to 2960', then turn RIGHT climbing to 4930' to VOR, then according to chart.				MSA SMF VOR
Alt Set: MM (hPa on req) Rwy Elev: 21 hPa Trans level: By ATC Trans alt: 10010'				

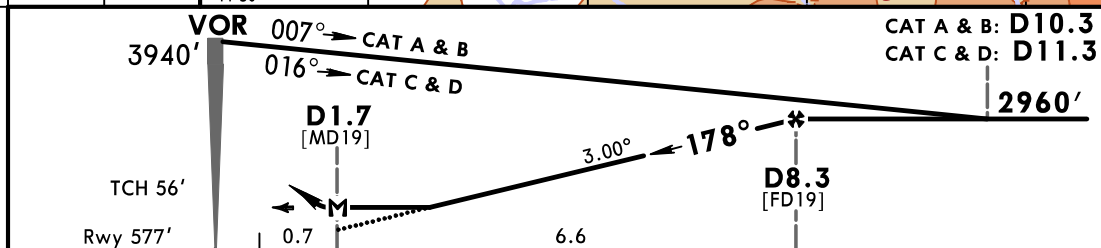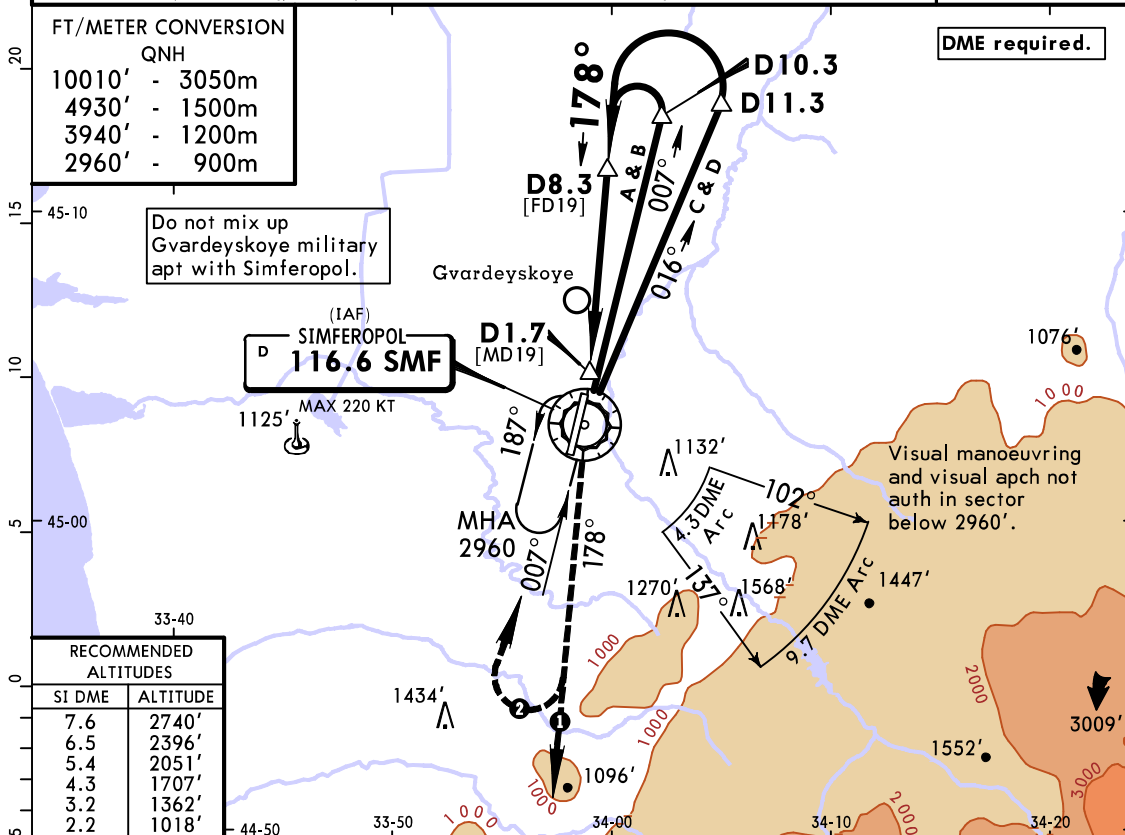

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at D1.7						

HIALS
PAPI
Refer to Missed Apch above

STRAIGHT-IN LANDING RWY 19				CIRCLE-TO-LAND ①	
MDA(H) AB: 970' (393') C: 1010' (433') D: 1020' (443')					
ALS out				Max Kts	MDA(H)
A	RVR 720m	RVR 1500m		100	1070' (493') 1600m
B	VIS 800m	VIS 1600m		135	1100' (523') 1600m
C	1200m	RVR 1800m		180	1530' (953') 4800m
D	RVR 1500m	VIS 2000m		205	
	VIS 1600m	2400m			

① Circling height based on rwy 19 thresh elev of 577'.

CHANGES: Comm. VOR ident and frequency.

© JEPPESSEN, 2008, 2018. ALL RIGHTS RESERVED.

UKFF SIMFEROPOL



JEPPESSEN
24 AUG 18 16-1

SIMFEROPOL NDB Rwy 01

BRIEFING STRIP

TM

ATIS		SIMFEROPOL Approach		SIMFEROPOL Radar (TWR)	SIMFEROPOL Tower	Ground
122.15 (Russian 127.2)		124.7		135.775	120.8	119.0
NDB N 285	Final Apch Crs 007°	Minimum Alt D8.3 2960' (2363')	MDA(H) (CONDITIONAL) 970' (373')	Apt Elev 597' Rwy 597'		
MISSED APCH: ① Climb on 007° to 2960', then as directed. MISSED APCH RADIO COMM FAILURE: ② Climb on 007° to 3940', then turn RIGHT climbing to 4930' to VOR, then according to chart.						MSA SMF VOR
Alt Set: MM (hPa on req)		Rwy Elev: 22 hPa	Trans level: By ATC	Trans alt: 10010'		

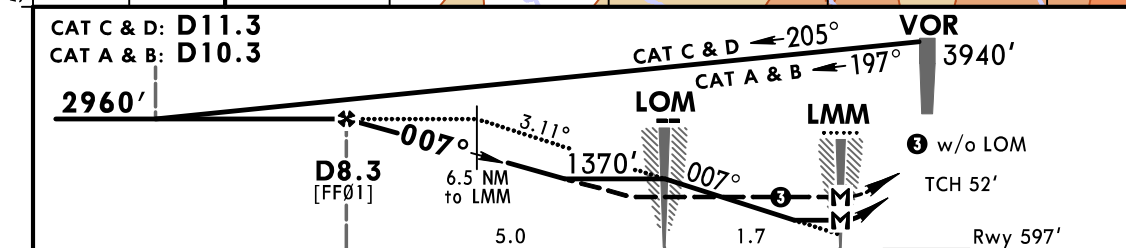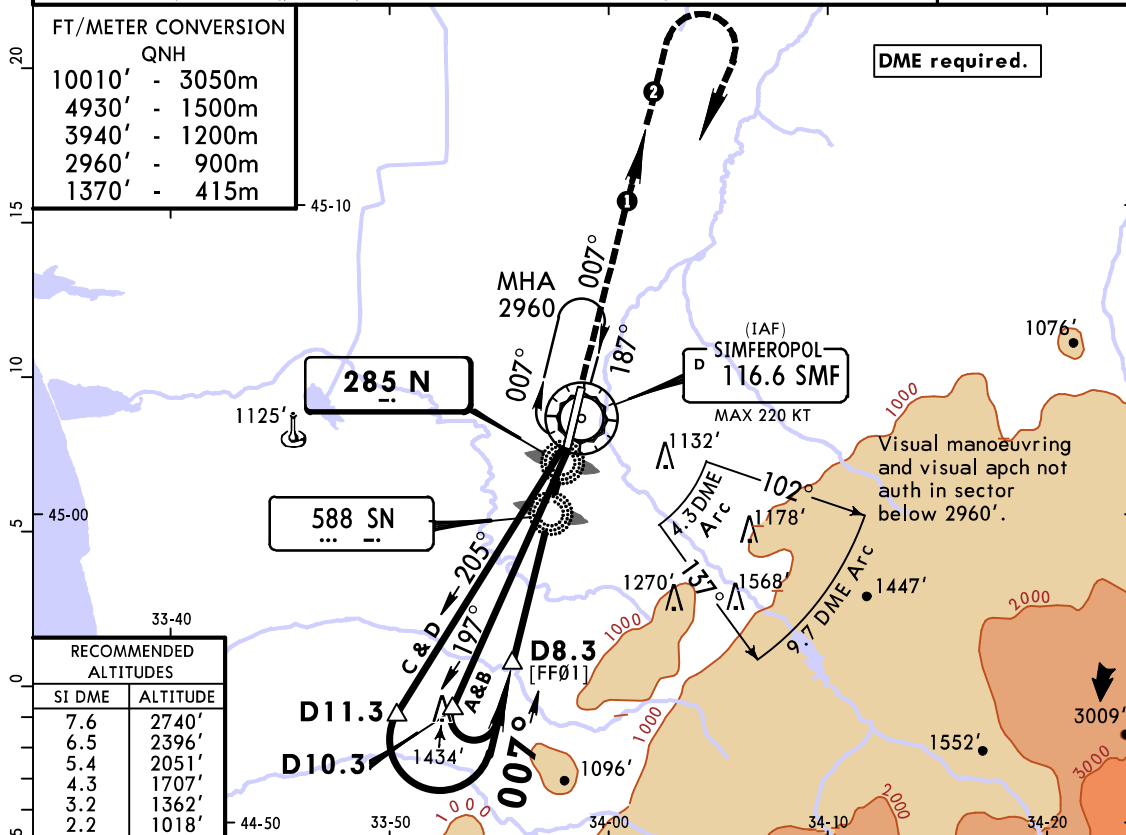

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.11°	385	495	550	660	770	880
MAP at LMM						

HIALS
PAPI

Refer to Missed Apch above

STRAIGHT-IN LANDING RWY 01				CIRCLE-TO-LAND	
with LOM		w/o LOM			
MDA(H) 970' (373')		MDA(H) 1120' (523')			
ALS out		ALS out		Max Kts	MDA(H)
A	1200m	RVR 1500m VIS 1600m	1200m	100	1120' (523')
B			RVR 1500m VIS 1600m	135	1600m
C			2400m	180	1530' (933')
D	RVR 1500m VIS 1600m	RVR 1800m VIS 2000m	2400m	205	4800m

CHANGES: Comm. VOR ident and frequency.



© JEPPESSEN, 2000, 2018. ALL RIGHTS RESERVED.

UKFF SIMFEROPOL

JEPPESEN
24 AUG 18 **(16-2)**

SIMFEROPOL NDB Rwy 19

ATIS	SIMFEROPOL Approach	SIMFEROPOL Radar (TWR)	SIMFEROPOL Tower	Ground
122.15 (Russian 127.2)	124.7	135.775	120.8	119.0
NDB SF 588	Final Apch Crs 187°	Minimum Alt D8.3 2960' (2383')	MDA(H) 970' (393')	Apt Elev 597' Rwy 577'
MISSED APCH: ① Climb on 187° to 2960', then as directed. MISSED APCH RADIO COMM FAILURE: ② Climb on 187° to 2960', then turn RIGHT climbing to 4930' to VOR, then according to chart.				
Alt Set: MM (hPa on req) Rwy Elev: 21 hPa Trans level: By ATC Trans alt: 10010'				MSA SMF VOR

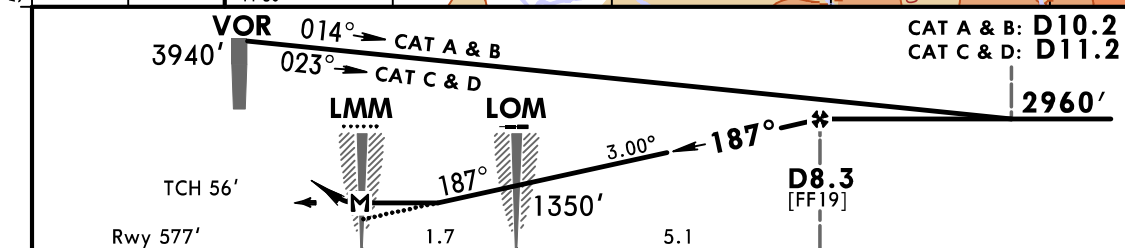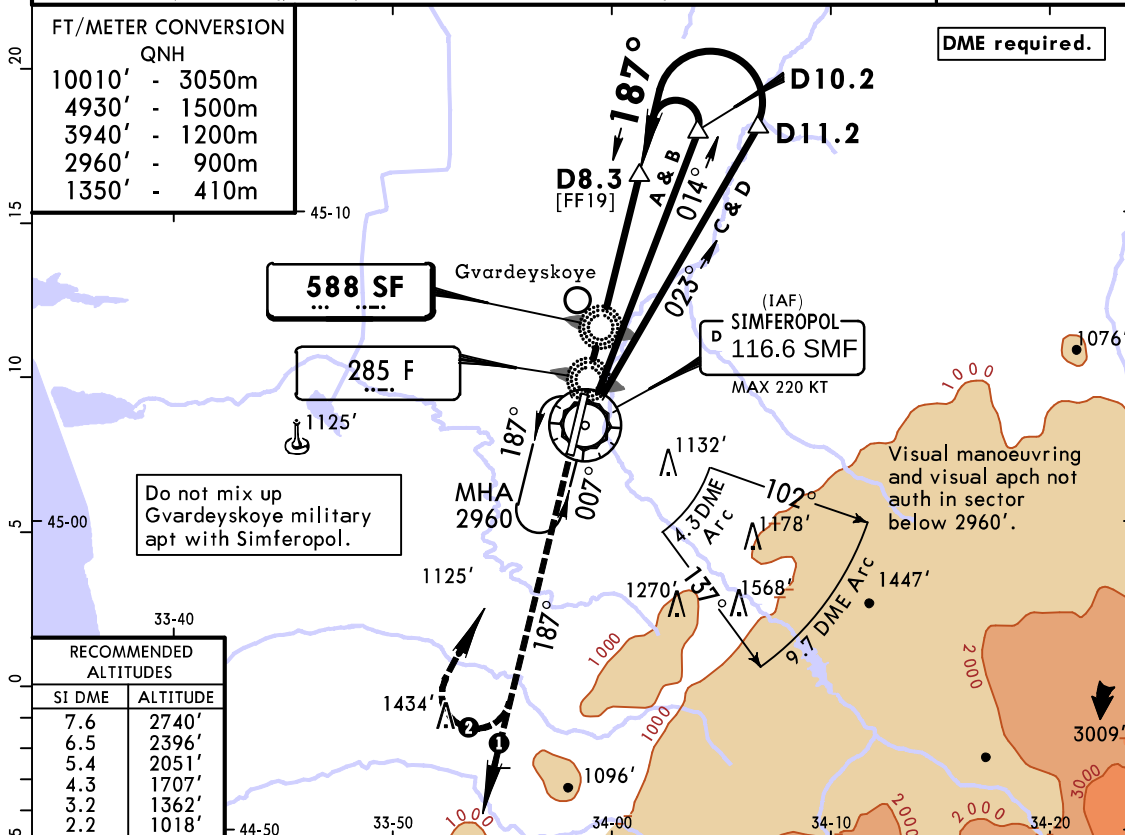

Gnd speed-Kts	70	90	100	120	140	160
Descent Angle 3.00°	372	478	531	637	743	849
MAP at LMM						

STRAIGHT-IN LANDING RWY 19				CIRCLE-TO-LAND ①			
MDA(H) 970' (393')							
ALS out				Max Kts	MDA(H)		
A				100	1070'	(493')	1600m
B	1200m				135	1100'	(523') 1600m
C				180			
D	RVR 1500m VIS 1600m				205	1530'	(953') 4800m

① Circling height based on rwy 19 thresh elev of 577'.

CHANGES: Comm. VOR ident and frequency.

© JEPPESEN, 2000, 2018. ALL RIGHTS RESERVED.